January 1984
Vol. 10, No. 1
$2.95

creative computing®

the #1 magazine of computer applications and software

Notebook Computers

In-Depth Evaluations:

- **Sharp PC-5000**
- **MicroOffice Road Runner**
- **Teleram T-3000**
- **Cromemco C-10SP**
- **Commander Keyboard**
- **Atari Games**
- **Word Processors For The Home**

Choosing A Notebook Computer

Ratings of 14 Notebook Computers

Computing Taxes With VisiCalc

Deducting Your Computer

Mastering Jumpman

CBasic Clinic

Plotter Tutorial

High Precision Functions In Basic



0 14024 14044 01

If you're considering linking up more than one computer, there's only one computer worth considering.

The British Broadcasting Corporation Microcomputer System by Acorn.

One of the BBC Micro's many built-in features is an economical and powerful communications network.

We call this the Econet® local area network.

Econet lets you combine up to 254 BBC's into a single communications system. Virtually no other system lets you hook up this many computers this easily.

What's more, you can link two micros without any special hardware. And all computers on the Econet network can share disc drives and printers.

But what really makes Econet such a great network of computers is the computer it networks. The BBC Micro. The most versatile computer anywhere for its size and price. Its enormous built-in expansion potential means it can handle anything from basic tasks to advanced Econet networking. It also means changing technology won't change it into an obsolete system overnight.

All of which make Acorn the perfect communications system for schools or business.

If you'd like to learn more about how Acorn can build you the perfect communications network, write Acorn Computers Corporation, 400 Unicorn Park Drive, Woburn, Massachusetts, 01801, or call toll-free 1-800-225-8001 (in Massachusetts call 617-935-1190). We'd be happy to communicate with you.

ACORN COMPUTER

© 1983 Acorn Computers Corporation.

CIRCLE 105 ON READER SERVICE CARD




THE ONE COMPUTER TO HAVE WHEN YOU'RE HAVING MORE THAN ONE.



Hayes™


Your Apple's telephone.

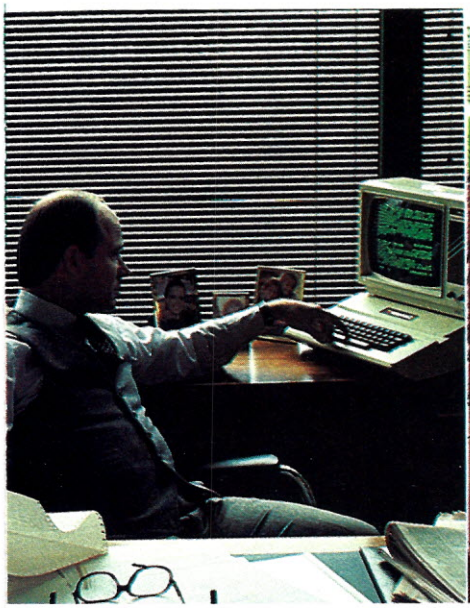


"Thanks for the prompt reply. Sure was a lot faster than waiting for the mail!"



"Gary: The pedigrees for next week's auction are as follows..."

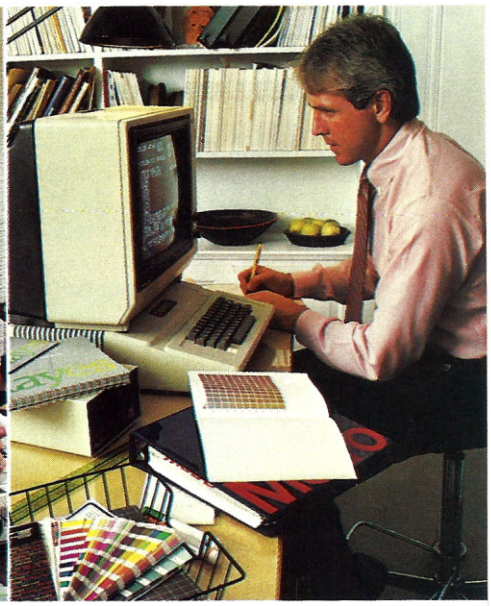

"Attn. Prod., Sales, Purch.: Recommend 50% blue, 30% red screen for closest match."

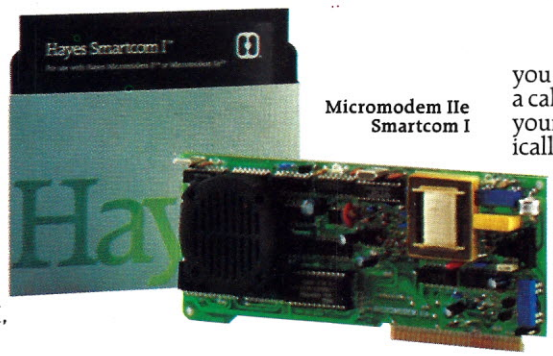

Micromodem IIe
Smartcom I

A complete plug-in communications system for Apple® computers. From Hayes, the established telecomputing leader: the simple but sophisticated Micromodem IIe® plug-in board modem and its companion software, Smartcom I.™ Everything you need to expand the world of your Apple II, IIe, II Plus and Apple III. In one, convenient communications package.

With Micromodem IIe and Smartcom I, you can access data bases, bulletin boards, and the varied resources of information services. Plan your travel itinerary via computer, including flight numbers, hotel and rental car reservations. Retrieve and analyze daily stock and options prices. Work at home and send reports to your office. You can even do your gift shopping by computer!

Micromodem IIe. Think of it as your Apple's telephone. It allows your computer to communicate with any Bell-103 type modem over ordinary telephone lines, at 110 or 300 bits per second. Micromodem IIe installs easily in an expansion slot, and requires no outside power source. It connects directly to either a single or multiline modular phone jack, to perform both Touch-Tone® and pulse dialing.

Micromodem IIe dials, answers and disconnects calls automatically. And, unlike some modems, it operates in full or half duplex, for compatibility with most time-sharing systems.

A built-in speaker lets you monitor your calls when dialing. That way, you'll know if a line is busy. With Smartcom I, Micromodem IIe automatically redials your last number.

Discover how Micromodem IIe can help maximize the capabilities of your Apple. While Smartcom I software will minimize *your* efforts.

Smartcom I companion software. For effortless communications. Whether you're a newcomer to personal computing or a seasoned professional, you'll appreciate the ease and speed with which you can perform any communications function. Thanks to Smartcom I!

Let Smartcom I guide you through a few easy-to-answer questions to tailor the program to your particular needs. Then you're ready to go!

Make a selection from the Smartcom I menu to manage your communications, files or printer. Program prompts guide you along the way. And menu selections let you easily make a call, end a call, or answer a call. When you're on the receiving end, your Micromodem IIe answers automatically, even if you're not there!

Convenient! And so is the Smartcom I memory for phone numbers. Smartcom I stores three of your most frequently called telephone numbers and one prefix. Plus, it also remembers the last number dialed.

Smartcom I also provides a directory of the files stored on your disk. And lets you create, list, name, send, receive, print or erase files right from its menu.

Smartcom I is as versatile as you need it to be. It accepts DOS 3.3, Pascal, CP/M™ 3.0 or CP/M Plus™ operating systems. And accommodates up to six disk drives and several printer interface cards.

Like all our products, Smartcom I and Micromodem IIe are backed by excellent documentation and full support. Including a two-year limited warranty on Micromodem IIe and a 90-day warranty on Smartcom I!

Hayes®

See your dealer today. Then plug into the exciting world of telecomputing.

Hayes Microcomputer Products, Inc., 5923 Peachtree Industrial Blvd., Norcross, Georgia 30092. 404/441-1617.

FCC approved in U.S.A. Micromodem IIe is a registered trademark of Hayes Microcomputer Products, Inc. Smartcom I is a trademark of Hayes Microcomputer Products, Inc. Apple is a registered trademark of Apple Computer, Inc. Touch-Tone is a registered service mark of American Telephone and Telegraph. CP/M is a trademark of Digital Research, Inc. CP/M Plus is a trademark of Advanced Logic Systems. ©1983 Hayes Microcomputer Products, Inc.

CIRCLE 161 ON READER SERVICE CARD



Qantex 7030. It wears a lot of hats.

Torn whether to choose letter quality reproduction or data processing speed in a printer? With the multimode Qantex 7030 you don't have to make a choice.

Rated one of today's most flexible dot matrix printers, the advanced 7030 does everything you can ask a printer to do—now or as your needs change. All at a very competitive price.

As a letter quality printer (37 cps) the 7030 gives you high density double pass printing in a 24 x 18 matrix. You choose from almost 20 fonts such as Script, Courier and APL, plus you get proportional spacing, justification, auto underline, overprint, bold and a host of other features.

As a near letter quality word processor (75 cps) the 7030 uses a 12 x 9 matrix in a single pass mode.

As a data processor, the 7030 produces copy at 180 or 150 cps bidirectionally. When you need multipart forms, it gives you 6-part forms capability as well as user definable formats with programmable lengths, programmable vertical and horizontal margins and tabs.

As a graphics printer, the dot addressable 7030 has a resolution up to 144 x 144 dots per square inch, and offers a full complement of line drawing graphics.

The 7030 even makes available an enlarged character mode useful in producing custom labels. It also provides a complete printed status report of operating parameters or diagnostics when ordered by the operator. And its heavy duty print head and industrial quality construction are designed for long hard use.

Discover all the ways the 7030 can fit your computer system, no matter what size. Contact Qantex for details or a demo at 60 Plant Ave., Hauppauge, NY 11788. Call toll-free 800-645-5292; in New York State 516-582-6060.

north atlantic
Qantex

CIRCLE 243 ON READER SERVICE CARD

Make April 15th just another day. Get The Tax Advantage.™









April 15 doesn't have to throw you into a cold sweat anymore. Now you can sail through the task you've been dreading all year long. With **The Tax Advantage**.

This program is so easy, you'll be able to use it right away. Even if you've never done your taxes by yourself or used a computer before.

HERE'S HOW IT WORKS

The Tax Advantage takes you line-by-line through Form 1040 and the other most common tax forms. It asks you for information in plain English, and you type in the numbers. That's all there is to it.

The Tax Advantage automatically computes your taxes with each entry you make. So you know exactly how each line affects your overall tax picture. Additionally, **The Tax Advantage** does complex operations like income averaging with a few simple commands.

What's more, you can use these features to help plan what your tax would be if your income, deductions or other figures changed.

And each year, as tax laws change, you (as a registered owner) can get the newest version of **The Tax Advantage** at a special rate.

If you think **The Tax Advantage** sounds fantastic, you're right. But there's more.

THE TAX ADVANTAGE "TALKS" TO THE HOME ACCOUNTANT.™

If you own **The Home Accountant**, the #1 best-selling home finance program, you can transfer your records to **The Tax Advantage** at tax time. It'll make doing your taxes even faster.

You'll be surprised how simply and efficiently you'll knock off the dreaded tax return.

So get **The Tax Advantage**.

And have a terrifically ordinary April 15.

The Tax Advantage is available for: Apple II/IIe, Atari 400/800, IBM PC/PC XT, Texas Instruments Professional and Commodore 64.

For your free 64 page booklet, "Tips For Buying Software," please write Continental Software, Dept. CC, 11223 S. Hindry Avenue, Los Angeles, CA 90045, 213/417-8031.



Continental Software

A Division of Arrays, Inc.

The Tax Advantage and The Home Accountant are registered trademarks of Continental Software. Apple II/IIe are registered trademarks of Apple Computer, Inc. Atari 400/800 are registered trademarks of Atari, Inc., a div. of Warner Communications, Inc. IBM PC/PC XT are registered trademarks of IBM Corp. Texas Instruments Professional is a registered trademark of Texas Instruments, Inc. Commodore 64 is a registered trademark of Commodore Business Machines, Inc.

CIRCLE 139 ON READER SERVICE CARD

In This Issue

Evaluations & Profiles

Notebook Computers

18 **Choosing A Notebook Computer** ..... *Ahl*
What's available; what to look for, comparison charts

34 **The Ultimate Notebook Computer** ..... *Ahl*
What we would like to see next year

38 **14 Notebook Computers** ..... *Ahl*
Descriptions and impressions

55 **Sharp PC-5000** ..... *Ahl*
Astonishing capability, speed, and memory

78 **MicroOffice RoadRunner** ..... *Ahl*
An office on the road

86 **Teleram T-3000** ..... *Arrants*
Excellent telecommunications and bubble memory

92 **Cromemco C-10SP** ..... *Hilton*
A reasonably priced small business system

98 **Commander Keyboard** ..... *Leyenberger*
A detachable replacement keyboard for Atari

100 **Appli-Card** ..... *Becker*
Adding CP/M and extra speed to your Apple

103 **Microprocessors In Consumer Electronics** ..... *Gray*
Multi-function back for the Minolta X-700 camera

106 **Four Word Processors For The Home** ..... *Arrants*
Write Away, HomeWord, Format II, and WordJuggler IIe

114 **Games For Atari** ..... *Leyenberger*
Six good ones and a dog

Articles

128 **Mastering Jumpman** ..... *Ahl & Staples*
Scoring hints for the year's best game

144 **IFIP, SICOB, and PCW** ..... *Ahl*
What's new on the European market

163 **The CBasic Clinic** ..... *Libertine*
Part 3 in a series

172 **Writing It Off** ..... *Shershin*
How to deduct a personal computer on your tax return

The Cover: Photograph by Steven Borns. Attaché cases courtesy of Crouch & Fitzgerald Corp., 400 Madison Ave., New York, NY.

Applications & Software

180 **Compute Your Taxes With VisiCalc** ..... *Williams*
Simplifying an unpleasant task

191 **The First One** ..... *Parrott*
A print statement formatter for Apple

205 **High Precision Functions In Basic** ..... *Nijenhuis*
Calculating SQR, LOG, ASN, and ATN

210 **Plotter Tutorial** ..... *van de Panne*
Part 2: Random landscapes

221 **$3.50 Apple Keypad** ..... *Hubbard*
And you never have to lift a soldering iron

231 **Mercury Mine Corrected** ..... *Guber*

Departments

6 **Street Price Index** ..... *Ahl*

8 **7 Years Ago** ..... *Ahl*

10 **Notices** ..... *Fee*

12 **Benchmark** ..... *Ahl*

14 **A Note To Our Readers** ..... *Staff*

186 **Short Programs** ..... *Samper*
ACRS Depreciation for Apple

234 **Print About Printers** ..... *Anderson*

242 **Outpost: Atari** ..... *Leyenberger*

248 **Commodore's Port** ..... *Anderson*

256 **Logo Type** ..... *Bearden*

262 **The Cultured Computer** ..... *Mueller*
Video games in society

266 **Telecommunications Talk** ..... *Murphy*
Is there anything wrong with hacking?

274 **Apple Cart** ..... *Arrants*
The survey; words from Woz

280 **IBM Images** ..... *Glinert-Cole*

290 **TRS-80 Strings** ..... *Gray*

294 **Book Reviews** ..... *Gray*

January, 1984
Volume 10, Number 1


Creative Computing (ISSN 0 097-8140) is published monthly by Ahl Computing, Inc., a subsidiary of Ziff-Davis Publishing Company. David Ahl, President; Elizabeth B. Staples, Vice President; Selwyn Taubman, Treasurer; Bertram A. Abrams, Secretary. P.O. Box 789-M Morristown, N.J. 07960. Second Class Postage paid at Los Angeles, CA 90052 and additional mailing offices.

Copyright©1983 by Ahl Computing, Inc. All rights reserved.

Editorial offices located at 39 East Hanover Ave., Morris Plains, NJ 07950. Phone (201) 540-0445.
Domestic Subscriptions: 12 issues $24.97; 24 issues $43.97; 36 issues $57.97. POSTMASTER: send address changes to Creative Computing, P.O. Box 5214, Boulder, CO 80321. Call 800-631-8112 toll-free (in New Jersey call 201-540-0445) to order a subscription.

Staff

Founder/Editor-in-Chief	**David H. Ahl**
Editor	**Elizabeth B. Staples**
Managing Editor	**Peter Fee**
Associate Editors	**John Anderson** **Stephen Arrants, jr.**
Editor-at-Large	**Ken Uston**
Contributing Editors	**Dale Archibald** **Charles Carpenter** **Will Fastie** **Susan Glinert-Cole** **Danny Goodman** **Stephen B. Gray** **Glenn Hart** **Stephen Kimmel** **Art Leyenberger** **Brian Murphy** **Ted Nelson** **Peter Payack** **Alvin Toffler**
Copy Editor	**Sherrie Van Tyle**
Editorial Assistants	**Andrew Brill** **Laura Gibbons**
Secretary	**Diane Koncur**
Art Director	**Patrick Calkins**
Assistant Art Director	**Chris DeMilia**
Artists	**Diana Negri Rudio** **Eugene Bicknell** **Paul Krasner**
Typesetting	**Karen K.Brown**
Advertising Director	**Claude P. Shear**
Creative Computing Press	**Laura Conboy**
Comptroller	**Jennifer H. Shaler**
Accounting	**Joanne Sapio**
Retail Marketing	**Susan DeMark**
Customer Service	**Renea Cole Cross**
Fulfillment	**Frances Miskovich** **Rosemary Bender** **Linda Blank** **Pat Champion** **Elsie Graff** **Linda McCatharn** **Carol Vita** **Jim Zecchin** **Diane Moran** **Barbara Carnegie** **Lisa Dickisson** **Maura Russell** **Donna Stiefel** **Cheryl Schauble** **Valerie Gaddis**
Shipping & Receiving	**Ronald Antonaccio** **Craig A. Brown** **Richard Crawford** **Michael Iacangelo** **William Sprouls** **John Ziegenfuss**



Advertising Sales

Advertising Director
Claude P. Sheer
Creative Computing
Ziff-Davis Publishing Company
One Park Avenue
New York, NY 10016
(212) 725-3449

Advertising Coordinator
Ruth Darling
Creative Computing
Ziff-Davis Publishing Company
One Park Ave.
New York, NY 10016
(212) 725-3446

Northern California, Northwest
Jeff Miller
Ziff-Davis Publishing Company
3030 Bridgeway Blvd.
Sausalito, CA 94965
(415) 331-7133

Southern California, Southwest
Tom Whiteway
Ziff-Davis Publishing Company
3460 Wilshire Blvd.
Los Angeles, CA 90010
(213) 387-2100

New England
CEL Associates, Inc.
27 Adams Street
Braintree, MA 02184
(617) 848-9306

Midwest
Jeff Edman
William Biff Fairclough
The Pattis Group
4761 W. Touhy Ave.
Lincolnwood, IL 60646
(312) 679-1100

Mid-Atlantic
Larry Levine
Ziff-Davis Publishing Company
One Park Ave.
New York, NY 10016
(212) 725-7668

Southeast
Browning Publications
P.O. Box 81306
Atlanta, GA 30366
(404) 455-3430

Canada
The Pattis Group
1623 Younge St.
Toronto, Ontario M4T 241
(416) 482-6288

Ziff Davis Consumer Computers & Electronics Magazine Division
President: Larry Sporn
Vice President/ General Manager: Eileen G. Markowitz
Vice President Marketing: Jeff Hammond
Vice President Circulation: Carole Mandel
Creative Director: Peter J. Blank

Permissions

Material in this publication may not be reproduced in any form without permission. Requests for permission should be directed to Lette Amado, Ziff-Davis Publishing Company, One Park Avenue, New York, New York 10016.

Where To Send It

All **editorial material**, including article submissions, press releases, and products for evaluation should be sent to:
Creative Computing
39 E. Hanover Ave.
Morris Plains, NJ 07950

Correspondence regarding other Creative Computing products and publications should also be sent to the Morris Plains address.

Correspondence related to **advertising**, including ad copy, questions on billing, and requests for rates, should be sent to:
Advertising Department
Creative Computing
Ziff-Davis Publishing Co.
One Park Ave.
New York, NY 10016

Correspondence regarding **subscriptions**, including orders, changes of address, and problems should be sent to:
Creative Computing
P.O. Box 5214
Boulder, CO 80321

Your help in choosing the correct address for your correspondence is appreciated. An incorrectly addressed letter or package can take as long as several weeks to reach its proper destination.

Subscriptions

All subscriptions orders and other correspondence related to subscriptions should be addressed to:
Creative Computing
P.O. Box 5214
Boulder, Colorado 80321.

Foreign subscriptions must be accompanied by payment in U.S. currency.

Subscription prices:

U.S.		Canada		Foreign	
1 year	$24.97	1 year	29.97	1 year	34.97
2 years	43.97	2 years	53.97	2 years	63.97
3 years	57.97	3 years	72.97	3 years	87.97

Airmail delivery on foreign subscriptions is available for a one-year period only at $75.00 additional for mail to Asia and Australia, and $50.00 additional for all other foreign.


Subscribers in the United Kingdom may send payment in sterling to:
Hazel Gordon
10 Bishops Way
Sutton Coldfield
West Midlands B74 4XU

Please allow at least eight weeks for change of address. Include old address as well as new—enclosing if possible an address label from a recent issue.

Attention Authors

Creative Computing will not be responsible for the return of unsolicited manuscripts, cassettes, floppy disks, program listings, etc. not submitted with a self-addressed, stamped envelope.

Five Easy Ways To Clean Up Your Finances.

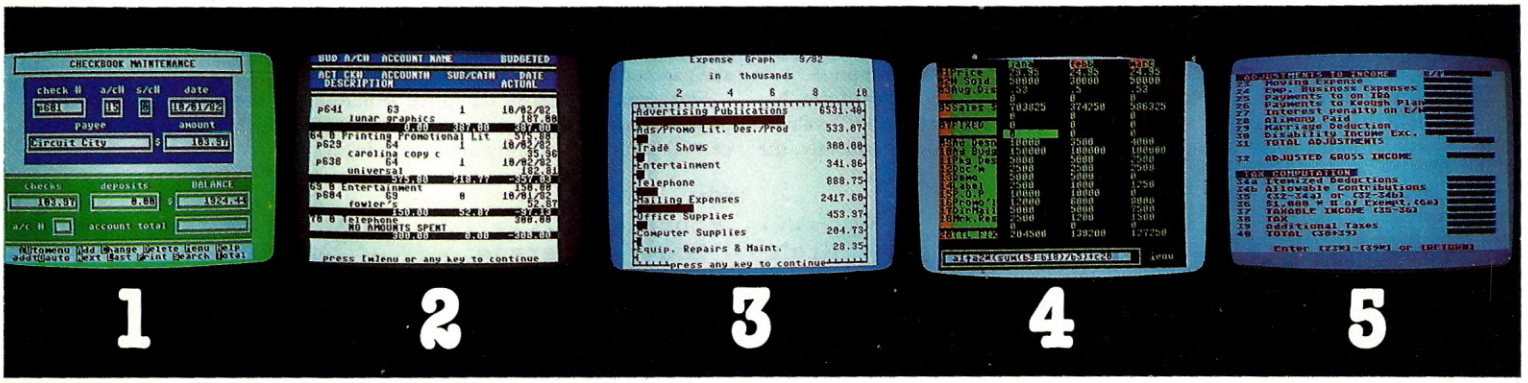

actual screen display *indicates function being shown

Chart of Accounts
*Checkbook Maintenance
Check Search
Prints Checks

*Detail Budget Analysis
Summary Budget Analysis
Income/Expense Statements
Net Worth Statement

Appointments Calendar
Payments Calendar
*Color Chart Package
Mailing List

*Spreadsheet
Compatible with Finance 1, 2 and 5

*Income Tax
Prints forms
Most schedules
Uses Finance 1, 2 and 4

the Complete Personal Accountant™



Whether you're cleaning up at home or around the office, there's NOW a COMPLETE line of money management software that will attend to all the details, while letting you see the whole financial picture. The *Complete Personal Accountant's* exclusive combination of easy to use programs give the wise investor a quick and dependable way to control finances and plan for the future.

FINANCE 1 gets you organized with a standard chart of accounts adaptable to any situation. The Checkbook Maintenance program with *full screen editing* and special 'Help' commands let you find any check by any field. You can flag tax deductibles, reconcile your bank statement, print checks and more.

FINANCE 2 tells you where your money is, where it's going and where it's coming from. The Detail and Summary Budget programs show exactly where you're spending your money. The Income/Expense and Net Worth programs provide professional-looking statements that can be printed with any 80 column printer.

FINANCE 3 separates the CPA from the competition. No other finance package for the home or small business gives you Appointments and Payments Calendars for scheduling your time and money. Few packages offer the ability to chart each account in color. And only the CPA includes a mailing list with a 1200 name capacity*. All reports are printable with an 80 column printer.

FINANCE 4 lets you determine the "what if's" of your financial future. With this easy to learn spreadsheet you'll spend more time making decisions and less time crunching numbers.

FINANCE 5, The Tax Handler™, uses your files from Finance 1, 2 and 4 to complete your taxes in a fraction of the normal time.

The Complete Personal Accountant™ line of money management software is simply the most comprehensive, easy to use financial software available anywhere.



	Disk	Cassette
Finance 1	39.95	34.95
Finance 2	29.95	24.95
Finance 3	29.95	24.95
Finance 4	29.95	24.95
Finance 5	59.95	54.95
SAVE when you purchase Finance 1, 2 and 3 as a set	79.95	74.95

Available for Atari 400/800/1200™, Commodore 64™, IBM PC™, TRS 80 Color™ and Vic 20™

Prices subject to change without notice. Add $3.00 for postage and handling.

Ask you local deal to see a running demo or call 1-800-334-SOFT to order direct.

*Varies according to computer.

programmer's institute a division of futurehouse

p.o. box 3470, department r, chapel hill, north carolina 27514

CIRCLE 292 ON READER SERVICE CARD

Street Price Index

The Creative Computing Street Price Index is an on-going monitor of the average price levels of selected computers, peripherals, video games and related accessories in the real-world marketplace. The list price is the price set by the manufacturer for the product when it was first announced, and is not necessarily the current manufacturer list price.

As time goes on, this Index will be presented in graphical form, but until there are six or seven data points, a graph would be of little value.


This Index is not intended to be a purchasing guide. Frequently, the lowest price for a computer will be offered by a vendor who is going out of business or closing out that particular item. Unless you are convinced you will never need service or are skillful enough to repair an unhealthy computer yourself, you would probably not want to buy a machine from such an outlet.

Furthermore, most of our price monitoring is done in major metropolitan areas on the two coasts. Prices outside of large cities and in the central part of the country are usually higher.

	Orig List	Nov. 1983 Monthly			Month	Year
Computer	Price	High	Low	Average	Ago	Ago
Apple IIe (64K, 40-col)	1395	1395	1149	1260	1260	n/a
Atari 400, 16K	559	249	69(1)	159	164	352
Atari 800, 48K	999	549	199(1)	374	374	863
Atari 1200, 64K	899	679	249(1)	464	464	n/a
Commodore Vic-20	297	149	69	109	109	274
Commodore 64	599	399	179(1)	289	289	n/a
Osborne 1, 64K	1795	1795	975	1390	1440	1895
Radio Shack:						
Color Comp, 16K	399	199	159	179	199	399
Model 4, 64K	999	999	799	899	999	n/a
TI 99/4A, 16K	635	269	84(1)	167	167	299
Timex 1000, 2K	99	45	29	38	43	149
Average home computer (up to 16K)	398	208	87	142	143	295
Line Printer						
Epson FX-80	699	599	519	559	615	n/a
Epson MX-80FT	745	505	395	450	450	567
NEC PC-8023A	795	475	379	427	449	599
Okidata 82A	799	459	355	407	420	549
Okidata 92	699	599	449	524	524	n/a
Star Gemini 10	449	369	269	319	350	n/a
Average 80-col dot matrix printer	697	520	394	457	467	572
Video Games						
Atari 2600	199	99	55(1)	77	77	149
Atari 5200	269	200	118(1)	159	174	n/a
Colecovision	199	189	123	156	162	n/a
Intellivision II	199	150	69(1)	110	115	189
Average video game	216	145	91	118	127	169
Dynamic Memory Chips (200 ns, quantity 8)					...Lowest..	
16K x 1 bit (4116)	...	1.95	1.50	1.73	1.50	1.56
64K x 1 bit (4164)	...	7.49	5.75	6.62	5.95	n/a

(1) Includes a manufacturer rebate or equivalent

TECMAR'S SUPER PRICES!

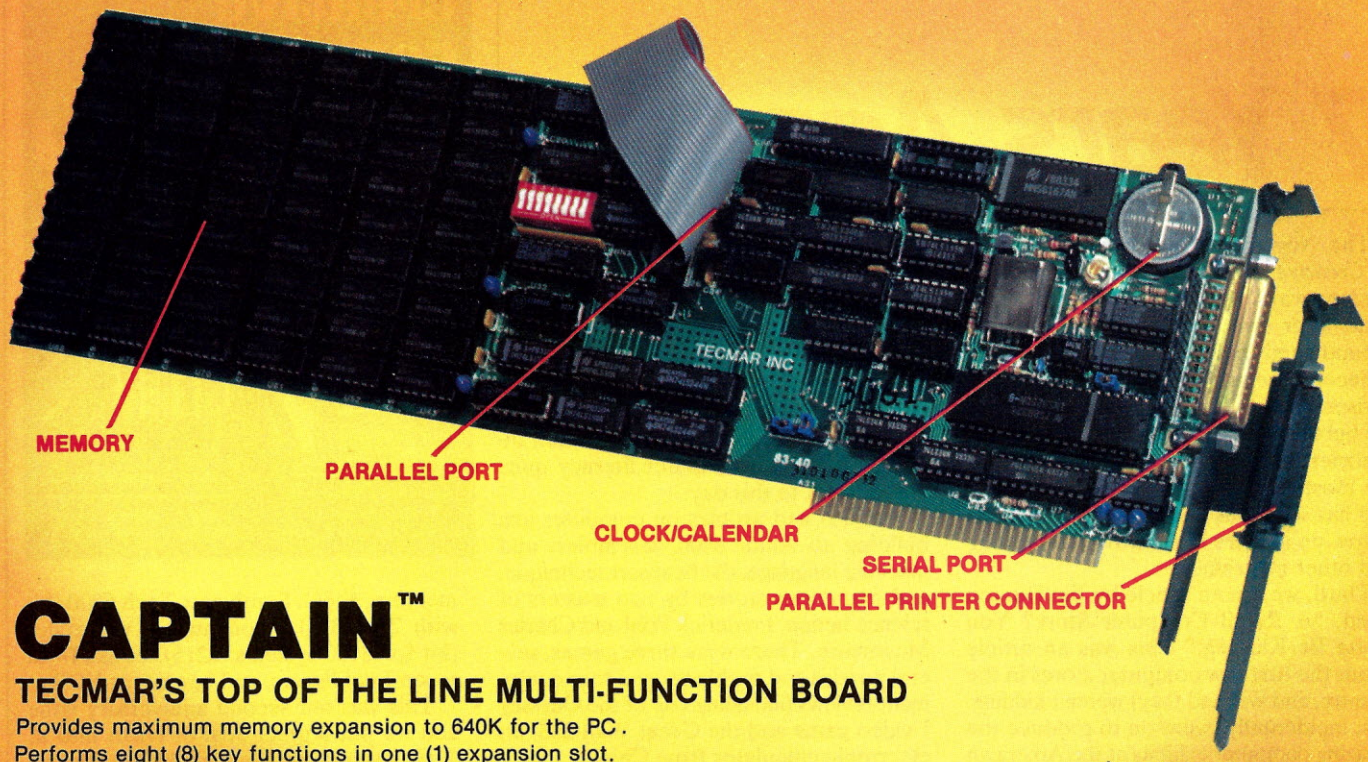

CAPTAIN™

TECMAR'S TOP OF THE LINE MULTI-FUNCTION BOARD

Provides maximum memory expansion to 640K for the PC.
Performs eight (8) key functions in one (1) expansion slot.

- **0 to 384K MEMORY** - fully socketed for easy user upgrade in 64K blocks.
- **CLOCK/CALENDAR** - battery-powered to maintain date and time while computer is on or off.
- **SERIAL PORT** - to connect to modem or printer with full IBM PC compatibility.
- **PARALLEL PORT** - fully compatible for standard IBM Parallel Printer or compatible printers. Cable and connector included.
- **RAMSPOOLER SOFTWARE (included)** - enables printing to become a background task, freeing your PC for other functions.
- **SPEED DISK SOFTWARE (included)** - simulates high speed disk drive in RAM, from 5K to 512K in 1K increments. 50% faster than a Winchester.
- **AUTOTIME SOFTWARE (included)** - automatically enters correct date and time each time the user powers up the computer.
- **OPTION** - inexpensive PAL chip enables user to restrict availability of information on a 'need to know' basis or to limit access to proprietary software.


$349 Unpopulated Memory

$424/64K
$499/128K
$574/192K
$649/256K
$724/320K
$795/384K

WAVE™ & BOSUN™ for your IBM PC/XT

WAVE **$299.00**

BOSUN **$195.00**

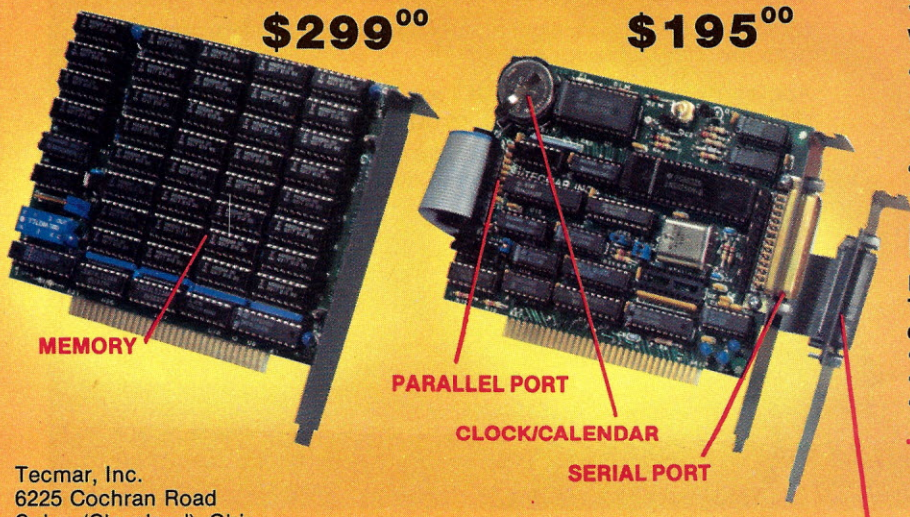

WAVE™

$299/64K **$449/192K**
$379/ 128K **$499/256K**

WAVE fits into a short slot in the IBM PC/XT.

- **64K to 256K MEMORY** - fully socketed for easy field upgrade in 64K blocks.

The following additional features are the same as Captain described above:

- **RAMSpooler™ Software**
- **SpeedDisk™ Software**

BOSUN™

BOSUN fits into a short slot in the IBM PC/XT. The following features are the same as Captain described above:

- **Clock/Calendar**
- **Serial Port**
- **Parallel Port**
- **RAMSpooler Software**
- **Autotime™ Software**
- **PAL Option**
- **Cable and Connector**

Tecmar boards have:

- COMPATIBILITY WITH IBM PC AND OTHER LOOK ALIKES.
- Full one year warranty
- GUARANTEED 72 Hour repair turn-around

THESE TECMAR PRODUCTS ARE DELIVERABLE NOW!

Tecmar, Inc.
6225 Cochran Road
Solon (Cleveland), Ohio
Phone: (216)349-0600 Telex: 466692

TECMAR

CIRCLE 222 ON READER SERVICE CARD

7 Years Ago



The November/December 1976 issue of *Creative Computing* was a milestone in many ways. First, it was our first "slick" issue after two years of publishing on groundwood (newsprint) stock.

Second, we printed the article, "A Comparison of Sorts" by John Grillo comparing the bubble, delayed replacement and Shell-Metzner sorting techniques. This has been the most reprinted article in our history, and has served as the basis for at least six follow up articles in *Creative Computing* and other magazines.

Third, we ran an article by Jim Dunion titled, "A Retail Computer Store? You Gotta Be Kidding." This was an article about the first few computer stores in the country, and we (and they) weren't kidding. Jim, incidentally, went on to produce the amazing computer exhibits at the American Museum of Science and Energy in Oak Ridge and, more recently, joined Atari.

Fourth, we printed two now-classic articles in the area of computers in education. The first was Arthur Luehrmann's "Should the Computer Teach the Student, or Vice-versa?" It concluded that that it would not be much longer that a computer illiterate would be considered an educated person. The second was David Moursund's "What Is Computer Literacy?" which included a related computer literacy quiz. It is current to this day.

We also had articles on computer art, building an Altair 8800, assemblers and machine language, the heapsort technique, and marvelous stories by two masters of science fiction, Frederick Pohl and Charles Mossmann, There were three games, several puzzles and problems, and four equipment reviews (including one of the Odyssey I video game and the Great Wall 203, an electronic calculator from China).

Since this was our first slick issue, we didn't have a great deal of advertising. We had ads for the Altair 680 (kit with 1K memory, $466), Southwest Tech 6800 (kit with 2K, $395), Cromemco TV Dazzler (kit for S100 systems, $215), books from several publishers, and careers at NCR.

This was our second anniversary issue and we put a great deal of effort into it. Now, seven years later with 20-20 hindsight, we can say definitively it was one of the most successful issues in the history of *Creative Computing*. —*DHA*

Pilots asked us for it.
Pilots and nonpilots will love it!

Fly Us!



We are pleased to present our new

AIRSIM-3™ Airplane Simulator . . .

Ground scenery: San Diego to San Francisco with many airfields.

Aerobatic: Loops, rolls, stalls and more.

Instrumentation: Standard basic instrument panel, plus everything required for instrument flying. HSI, ADF, VOR's, NDB's, approach markers, ILS, DME, radar.

User definable: Set up your own navigational situations, with runway scenery, wind conditions and nav-aid locations.

Educational: Special features for exploring navigational-instrument behavior.

Engine sound if Mockingboard (not included) is installed.

Optional Feature: Store flight data in RAM card. Useful for research purposes. Contact us for details.

Apple II, II+, IIe, Apple /// in Apple II emulation mode. 48K RAM, paddles or joystick. Recommended for ages 14 to Adult.

$44.95 Mass. residents add 5% sales tax. Overseas shipping add $5.00. See your dealer or contact us directly. Visa, Mastercard.

ALSO AVAILABLE:

AIRSIM-1 Flight Simulator
now $24.95



$40.00

Mind Systems™ corporation

P.O. Box 506
Northampton, MA 01061
(413) 586-6463

Copyright © 1983 by Mind Systems Corporation

Trademarks:
Apple, Apple Computer Co.
Mockingboard, Sweet Micro Systems
AIRSIM, Mind Systems Corporation

THE SECRETS OF PERFECT MEMORY: ONE AND ONE HALF EARTH DOLLARS

AT LAST: THE WHOLE TRUTH ABOUT FLOPPIES.

Amazing book reveals all!

How to keep from brainwashing your disk so it never loses it's memory.


How fingerprints can actually damage disks. Unretouched Kirlian photographs of UFO's (Unidentified Floppy Objects)! The incredible importance of making copies: the Department of Redundancy Department—and what goes on when it goes on! Powerful secret methods that scientists claim can actually prevent computer amnesia! All this, and much more . . .

In short, it's an 80-page plain-English, graphically stunning, pocket-sized definitive guide to the care and feeding of flexible disks.

For The Book, ask your nearest computer store that sells Elephant™ disks, and bring along one and one half earth dollars.

For the name of the store, ask us.

ELEPHANT MEMORY SYSTEMS® Marketed exclusively by Leading Edge Products, Inc., Information Systems and Supplies Division, 55 Providence Highway, Norwood, MA 02062. Call toll free 1-800-343-8413, In Massachusetts, call collect (617) 769-8150, Telex 951-624.

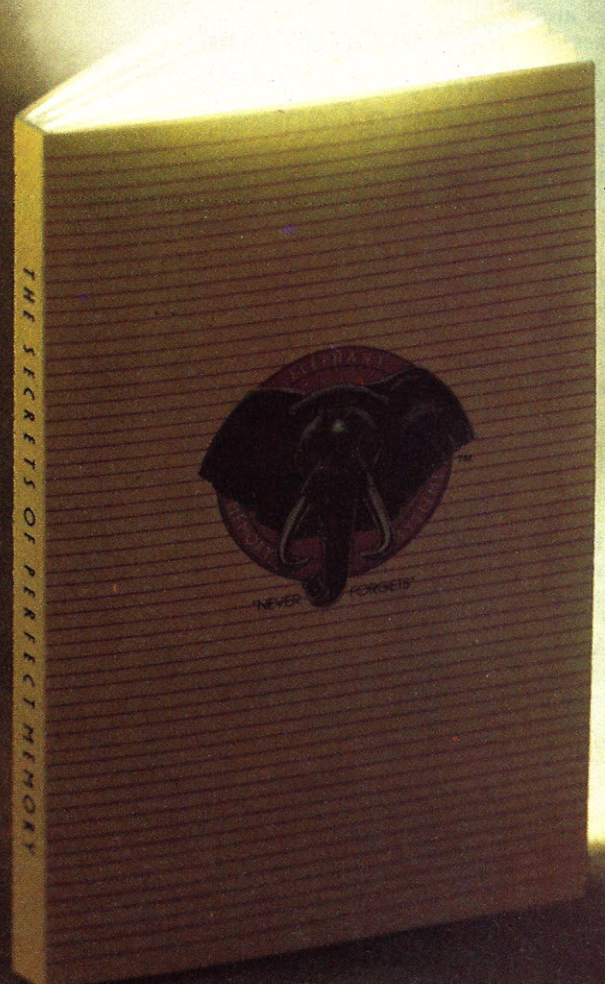

CIRCLE 190 ON READER SERVICE CARD

Creative Computing Benchmark


The Creative Computing benchmark is a short test of computational speed, accuracy, and the random number generator in Basic. Computers in the chart are listed in ascending order of completion time of the test expressed in minutes and seconds. In the accuracy measure, the smaller the number the better (.0000001 is excellent while .187805 is poor). In the randomness measure, smaller is better (numbers under 15 are good and over 15 are fair).


Since running the short article about the benchmark test, we have been overwhelmed with responses from readers who ran the test on machines not listed in our original table. With letters still pouring in, here are the results for 107 different computers.


We have taken note of the criticisms of this simple test and are in the process of devising a more comprehensive one. Watch for a follow-up article.—DHA END

```
10 ' Ahl's Simple Benchmark
20 FOR N=1 TO 100: A=N
30 FOR I=1 TO 10
40 A=SQR(A): R=R+RND(1)
50 NEXT I
60 FOR I=1 TO 10
70 A=A^2: R=R+RND(1)
80 NEXT I
90 S=S+A: NEXT N
100 PRINT ABS(1010-S/5)
110 PRINT ABS(1000-R)
```

Computer	Time	Accuracy	Random
DEC VAX 11/780	0:01	.0113525	5.3
DEC VAX 11/780 (double)	0:015	.000000000163283	5.3
HP 9845B (390 bit slice)	0:03	.00000882	23.1
Control Data Cyber 730	0:03	.00000000355	6.1
Amdahl 470	0:04	.00000000011846	12.4
HP 3000 Series 44	0:04	.112549	12.9
HP 9836	0:05	.000000000127329	5.5
Wang 2200 SVP	0:05	.000000076	3.9
Stearns Micro	0:08	.005859375	7.1
Burroughs B20	0:09	.005938744544977	3.2
Alpha Micro AM 100T	0:10	.00000387337	12.4
Burroughs B22	0:12	.005859375	15.7
NEC Adv Pers Comp	0:12	.005859375	7.2
Tektronix 4054	0:12	.000000014042598	8.5
Olivetti M20	0:13	.0114136	6.2
Saybrook 68000 (in Apple)	0:13	.00000000011	10.4
TI Professional	0:15	.005859375	7.1
Compaq	0:15	.005859375	7.1
HP 9845B	0:15	.00000882	23.1
Zenith Z-100 (8088)	0:17	.005859375	9.7
ACT Apricot	0:18	.005859375	7.2
Sharp PC-5000	0:18	.005859375	7.2
Eagle PC-2	0:19	.005859375	7.2
DEC Rainbow 100	0:20	.005859375	7.2
Acorn BBC Computer	0:21	.0000128746033	5.2
Columbia MPC	0:21	.005859375	7.2
Computer Devices DOT	0:22	.005859375	7.1
IBM PC	0:24	.01159668	6.3
GCE Vectrex	0:33	.0753174	0.9
TI DS990/12 (Mini TS)	0:36	.0000000388	3.1
Laser 2001	0:40	.0003272295	17.4
Memotech MX-512	0:46	.000252962112	6.9
HP 9020C	0:48	.000000000127329	23.2
Lobo Max-80	0:48	.0338745	5.8
Lynx	0:51	.155	14.1
TRS-80 Model 4	0:53	.0670776	6.5
Panasonic JR200	0:57	.00021481514	15.1
SCS 100	0:59	.187805	7.4
IMS 8000	0:59	.187805	9.6
Alspa ACI-1	0:59	.187805	7.4
DECmate II	0:59	.187805	7.4
Xerox 820-II	0:59	.187805	7.4
Vector Graphic 3 VIP	1:04	.0338745	7.5
Zenith Z-100 (8085)	1:04	.187805	9.5
Toshiba T100	1:09	.187805	7.4
Epson QX-10	1:09	.187805	7.4
Osborne 01	1:10	.187805	7.4
Mattel Aquarius	1:17	.187805	10.0
Epson QX-10	1:18	.187805	7.4
HP-85A	1:20	.00000002	5.8
Morrow MD3 (Bazic 10)	1:21	.000473	3.6
HP-86A	1:25	.00000002	5.8
Tektronix 4051	1:26	.000000014042598	8.1
Digital Group Bytemaster	1:27	.000002779	3.6
NEC PC-8001A	1:29	.0338745	3.0
Atari 800 (MBasic)	1:35	.150879	2.1
Kaypro II	1:36	.187805	7.5
Sony SMC-70	1:37	.0000000458	3.8
HP-75C	1:38	.00000002	5.8
North Star Horizon(10 dig)	1:41	.000473	3.6
NEC PC-8201	1:44	.187805	9.3
MicroOffice RoadRunner	1:48	.187805	7.4
Teleram 3000	1:48	.187805	7.4
Apple III	1:48	.011914	6.7
Vic 20	1:49	.0010414235	23.7
HP 9830B	1:52	.00000889	13.1
Commodore 64	1:53	.0010414235	8.9
Apple II plus	1:53	.0010414235	12.0
Apple IIe	1:53	.0010414235	12.0
NEC PC-8801A	1:54	.187805	7.4
Rockwell Aim 65	1:56	.00104141235	14.7
Compucolor II	1:57	.0338745	1.4
TRS-80 Model III	1:59	.0338745	5.8
Micro Color Computer	1:59	.000596284867	7.6
Commodore CBM 8032, 2001	2:01	.0010414235	1.4
Heath/Zenith H-89A	2:04	.187805	7.4
Atari 2600 Graduate	2:15	.000224679708	7.9
TRS-80 Model I	2:19	.0338745	12.0
Color Computer	2:23	.000596284867	7.3
Atari 800 (fastchip)	2:23	.006875	7.0
Dragon 32	2:29	.000596284867	7.3
Epson HX-20	2:36	.0338745	23.8
Timex/Sinclair 1000 (fast)	2:43	.00041294098	8.7
Interact Model R	2:50	.0338745	8.1
Wang 2210	2:52	.000011432	12.5
OSI Challenger 1	3:07	.0010414235	13.9
SpectraVideo 318/328	3:40	.0000002058	0.7
TI 99/4A	3:46	.00000011	2.6
Radio Shack PC-3	4:00	.00000627	10.9
TI 99/4A, Extended	4:10	.00000011	10.7
Oric-1	4:10	.00104141235	12.1
Datapoint 1800	4:16	.0000012042	11.3
Sinclair ZX81	4:23	.0006685257	6.3
Sinclair Spectrum	4:39	.0006685257	3.5
TRS-80 Model 100	4:54	.0000002058	0.7
Casio FP-200	5:05	.00723	30.3
Sharp PC-1500 (RS PC-2)	5:10	.0000288	7.8
TI CC-40	5:41	.00000011	6.2
Sanyo PHC-25	5:41	.000267505646	10.2
Canon X-07	6:03	.0000002058	24.9
Atari 1200XL	6:45	.013959	5.2
Atari 400/800	6:48	.012959	22.8
Sharp PC-1250	11:14	.0000288	5.9
Timex/Sinclair 1000(slow)	16:55	.00041294098	7.4
IBM System 23	19:00	.00000005503	3.4
HP-97	23:00	.000034	---
Sharp PC-1211	28:32	.00002882	---

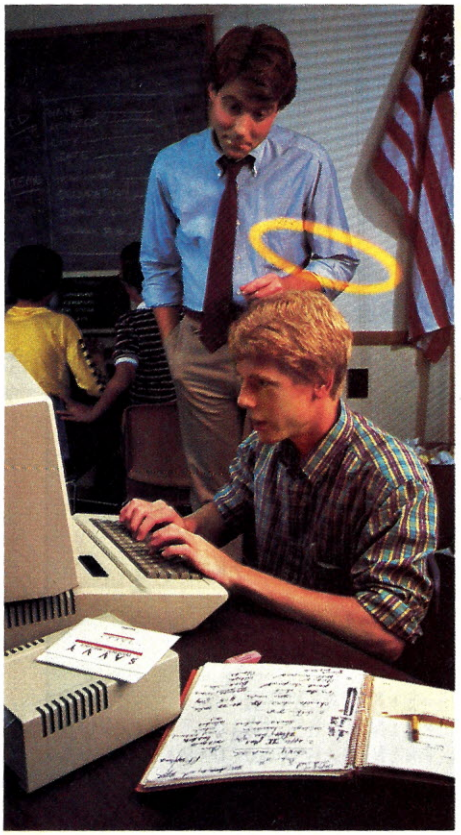

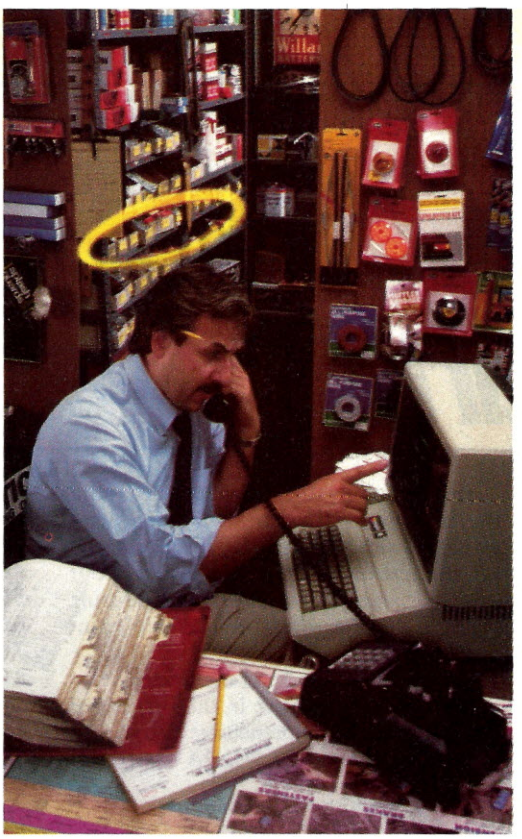

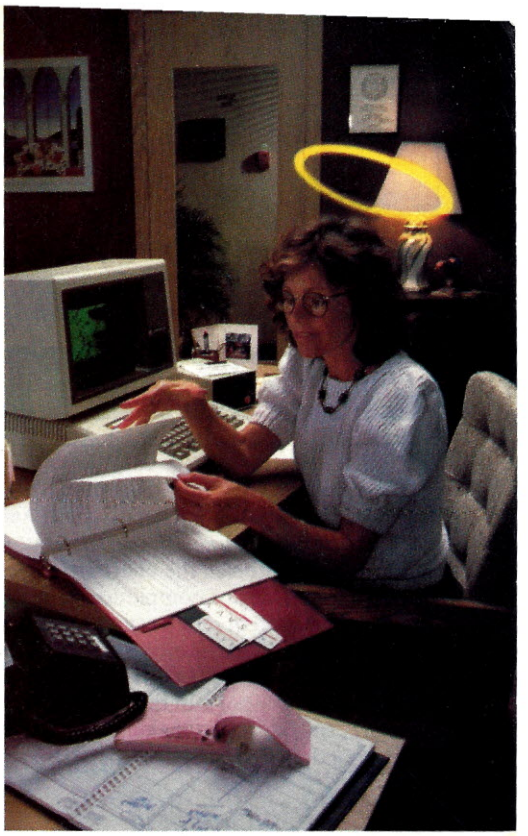

Meet Tom, Dick and Jeri. Before they had SAVVY® they were just like you.

Introducing three new integrated personal computer language/database systems that recognize... to err is human and to forgive is SAVVY.

SAVVY is the most "forgiving" software ever developed for your Apple IIe,® II Plus,® or Apple-compatible computer. It's a database system, natural programming language, file manager and operating system all in one. And because SAVVY can recognize your personal word patterns, you can misspell, mistype, abbreviate, or rephrase and still successfully command your computer.

SAVVY One™ is for single disk systems. It's ideal for use in the home or classroom by users new to personal computing.

SAVVY Pro™ for multiple or hard disk systems can be used by experienced software program developers to create integrated applications.

Business SAVVY provides easy-to-use application programs, such as accounts payable, accounts receivable, general ledger, payroll, inventory and document writer. It's also for use with multiple or hard disk systems.

Call 800-551-5199 to arrange for a free demonstration of SAVVY One, SAVVY Pro or Business SAVVY at your local computer store. In New Mexico, call 505-242-3333. Or for more information circle and return the reader service card.

SAVVY is a product of Excalibur Technologies Corporation, 800 Rio Grande Boulevard N.W., Mercado 21, Albuquerque, New Mexico 87104.



SAVVY®

A product of Excalibur TECHNOLOGIES CORPORATION

SAVVY is a registered trademark of Excalibur Technologies Corporation. SAVVY One and SAVVY Pro are trademarks of Excalibur Technologies Corporation. Apple IIe and II Plus are registered trademarks of Apple Computer Inc.

CIRCLE 142 ON READER SERVICE CARD

Notices

Creative Computing On CompuServe

Creative Computing now has a SIG (Special Interest Group) on the CompuServe Information Service. This SIG features a download section of popular programs from the magazine and program fixes and enhancements. Members are invited to submit programs and fixes of their own. Also featured is a bulletin board area for readers' questions to the *Creative Computing* staff and their answers. A conference section allows SIG members to participate in a multi-person discussion with editors and guests of *Creative Computing.*

A special feature is the "Street Price Index," a comparison of high and low equipment prices gathered from dealers in different areas of the country, authored by David Ahl, our editor-in-chief.

Membership is free to all CompuServe subscribers.

No Connection

The marks depicted with the review of the *Electric Webster* program in the November 1983 issue are the trademarks of Merriam-Webster Inc., publisher of *Webster's Third New International Dictionary of the English Language, Unabridged*, and neither *Electric Webster* nor its manufacturer is associated with, sponsored by, or approved by Merriam-Webster, Inc.

Call For Papers

The Instructional Resource Center of the City University of New York announces a national conference on Microcomputers and Basic Skills in College to be held April 13-15, 1984.

Papers on the use of microcomputers in postsecondary basic skills instruction in the folllowing areas are invited: writing, English as a second language, reading, speech, mathematics (arithmetic through precalculus), other areas of developmental education.

Send abstracts and address inquiries to: Prof. Geoffrey Akst, Instructional Resource Center, The City University of New York, 535 East 80th St., New York, NY 10021. (212) 794-5425.

The International Computer Problem Solving Contest


Since 1981, the University of Wisconsin-Parkside has invited pre-college students all over the world to participate in a computer problem solving contest. This contest is an extension of a competition held locally at the university since 1977. The idea of the contest is simple: teams, made up of one to three students using one terminal or microcomputer, attempt to solve five problems within a two-hour time period. At the end of this period, the programs and required sample runs are listed out to a printer and handed over to the local judges.

If a team solves four or five problems correctly, the local contest director can forward the programs to the University of Wisconsin-Parkside for international comparison and ranking. Any local recognition for the top teams is left to the discretion of the local contest director.

This contest is primarily a local event. Any adult may become a contest director and establish a contest site in his area. The University of Wisconsin-Parkside supplies the problems, sample solutions, rules, score cards, result forms, and previous contest problems.

The Fourth International Computer Problem Solving Contest will be held on Saturday, April 28, 1984. Friday, April 27 is the alternate date for contest sites that cannot hold the contest on Saturday.

For registration forms and further information, contact Dr. D.T. Piele, Box 2000, University of Wisconsin-Parkside, Kenosha, WI 53141.

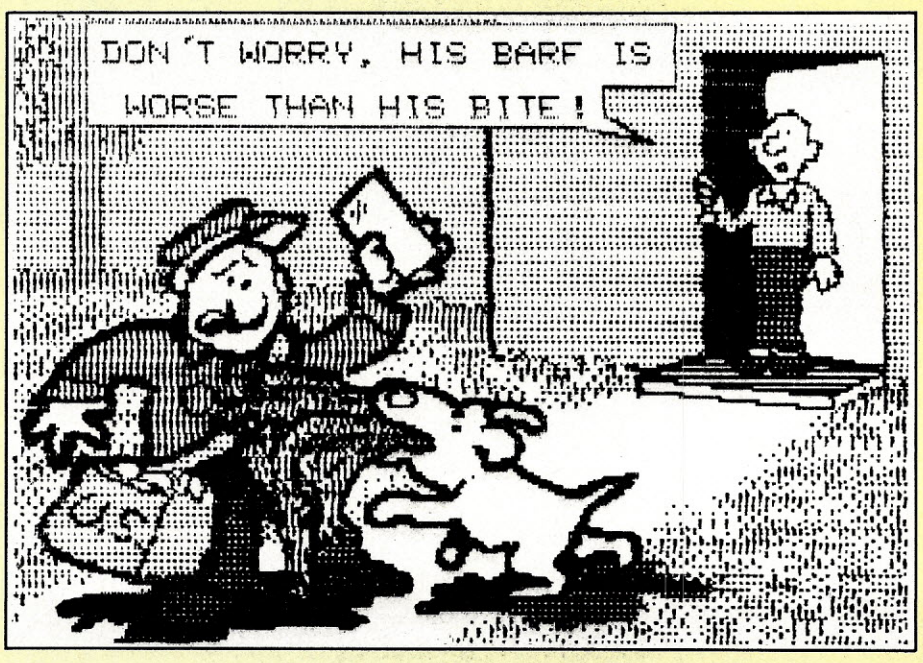




Using Your Brain Is Fun When You're Playing Quizagon!

Knowledge, strategy, luck...all are part of mastering this exciting, new type of game!

Over 6,000 questions explore and expand what you know about science, sports, entertainment and potpourri.

It's a family game. It's a party game. It's a game for people who want to challenge their minds.

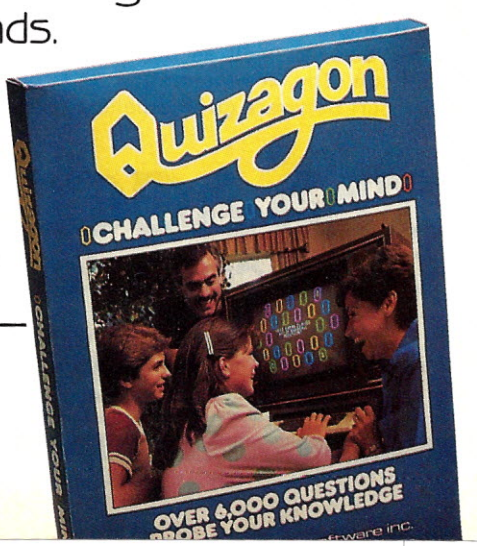

Available for the IBM PC, Apple II, Commodore 64, and VIC-20 computers
For the name of your nearest dealer call 800-328-1223

CSI counterpoint software, inc.
4005 west sixty-fifth street • minneapolis, mn 55435
(612) 926-7888 • (800) 328-1223

Do you want the #1 Seller or the #1 Financial System?

FEATURES	The Home Accountant™	The ACCOUNTANT Finance Data Base System™
Transactions Per Diskette	1000	2000-4000
Number of Tax or Project Codes	1	63
Automatic Transactions		900
Number	25	Unlimited
Frequency	Once a month	YES
Double Entry	NO	NO
Accounting Background Required	NO	63-200
Number of Accounts	100-200	Screen at a time
Transaction Retrieval	One at a time	YES
Backdate Transactions	NO	ALWAYS
Ability to Interrupt While Printing	SOMETIMES	NO
132 COL PRINTER REQUIRED	YES	292,661.42
NUMERIC FORMATTING	292661	Optional
1-2-3, VisiCalc, or MultiPlan Interface	NO	
PERFORMANCE*		
Startup to Transaction Entry	1 min 53 sec	44 sec.
Begin Printing Balance Sheet After Entering Transactions	2 min 42 sec	1 sec
Begin Printing Transactions After Entering Transactions	1 min 46 sec	2 sec
RATING		
Peelings II Evaluation	C—	A
PRICE		
APPLE II/IIe Personal Version	$75	$129
IBM PC/XT Personal Version	$150	$195
APPLE II/IIe The Business ACCOUNTANT™	—	$255
IBM PC/XT The Business ACCOUNTANT™		$295

*based on APPLE benchmarks The Accountant's performance superiority is even **greater** on the IBM PC/XT

.... Here is what one of our users, a Washington D.C. channel 4 newscaster wrote to Softalk

As a computer novice and accounting illiterate, I set out to make a home finance program my first major software purchase. I fear *Softalk's* Fastalk column led me astray.

The Home Accountant is called "thorough and powerful." *The Accountant* is more expensive and gets modest descriptions like "simple-to-use" and "a sleeper." The choice should be obvious.

In fact, I believe *The Accountant* (the more expensive program) is so far superior as to justify the cost. It gives the user credit for brains but will handhold you through a remarkably effective double-entry system. That part might scare people off. In fact, it makes this program more enjoyable, as well as being educational and practical, but not more difficult. The documentation and tutorial are excellent, and Decision Support Software gives excellent user support.

Henry Tenenbaum, Washington, DC

The ACCOUNTANT
Finance Data Base System™

Decision Support Software Inc.
1300 Vincent Place, McLean, VA 22101 • (703) 442-7900 • Orders Only: (800) 368-2022

APPLE™, IBM®, 1-2-3™, VisiCalc™, Multiplan, and The Home Accountant™ are trademarks of APPLE™, IBM, Lotus, VisiCorp., Microsoft, and Continental Software respectively.

CIRCLE 147 ON READER SERVICE CARD

creative computing software evaluation

creative computing equipment evaluation

A Note To Our Readers

Product evaluations in *Creative Computing* are different from those in many other magazines. Here's why.

A *Creative Computing* product evaluation is objective, thorough, and in-depth. Normally, we get an actual production product for testing—on loan or purchased from the manufacturer. We do not ask for or accept any special treatment, but interact with the manufacturer as a normal customer would.

In most cases, we test the product in the environment and under the conditions in which we would expect it to be used. We do not believe that we should sit in an ivory tower and pass judgment on a product that is meant to be used by a salesman on the road or a child in a classsroom.

When we evaluate a prototype, we state that fact in the review. Even so, we do not simply recite the manufacturer specifications; instead, we use the product, apply our own tests, and report on the results. If it lives up to the published specs, fine; if not, we tell you.

In our evaluations, we call a spade a spade and a lemon a lemon. Advertisers do not receive special treatment—no one does. Some manufacturers do not like this policy and refuse to work with us or advertise in the magazine. But most manufacturers welcome our policy of scrupulous honesty, and for that, we applaud them.

Nevertheless, we are not right all of the time. Sometimes, a unit might perform well in our tests, but be a dog for you. For that, we are sorry. But for the most part, we trust you will find our reviews—and the rest of the magazine—credible, honest, and interesting. END

See jane™ run

Once there was a  time,

before the written word, when  people used  pictures to communicate. Symbols representing

entire  ideas were easy to  see and understand. And the people were comfortable with this language.

And they were  happy.

But then came the  computer.

And symbols were replaced by complicated commands. Soon data processing meant learning a whole new

vocabulary. And the  people became frightened of the new computer language. And they were  sad.

Then came Jane.

Absolutely, positively, unequivocably, unquestionably, the most simple way to operate a  computer.

Jane does away with the keyboard  . Instead, a simple, hand-held device called a  mouse

selects from a variety of applications. From letters to lists, to calculations and spreadsheets. Jane does them all.

Jane does away with complex command words.

Instead, simple, easy-to-understand  pictures tell the computer what to do.

From one operation to many, all on one screen at the same time.

Best of all, Jane doesn't cost lots of  money. Now everyone can use a home computer. Jane gives back to

the people a language they understand.

And they  Jane. You can too.

One word is worth a thousand pictures.

jane

Jane comes complete with Janewrite™, Janecalc™, Janelist™, and of course, a mouse.

arktronics 113 South Fourth Avenue, Ann Arbor, Michigan 48104, 1-800-Call ARK, in Michigan, (313) 769-7253

Jane is now available for the Apple][,][+ [64K], //e, Commodore 64. Available soon for the new Atari™ series and the IBM PC™ and compatibles. Apple™, Commodore™, IBM™ and Atari™ are all registered trademarks.


CIRCLE 110 ON READER SERVICE CARD

SPINNAKER'S LINE OF EARLY LEARNING GAMES IS GROWING AS FAST AS YOUR CHILD'S MIND.

Watching your kids grow up is a lot of fun. But making sure their minds grow as fast as their bodies is even more rewarding. That's where we can help. With a growing line of Early Learning Programs that are not only lots of fun to play, but also educational.

Some of the games you see on these two pages help exercise your child's creativity. Others help improve vocabulary and spelling skills. While others improve your child's writing and reading abilities. And all of them help your child understand how to use the computer.

So if you're looking for computer programs that do more than just "babysit" for your kids, read on. You'll find that our Early Learning Programs are not only compatible with **Apple,® Atari,® IBM®** and **Commodore 64™** computers, but also with kids who like to have fun.

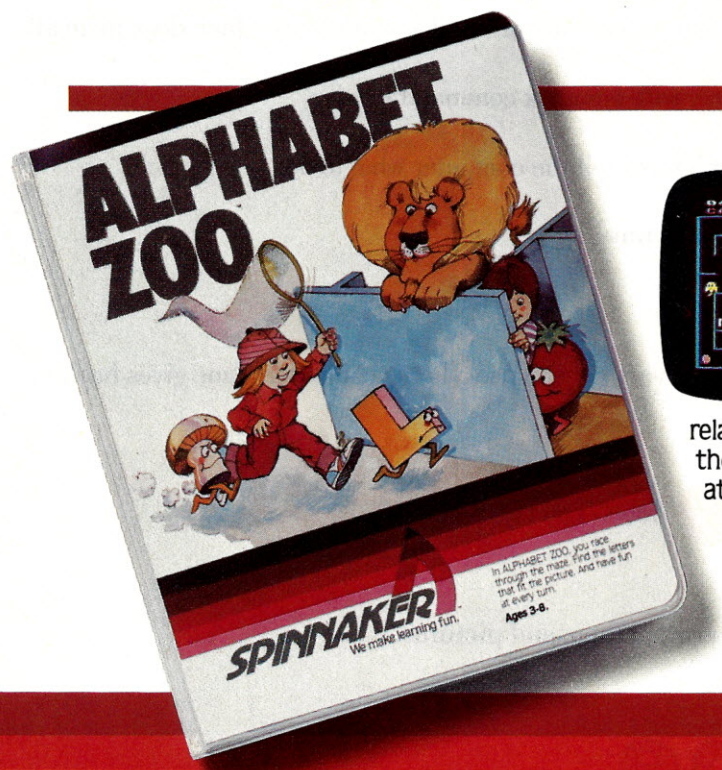


A trip through ALPHABET ZOO.™ Ages 3-8




It's a race. It's a chase. It's Alphabet Zoo, the exciting game that will have your kids zipping through the maze, after letters that fit the picture on the screen.

And at the same time, your kids will be learning the relationship of letters and sounds, and sharpening their spelling skills. So they'll be laughing and learning at every turn.

Apple, IBM and Atari are registered trademarks of Apple Computer, Inc., International Business Machines Corp. and Atari, Inc. respectively. Commodore 64 is a trademark of Commodore Electronics Limited.
© 1983, Spinnaker Software Corp. All rights reserved.

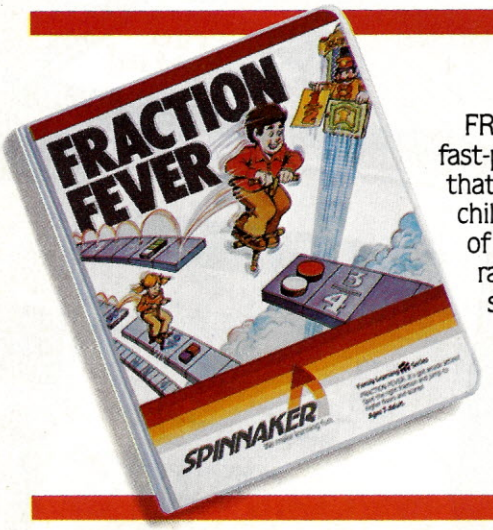


FRACTION FEVER™ brings fractions into play. Ages 7 to Adult.



FRACTION FEVER is a fast-paced arcade game that challenges a child's understanding of fractions. As kids race across the screen in search of the assigned fraction, they're actually developing a basic understanding of what a fraction is and of relationships between fractions. They're even discovering that the same fraction may be written in a number of different ways.

All in all, FRACTION FEVER encourages kids to learn as much as they can about fractions – just for the fun of it!


KINDERCOMP™ Numbers, shapes, letters, words and drawings make fun. Ages 3 to 8.



KINDERCOMP is a game that allows very young children to start learning on the computer. It's a collection of learning exercises that ask your children to match shapes and letters, write their names, draw pictures, or fill in missing numbers. And KINDERCOMP will delight kids with colorful rewards, as the screen comes to life when correct answers are given.

As a parent, you can enjoy the fact that your children are having fun while improving their reading readiness and counting skills.



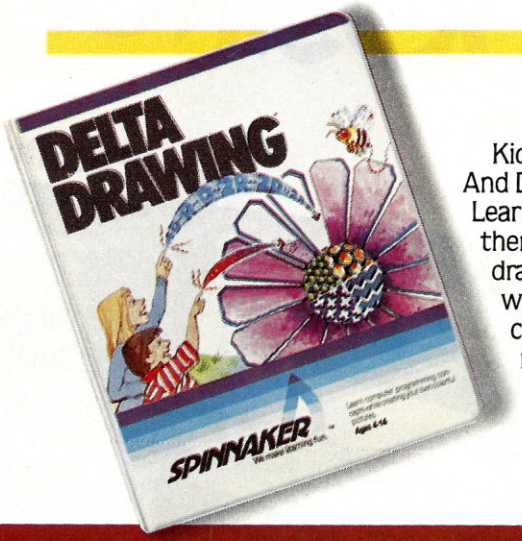

DELTA DRAWING™ Have fun creating pictures and computer programs. Ages 4-Adult.



Kids love to draw. And DELTA DRAWING Learning Program lets them enjoy creative drawing and coloring while they learn computer programming concepts. As they use simple commands to put lines and colors in their drawings, they're actually writing computer programs!

With DELTA DRAWING, even kids who have never used a computer before can learn to do simple programming and build an understanding of procedural thinking. It's easy, clear, and lots of fun!

SPINNAKER™
We make learning fun.

Disks for: Apple, Atari, IBM, Commodore 64,
Cartridges for: Atari, Commodore 64



Photos/Steve Borns





CHOOSING A

David H. Ahl



NOTEBOOK COMPUTER

Eight years ago, several of us paid a visit to Alan Kay at the Xerox Palo Alto Research Center (PARC). Late in the afternoon, the mood was given over to blue-sky dreaming, kind of a "wouldn't it be nice if. . ." session. One dream that seemed to be shared by everyone in the group, managers, researchers, and educators alike was that it would be wonderful to have a truly portable computer about the size of a three-ring binder with computational, word processing, and color graphics capability at an affordable price.

Today, except for the color graphics capability, such a machine is here. And it probably won't be too long until the graphics are available too.

Such a computer is not necessarily for everyone, but it is far easier to name people who could make good use of such a machine than those who could not. Anyone who works with numbers knows the benefits of a computer or programmable calculator. Most writers are switching to word processing systems in the home office. Now even the field notebook and pocket tape recorder can be replaced.

But notebook computers will find application with scores of people who have never touched a computer before—sales people making presentations to clients, business people at a branch office, students in the library, scorers at athletic games, and just plain folks who need to jot down a note or do a quick calculation.

What Is A Notebook Computer?

In a sense, there are three, or possibly four, categories of portable computers. There is the group that first took the name portable—the Osborne, Kaypro, Compaq type of machine. We prefer to think of these sewing-machine size computers as "transportable" rather than truly portable. Most weigh well over 20 pounds and are not something you would want resting on your lap for an extended period of time. Their appeal for most users is something other than portability. These machines are not included in our roundup.

At the other end of the spectrum are the pocket computers such as the Sharp PC-1500, Casio FX-700P, and Radio Shack PC-1. These are capable little units for computational applications, but rather limited for general purpose computing. We have included two machines in this roundup that overlap the pocket category, the TI CC-40 and HP-75C, but we have excluded the true pocket units.

Between these two extremes lie the notebook computers. The forecasters at Future Computing see this group as being split between the Radio Shack Model 100 type of computer and machines with more extensive capabilities such as the Sharp PC-5000, Gavilan, and Grid Compass. We have chosen to ignore this split, although with the rapid migration to this part of the market, perhaps we, too, will be seeking new categories before long.

At the time we put this article on our editorial schedule, there were six notebook computers. In the next three months, ten additional machines were introduced, with two introduced the week before our deadline. Of this total of 16 machines, 14 are included in this roundup. The two that are not included are the Grid Compass and Universal Data UDI-500. We excluded the Compass because its $9000 price was more than twice that of the next machine down, and we felt that it had appeal for a rather different market. We excluded the UDI-500 because we were unable to get the data on it in time for our print deadline.

The Same and Different

The 14 notebook computers are similar in some ways, but quite different in many other ways. All are portable, although 1½ pounds is a great deal more portable than 11 pounds. All perform computations, although the fastest is a staggering 20 times faster than the slowest. The minimum amount of user programmable memory ranges from 8K to 128K, a 16 to 1 difference.

Most use a proprietary operating system, although in most cases it is not an operating system at all, but simply a traffic cop to direct information flow. All but one of the machines speak Basic, mostly Microsoft; many have communications capabilities; but fewer have word processing or spreadsheet packages available.

From these few comparisons, you can see that it is not just a matter of deciding you want a notebook computer, marching down to your local computer store, plunking down your money, and taking one home. As with any other computer purchase, you should have some idea of what you want to do with it, and then look for a machine to meet both your needs and your budget. Also, as with other computers, you almost certainly will find more uses for the machine than you originally anticipated; thus you should buy as much capability as you can comfortably afford.

As you get acquainted with notebook computers, you will find that the manufacturers have made all sorts of tradeoffs. Size versus extra features is an obvious tradeoff—you just can't fit a large display, modem, and printer in a package the size of a paperback novel. Price is a tradeoff against nearly everything—speed, memory capacity, and technical sophistication. In the following sections, we discuss some of the key features—and related tradeoffs—in more detail.

The Display

Every one of the 14 notebook computers uses a liquid crystal display (LCD), and three of them (Gavilan, Sunrise, and Toshiba) have the capability to drive a CRT monitor as well. Note that these are also three of the highest priced units.

The LCD display is the familiar black on gray found in most digital watches and calculators today. A key advantage to an LCD display is that it draws relatively little power and is more or less shock resistant. It is light in weight compared to a CRT, but, because of the rigid material required for the display, larger ones start to add pounds, not ounces, to the weight of a computer.

LCD displays have several disadvantages. First, the response time is much slower than a CRT. Second, the pixels are relatively large thus ruling out high-resolution graphics. Third, in certain lighting conditions, LCD displays are difficult to read, even though most of the computers provide both tilt and contrast adjustments. And fourth, LCD displays are very sensitive to cold; at temperatures below freezing, they don't work reliably, and may stop altogether.

The Gavilan, RoadRunner, and Sharp display the most text characters, although the physical size of the displays on these machines is not the largest. This means that the characters are quite small—about the same size as dot matrix printer output. The WorkSlate, a spreadsheet-only machine, displays even more characters in its higher 16-line x 46-character display; it is more readable.

The displays on the remaining machines use larger pixels; they thus have larger character sizes and are more legible. On the other hand, computers with

LCD Display

Computer	Lines x Chars.	Total	Graphics Pixels
WorkSlate	16 46	736	none
Sharp PC-5000	8 80	640	80x640
RoadRunner	8 80	640	64x480
Gavilan	8 80	640	64x400
Toshiba T100	8 40	320	64x240
NEC PC-8201	8 40	320	64x240
Radio Shack 100	8 40	320	64x240
Teleram 3000	4 80	320	none
Xerox 1810	3 80	240	32x480
Casio FP-200	8 20	160	64x160
Epson HX-20	4 20	80	32x120
Canon X-07	4 20	80	32x120
HP-75C	1 32	32	none
TI CC-40	1 31	31	none

Time and Accuracy

Computer	Time	Accuracy
Sharp PC-5000	0:18	.005859375
Gavilan*	0:20	.005859375
Toshiba T100	1:09	.187805
HP-75C	1:38	.00000002
NEC PC-8201	1:44	.187805
RoadRunner	1:48	.187805
Teleram 3000	1:48	.187805
Xerox 1810	1:48	.187805
Epson HX-20	2:36	.0338745
Radio Shack 100	4:54	.0000002058
Casio FP-200	5:05	.00723
TI CC-40	5:41	.00000011
Canon X-07	6:03	.0000002058
WorkSlate**	n/a	n/a

* Estimated values
** Runs only spreadsheet software

one-line displays (HP and TI) are not usable for word processing, and are barely usable for spreadsheet work or even Basic programming. Even the two machines with 4-line by 20-character displays (Canon and Epson) are difficult to use and have been eclipsed by the larger LCD displays.


It is unlikely that you would want to use a notebook computer for any serious graphics except simple plots and bar charts. Ten of the computers provide such rudimentary plotting capability (see chart); we judge the Canon and Epson unsatisfactory for graphs even though Basic allows pixel addressing.

Speed and Accuracy

We were unable to run our benchmark on three of the 14 computers; however, based on the mpu, clock rate, and operating system, we were able to estimate the values for the Gavilan and Sunrise. As Basic is not offered on the WorkSlate, it is not included in the chart.



Four representative notebook computers: Teleram T3000, Radio Shack 100, TI CC-40, and Epson HX-20.

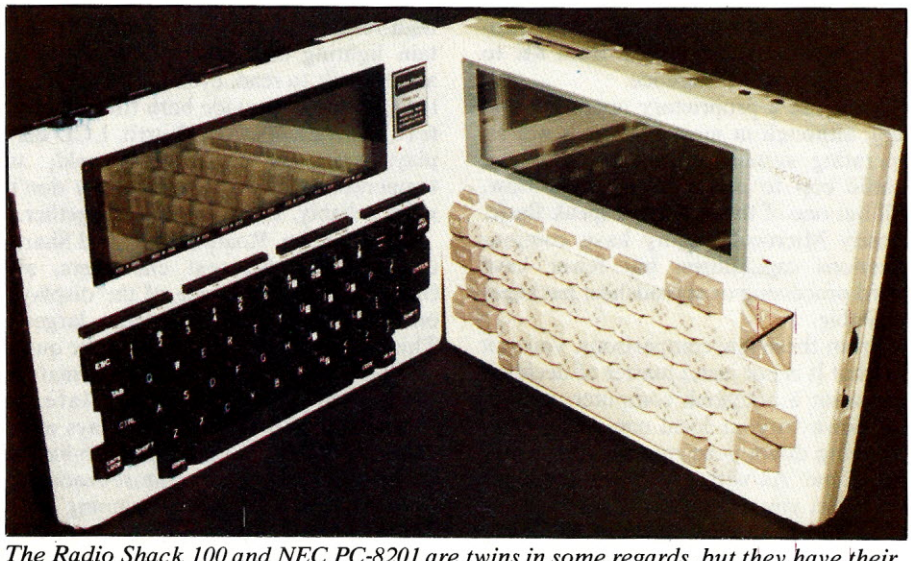

The Radio Shack 100 and NEC PC-8201 are twins in some regards, but they have their differences.

The two 16-bit 8088-based machines, the Sharp and Gavilan, are the speed demons. Both use MS-DOS with Microsoft GW (Gee Whiz) Basic. The Toshiba, NEC, and RoadRunner also use Microsoft Basic, but with an 8-bit 80C85 mpu, the CMOS version of the Z80A. Accuracy is grim, but speed isn't bad.

The Epson also uses Microsoft Basic, but on a different Z80 look-alike, a CMOS 6301 mpu. It is slightly slower, but considerably more accurate than the 80C85.

The Radio Shack Model 100 is a virtual twin of the NEC 8201 (both are made by Kyoto Ceramics in Japan), but Radio Shack elected to use double precision variables as the default mode. Hence, it is 2½ times slower than the NEC, but has astoundingly greater accuracy. The Canon X-07 uses a similar approach but, because of running the mpu at a slower clock rate, is even slower.

Incidentally, double precision variables can be specified on the NEC,



Can you save the Doomed Dinos and escape the Dino Mom's stomp?

Warped into a prehistoric world you've contaminated the dinosaurs. You must climb nine deadly cliffs, find the dino eggs and carry them back to the 21st century.

Dodge the radioactive snakes and spiders when you climb, leap and jump over the challenging cliffs to locate the eggs. As you fight your way up the nine levels your skills must increase if you are to survive the deadly creatures

Fire is the only weapon you have to keep the Dino Mom from putting her foot down and crushing YOU!



Can you escape the Dino Mom's stomp, avoid the crawling, clawing creatures, find the eggs and save the dinosaurs from extinction? Only you can face the challenges of survival in the prehistoric time warp of DINO EGGS™ from MicroFun, Inc. *...the fun goes on forever.*



Created by David Schroeder

micro fun™

...the fun goes on forever


Available for:
Apple II™ & IIe™
Atari 800™
IBM PC™
ColecoVision™
Commodore 64™

MicroFun™ and Dino Eggs™ are registered trademarks of MicroLab, Inc. Apple II & IIe, IBM PC, Atari 800, Commodore 64 and ColecoVision are registered trademarks of Apple Computer, Inc., IBM Corp., Atari, Inc., Commodore Electronics, Ltd., and Coleco Industries, Inc., respectively.

© 1983 **MicroLab, Inc.**

2699 Skokie Valley Road, Highland Park, IL 60035 312/433-7550

CIRCLE 174 ON READER SERVICE CARD

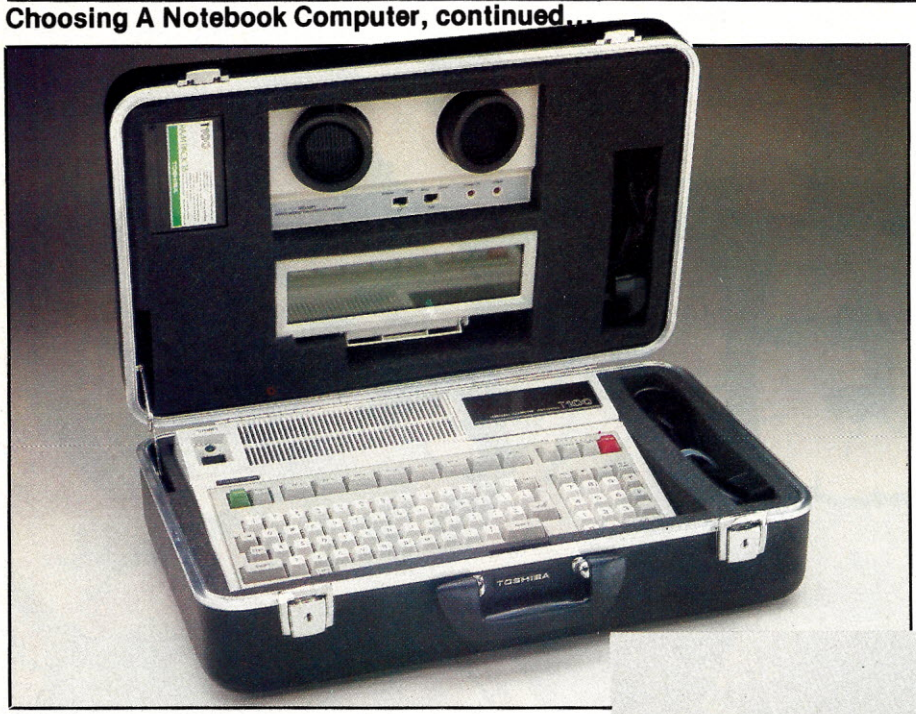

All of the notebook computers fit in an attache case. Here is one of the largest, the Toshiba T100, in a case with LCD display, acoustic modem, memory cartridge, and cables.

Toshiba, and RoadRunner and will yield the same speed and accuracy as the Model 100. The reverse is not true; specifying single precision on the Model 100 results in only about an 11% improvement in speed.

For a small machine, the HP-75 is amazingly fast and accurate; indeed it is the most accurate of all the computers we have ever tested, including several running in double precision mode.

The Casio and TI are the leisurely performers, but TI Basic with its 16-bit TMS 9995 mpu has the second best accuracy of all the computers tested, a nice plus for engineers and scientists who need accurate results to seven decimal digits.

Memory and Mass Storage

Four of the basic computers come with 8K of memory or less. Our experience indicates that this is barely adequate for any but the simplest applications. Two of the computers, the TI and the WorkSlate, can be expanded only to 16K; this, too, may prove limiting.

The upper internal memory limit on the next five machines is 32K, which should be adequate for most jobs. However, if you intend to leave several large programs or data files permanently or temporarily in the computer, you will probably want even more memory. The two 16-bit computers, the Sharp and Gavilan, provide the most internal memory capacity.

It is in the area of mass storage that manufacturers have taken radically different approaches. The HP-75C uses small magnetic cards, very convenient, but with rather limited capacity. Three of the computers have built-in microcassette recorders, the Epson, Xerox, and WorkSlate. This is a very satisfactory approach with a notebook computer as it does not require an external recorder with its added bulk and messy cables to be dragged around.

Another satisfactory, but more expensive approach, is plug-in RAM cartridges. The cartridges on the NEC, Toshiba, and RoadRunner are standard CMOS memory with a lithium battery. Even more expensive, but higher capacity bubble memory cartridges are available for the Sharp and Teleram.

The full-featured Gavilan has a touch pad, printer, and 3" floppy disk built in.



Videx INC TM

The Ultimate Spreadsheet Display For Apple®

128 Columns by 32 Lines, 80 Columns by 48 Lines, and More!


UltraPlan™


SPREADSHEET CALCULATOR

Software For use with Apple

- **EASY TO FOLLOW MENUS**
- **VARIABLE COLUMN WIDTHS**
- **SHIELDS CONFIDENTIAL INFORMATION**
- **PREVENTS ACCIDENTAL CHANGES**
- **EASY CURSOR MOVEMENT**

UltraPlan—an advanced spreadsheet program—makes planning, forecasting, and budgeting easy, fast, and accurate. UltraPlan can make full use of the UltraTerm, Videoterm, and can use additional memory cards for models as large as 512K. UltraPlan is compatible with VisiCalc® data files and features advanced commands not found in VisiCalc. UltraPlan is compatible with the Apple][and Apple //e computers.

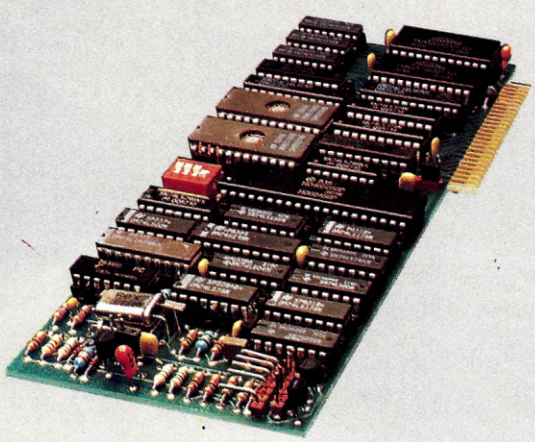

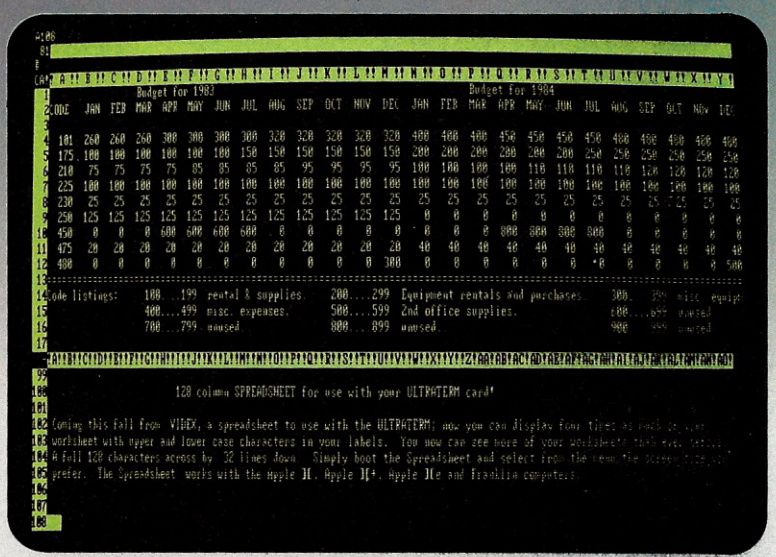

Actual photo of 128x32 screen.

UltraTerm™

A DISPLAY PERIPHERAL

To display more than 80 columns or 24 lines, you will need an UltraTerm video display card. This card gives your Apple][or Apple //e the ability to display more characters than ever. Nine display modes that can display as many as 4096 characters allow you to choose the number of columns and rows best suited to your application.

UltraTerm utilizes 8 x 9 or 8 x 12 dot character matrix (versus the normal 5 x 7) to deliver superb resolution in the crispest, cleanest characters available anywhere.

Other display attributes such as highlight/lowlight, inverse, and half-intensity backgrounds can be chosen to suit your own viewing preferences.

Videoterm™


The Videoterm—the best selling 80 x 24 display card for the Apple][—can be used with UltraPlan. The advanced software features and expanded memory capability of UltraPlan are also available to Videoterm users.

Apple is a registered trademark of Apple Computers, Inc. UltraPlan, UltraTerm and Videoterm are registered trademarks of Videx, Inc. VisiCalc is a registered trademark of VisiCorp.


Videx Inc.
897 NW Grant Ave. • Corvallis, Oregon 97330
(503) 758-0521

CIRCLE 229 ON READER SERVICE CARD

WE UNLEASH TH
POWERFUL GRAP

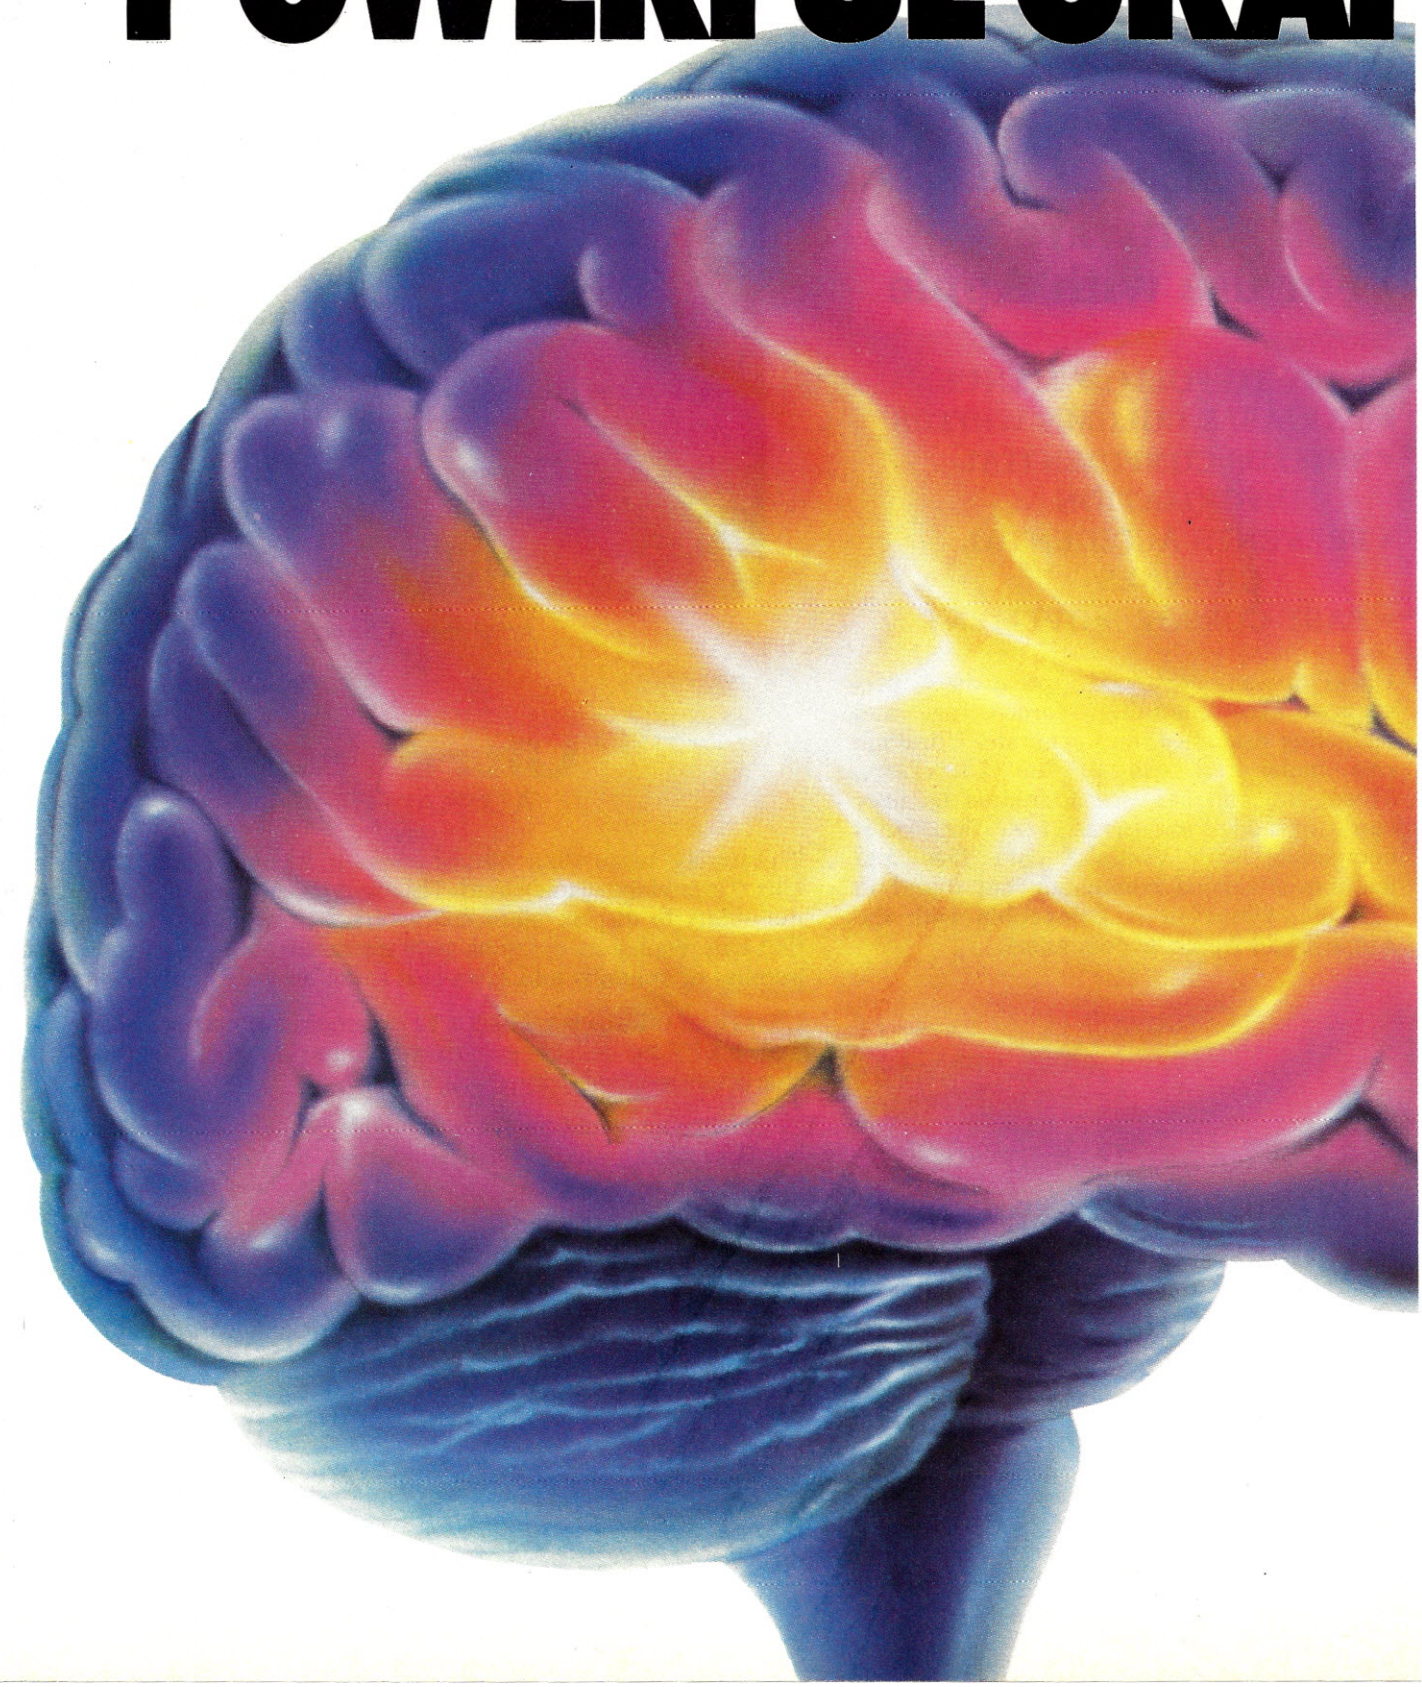

E WORLD'S MOST HICS TECHNOLOGY.

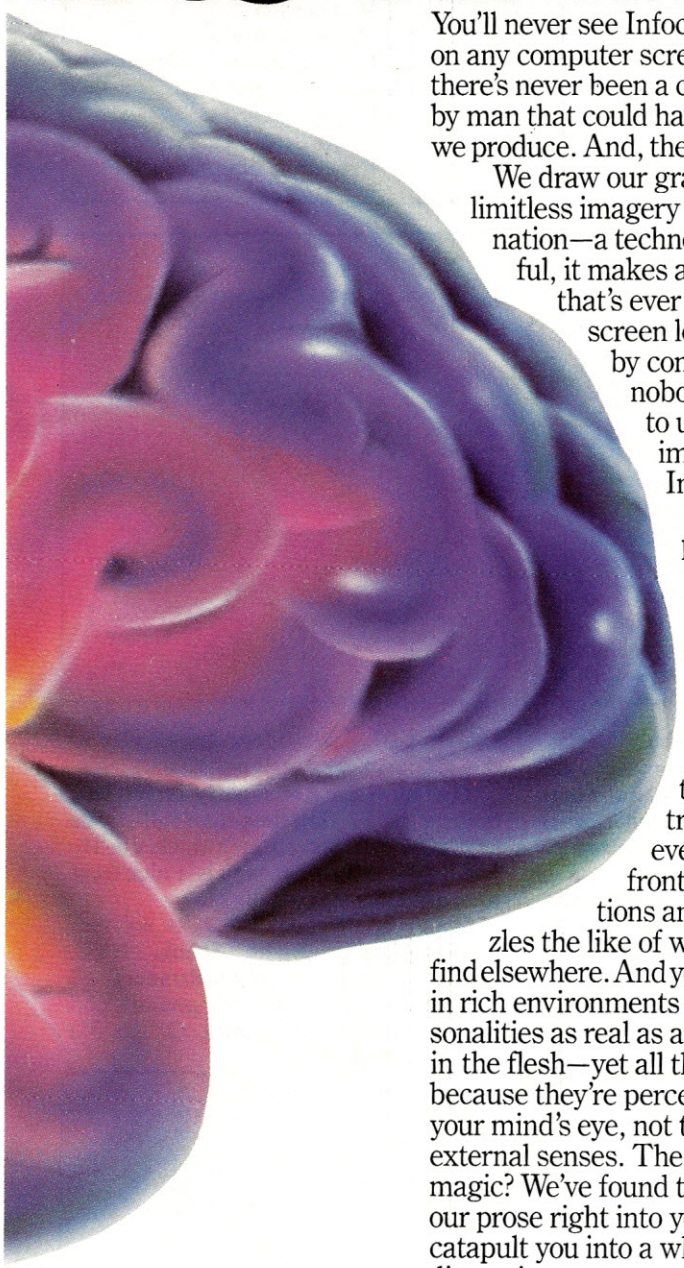

You'll never see Infocom's graphics on any computer screen. Because there's never been a computer built by man that could handle the images we produce. And, there never will be.

We draw our graphics from the limitless imagery of your imagination—a technology so powerful, it makes any picture that's ever come out of a screen look like graffiti by comparison. And nobody knows how to unleash your imagination like Infocom.

Through our prose, your imagination makes you part of our stories, in control of what you do and where you go—yet unable to predict or control the course of events. You're confronted with situations and logical puzzles the like of which you won't find elsewhere. And you're immersed in rich environments alive with personalities as real as any you'll meet in the flesh—yet all the more vivid because they're perceived directly by your mind's eye, not through your external senses. The method to this magic? We've found the way to plug our prose right into your psyche, and catapult you into a whole new dimension.

Take some tough critics' words about our words. SOFTALK, for example, called ZORK® III's prose "far more graphic than any depiction yet achieved by an adventure with graphics." And the NEW YORK TIMES saw fit to print that our DEADLINE™ is "an amazing feat of programming." Even a journal as video-oriented as ELECTRONIC GAMES found Infocom prose to be such an eye-opener, they named one of our games their Best Adventure of 1983.

Better still, bring an Infocom game home with you. Discover firsthand why thousands upon thousands of discriminating game players keep turning everything we write into instantaneous bestsellers.

Step up to Infocom. All words. No graffiti. The secret reaches of your mind are beckoning. A whole new dimension is in there waiting for you.

(For more information on Infocom games contact: Infocom, Inc., P.O. Box 855, Garden City, NY 11530.)



INFOCOM™

The next dimension.

For your: Apple II, Atari, Commodore 64, CP/M 8," DEC Rainbow, DEC RT-11, IBM, MS-DOS 2.0, NEC APC, NEC PC-8000, Osborne, TI Professional, TI 99/4A, TRS-80 Model I, TRS-80 Model III.

CIRCLE 178 ON READER SERVICE CARD

Unique among the 14 machines is the Gavilan with a built-in 3" floppy disk drive. Obviously, it must be treated with added care since a mechanical drive is inherently more sensitive to shock than a solid state device. Since none have been in the field long enough, we cannot comment on reliability.

Two of the computers, the Sharp and Toshiba, provide an interface to standard floppy disk drives for operation at home base. Several of the others plan to offer optional floppy disk interfaces.

Software, Internal and External

Eight of the 14 computers have proprietary operating systems which, as we said earlier, are generally not operating systems per se, but rather controllers of information and data flow. The two 8088-based machines, the Sharp and Gavilan, have full MS-DOS operating systems with, seemingly, few compromises for the small size.

For of the 8-bit machines have CP/M or CP/M compatible operating systems. These four computers plus the two with MS-DOS are theoretically able to run more existing software packages than the machines with proprietary systems. But it doesn't always work out that way.

The chart shows the availability of Basic (Microsoft, on all but four machines). The calculator-like machines, TI and HP, each use their own Basic. The TI Basic on the CC-40 is similar to Microsoft, but HP Basic has many differences and idiosyncrasies. Casio Basic is similar to Microsoft, and the WorkSlate, of course, has no Basic at all.

The other software packages listed in the chart are those that are built into the basic hardware or are currently available on the appropriate media. On the machines with standard operating systems, other software packages can often be loaded through the RS-232 port and will run with minor modifications. For example, we loaded *WordStar* into our Teleram and got it running with relatively few problems. On the other hand, the menus and CRT screen overlays do not fit the LCD displays on these notebook portables, so even if a package can be loaded, it might not work.

Some of the manufacturers are encouraging the development of software by third party vendors, some are "not discouraging development," and still others plan to do everything internally or under contract and are not encouraging development at all.

Beyond the packages listed in the chart, currently, the most additional software is available for the TI, HP, and Toshiba computers. A goodly amount is available for the Radio Shack 100, and slightly less for the Epson and NEC 8201.

Computer	RAM Memory Min	RAM Memory Max	Mass Storage
Sharp PC-5000	128K	256K	Bubble memory cartridges, external cassette or disk
Gavilan	64K	336K	3" microfloppy
Teleram 3000	64K	64K	Bubble memory cartridges
Toshiba T100	64K	64K	RAM pack, ext. cassette, or floppy disk
RoadRunner	48K	48K	RAM cartridges
Xerox 1810	16K	64K	Microcassette
NEC PC-8201	16K	64K	RAM pack, ext. cassette
Epson HX-20	16K	32K	Microcassette
WorkSlate	16K	16K	Microcassette
Casio FP-200	8K	32K	RAM pack, ext. cassette
Radio Shack 100	8K	32K	External cassette
HP-75C	8K	32K	Magnetic card
Canon X-07	8K	24K	RAM card, ext. cassette
TI CC-40	6K	16K	External wafertape

Computer	Operating System	Basic	Spread Sheet	Word Processor	Comm.
Canon X-07	Prop.	MS	-	-	-
Casio FP-200	Prop.	Y	Y	-	-
Epson HX-20	Prop.	MS	-	Y	-
Gavilan	MS-DOS	MS	Y	Y	Y
HP-75C	Prop.	HP	Y	Y	-
NEC PC-8201	Prop.	MS	-	Y	Y
Radio Shack 100	Prop.	MS	-	Y	Y
RoadRunner	CP/M	MS	Y	Y	Y
Sharp PC-5000	MS-DOS	MS	Y	Y	Y
Xerox 1810	CP/M	MS	Y	Y	Y
Teleram 3000	CP/M	MS	-	Y	Y
TI CC-40	Prop.	TI	-	-	-
Toshiba T100	CP/M	MS	Y	Y	Y
WorkSlate	Prop.	-	Y	-	Y

Just How Portable is Portable?

Although notebook computers are considerably more portable than the machines that created the portable label just 1½ years ago, some are much more portable than others. In general, size is inversely proportional to capability and features, but this is not universally true.

Three of the machines weigh under two pounds and are about the size of a hardback novel. Two, the TI and HP, have one-line displays, but one, the Canon X-07, packs a four-line display in this size package.

The WorkSlate is slightly larger but, because of its flat, less-than-full-stroke keyboard, it is just an inch thick. Its 16-line x 46-character display is a nice treat on a machine this small.

Going up in size, the next six machines (Epson, Radio Shack, NEC, Casio, Xerox, and RoadRunner) all weigh between four and five pounds, and all are the size of a thick (2" to 3")

Computer	Weight	Size			Volume
Canon X-07	1.1 lb.	8.0" x	5.1" x	1.0"	41 cu. in.
TI CC-40	1.4	9.5	5.8	1.0	55
HP-75C	1.6	10.0	5.0	1.3	65
WorkSlate	3.2	11.3	8.5	1.0	96
Epson HX-20	3.8	11.3	8.5	1.8	173
Radio Shack 100	3.8	11.8	8.5	2.0	201
NEC PC-8201	3.8	11.8	8.5	2.4	241
Casio FP-200	4.0	12.5	8.8	2.2	242
Xerox 1810	5.0	16.0	9.0	2.0	288
RoadRunner	5.0	11.5	7.8	3.0	269
Gavilan	9.0	11.4	11.4	2.8	364
Teleram 3000	8.8	13.0	9.7	3.5	441
Sharp PC-5000	11.0	12.8	12.0	3.4	522
Toshiba T100	13.0	16.5	11.0	4.0	726

Dead end.



Your agents risked their lives to find the enemy's secret headquarters.

Now you're risking yours to destroy it.

The odds are not in your favor. Because, you see, the other side is waiting for you.

Time is short, so you'll have to fly. But fly too fast, and you'll squander your precious fuel supply.

(By the way, since you're not expected back, they didn't bother to give you a parachute.)

As you soar over hundreds of miles of distinctly unfriendly territory, the action is thick, fast and frighteningly three-dimensional. Fighter aircraft. Helicopter gunships. Surface-to-air missiles. The attacks come from every direction.

Even from behind.

And you thought the rear-view mirror was only there for decoration.

Developed by Graham McKay.
Available for your
Commodore 64™

SUICIDE STRIKE



TRONIX™

8295 South La Cienega Blvd.
Inglewood, CA 90301 (213) 215-0529


CIRCLE 225 ON READER SERVICE CARD

mmodore 64 is a trademark of Commodore Electronics, Ltd.

three-ring binder. All will fit easily in a standard attaché case, and weigh no more than an equivalent amount of paper.

The next four machines represent a big jump in size and weight. While none of them approach the size and weight of the sewing machine portables, you will probably think twice before tossing one of them in your briefcase. Ten pounds sounds light, but on long trips your arm will start to feel as though it is stretching.

In some sense, the Toshiba is not a true portable, since it requires an AC power source. The design philosophy was to produce a machine, the cpu of which could be carried around along with a small LCD display, modem, and memory cartridges for work away from the home office. Back home, the same T100 serves as a desktop computer with a stationary monitor and floppy disk drives.

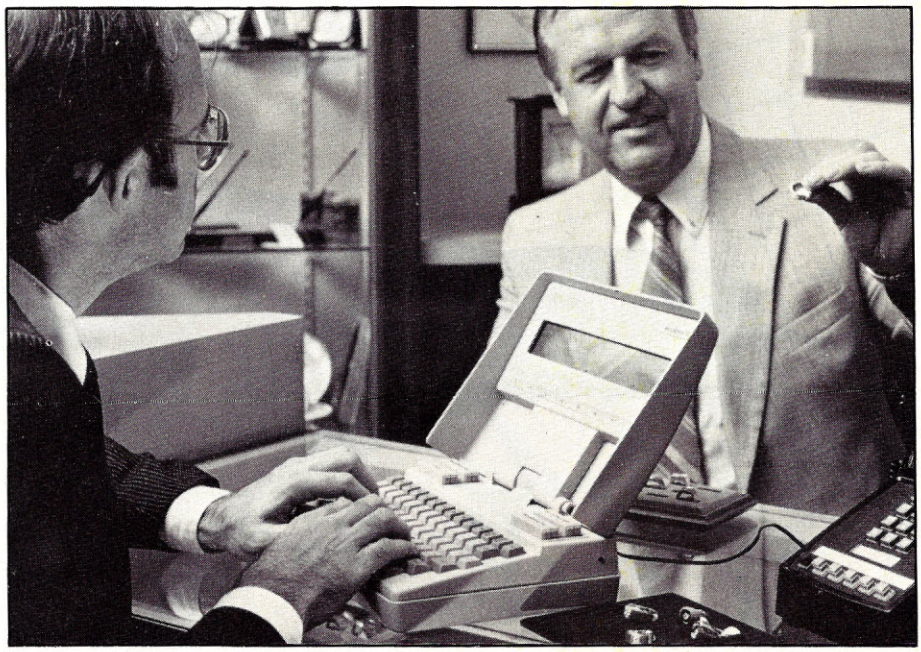

Notebook computers are an excellent sales tool. Here is a RoadRunner in the field.



Notebook computers are excellent travelling companions. Unfortunately, four airlines have banned their use in recent weeks.

Overall Ratings

The overall ratings of any products are, of course, affected by the biases of the testers. This is no exception. We are computer enthusiasts, so we look for good performance. We are writers, so we look for excellent word processing. We travel a great deal, so we look for lightweight portability. We are underpaid, so we look for an attractive price. We are impatient, so we look for fast storage.

In an effort to remove our biases, we rated each computer in each of 12 areas, as objectively as possible. We added up the total points and plotted the resultant value against the price.

The following are the 12 areas of ranking, and how each was scored.


- *Speed:* 7 minus benchmark completion time to nearest minute.
- *Size/Weight:* 8 minus weight divided by 2, rounded off.
- *Keyboard:* 5, standard full-stroke; 4, non-standard; 3, full-size, not full-stroke; 2, smaller; 1, calculator style.
- *Display:* Characters in display divided by 120, rounded off.
- *I/O:* Number of I/O ports.
- *Memory:* Minimum internal memory divided by 16K.
- *Mass Storage:* 5, floppy or bubble memory; 4, RAM cartridge; 3, built-in cassette; 2, external cassette; 1, other.
- *Programming Ease:* 5, large display, on-screen editing; 4, medium display, on-screen editing; 3, small display, on-screen editing or no on-screen editing; 2, one-line display; 1, no programming.
- *Graphics:* display height in inches plus number of vertical pixels divided by 20, rounded off.
- *Software:* Packages currently available; maximum 6.

Computer	Speed	Weight	Keyboard	Display	Input/Output	Memory	Mass Storage	Programming	Graphics	Software	Battery life	Features	Total
TI CC-40	1	7	1	0	1	0	2	2	0	5	8	0	27
Casio FP-200	2	6	3	2	2	1	2	4	4	2	3	0	31
WorkSlate	3	6	3	6	2	1	3	1	0	2	3	1	31
Canon X-07	1	7	2	1	3	1	2	3	3	1	8	1	33
HP-75C	5	7	1	0	2	1	2	2	0	5	8	0	33
Teleram 3000	5	4	5	3	2	4	5	4	0	3	2	1	38
Toshiba T100	6	0	5	3	4	4	4	4	5	6	0	1	40
Radio Shack 100	2	6	5	3	5	1	2	3	5	5	2	1	40
Epson HX-20	4	6	5	1	3	1	3	3	3	2	8	2	41
NEC PC-8201	5	6	5	3	5	1	4	4	5	3	2	0	43
RoadRunner	5	5	5	5	3	3	4	3	4	4	2	1	44
Xerox 1810	5	6	5	2	4	2	3	4	5	4	2	3	45
Sharp PC-5000	7	3	5	5	4	8	5	5	5	4	2	1	54
Gavilan	7	4	5	5	4	5	5	5	5	4	2	5	56

A_____

B_____

SUCCESS STARTS HERE

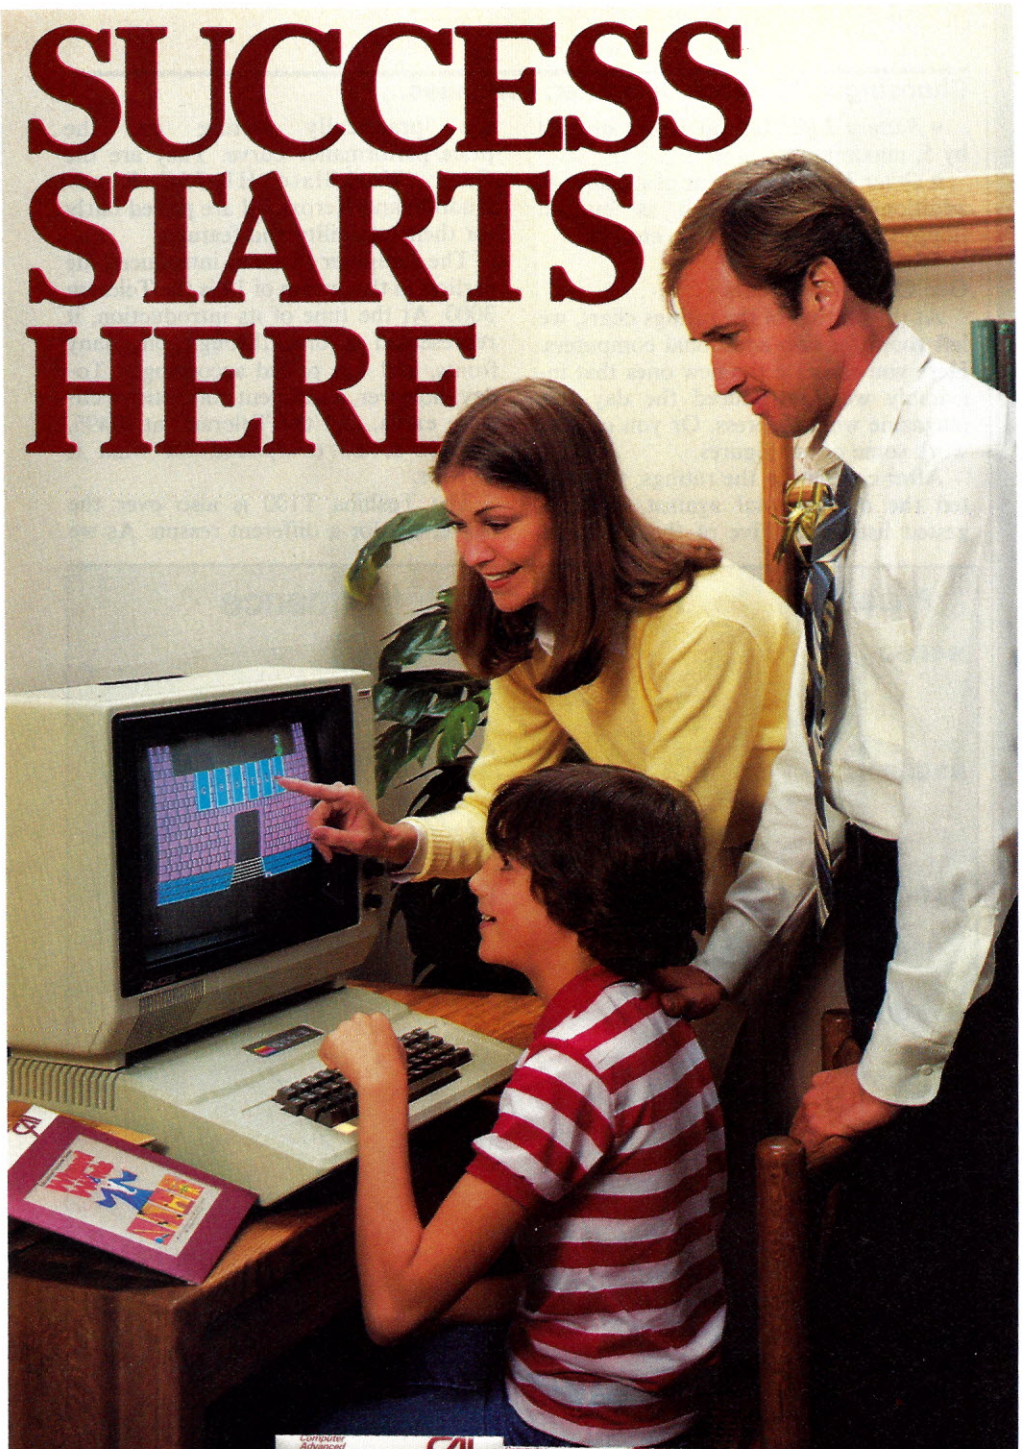

The day you bring your first CAI™ learning game home and watch your child play, you'll know the excitement of a winning choice.

Active Family

Your family and CAI's growing family of animated, full-color programs have a lot to share —beginning with a willingness to reach beyond the ordinary to achieve the best.

At Your Command

You may meet a princess, a juggler or a dragon in *Wizard of Words.*™ You may appear as a guest on TV in *Master Match,*™ *The Game Show*™ or *Tic Tac Show.*™ Or, you may extend these programs still further with our *LearningWare*™ diskettes, offering hundreds of questions matched to the teaching strategies in the games. In every case, CAI puts a world of imagination and learning at your fingertips. And puts you and your child in control.


Unique Approach

Key features place CAI thinking tools in a class by themselves: Each program comes with its own *library of subjects.* But that's just the start. Our unique *authoring system* let's you or your child create your own lessons on any topic, tailoring the program to your family's needs —and no computer knowledge is required. Add the fact that we've kept the vital ingredient –*FUN*– in learning, and our *proven success* is no surprise. Over 2,000 school districts now use CAI programs to teach essential vocabulary and logic skills in a variety of subject areas.

CAI supports its products —and you —with an unconditional guarantee and a free backup disk. And provides compatibility with the most popular computers: Apple,® IBM® (and soon Commodore™).

Wise Choice

CAI is a group of experienced educators and programmers who believe that success begins with opportunities you create at home. Ask to see a demonstration of CAI programs at your local computer store, and see for yourself just how rewarding a good education can be.

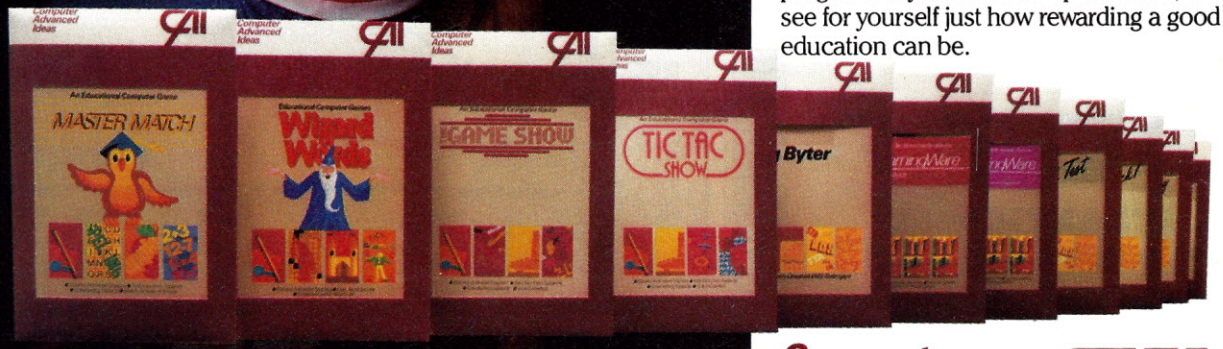

Computer Advanced Ideas CAI™

Bringing Ideas Home

1442A Walnut Street, Suite 341
Berkeley, CA 94709 (415) 526-9100

Apple is a registered trademark of Apple Computers, Inc. IBM is a registered trademark of IBM Corp. Commodore is a trademark of Commodore Business Machines, Inc.

CIRCLE 130 ON READER SERVICE CARD

7 Day Return

Most orders shipped within 24 hours.

ALL HARDWARE SOLD BY US IS COVERED BY OUR SEVEN DAY RETURN POLICY. ANY HARDWARE PRODUCT MAY BE RETURNED FOR A COMPLETE REFUND, EXCEPT SHIPPING CHARGES, WITHIN 7 DAYS OF RECEIPT. ALL PARTS AND DOCUMENTATION MUST BE RETURNED IN RESALEABLE CONDITION. A RETURN AUTHORIZATION NUMBER MUST BE OBTAINED FROM OUR TECHNICAL ASSISTANCE DEPT. BEFORE RETURNING ANY PRODUCT.

CALL FOR MONTHLY SPECIALS AND CURRENT PRICES.

HARDWARE FOR APPLE, ATARI, COMMODORE, IBM PC, and OTHERS

DISK DRIVES, PRINTERS, MONITORS, MODEMS, PRINT BUFFERS, MEMORY EXPANSION, I/O BOARDS, TERMINALS, TOUCH PADS, FLOPPY DISKS, PLOTTERS, HEAD CLEANTERS, DISK BOXES, FURNITURE, PROTECTION DEVICES, PAPER, ETC.

SOFTWARE FOR APPLE, ATARI, COMMODORE, and IBM PC

GAMES—WORDPROCESSORS
BUSINESS—UTILITIES

A D S SOFTWARE, ADVENTURE INTERNATIONAL, ASHTON TATE, AVAVON, BEAGLE BROS., BLUE SKY, BRODERBUND, CDEX, COMPUTER MAGIC, CONTINTENTAL, CREATIVE CONCEPTS, DATAMOST, DATASOFT, DESIGNWARE, EASTERN, EPYX, FOX & GELLER, GAMESTAR, GENTRY, HES WARE, IDSI, I MAGIC, INFOCOM, IUS, KENSINGTON, K-RAZY, KOALA, LJK, MICROCOM, MICROLAB, MICROPRO, MICROSOFT, MILLIKEN, MINDWARE, MUSE, ODESTA, PARKER BROS., PENGUIN, QUICK BROWN FOX, SCOTT ADAMS, SIERRA/ON LINE, SILICON VALLEY, SIRIUS, SORCIM, SPINNAKER, STONEWARE, SUBLOGIC, SYNAPSE, THORN EMI, TIMEWORKS, TIMEX, TRONIX, VERSA COMPUTING, VISI, XEROX, 20TH CENTURY FOX

• AND MANY MORE •

WE SUPPORT WHAT WE SELL!

CALL OR WRITE FOR FREE CATALOG

ATLANTIC COMPUTER ACCESSORIES, INC.

FREE SHIPPING—Payment w/order
UPS GROUND over $100.00

Se Habla Espanol

1-800-327-8020 OUTSIDE FLORIDA
1-305-972-5399 FLORIDA AND TECH ASSISTANCE

6951 N.W. 15th Avenue
Ft. Lauderdale, FL 33309

CIRCLE 112 ON READER SERVICE CARD

Choosing A Notebook Computer, continued...

• *Battery Life:* Life in hours divided by 5, maximum 8.

• *Other Features:* Count of number of additional features (such as built-in floppy disk, built-in printer, etc.)

Our Chart, And Yours

At the bottom of the ratings chart, we left room for two additional computers. Here you can rate the new ones that inevitably were introduced the day this magazine went to press. Or you can rework some of our figures.

After computing the ratings, we plotted the overall total against the suggested list price. Five of the machines are practically sitting on the price/performance curve. They are the Casio, WorkSlate, HP-75C, RoadRunner, and Xerox. All are priced fairly for their capability and features.

The computer that was introduced the earliest in this group of 14 is the Teleram 3000. At the time of its introduction, it represented a breakthrough on many fronts, and was priced accordingly. Today, however, a different competitive climate exists, and the Teleram, at $2495, appears to be overpriced for what it delivers.

The Toshiba T100 is also over the curve, but for a different reason. As we

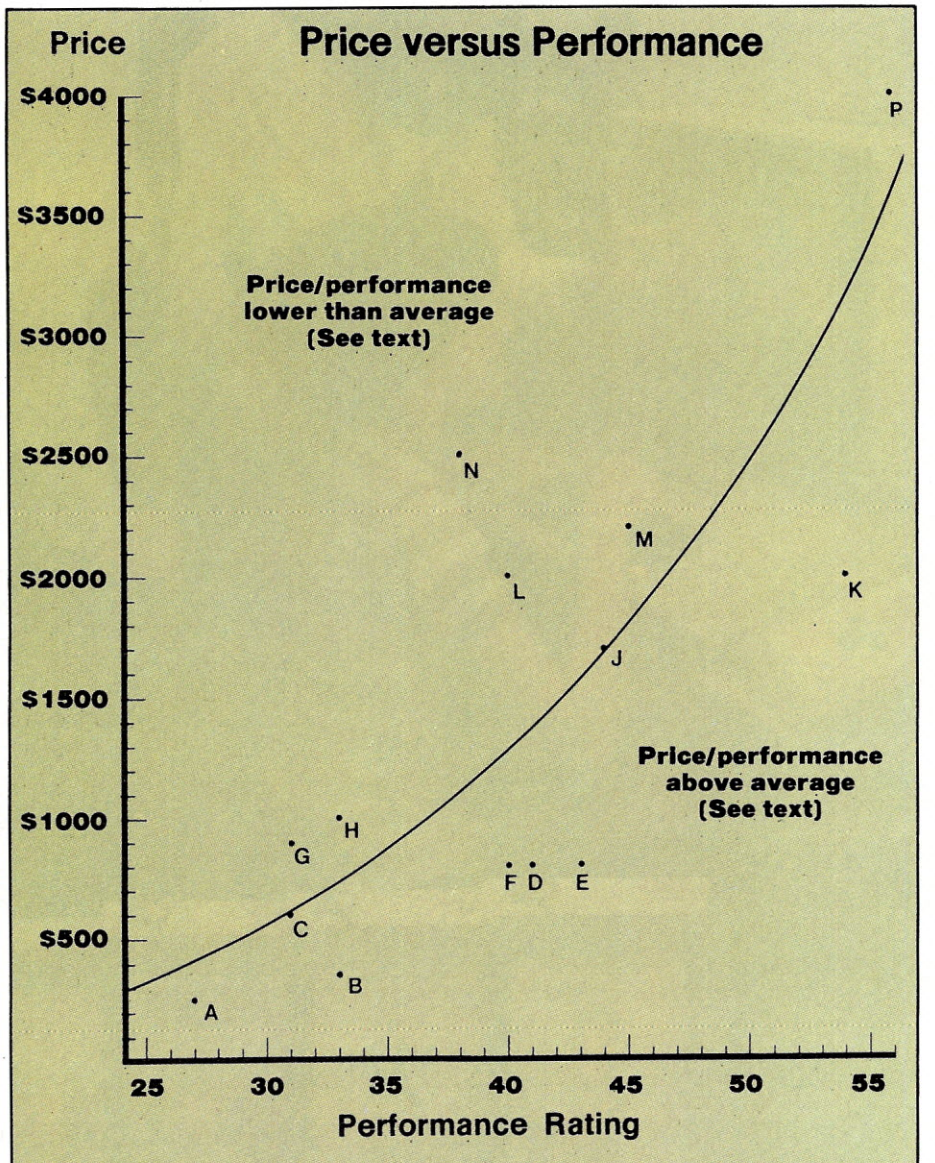


Table 1. Chart plots price (vertical) against performance (horizontal). Curve shows average for 14 notebook computers.

A	*TI CC-40*	*F*	*Radio Shack 100*	*L*	*Toshiba T100*
B	*Canon X-07*	*G*	*WorkSlate*	*M*	*Xerox 1810*
C	*Casio FP-200*	*H*	*HP-75C*	*N*	*Teleram T3000*
D	*Epson HX-20*	*J*	*RoadRunner*	*P*	*Gavilan*
E	*NEC PC-8201*	*K*	*Sharp PC-5000*		



HOW TO UNSCRAMBLE YOUR NEST EGG.

It doesn't take a computer to tell you that money can't buy you happiness.

But at last there is a piece of personal computer software that will make you a lot happier about your money.

And you're looking at it.

Making sense of your dollars.

Dollars and Sense™ is designed to save you money by organizing your money. By giving you the clearest picture you've ever had of your financial behavior.

It can establish budgets along any lines you like. Monthly or annually, fixed or variable. On up to 120 accounts.

It can write checks, make transactions automatically. Even remind you to pay your bills.

And as time goes by, it tells you exactly how you're doing. With a complete set of reports and full-color graphs* that come up on screen or print out on paper. At the touch of a key.

And all you have to do is spend a few minutes each week telling your IBM® PC, Apple® II or IIe what came in and what went out.



User friendly. Really.

Dollars and Sense also happens to be very easy to use. For everyone who uses it.

If you're a novice, at computing or accounting or both, don't worry.

The interactive demonstration disk will get you started. And the program will keep you going. With sample accounts, on-screen prompts and a user's manual that's written in plain English.

And one more thing. Dollars and Sense is tax-deductible.

But only if you use it on your taxes.

MONOGRAM™

8295 South La Cienega Blvd., Inglewood, CA 90301 213/215-0529

Apple is a registered trademark of Apple, Inc. IBM is a trademark of International Business Machines. *Color monitor required.

CIRCLE 226 ON READER SERVICE CARD

mentioned earlier, the T100 is the cpu component of a full-fledged desktop machine, one which we rated very highly in our review in November. Hence, it should not be compared only to portables, but should be viewed in its dual role. In this light, it may well represent a bargain.

Also above the curve is the Gavilan. This is a state-of-the-art machine that offers many novel and unique features—built-in 3" floppy disk, touch pad, snap-on printer, and Lisa-like software. Obviously, this all costs money, and the Gavilan is priced accordingly.

But perhaps most interesting are the five machines that fall below the curve, and thus represent a relative bargain. At the low end is the TI CC-40. For professionals, students, and engineers, this is an unbeatable machine at only $250, frequently discounted to well under $200.

Although we haven't had an opportunity to give the Canon X-07 a thorough shakedown, at $350 it appears to be a good buy.

Computer	Price
TI CC-40	$ 250
Canon X-07	350
Casio FP-200	499
Epson HX-20	795
NEC PC-8201	795
Radio Shack 100	799
WorkSlate	895
HP-75C	995
RoadRunner	1695
Sharp PC-5000	1995
Toshiba T100	1995
Xerox 1810	2195
Teleram 3000	2495
Gavilan	3995

Coming up a bit, if you can put up with the small screen size of the Epson HX-20, it offers a large amount of capability and extra features such as a built-in microcassette and printer and long battery life.

The Radio Shack 100 and NEC 8201 twins also fall below the curve. In our ratings, the NEC is the preferred machine, mainly because of the plug-in memory cartridges and on-screen Basic editing. On the other hand, if you want a built-in modem, the Model 100 is the machine of choice.

At the high end, the Sharp PC-5000 falls way below the curve. This is a spectacular, state-of-the-art computer offering tremendous capability in the $2000-3000 price range. The only real disadvantage of the Sharp is the 11-pound weight and somewhat greater bulk than many other units. To us, this seems a small drawback against its outstanding performance.

Obviously, our choice is not necessarily yours. Choosing a notebook computer—or any computer for that matter—is not easy. The increasing number of entries in the market and the bewildering array of features make the choice a tough one. Armed with the information from this issue, plus a healthy dose of skepticism and patience, you should be able to find the computer that best meets your needs and budget. END

Computer, Issue Reviewed Manufacturer Name & Address

Canon X-07
Canon USA
One Canon Plaza
Lake Success, NY 11042
(516) 488-6700
CIRCLE 401 ON READER SERVICE CARD

Casio FP-200
Casio, Inc.
15 Gardner Rd.
Fairfield, NJ 07006
(201) 575-7400
CIRCLE 402 ON READER SERVICE CARD

Epson HX-20
(March 1983, Buyer's Guide 1984)
Epson America, Inc.
3415 Kashiwa St.
Torrance, CA 90505
(213) 539-9140
CIRCLE 403 ON READER SERVICE CARD

Gavilan
Gavilan Computer Corp.
240 Hacienda Ave.
Campbell, CA 95008
(408) 379-8000
CIRCLE 404 ON READER SERVICE CARD

HP-75C
(Buyer's Guide 1984)
Hewlett Packard
1000 N.E. Circle Dr.
Corvallis, OR 97330
(503) 757-2000
CIRCLE 405 ON READER SERVICE CARD

NEC PC-8201
(August 1983, Buyer's Guide 1984)
NEC Home Electronics
1401 W. Estes Ave.
Elk Grove Village, IL 60007
(312) 228-5900
CIRCLE 406 ON READER SERVICE CARD

Radio Shack 100
(August 1983, Buyer's Guide 1984)
Tandy Corp.
Fort Worth, TX 76102
(817) 390-3011
CIRCLE 407 ON READER SERVICE CARD

RoadRunner
(January 1984)
MicroOffice Systems Technology
35 Kings Highway East
Fairfield, CT 06430
(203) 367-2525
CIRCLE 408 ON READER SERVICE CARD

Sharp PC-5000
(January 1984)
Sharp Electronics Corp.
10 Sharp Plaza
Paramus, NJ 07652
(201) 265-5600
CIRCLE 409 ON READER SERVICE CARD

Teleram 3000
(January 1984)
Teleram Communications Corp.
2 Corporate Park Dr.
White Plains, NY 10604
(914) 694-9270
CIRCLE 410 ON READER SERVICE CARD

TI CC-40
(August 1983, Buyer's Guide 1984)
Texas Instruments
P.O. Box 225012
Dallas, TX 75265
(214) 995-3741
CIRCLE 411 ON READER SERVICE CARD

Toshiba T100
(November 1983)
Toshiba America, Inc.
2441 Michelle Dr.
Tustin, CA 92680
(714) 730-5000
CIRCLE 412 ON READER SERVICE CARD

WorkSlate
Convergent Technologies, Inc.
2441 Mission College Blvd.
Santa Clara, CA 95050
(408) 727-8830
CIRCLE 413 ON READER SERVICE CARD

Xerox 1810
Xerox Corp.
Xerox Square 006
Rochester, NY 14644
(716) 423-3539
CIRCLE 414 ON READER SERVICE CARD

When contacting manufacturers, please mention *Creative Computing.*

"There's No Time Wiser Than After Dark."



When you're looking for solid, up-to-the-minute information, the best place to search is BRS/AFTER DARK. The one system designed for serious searchers, AFTER DARK offers you more databases citing more authorities on more subjects than any other popular online information service—at the lowest cost.

For only $6 to $20 per connect hour, including telecommunications charges, you can personally access the same online files used by major reference libraries and corporations worldwide. These files contain the latest information on subjects ranging from business management, mathematics and education to health, psychology, chemistry, family planning, and just about everything in between.

The range of databases available keeps expanding all the time. AFTER DARK now brings you the full text of the **Academic American Encyclopedia,** as well as the **Harvard Business Review.**

CIRCLE 119 ON READER SERVICE CARD

And for microcomputer buffs, there's a new online Software Directory listing major software packages.

AFTER DARK's simple, interactive language and straightforward logic take only minutes to master. The system is outstandingly comprehensive, remarkably fast, and above all, fun to use. All you need is your classified BRS password and any dial-up system. Then, every weekday from six in the evening until the early morning hours—round the clock on weekends and holidays—you can summon up a wealth of valuable information.

Use the coupon to sign up for BRS/AFTER DARK before another evening goes by. Seriously, it's like having your own university library online at home.

BRS COLLEAGUE
AFTER DARK

☐ Sign me up as a BRS/AFTER DARK subscriber. I understand I will be charged a one-time subscription fee of $50 plus connect hour rates as low as $6 per hour, billed to my credit card account with a monthly minimum charge of $12.

☐ I'd like to know more. Please send me a list of databases and a brochure describing BRS/AFTER DARK.

My profession is _____.

Mail to BRS • 1200 RT. 7 • LATHAM, NY 12110 • (518) 783-1161

CC 1/84

Name _____

Address _____

City _____ State _____ Zip _____

Charge to MASTERCARD/VISA/AMERICAN EXPRESS
(Circle one)

Acct. No. _____

Expires _____

Signature _____

The Ultimate Notebook Computer


David H. Ahl

While doing the series of articles on notebook computers, speaking to manufacturers, and, most of all, using a notebook computer for the past nine months, I thought of many things that I would like to see on the ultimate notebook computer.

That is not to say that today's machines aren't good—they are. In fact, I firmly believe that notebook computers will have more impact on the way people use computers than anything else since the first computer was invented. They will have more impact than transistors, than minicomputers, than microcomputers, or than graphics displays. Why? Because now you can take a computer anywhere. Your mind extending tool can be your constant companion—a.d it will be.


But what would be nice to have on it compared to the machines of today? Frankly, just a few additional touches would make today's notebook computers nearly ideal. A little less weight, a touch-sensitive color screen, the ability to run a wide range of software, stereo sound, and a longer battery life would make a mighty fine machine.

We put our heads together, came up with a wish list, and then had John Jinks do a rendering of the Ultimate Notebook Computer. END

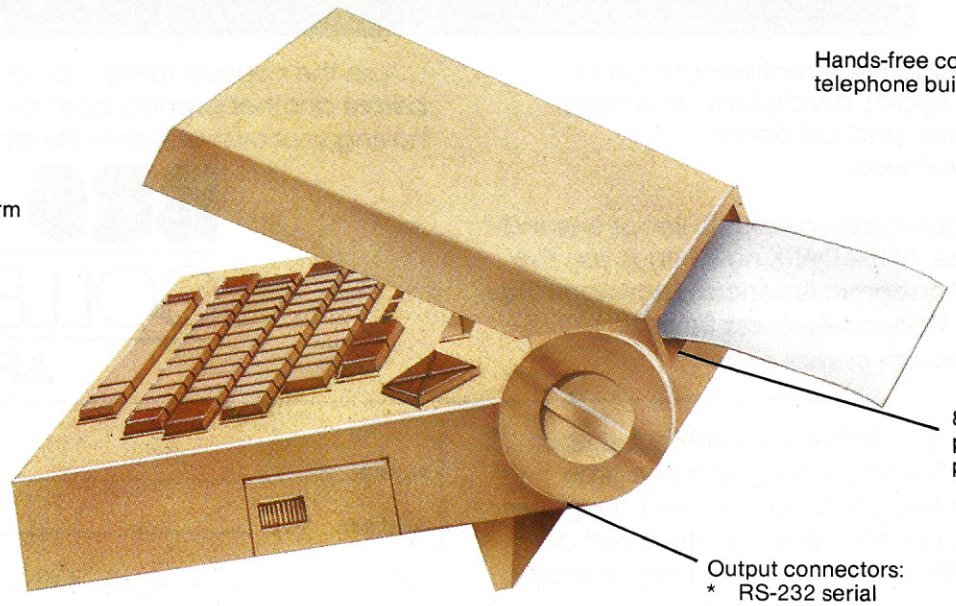

Stereo sound; 3 voices per channel, 5 octaves

Touch-sensitive, flat screen color display (5.5" x 9"). Up to 32 lines of 132 characters; graphics resolution 768 x 1024.

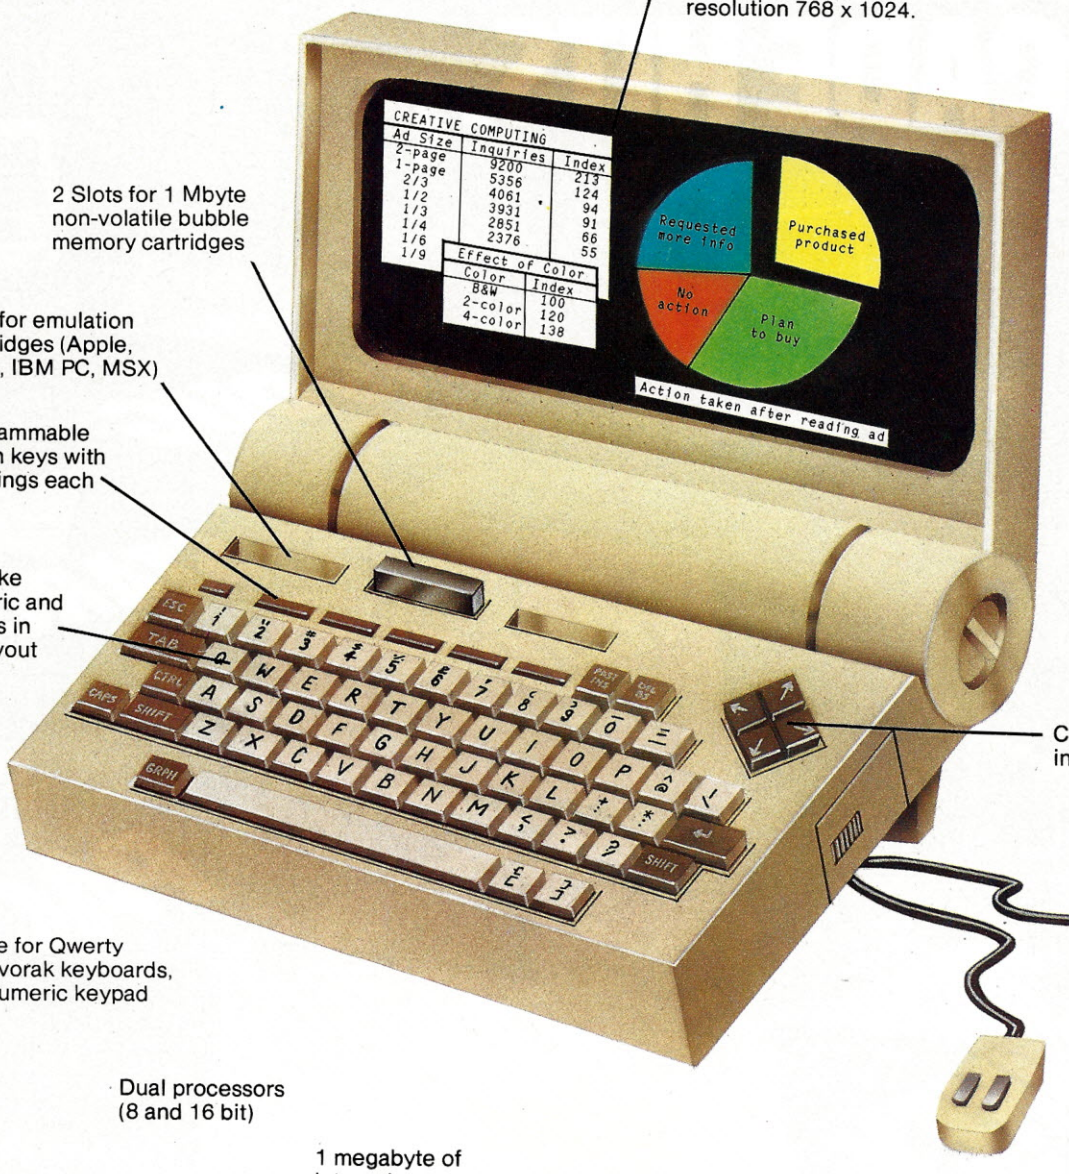

2 Slots for 1 Mbyte non-volatile bubble memory cartridges

Slot for emulation cartridges (Apple, Atari, IBM PC, MSX)

5 Programmable function keys with 4 meanings each

63 Full-stroke alphanumeric and symbol keys in standard layout

Cursor control keys in logical pattern

Toggle for Qwerty and Dvorak keyboards, also numeric keypad

Dual processors (8 and 16 bit)

1 megabyte of internal memory

Portable joystick and mini-mouse (fit in case)

Total compatibility with MS-DOS and CP/M

Contained in ROM:
* Telecommunications
* Word processing
* Spreadsheet
* Database package
* MBasic and CBasic

Optional peripherals:
* 20 Mbyte hard disk
* 5 1/4" and 8" floppy disks which can read and write any disk format (Apple, IBM, etc.)
* Read/write videodisc


NOW YOUR COMPUTER FITS THE ORIGINAL ARCADE HITS.
COMMODORE 64
IBM PC
COMMODORE VIC 20
DIG DUG
FROM ATARISOFT
ROBOTRON: 2084
FROM ATARISOFT
STARGATE
FROM ATARISOFT
DONKEY KONG
BY NINTENDO*
CENTIPEDE
FROM ATARISOFT
PAC-MAN
FROM ATARISOFT



Now the excitement of original arcade graphics and sound effects comes home to your computer.

Introducing ATARISOFT.™ A new source for computer software.

If you own a Commodore VIC 20 or 64, a Texas Instruments 99/4A, an IBM or an Apple II, you can play the original arcade hits.

DONKEY KONG by Nintendo, CENTIPEDE,™ PAC-MAN, DEFENDER, ROBOTRON: 2084, STARGATE and DIG DUG. (On the TI 99/4A you can also play Protector II, Shamus, Picnic Paranoia and Super Storm.)

So, start playing the original hits on your computer.

Only from ATARISOFT.

Some games also available on ColecoVision and Intellivision.

ATARISOFT™

Now your computer fits the arcade hits.

DONKEY KONG, Mario and NINTENDO are trademarks and © Nintendo 1981, 1983. PAC-MAN and characters are trademarks of Bally Midway Mfg. Co. sublicensed to Atari, Inc. by Namco-America, Inc. DEFENDER is a trademark of Williams Electronics, Inc., manufactured under license from Williams Electronics, Inc. ROBOTRON: 2084 is a trademark and © of Williams 1982, manufactured under license from Williams Electronics, Inc. STARGATE is a trademark and © of Williams 1981, manufactured under license from Williams Electronics, Inc. DIG DUG is created and designed by Namco Ltd. manufactured under license by Atari, Inc. Trademarks and © Namco 1982. PROTECTOR II is a trademark of Synapse Software Corporation, manufactured under license by Atari, Inc. SHAMUS is a trademark of Synapse Software Corporation, manufactured under license by Atari, Inc. PICNIC PARANOIA is a trademark of Synapse Software Corporation, manufactured by Atari, Inc. SUPER STORM is engineered and designed by Synapse Software Corporation, manufactured under license by Atari, Inc. ATARISOFT™ products are manufactured by Atari, Inc. for use on the above referenced machines and are not made, licensed or approved by the manufacturers of these machines. COMMODORE 64, VIC 20, TEXAS INSTRUMENTS 99/4A, IBM, APPLE, COLECOVISION and INTELLIVISION are respectively trademarks of Commodore Electronics Limited, Texas Instruments, International Business Machines Corp., Apple Computer, Inc., Coleco Industries, Inc. and Mattel, Inc. A Warner Communications Company.
© 1983 Atari, Inc. All rights reserved.

Complete this coupon and we'll keep you up to date on the newest hits from ATARISOFT.™

Name _____

Address _____

City _____ State _____ Zip _____

Telephone _____

PRODUCT OWNED: (Check one)

1 ☐ TI-99/4A
2 ☐ IBM PC
3 ☐ Commodore 64
4 ☐ ColecoVision
5 ☐ Commodore Vic 20
6 ☐ Intellivision
7 ☐ Apple II
8 ☐ _____

Mail to:
Atari, Inc., P.O. Box 2943,
So. San Francisco, CA 94080.

ASM 7

CIRCLE 104 ON READER SERVICE CARD

14 Notebook Computers in Brief

David H. Ahl

Since the introduction of the first pocket computers just over two years ago and the first transportables about 1½ years ago, we have been avidly following the developments in the field. We have reviewed a cross section of these computers on the pages of *Creative Computing* (the dates of these reviews are noted in the chart at the end of the previous section).

This section is not intended to be an exhaustive, in-depth review of the computers. Rather, it contains a description of each machine including impressions from our review of it or from the comments of other users.

Texas Instruments CC-40

The Texas Instruments Compact Computer 40 (CC-40) bridges the gap between the pocket and notebook categories. It has one of the best versions of Basic ever offered by TI and provides exceptional accuracy, albeit rather slowly.

The CC-40 is powered by four AA alkaline batteries which will last for 200 hours of use, considerably longer than most other notebook machines. If you prefer, an AC adapter is also available.

Although the keyboard is arranged in the standard QWERTY layout, it is only two-thirds the size of a standard keyboard and sports calculator-style keys. Thus, touch typing is not possible, and even experienced typists will find a two-finger approach more reliable. For data entry, a numeric keypad is provided to the right of the main keyboard.

The CC-40 uses a single line, 31-character display capable of reproducing upper- and lowercase text and a variety of graphics symbols. The display scrolls horizontally on a maximum 80-character line. The LCD screen also displays several special status indicators above and below the main text line, so it is more versatile than it might appear.

As it comes out of the box, the CC-40 does not interface to anything directly—not even a cassette recorder. However, an eight-pin connector attaches to a hexbus peripheral module. This unit provides an interface to three peripherals, an RS-232 interface, a printer/plotter, and a wafertape drive. On the top of the CC-40 is a cartridge port that can accept ROM cartridge software or a memory expansion cartridge.


TI has announced a wide variety of software packages on both wafertape and ROM cartridges. The packages tend to be adaptations of programmable calculator software and will have greatest appeal for engineers and financial analysts.

The most likely market for the TI CC-40 is probably as a competitor to pocket computers and as an upgrade from programmable calculators. In this market with its low price tag (frequently discounted to under $200), it is a formidable competitor.


Casio FP-200

Casio is a very successful maker of calculators, watches, and electronic musical keyboards. However, their previous forays into computers have ended in failure, at least in the U.S. With the FP-200, they have taken a different approach and may be able to carve out their own niche in the market.

The FP-200 is primarily a spreadsheet machine and runs a built-in software package called CETL (Casio Easy Table Language). It is a *VisiCalc*-like language, and anyone familiar with another spreadsheet will be able to use it immedi-

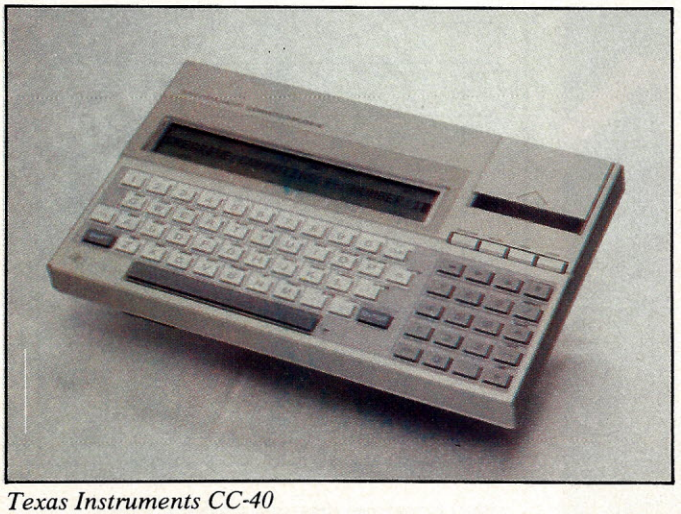

Texas Instruments CC-40

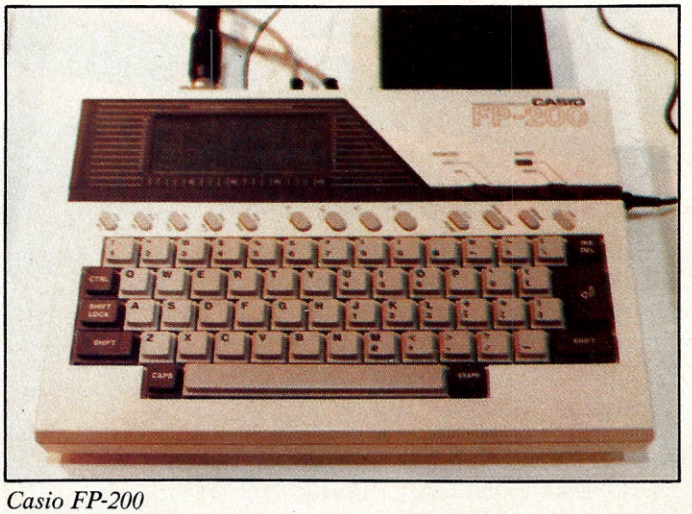

Casio FP-200

HELENA ON CREATIVITY.



Name:	Helena Paoli
Age:	9
Home:	Belvedere, California
School:	Bel Aire
Hobbies:	Drawing, playing with dolls, reading, swimming
Ambition:	To be a fashion designer
Favorite software:	Creature Creator™ by DesignWare

"I like *Creature Creator* because it's kinda like drawing—only the pictures are alive! I can make different creatures, and then make them do lots of different dances.

"Lots of games—well, you just keep shooting or dodging things until you learn the pattern. Then you can beat it easily, and you get bored.

"*Creature Creator* lets me use my imagination. Now a couple of kids have it, so we get together to compare the creatures and monster dances we've made."

DESIGNWARE ON CREATIVITY. Children learn the most through creative problem solving. That's why *Creature Creator,* like so many DesignWare games, is an open-ended exercise that challenges and nourishes young minds. In a way that's a lot of fun.


DesignWare programs go far beyond putting a sugar coating on rote drills; they encourage kids to draw on something they just happen to have an unlimited supply of—imagination!

SPELLING, MATH, OR LANGUAGE. Games like *Creature Creator, Spellicopter*™ and *Math Maze*™ inspire youngsters to tap into that fertile idea-field. To actively become part of the program, in effect creating "new" games as they go along. And all the while building up solid skills in the basics. And all the while having a lot of plain old fun.

DesignWare. We make learning come alive. On Apple II,® IBM® and Atari® computers.

Ask for DesignWare products at your local software retailer. Or call us at 800-572-7767 or 415-546-1866 and ask for our free catalog.

As Helena Paoli says, "Mom, Dad—look what I've created now!"



DesignWare™

LEARNING COMES ALIVE

Apple II is a registered trademark of Apple Computer, Inc.
IBM is a registered trademark of International Business Machines.
Atari is a registered trademark of Atari, Inc.

CIRCLE 152 ON READER SERVICE CARD



WorkSlate



Canon X-07

ately. Also built-in is Casio Basic, a Microsoft-like implementation with rather leisurely performance.

The FP-200 is built around a CMOS version of the Z80 and has 32K of ROM and 8K of RAM, expandable to 32K. External mass storage requires either a cassette tape recorder (300 baud) or a 70K single-sided, single-density floppy disk drive. Output ports are also provided for a parallel printer and RS-232 serial device such as a modem.

The FP-200 has an 8-line x 20 character display. For graphics, 64 x 160 pixels can be individually addressed.

The keyboard is full-size, but uses calculator-style short-throw keys. It has 57 alphanumeric keys, four special keys, five function keys (two meanings each), and four cursor keys (arranged in a straight line). An optional, external numeric keypad is available.

The FP-200 would be a good choice if you are looking for a machine primarily for spreadsheet calculations and some Basic programming. The keyboard renders it unsuitable for word processing, even if there were software available which there is not. Several utility software packages (sort/merge, statistics, graphics) are promised and would further enhance the utility of the machine.

The suggested retail price is $499, but we have yet to see a machine in any retail outlets.

WorkSlate

Like the Casio FP-200, the WorkSlate from Convergent Technologies, is primarily a spreadsheet machine. Indeed, all the software packages on the WorkSlate are various adaptations of the basic spreadsheet program.

In a departure from all of the other notebook computers, the WorkSlate uses a CMOS version of the 6800 mpu. Included with the basic system is 16K of RAM memory. Currently, this is not expandable, but a company spokesman tells us that a 16K upgrade (32K total) will eventually be available. That is necessary, because the 16K gets filled up with just a 30 x 24 cell spreadsheet; in this state, it takes over two minutes just to perform a simple operation. Theoretically, a spreadsheet can expand to 128 rows and columns, but if you have 128 in either dimension, 5 is the maximum in the other.

The display on the WorkSlate consists of 16 lines by 42 characters. Some lines are devoted to status indicators, headings, and formulae; as a result, about 11 by 5 cells of a spreadsheet are visible at a time.

The keyboard follows the QWERTY layout, but it is about six percent smaller than a standard keyboard. This is not bothersome, but the circular keys with less than full travel might be. Clearly, it is not designed for text entry, and the majority of the numeric entries will be made from the numeric keypad to the right of the main keyboard. Indeed, there is no row of numeric keys over the alphabetic portion of the keyboard. A nice touch is the large diamond shaped cursor control key between the alpha and numeric keys.

To the right of the display is a microcassette recorder. This is a dual-function unit which can record either data or audio. The data transfer rate is 2400 baud, one of the fastest available on a small computer. For audio recording, WorkSlate has a built-in speaker, microphone, and jacks for an external earphone and microphone.

Also built in are a direct-connect, 300-baud modem and communications software. A matching printer, capable of 40- or 80-column compressed print widths is available for $250. Alternatively, an adapter is available for standard parallel or RS-232 serial printers or other devices.

We mentioned software packages other than the basic spreadsheet. These are Memo Pad, Phone List, and Calendar. Actually, the only difference between these and blank spreadsheets are some headings, graphics, and modifications of column width. In other words, a Memo Pad is simply a spreadsheet whose A column is 128 characters wide. Two self-instruction tutorial tapes are also available.

As the reviewer in our sister publication, *Computers & Electronics* concluded, "The features of WorkSlate are geared to the business person who wants spreadsheet capabilities in a portable package without all the fuss of learning about computers. For those who want such a business tool, WorkSlate has hit its design mark."

Canon X-07

The Canon X-07 is an exceptionally compact computer, weighing just over one pound. It has a four-line display, sensible cursor movement keys, and a novel optical communications capability.

The X-07 is primarily intended for computing in Basic, and no other software is currently built-in or offered. The default mode for calculations is double precision; as a result, the machine is quite accurate, but was the slowest of the 14 tested.

The X-07 uses a CMOS version of the Z80 mpu and has 20K of ROM and 8K of RAM (expandable to 24K). An external cassette recorder provides mass storage. The X-07 is powered by four AA akaline batteries with a rated life of "up to 2000 hours of use." Unbelievable!

Small memory cards about the size of two stacked credit cards are available with both ROM for applications software packages and RAM for removable user memory. Each card has a lithium watch battery which provides power for over a year.

The keyboard is laid out in QWERTY fashion, but it is 20% smaller than a standard keyboard and has calculator-

Sports Illustrated
Sports Special
microcomputer news
Tuesday, April 1

Four exciting sports games from Avalon Hill

Colts romp over Dolphins, 24-7

Last night's sensational gridiron duel proved there are no underdogs in Avalon Hill's **Computer Football Strategy**.

The Colts ran in the first Miami punt and then capitalized on a Dolphin fumble to jump out to a quick 14-0 lead.



Early in the 1st qtr. with Colts in possession
ATARI SCREEN

Dropped passes, penalties, fumbles . . . all took their toll in the exciting contest in the home of Ogie Pincikowski, newest armchair quarterback. Says Ogie with some satisfaction, "It's the next best thing to being out on the gridiron itself!"

In Avalon Hill's **Computer Football Strategy** you pit your skills as play caller against the computer or go head-to-head with a live opponent.

Atari® Home Computers 32K Disk (joystick required); Commodore 64® Disk; IBM® PC 64K Disk; TRS-80® 32K Disk and 32K Cassette for Models I/III/IV; Commodore 64® Cassette & Atari® Home Computers Cassette. All Diskettes $21; Cassettes $16.

Marciano to spar Ali

Tomorrow night's 15 round **Computer Title Bout** matchup between two of professional boxing's greatest fighters promises to be historic in all senses of the word.

This "Match from the Past", as the bout has been dubbed, is slated to begin at 9pm in the basement of Marvin "Max" Maxwell's house on the outskirts of Baltimore. States Max, "I've always wondered if the incredible boxing skills of Ali could stand up to the sledgehammer fists of the Brockton Blockbuster."


Avalon Hill's **Computer Titlebout** will factor in dozens of variables in deciding the ultimate winner, round by grueling round.

Adds Max, "The game gives you the statistics of hundreds of contenders, and lets you do the pairing up. In fact, you can even create your own fighter. **Computer Title Bout** is a fast-moving game for two players, or solitaire against yourself."

Atari Home Computers 48K Disk for $30.

Tournament Golf a hole-in-one

"Sixteen feet to the hole and a steep break to the left." Harvey Hornbuster carefully considered his predicament. The entire match had come down to this last putt. Sink it and he's a hero; miss it and he'll be buying the drinks.

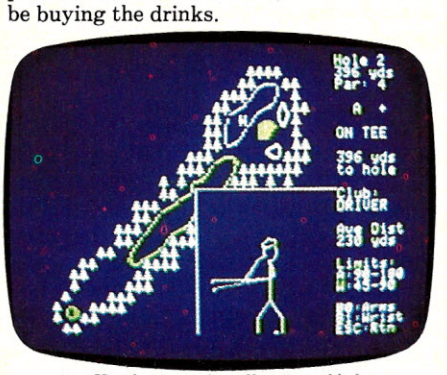

Hornbuster teeing off on second hole

Carefully, with a steady hand and just the right twist to the wrists, Harvey took his putt. Looking over his shoulders at the video screen, the other members of his foursome held their breath and stared as the ball steadily approached the hole and then disappeared. A perfect putt!!

Tournament Golf brings you all the tense excitement of a real day out on the links right in your own home. Hooks, slices, muffs, traps, water hazards and rough . . . it's all there and more, including **two** challenging 18 hole championship golf courses.

Apple Home computers 48K Disk for $30. Joystick/Paddles required.

Upstart Cubs Take AH Series in 6

Chicago's stunning victory yesterday in the living room of **Computer Statis Pro Baseball's** AH-League manager Milton Mousehouse didn't surprise the team's owner, Fred Smith. Commented Smith after the victory, "It was just sound management. My lineup selection, pitcher choices and timely substitutions carried me through."

Trailing 4 to 1 going into the ninth inning, the Cubs' bats finally came alive as they pounded in 5 runs to win the game, and the championship, 6 to 4. A good showing for Fred's cubs, especially after dropping the first two games to the defending champions, the Baltimore Orioles.

Added Milton, "Avalon Hill's **Computer Statis Pro Baseball** places you in charge of your favorite ballclub. **Your** decisions can make an also-ran into a pennant winner. You don't play against the computer. You can, however, play against yourself and have the computer do all the bookkeeping. It will even supply you with a printout of the boxscores after each game, if you have a printer."

Of course, you can also do as Milton and his friends did and organize a league of your own, capping it off with your own championship series. **Computer Statis Pro Baseball** puts you in the dugout, so to speak, especially with Milton's wife Mortina supplying the hot dogs!

Apple Home Computers 48K Disk for $35; TRS-80 Mods. I/III/IV: 16K Cassette $25 & 32K Disk $35.



AH microcomputer games®
A DIVISION OF
The Avalon Hill Game Co.
4517 Harford Rd. • Baltimore, MD 21214
AVAILABLE AT LEADING COMPUTER GAME STORES EVERYWHERE
or call Toll-Free: **1 (800) 638-9292** for the name of a store near you. Ask for Operator S.
® Trademarks of Warner Communications, Commodore Business Machines, International Business Machines and Tandy Corporation.
CIRCLE 117 ON READER SERVICE CARD



Hewlett Packard HP-75C



Toshiba T100

style keys. The spacebar is half the normal size, and there is only one SHIFT key, located below the Z. Thus, although it has a good feel, it is not suitable for rapid typing. However, for program editing, the cursor control keys are ideal, being oversize and laid out in a logical pattern.

The display has four lines of 20 characters each. Also, individual pixels can be addressed on the 32 x 120 screen. The X-07 also has a speaker capable of reproducing notes over four octaves.

Six peripherals are available for the X-07. A color plotter both prints and plots on 4½" wide paper in four colors. A compact thermal printer uses narrow (2¼") thermal paper. Three interface modules are available: one for RS-232 devices, one for a monitor or TV set, and another for interfacing to parallel devices such as Centronics-type printers, sensors, and synthesizers.

The last peripheral is an odd one; it is an infra-red optical coupler that permits two X-07 computers to communicate with each other. It makes a novel demonstration at trade shows, but we're not sure of what use it would be to the average user.

The Canon X-07 is a capable Basic-speaking computer in a compact package with a nice printer/plotter available. Support may be another issue. All of our testing of the X-07 was done in France and Japan where the Canon people were much more helpful than in the U.S. Buyers should hope that Canon will be more friendly to them than they are to the press.

Hewlett Packard HP-75C

The HP-75 is a very compact computer with unexpected speed and the highest accuracy of any computer we have ever tested—portable or desktop. It has a one-line display, but a monitor, as well as several other peripherals, are available.

At first glance, the keyboard appears to be much smaller than a standard one, but in fact is only 5% reduced. However, it uses calculator-style, short-travel keys and has a few keys in odd places; thus it is not suitable for rapid typing. A block of ten alpha keys can be specified as a numeric keypad for data entry.

Like earlier HP calculators, the HP-75 uses magnetic cards for program and data storage. Each card is 10" long and stores up to 1.4K. The cards must be pulled by hand through a slot on the lower right; it takes a bit of practice to get the hang of it, but the computer tells you if you have pulled it too fast or too slow.

The HP-75 uses a custom HP CMOS processor. It comes with 8K of RAM built in. Three slots on the front accommodate additional 8K RAM cartridges or ROM software cartridges. The machine can hold several programs which are accessed like a mini timesharing system. The HP-75 even has an Appointment Mode which can trigger one of nine different alarm sounds, a Basic program, or other action.

As expected, the HP-75 uses a dialect of HP Basic which is quite different from the DEC Basic, on which Microsoft Basic was modeled. Thus, string handling, functions, and PRINT USING (DISPLAY USING on the HP-75) are quite different from what much of the world regards as standard. Nevertheless, HP Basic is quite satisfactory and has several unexpected features such as powerful TRACE utility, recursive calls, and the ability to issue operating system commands from within a Basic program.

As might be expected, HP is converting programmable calculator application packages to the HP-75. Several engineering and financial packages have been released, and more are on the way. Even *VisiCalc* is available for the HP-75; with the single 32-character display line, it is less than satisfactory, but with the optional monitor hookup, it is fine. A word processing module has been announced, but we can't imagine doing serious text entry on the HP-75 keyboard.

The HP-75 uses an interface loop structure with each peripheral device daisychained in a continuous loop. Available peripherals include a digital cassette drive (fast and reliable), 24-column thermal printer, video interface (16 lines x 32 characters), plotter, 80-column dot matrix printer, and several laboratory device controllers.

The HP-75 is a fine computer system, particularly for a laboratory user or someone stepping up from a programmable calculator. It is well-engineered, has a good Basic (albeit a bit unusual), and a nice array of immediately available peripherals.

Toshiba T100

Unlike the other 13 machines in this roundup, the Toshiba T100 was not designed primarily as a notebook portable. Rather, it is the keyboard/system unit of an excellent desktop system to which attaches an eight-line LCD display and acoustic coupler to make it portable. It still needs AC power. Hence, it is primarily targeted at people who want to do all their computing on the same machine, but occasionally require computing capability away from the home office.

The T100 uses a Z80A running at 4 MHz; it was the fastest 8-bit machine we have tested to date. It has 32K of ROM and 64K of RAM built in. Two slots at the upper right accept ROM and RAM packs which are accessed from CP/M as disk drive E.

The keyboard is full-size with 89 full-stroke keys divided into a standard keyboard, numeric keypad, six special keys,



Teleram 3000



Radio Shack Model 100

and eight function keys (two user-programmable meanings each).

Three display connectors are provided, one each for a monochrome and RGB color monitor and one for the 8-line x 40-character LCD display. Individual pixels (64 x 240) can be addressed on the LCD display, a far cry from the spectacular 240 x 600 pixel resolution available on the color monitor.

For communications capability in either portable or stationary mode, the T100 uses the Lexicon LEX-12 modem, a 300-baud combination direct-connect/acoustic modem.

As mentioned, the T100 comes with CP/M 2.2 and Microsoft Basic in ROM. A disk, furnished with the portability package, scales the various menus to the LCD display and provides an assortment of utility packages. You can load any of these programs onto a RAM cartridge.

The T100 comes with an impressive array of bundled software including *Word Right, Magic Worksheet, MatheMagic, GraphMagic, Analyst, Q-Sort,* and *NAD.* Not all of these are suitable for use in the portable mode since several require disk operations.

The T100 has been on sale in Japan for over a year and is a proven performer. Toshiba offers a good array of peripherals including disk drives, monitors, printers, and a hardside carrying case for the cpu unit, display, and modem. The T100 should appeal to the user who wants, or can only afford, one computer; who needs an outstanding desktop machine; but who also needs limited away-from-home capability.

Teleram 3000

The Teleram 3000 was the first notebook portable introduced. It was targeted at large corporate users, and has found good acceptance in that market.

The 3000 is one of the largest notebook machines, weighing in at nine pounds. However, in this package, it has a full-size, full-stroke, completely standard keyboard; four-line by 80-character display; 128K of internal bubble memory (expandable to 256K); and CP/M operating system.

The 3000 has 64K of RAM; the one or two 128K bubble memory cartridges are accessed from CP/M like a floppy disk in drive A. The Teleram uses a CMOS version of the Z80; performance is similar to the four other machines using this configuration.

In addition to the standard alphanumeric keyboard, the 3000 has a numeric keypad to the right, eight programmable function keys with two meanings each, and several special keys.

Built into the 3000 are MBasic, several CP/M utilities, and a communications program called teleTalk. Microsoft Basic functions are as expected, although the graphics commands are not implemented; apparently the Teleram people couldn't imagine doing graphics on a 1.1" x 8.2" LCD screen—can't say as we blame them.

The teleTalk package is an especially rich communications package providing auto-dial, auto-answer, data capture, dump, and file transfer. Telephone numbers, passwords, commands, and log-on procedures may all be stored in command files. We were very impressed with the file transfer capabilities which allow all kinds of files, even CP/M .COM and text files, to be sent, received, and processed.

The Teleram 3000 has exceptional communications capabilities, a good Basic, and a standard operating system (CP/M) which opens the door to a large library of programs. Thus, the machine should have greatest appeal to the executive on the move, and the large company target audience of Teleram makes good sense.

Radio Shack Model 100

The story of the Radio Shack TRS-80 Model 100 is actually not the story of a TRS-80 at all. The machine was conceived by a small Japanese company, Kyoto Ceramics and first sold in Japan by NEC. Radio Shack designers worked with Kyocera to incorporate certain changes and additional features in the computer before introducing it in the American market. These changes were apparently "right," as few other computers have enjoyed such runaway sales success as the Model 100.

The Model 100 is truly notebook size (8.5" x 12" x 2.2") and weighs just under four pounds. It incorporates a full-size, full-stroke keyboard, with four special keys, eight function keys, and four cursor keys (in an unfriendly straight line).

The display is the largest on any notebook computer, 2" x 7.5", and displays eight lines of 40 characters each. The character size is large and legible. Graphics within a 64 x 240 pixel matrix are also possible. A built-in speaker plays notes over a five-octave range.

The Model 100 uses a CMOS version of the Z80 running at 2.5 MHz. Since default mode in Basic is double precision, the machine was very slow in running our benchmark; on the other hand, it scored high in the accuracy department. It has only 8K of RAM built in, but a 24K version is available. Both can be further expanded to 32K. An external cassette recorder provides mass storage.

The computer provides an impressive array of I/O ports. On the back are connectors for Centronics parallel printer, RS-232 serial device, cassette recorder, bar code reader, and modular telephone jack.

The Model 100 has a built-in direct-connect modem which can plug into any telephone jack. Coupled with the communications software package, it pro-



NEC PC-8201



Epson HX-20

vides many of the features of a so-called "smart" modem—auto-dial, log-on, download, and upload—although it does not have wake up and auto-answer.

The Model 100 has five programs built in. Microsoft Basic is missing a few commands and does not have on-screen editing (except by means of the text editor, a cumbersome process). The text editor is an adequate package. It is always in insert mode, and has cut, paste, search, and other rudimentary features. It does not have an output formatter, but several are available from third party vendors.

The communications package was mentioned above. The last two packages, schedule organizer and name/address organizer, are simply special versions of the text editor with certain commands locked out. We have not found them particularly useful.

Many software packages have been introduced already by third party vendors, and much more is on the way. The availability of software coupled with the integrated packages built into the machine make the Model 100 an attractive choice for a wide variety of users. Poor Basic program editing and lack of an output formatter are small drawbacks against the many enticing capabilities of the computer coupled with an attractive price.

NEC PC-8201

We have frequently called the NEC PC-8201 the twin of the Radio Shack Model 100. Strictly speaking, this is not true. The 8201 was born six months or so earlier in Japan and is a somewhat different version of the Kyoto Ceramics original.

The 8201 is slightly larger than the Model 100 as a result of providing a slot in the left side for an expansion memory cartridge. The 8201 can have from 16K to 64K of RAM in the basic machine. The 32K plug-in memory cartridges function as a switchable bank of main memory, rather than a disk drive as on some other machines.

The 8201 has a full-size, full-stroke keyboard with two special keys, five function keys (two programmable meanings for each), and cursor control keys laid out in a logical diamond pattern. Graphics characters are not built into the 8201 as they are on the Model 100; instead any desired graphics characters can be entered by the user with a short included utility program.

The display is 2″ x 7.5″ and displays eight lines of 40 characters each. The version of Microsoft Basic on the NEC has the LOCATE command not found on the Model 100, so characters as well as individual pixels (64 x 240) can be addressed. The Basic on the NEC also has on-screen editing and RENUM, both lacking in the Model 100 implementation.

In addition to Basic, the 8201 has a text editor (but no output formatter) and telecommunications software package (but no built-in modem). The 8201 also comes with a cassette tape of 16 utility and demonstration programs—a desirable extra.

The 8201 has output connectors for Centronics parallel printer, RS-232 serial device, bar code reader, modem, and cassette recorder. The literature promises a floppy disk interface, but we have been unable to get any information on it.

For an attractive price, the NEC PC-8201 offers a great deal of capability—Basic computations, word processing, and communications, with RAM cartridges for external storage. The machine should have appeal for a wide cross section of people needing a true portable computer.

Epson HX-20

The Epson HX-20 was the first true notebook size computer introduced. Unfortunately, lack of availability prevented it from being a runaway success when it was introduced in late 1982. Now that it is widely available, it no longer has the market to itself and will have to carve out a smaller niche among a tough field of competitors.

Several reviewers have looked at the small screen size of the HX-20 and concluded that it is not competitive with the later entries sporting screens four to eight times larger. We think that is unfair, as the HX-20 still offers a wide array of features, some of them unique in a machine this size.

The Epson is slightly thinner than the Model 100, but weighs the same 3.8 pounds. It has a full-stroke, standard size keyboard with an excellent feel. Along with the 54-key QWERTY keyboard, it has seven special keys and five function keys, each with a dual meaning. The main disadvantage is that there are only two cursor control keys; the other two directions are gotten by pressing shift with one of the two keys. Although Basic has on-screen editing, using just two keys is a pain.

The LCD screen displays four lines of 20 characters each. The display is actually a window onto a much larger virtual screen; the size can be specified by the user. Hence, it is possible to scroll in both directions. Pixel and character addressing are possible within the 32 x 120 pixel dimensions of the screen. A small speaker can produce tones over a four-octave range.

The HX-20 uses a CMOS version of the Z80 mpu. It has 32K of ROM and 16K of RAM, expandable to 32K with an external module. Mass storage is provided in the form of a built-in microcassette recorder. We found this to be fast and reliable. An external cassette can also be used.

The HX-20 provides I/O connectors for RS-232 serial devices, bar code reader, cassette recorder, and a 38,400-



RoadRunner



Sharp PC-5000

baud serial link to other devices via an interface module which has yet to be released.

On the top left of the case is a built-in printer. It uses plain paper rolls 2¼" wide and prints in black or purple. It is this printer that makes the small screen size tolerable as programs or text can be printed out in rough form for correction and then printed later on a full-size printer or transmitted to another machine.

The NiCad rechargeable battery on the HX-20 provides 50 hours of use, considerably more than any of the other notebook portables.

Built into ROM is a rudimentary monitor, Microsoft Basic, and *SkiWriter,* a word processing package. Basic is a complete implementation with no obvious omissions. Up to four Basic programs can be stored simultaneously in the machine. Many more, of course, can be stored on tape.

SkiWriter is an adequate, if not extensive, word processing package. It can operate in either insert or overstrike mode and has block copy and delete. It will search for a string, but will not search and replace automatically. Print formatting is barely adequate, as it requires that you put page breaks into the text rather than producing them automatically.

Epson has announced a wide array of plug-in ROM software packages, but we have not seen them at the retail level yet. The communications and spreadsheet packages should enhance the appeal of the machine considerably.

The HX-20 with built-in printer and optional microcassette offers a great deal of computing power at a moderate price. The long battery life between charges is a nice plus. The machine should appeal to people needing a full-feature Basic and occasional word processing. Additional software packages should help it carve out a niche with specific types of users.

RoadRunner

The MicroOffice RoadRunner is one of the latest entries in the notebook computer sweepstakes. Currently, it is being marketed primarily to OEMs and large-volume end users, but it may be available by mail order and in a limited number of retail computer stores.

The RoadRunner is equal in size to a large binder and weighs in at five pounds. When it is opened, it comes to life with a small beep and initial dialog on the display.

The LCD screen measures 1.3" x 9.3" and displays eight lines of 80 characters, about the size of a dot matrix printer. Graphics can be displayed on the 64 x 480 pixel screen. The display tilts, but unfortunately does not have a contrast adjustment.

The keyboard is a full-size, full-stroke unit with sculpted concave keys. Although close to a standard layout, it has several keys in unexpected locations. Most users will probably adjust in a week or two. The cursor keys are laid out in a logical pattern, an oversight on too many notebook portables. Six special keys and eight dual-meaning function keys are found in the top row above the standard QWERTY keyboard.

The RoadRunner uses a CMOS version of the Z80 mpu and has 16K of ROM and 48K of RAM. Four memory cartridge slots are found over the keyboard for extra RAM memory and ROM software cartridges. These are addressed from the CP/M-compatible operating system as devices A through D.

I/O connectors are provided for RS-232 serial devices, a modem module, and the main bus of the computer. The modem is a 300-baud direct-connect unit with auto-dial, auto-answer, and a wake-up mode of operation. In addition, the RoadRunner has a built-in terminal mode which emulates a DEC VT100 terminal.

Also built in is a schedule organizer, name/address organizer, and, of course, the CP/M operating system. Available on cartridge is a full-feature word processing package with features such as character, word, and line delete, and global search-and-replace.

Cartridges are also available with Microsoft Basic (with everything but on-screen editing) and Sorcim *SuperCalc.* More packages are promised in the future.

With its excellent communications, word processing, Basic, and spreadsheet software on a machine with full keyboard, large display, and plug-in memory cartridges, the RoadRunner is sure to find a market with executives, sales people, and writers who need a portable office on the road.


Sharp PC-5000

The Sharp PC-5000 is one of the largest of the notebook computers, but it is packed with features and capability. It has a large screen (eight lines by 80 characters), full keyboard, 16-bit processor, 128K memory, and much more.

The PC-5000 uses a 16-bit 8088 mpu, the same as in the IBM PC. MS-DOS

Hayes™


Your computer's telephone.

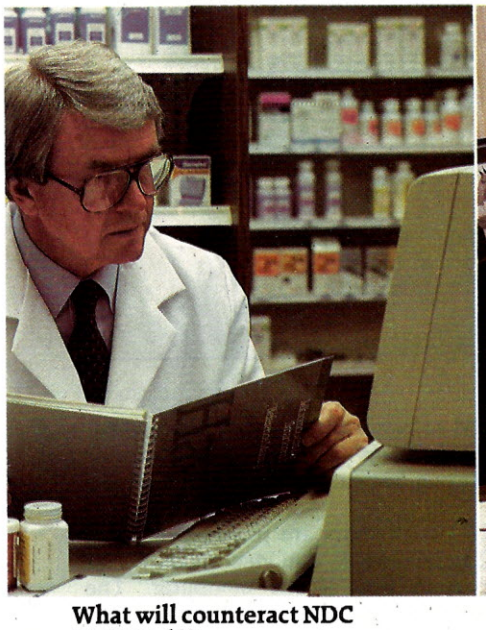

What will counteract NDC 74-0054-60?



Gary: The pedigrees for next week's auction are as follows...

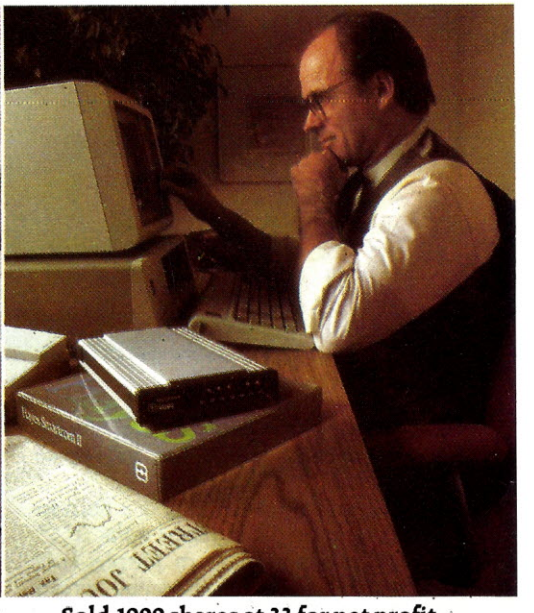

Sold 1000 shares at 33 for net profit of 6000. Richard.

Wouldn't it be great if you could use your IBM® PC to tap into vast resource libraries across the country? To transfer files to your partner, upstate? Or from your broker, down the street?

It's possible. All you need is a modem, to connect your computer to others. Down the hall. Or thousands of miles away.



Hayes Smartmodem. Think of it as your computer's telephone. Hayes Smartmodem 300,™ and the faster Smartmodem 1200,™ allow you to communicate over ordinary phone lines.

But any modem will send and receive data. Smartmodems also dial, answer and disconnect calls. Automatically. And without going through the telephone receiver, making them far superior to acoustic coupler modems.

Choose your speed; choose your price. The lower-priced Smartmodem 300 is ideal for local data swaps and communicates at 300 bps. For longer distance and larger volumes, Smartmodem 1200 operates at baud rates of 300 or 1200, with a built-in selector that automatically detects transmission speeds.

Both work with rotary dials, Touch-Tone® and key-set systems; connect to most time-sharing systems; and feature an audio speaker.

Smartmodem 1200B™ is also available as a plug-in board. Developed specifically for the PC, it comes packaged with Hayes' own communications software, Smartcom II.™

Smartcom II. We spent a lot of time developing it, so you can spend less time using it. Smartcom II prompts you in the simple steps required to create, send, receive, display, list, name and re-name files. It even receives data completely unattended—especially helpful when you're sending work from home to the office, or vice versa.

If you need it, there's always "help." This feature explains prompts, messages, etc. to make communicating extra easy.

With Smartcom II, it is. Case in point: Before you communicate with another system, you need to "set up" your computer to match the way the remote system transmits data. With Smartcom II, you do this only once. After that, parameters for 25 different remote systems are stored in a directory on Smartcom II.

Calling or answering a system listed in the directory requires just a few quick keystrokes.

You can store lengthy log-on sequences the same way. Press one key, and Smartcom II automatically connects you to a utility or information service.

Hayes®

Smartmodem 300, 1200 and 1200B are FCC approved in the U.S. and DOC approved in Canada. All require an IBM PC with minimum 96K bytes of memory; IBM DOS 1.10 or 1.00; one disk drive; and 80-column display.

Smartmodem 1200B. (Includes telephone cable. No serial card or separate power source is needed.)



Smartcom II communications software.

NOTE: Smartmodem 1200B may also be installed in the IBM Personal Computer XT or the Expansion Unit.
In those units, another board installed in the slot to the immediate right of the Smartmodem 1200B may not clear the modem; also, the brackets may not fit properly. If this occurs, the slot to the right of the modem should be left empty.

And, in addition to the IBM PC, Smartcom II is also available for the DEC Rainbow™ 100, Xerox 820-II,™ and Kaypro II™ personal computers.

Backed by the experience and reputation of Hayes. A solid leader in the microcomputer industry, Hayes provides excellent documentation for all products. A limited two-year warranty on all hardware. And full support from us to your dealer.

So see him today. Break out of isolation. Get a telephone for your personal computer. From Hayes.

Hayes Microcomputer Products, Inc., 5923 Peachtree Industrial Blvd., Norcross, GA 30092. 404/441-1617.

Smartmodem 300, Smartmodem 1200, Smartmodem 1200B and Smartcom II are trademarks of Hayes Microcomputer Products, Inc. IBM is a registered trademark of International Business Machines, Corp. Touch-Tone is a registered service mark of American Telephone and Telegraph. Rainbow is a trademark of Digital Equipment Corporation. Xerox 820-II is a trademark of Xerox Corporation. Kaypro II is a registered trademark of Non-Linear Systems, Inc.
©1983 Hayes Microcomputer Products, Inc.

CIRCLE 162 ON READER SERVICE CARD



Xerox 1810

and Microsoft GW (Gee Whiz) Basic reside in 64K of ROM, and 128K of RAM is available for user memory, expandable to 256K. Mass storage is in the form of a 128K bubble memory cartridge or, if you prefer, an external cassette recorder. In a non-portable mode, the PC-5000 also supports a double-density, double-sided floppy disk drive.

With the 16-bit processor, the PC-5000 is fast—close to the fastest computer we have ever tested, portable or not. A second control mpu controls the I/O functions, further contributing to the throughput.

The LCD screen measures 1.3" x 9.3" and displays eight lines of 80 characters or graphics in an 80 x 640 pixel field. Characters are about the same size as dot matrix printer output—small, but readable.

The keyboard has 57 full-stroke keys, three special keys, eight dual-meaning function keys, and four cursor control keys (laid out in a straight line, unfortunately). The keys are concave sculpted, and have a good feel, except for a slight "give" in the center of the keyboard.

Connectors are provided for a cassette recorder, external bus, RS-232 serial device, and modem. The modem is an option with the PC-5000 and fits into the lid of the case. It is a 300-baud, direct-connect unit with an auto-dial, redial, and conference phone capability. It is supported by the *SuperComm* software package by Sorcim.

Another optional extra which fits in the basic unit is an 80-column thermal printer which can print on plain paper as well as on thermal paper. It is a 30 cps unit that produces excellent type (and dot graphics) in a variety of formats.

Software is available on bubble memory cartridges or on disk. In addition to the built-in MS-DOS and Microsoft GW Basic, external software includes *SuperWriter,* an excellent menu-driven word processing package by Sorcim; *SuperCalc-2,* a spreadsheet package; and *SuperComm.* Many other software houses are said to be working to fit their packages on the PC-5000.

The PC-5000 is an outstanding, full-featured computer with a variety of excellent software backed up by some innovative serving arrangements. As such, it should find enthusiastic acceptance by a wide cross section of business people and other people on the move who need full-function computing power.

Xerox 1810

The Xerox 1810 is a notebook portable designed by Sunrise Systems. It is sold (by them) only to OEMs. Currently, the only OEM actively marketing the system is Xerox; from them it is known as the Xerox 1800. It is likely to be available from other vendors in slightly different configurations in the near future.

Like the Toshiba T100, the 1810 is the keyboard, cpu, and system unit of a desktop computer, although the LCD display is built in. The machine can be customized to the particular needs of an individual vendor, thus some vendors may offer it as a desktop unit with portable cpu, and others may offer it just as a notebook portable. Xerox offers both the 1810 keyboard unit plus an optional 1850 "Flat Pack" processor.

The processor is a CMOS version of the Z80 with 32K of ROM and 16K of RAM, expandable to 64K. In the desktop configuration, the unit contains a dual 16-bit 8088 and an 8-bit Z80 plus additional memory. Mass storage in the portable mode of operation is provided by a built-in microcassette recorder to the right of the keyboard. This stores 512K of digital information and also doubles as an audio recorder.

The keyboard has 63 full-stroke keys in a more or less standard layout. The



Gavilan

cursor control keys are arranged logically, although the up cursor key is where you might expect to find the question mark on the bottom row. A row of special and programmable function keys is over the regular keyboard.

The LCD display is available in two versions: six lines by 40 characters or three lines by 80 characters. For some inexplicable reason, Xerox chose the latter configuration for the 1810. Individual pixels are addressable, although hardly useful in the 3 x 80 layout (24 x 480 pixels). The unit also provides a signal for a monitor.

A direct-connect 300-baud modem, supported by a dumb terminal software package, is built in. An interesting telephone program lets the computer be used as an answering machine, and provides auto-dial, redial last number, hold, and speakerphone capabilities.

I/O connectors are provided for RS-232 serial devices, Centronics parallel printer, telephone, and RGB or monochrome monitor.

A vast array of software is available and under development. Built in is CP/M, a calendar/scheduler, and four-function calculator. Software on plug-in ROM cartridges includes Microsoft Basic, typewriter/note taker (a word processing package), a terminal program, and the telephone program mentioned above.

The Xerox 1810 is a state-of-the-art machine with a wide array of software and easy access to much more as a result of the CP/M operating system and communications capability. We will be anxious to see how Xerox (and other vendors) target it.

Gavilan

When the Gavilan was first shown at NCC in June 1983, many people wondered out loud whether it could really be made. It was just too much state-of-the-art stuff in one package for people to swallow. Now, that it is nearing readiness for the market and now that competitors are leaping in from all directions, the Gavilan looks more real than it did six months ago. But it still has an air of unreality.

The Gavilan is remarkably compact (11.4″ square x 2.7″ high) and weighs just nine pounds. Its optional, snap-on printer adds four inches and four pounds to the package. It has a 16-bit mpu, 64K of RAM, built-in 3″ floppy disk, eight-line display, full keyboard, and a unique touch panel in which your finger becomes sort of an electronic mouse.

The Gavilan uses a 16-bit 8088 mpu, 48K of ROM, and 64K of RAM, expandable with up to four 32K plug-in capsules of blank memory or applications software packages. Also built in is a 3″, 320K Hitachi floppy disk drive. Traffic cop chips turn off the power to the disk drive or mpu whenever it is not needed; thus the NiCad batteries provide eight hours of operation. Eighty percent of the charge can be restored in one hour on the charger.

The keyboard is a standard-size, full-stroke unit with 13 special keys to the right. Several keys are in "unusual" locations, especially the enter key next to the spacebar, but it shouldn't take too long to get used to it.


The most unusual feature of the Gavilan is the touch pad below the display. This lets you manipulate objects on the screen by pointing at them. A quick movement of your finger moves the cursor a long way while a slow movement gives you fine control. Like Apple's Lisa system, pictorial representations of objects such as file drawers, file folders, documents, and a trash basket are shown on the screen.

Although the screen is capable of displaying eight lines of 80 characters, in most cases, part of the screen will be devoted to menus in "windows" appropriate to the software package currently in use. This loss of a portion of the screen makes one wish mightily for a screen three times as large. At home base your prayers are answered, since the Gavilan provides standard video output to a monochrome monitor.

The Gavilan has a built-in 300-baud direct-connect modem supported by a comprehensive software package. It also has interfaces for the optional printer, a second disk drive, RS-232 serial device, and video output.

Besides MS-DOS, MBasic, and the communications software, Gavilan makes available an Office Pack of four applications, Sorcim *SuperCalc* and *SuperWriter,* and *PFS File* and *Report.*


All in all, the Gavilan offers as much or more than most desktop systems. It is a full-function computer with few trade-offs. All this comes at a price, but for the traveling professional this is a machine that is easy to learn and exceptionally user-friendly, and one that will spark envy in the eyes of all who see it. END

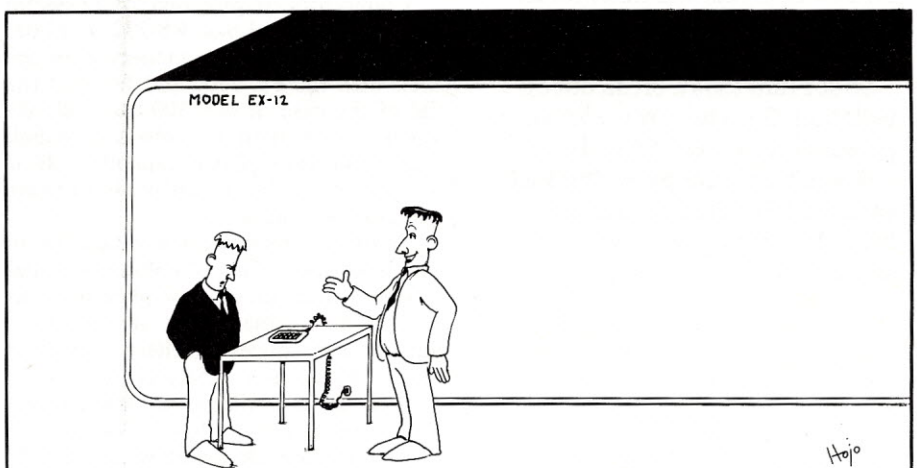


"... and once you're ready to use this computer with software all you'll need is the expansion module."

CIRCLE 191 ON READER SERVICE CARD →

Radio Shack® Educational Software Catalog 1984

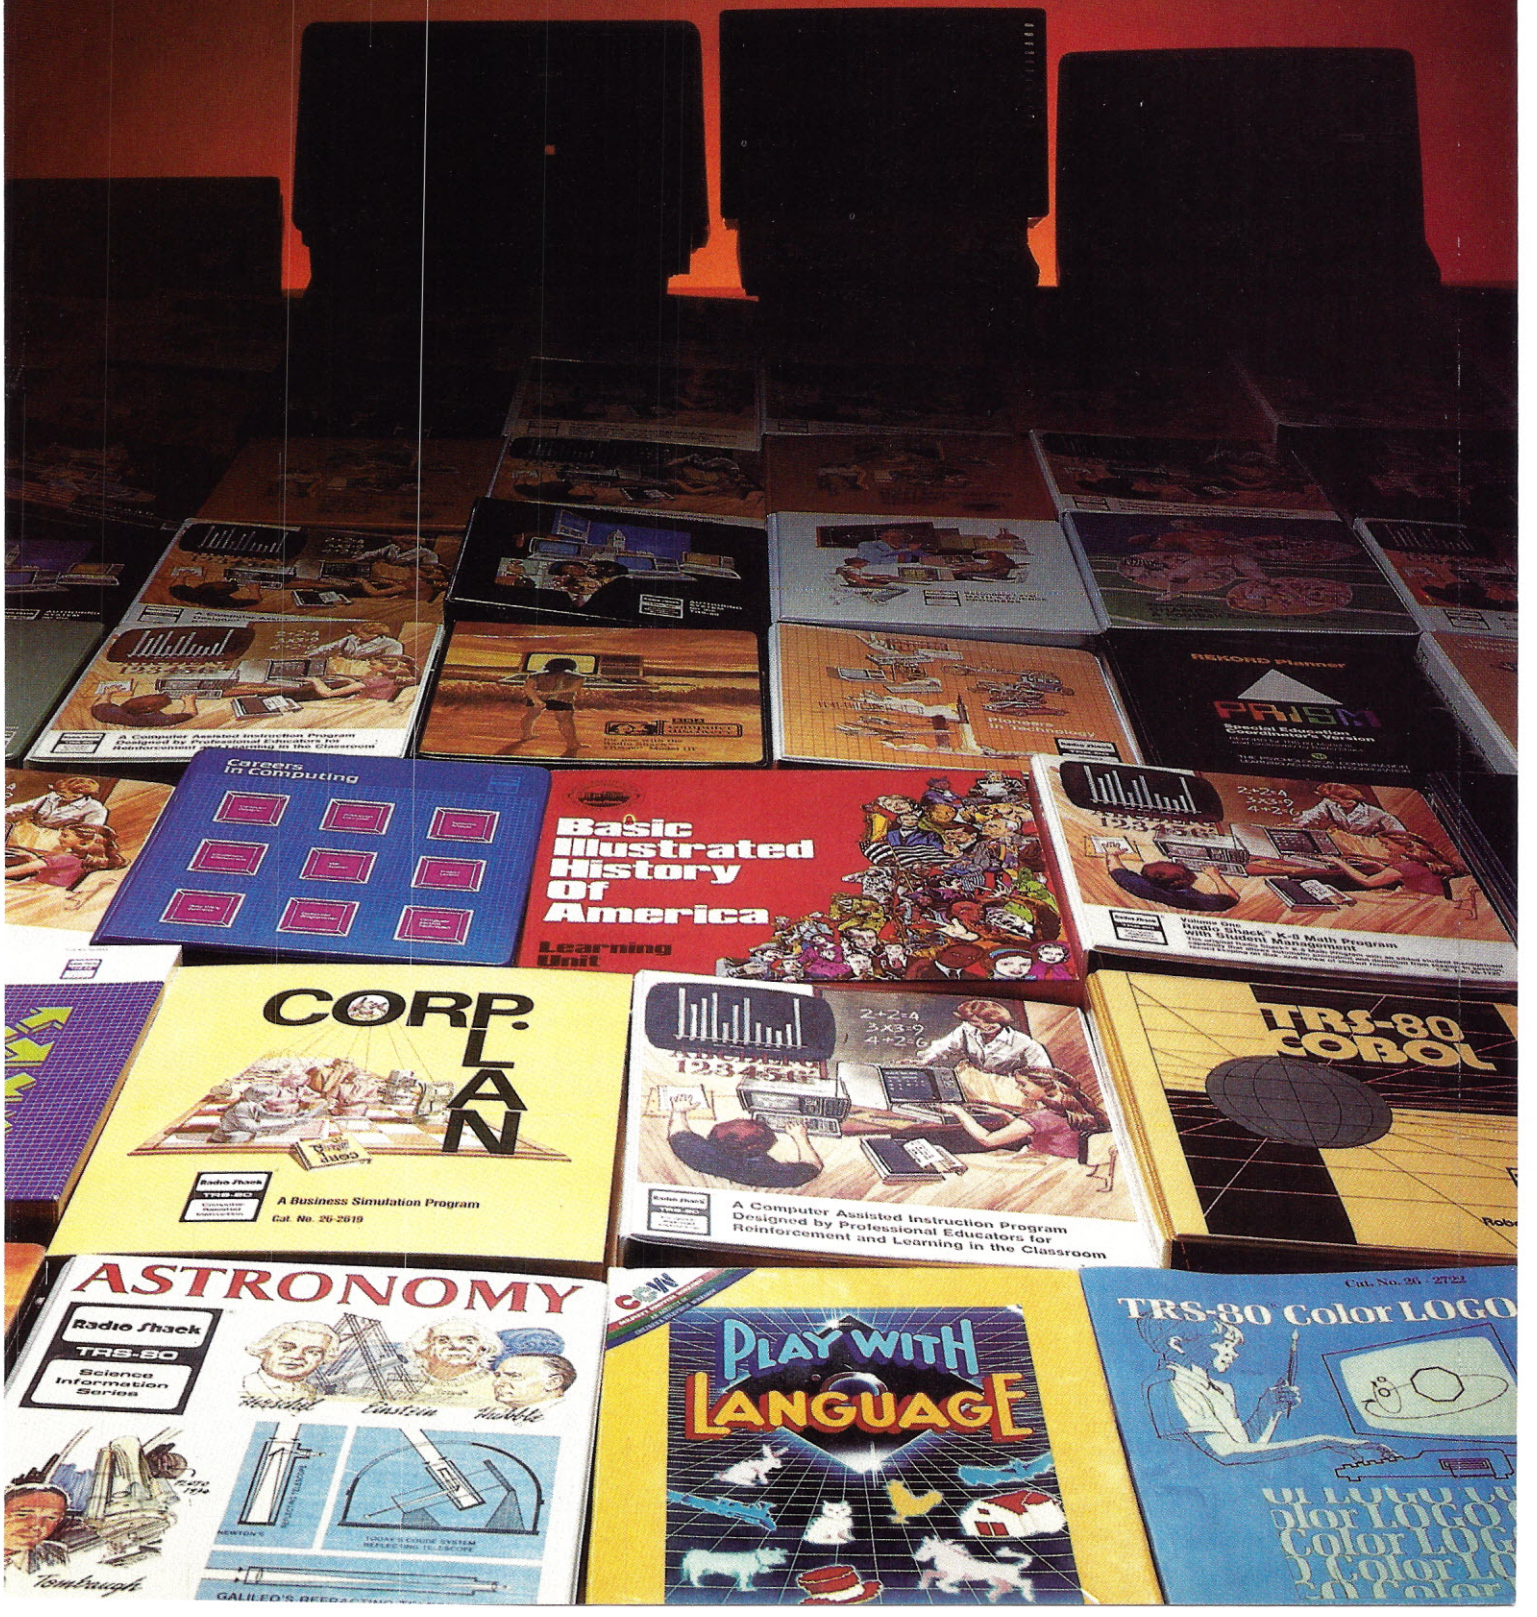



Radio Shack's Commitment to Education

We Meet Your Total Classroom Computing Needs

Radio Shack's TRS-80® microcomputer is a valuable teaching tool widely used in schools nationwide. We have a major commitment to support educational uses of the TRS-80 by producing a growing list of instructionally-sound courseware. We provide training and support, including free computer training classes, courseware manuals designed for educators who have never worked with a computer, and 25 Regional Educational Coordinators.

A Wide Selection of Field-Tested Programs

Radio Shack involves the experts—teachers, curriculum developers and administrators—in designing and field-testing our complete line of TRS-80 courseware. Compare our courseware with other programs currently available. You'll see what a difference a commitment to quality can make.

TRS-80 Reading Courseware for Your Classroom




Children's Computer Workshop Educational Packages

These superb courseware packages were designed by Children's Computer Workshop. CCW is an activity of Children's Television Workshop—the creators of Sesame Street®. The packages are for use with first and second graders, and require a TRS-80 Color Computer disk system. Each package includes diskettes, teacher's guide, game boards, posters, spirit masters and activity cards.

Play-With-Language™ (Cat. No. 26-2538, $99) consists of three word and reading activities that combine graphics and text to teach sight and vocabulary words, decoding skills, and comprehension skills. **Hands On!**™ (Cat. No. 26-2639, $99) encourages self-expression with the computer. The first activity lets students write with beginning word processing aids. With the second activity, children create and manipulate pictures in ways unique to computer art.

Computer Assisted Reading Development


C.A.R.D. I: Sentences and **C.A.R.D. II: Paragraphs** are adapted from the successful Philadelphia Computer Assisted Reading Development Program. They are written at a 4 to 8-grade level for students with reading problems. TRS-80 AUTHOR I Lesson Presentation Package (26-2707) or TRS-80 AUTHOR I (26-1727) and a Model III or Model 4 disk system are required. Network 3 compatible using the TRS-80 Network 3 AUTHOR I Lesson Presentation Package (26-2713).



C.A.R.D. I: Sentences (*26-2603, $199) covers sentence recognition, relationships, ordering, and labeling. Pre- and post-tests included for each topic.

C.A.R.D. II: Paragraphs (*26-2604, $199) provides reading development lessons to increase comprehension skills. The lessons help students define sentence relationships within a paragraph through recognition of general and specific topics, details and topic sentences. Pre- and post-tests included.

Reading Series

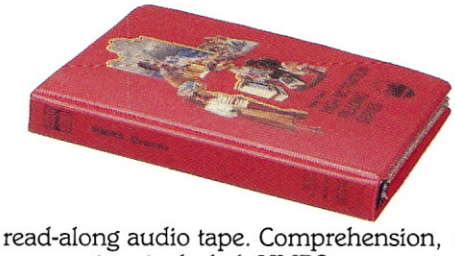


The programs in our **High Motivation Reading Series** are written for grade levels 4–6 and are accompanied by four student readers and a read-along audio tape. Comprehension, spelling and vocabulary exercises included. HMRS programs require a Model III or Model 4 disk system and TRS-80 MicroPILOT™ (26-2718).

Select **Charles Lindbergh/Amelia Earhart** (*26-2513, $74.95), **The Hound of the Baskervilles** (*26-2514, $69.95), **Dracula** (*26-2515, $69.95), **Moby Dick** (*26-2516, $69.95), **The Beatles** (*26-2517, $69.95), **20,000 Leagues Under the Sea** (*26-2518, $69.95), **Time Machine** (*26-2519, $59.95), **Frankenstein** (*26-2520, $59.95), and **HMRS Student Records System** (26-2521, $29.95).

Introduction to the Alphabet (*26-1718, $39.95) helps 4 to 6 year-olds learn the alphabet and computer keyboard. Available on cassette or disk for Model III or 4.

Enlighten Your Students With Our History Packages

Radio Shack's **Basic Illustrated History of America Learning Unit** (26-2645, $299) includes twelve illustrated books on American history—from 1500 to the 1980's. Read-along audio tapes and computer activities diskettes are included. TRS-80 AUTHOR I Lesson Presentation Package (26-2707) or TRS-80 AUTHOR I (26-1727), and a Model III or 4 disk system required. Network 3 compatible using 26-2713 (page 5).



Our **History of Technology** packages use colorful graphics, text, sound effects and recorded speech. Each package includes four lessons with student interaction and feedback messages. The 16K Color Computer, a TV and cassette recorder are required.

Pioneers in Technology (26-2624, $94.95) includes The Age of Flight, Space Exploration, The Electric Car, and History of Computers. **Inventions That Changed Our Lives** (26-2625, $94.95) includes Edison's Electric Inventions, Bell and the Telephone, The Story of Railroads, and The Age of Television.

***Network 3 compatible**

Math, Science and Business Courseware

K-8 Math Series




This series of programs supplements regular classroom math instruction in Kindergarten through eighth grades. Each program includes lesson summaries and a K-8 Math Cross-Reference to six of the most commonly-used math basals.

The **K-8 Math Program, Vol. I** (*26-1715, $199) provides randomly generated drill and practice problems in number concepts, addition, subtraction, multiplication and division. A Model III or Model 4 cassette system is required.

The **K-8 Math with Student Management, Vol. I** (*26-1725, $199) combines the K-8 program with a student management capability to monitor promotions and demotions, allow for teacher review of scores, and begin each student in the appropriate lesson each session. A Model III or Model 4 disk system is required. Printer is optional.

The **K-8 Math Worksheet Generator** (26-2162, $99.95) prints worksheets and answer sheets from K-8 Math lessons. Worksheets can be saved on disk. A Model III or Model 4 disk system and TRS-80 line printer are required.

Help Prepare Students for the World of Business



Our **Corplan**™ business simulation program (*26-2619, $49.95) gives instructors an effective way to demonstrate the many facets of business management. Corplan realistically simulates the operations of a company. Designed for use by the advanced secondary or college-level student, Corplan requires no previous knowledge of computer operation or business programs.


Corplan puts a player or a team of players in control of an imaginary corporation. Students have the responsibility of planning quarterly production, and making sales and financial decisions that will make or break the company. The computer keeps track of each quarter's decisions, calculates immediate results, gives immediate feedback such as "cash shortage", "plant congestion" or "bankruptcy", and maintains the books through a maximum of 12 quarters. Corplan also displays complete accounts and balance sheets. An easy-to-use auxiliary program lets the instructor modify the parameters of the game to create different business situations or to set new challenges for the student.

Corplan requires a Model III or Model 4 disk system. An optional printer can be used to produce copies of the program's charts and reports.

Sharpen Your Students' 10-Key Skills

Our **Numeric Data Entry Practice** (*26-2601, $39.95) is a 25-lesson practice course to help students develop speed and accuracy in the 10-key entry of numeric data. Using the TRS-80 standard numeric keypad, students "key in" numbers, and the computer graphs and records performance. It requires a Model III or Model 4 disk system. Printer is optional.

Secondary Math and Science

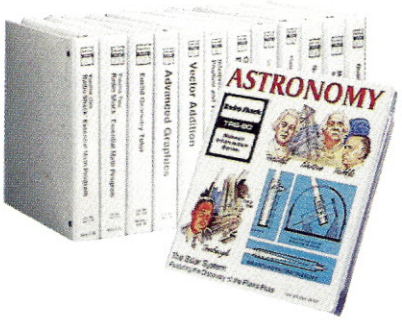

The Solar System: Featuring the Discovery of the Planet Pluto (26-2647, $59.95) combines high-resolution graphics and recorded speech to present facts about the planets. A 16K Color Computer, TV and cassette recorder are required.

Our **Essential Math Program, Vol. I and II** are drill and practice programs for grades 7-12 and are available on cassette or disk for Model III and Model 4. **Essential Math, Vol. I** (*26-1716, $199) includes exercises in addition, subtraction, multiplication, division, and more. **Essential Math, Vol. II** (*26-1719, $199) covers fractions, decimals and percents, and pre-algebra concepts.

Euclid Geometry Tutor (*26-1724, $39.95) allows students to practice constructing proofs using nine basic postulates.

Advanced Graphics (*26-1714, $39.95) gives practice in analyzing equations, and plots graphs of functions and polar and parametric equations.

Vector Addition (*26-1720, $39.95) illustrates and plots components and sums of student-provided vectors. **Vector Addition for the Color Computer** (26-2638, $39.95) requires Extended BASIC and is available on cassette or disk.

Interpreting Graphs in Physics: Position and Velocity vs. Time (*26-1721, $39.95) poses graph-related questions.

Graphical Analysis of Experimental Data (*26-1722, $39.95) plots data pairs that the student inputs.

Investigations in Integral Calculus (*26-2600, $39.95) graphs and computes areas of functions. **Investigations in Integral Calculus for the Color Computer** (26-2641, $39.95) requires Extended BASIC and is available on cassette or disk.


Plane Analytic Geometry (*26-2602, $39.95) includes problems on straight lines and conic sections.

Number Theory (*26-2613, $69.95) includes definitions, examples and exercises on number theory concepts.

Matrices, Determinants, and Simultaneous Equations (*26-2620, $49.95) generates problems related to simple matrix algebra.

Quadratic Equations (*26-2623, $49.95) covers coefficient recognition, discriminate evaluation, type of roots, and more.

Not including Color Computer programs, the above programs are available on cassette or disk for Model III and Model 4.



Electronic Chemistry Lab

The **TRS-80 Chemistry Lab** uses graphics and equations to simulate chemical reactions. Students control variables for six topics.

TRS-80 Chemistry Lab, Vol. I is available on cassette or disk for Model III and Model 4 (*26-2609, $199), and on cassette for the Color Computer with Extended BASIC (26-2626, $199). **Additional Student Experiment Books** (26-2666, $3 each) are available.

***Network 3 compatible**

Radio Shack's Computer Education Series

BASIC Programming



These complete classroom packages for secondary and post-secondary levels include overhead transparencies, a teacher's manual and 25 student workbooks.

Part 1: Introduction to BASIC (26-2150, $220) introduces students to the TRS-80 and BASIC. **Additional Student Workbooks for Part 1** (26-2151, $3.50 each) are available.

Part 1: Videotape Lessons (26-2753, $349) is a series of ten 30-minute lessons based on Part 1: Introduction to BASIC. Requires the Part 1 student workbook.

Part 2: BASIC Programming (26-2152, $260) builds on the concepts introduced in Part 1. **Additional Student Workbooks for Part 2** (26-2153, $4.50 each) are available.

Part 3: Advanced BASIC (26-2154, $260) introduces the INKEY$ statement, ASCII character set, action graphics and more. **Additional Student Workbooks for Part 3** (26-2155, $4.50 each) are available.

Part 4: TRSDOS (26-2156, $299) covers concepts of the TRSDOS operating system. **Additional Student Workbooks for Part 4** (26-2157, $4.50 each) are available.

Introduction to TRS-80 Level II BASIC (26-2116, $9.95) is a beginning BASIC textbook for secondary students.

NOTE: Software not included in the above series. Student activities are designed for hands-on experience with Level II or Model III BASIC (or TRSDOS in Part 4).

TRS-80 COBOL Course




COBOL for Models II, 12, and 16, Vol. One (26-2706, $49.95) teaches fundamental concepts. Requires COBOL Development System (26-4703, $299) and a Model II, 12, or 16 computer. Use it as a self-teaching tool, or with **Class Notes** (26-2723, $9.95) for class instruction.

Learn Machine Language



The **Illustrated Computer** (26-2670, $44.95) introduces secondary students to machine language. The program illustrates a computer to be programmed. Requires 32K Extended BASIC Color Computer with disk drive.

Computer Literacy Packages



Computer Discovery™ introduces computers, their evolution and impact on society, and basic programming concepts. Each includes interactive exercises, 25 workbooks, and instructor's manual.

Computer Discovery for Junior High (26-2630, $189.95) requires a Model III or Model 4 disk system. **Additional Workbooks** (26-2631, $4.25 each) are available.

Computer Discovery for Senior High (26-2632, $189.95) requires a Model III or Model 4 disk system. **Additional Workbooks** (26-2636, $4.25 each) are available.

Careers in Computing (26-2758, $130) helps secondary students explore computer-related careers. Includes teacher's guide, 30 student manuals, narrated filmstrip, eight spirit masters and wall chart. **Additional Student Manuals** (26-2759, $1 each) available.

Computer Literacy: Computers Past and Present (26-2755, $9.95) is written for students in grades 4 through 8. Includes teacher's guide, six spirit masters and wall chart.



The **Computer Connection** (26-2663, $69) introduces basics of computer literacy to junior and senior high school students, and it's adaptable to most subject areas. Includes teacher's guide, spirit masters, four wall charts and narrated filmstrip.

Radio Shack and TRS-80 are #1 in the Classroom

Radio Shack is the leading marketer of microcomputers to schools, with more TRS-80 computers in America's schools than any other brand. And we maintain an extensive development effort to produce educational materials that use microcomputer technology in the best ways possible.

We offer educators a variety of special services. Our National Bid Department gives prompt attention to school bids. Our National Lease Department can put the TRS-80 into your classroom with terms that meet almost any budget. We offer "carry-in" and "on-site" service plans, too. And as an educator, you are eligible to attend our educator's workshop or Part 1 or Part 2 BASIC classes, without charge, at one of over 400 Radio Shack Computer Centers.

Radio Shack gives you complete support. We have 25 Regional Educational Coordinators located across the country. They can conduct demonstrations, workshops, and in-service training sessions for your school district. And our Regional Educational Coordinators can assist you in selecting the computer system and courseware that best suit your needs. For more information, visit your nearest Radio Shack Computer Center or participating store or dealer. Or call your Regional Educational Coordinator.

For the name of the full-time Regional Educational Coordinator in your area, call our Education Division at 800-433-5682, toll free. In Texas, call 800-772-8538.

Radio Shack®

The Name in Classroom Computing™

A DIVISION OF TANDY CORPORATION


Prices apply at participating Radio Shack stores and dealers. CHAMPS is a trademark of Mathew L. Rauh, Jr. and J. Richard Dewey. Computer Discovery is a trademark of SRA, Inc.

FC-0613

TRS-80 Shared Learning Systems

A **TRS-80 Network Controller** lets you implement a shared learning system—up to 16 non-disk student stations connected to the teacher's disk, or "host" computer. Students can access programs from disk with low-cost TRS-80 non-disk computers. The teacher can send programs to the student computers, and student work can be saved on the teacher's diskettes. Your computer lab requires less duplicate courseware because several students share the same software. In addition, we offer a choice of two controllers to meet your particular networking needs.



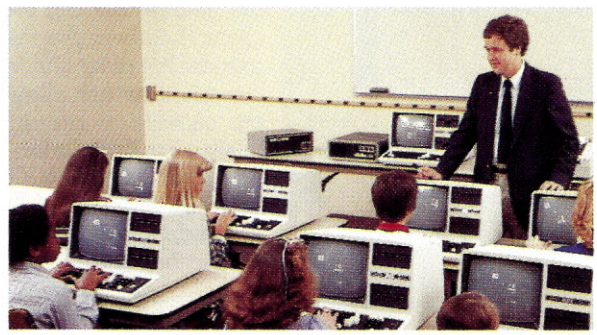



The **Network 3 Controller** (26-1212, $599) enables up to 16 non-disk Model III or Model 4 student workstations (with RS-232C interfaces) to select and access lessons stored on the teacher's Model III or Model 4 disk system. As a result, the teacher is freed from repeatedly loading programs. Under software control, scores can be stored on the host disk. An optional line printer attached to the host computer lets students get printouts of their programs without teacher assistance. Network 3 is designed for use with the educational software packages indicated in this catalog by an asterisk (*). Connecting cables available separately. Requires Network 3 Operating Software (below).

Network 3 Operating Software (26-2775, $149) supports the Network 3 host and its student stations with many of the capabilities of TRSDOS and Disk BASIC. Students can SAVE and LOAD programs to and from the host disk.

Radio Shack's **Network 2 Controller** (26-1211, $499) enables up to 16 non-disk student stations to be connected to the teacher's host computer using the cassette ports. The teacher can down-load programs to all stations simultaneously, or upload programs from individual stations. With an optional printer connected to the host computer, student programs can be loaded into the host and printed out. The Network 2 Controller can be used with a Model III or Model 4 disk and non-disk computers; with Color Computer disk and non-disk systems; or with the Model 100 computer. And now the Network 2 Controller can be used with our MC-10 Micro Color Computer. Use an MC-10 or Color Computer as host and MC-10s as student stations. (MC-10 programs cannot run on the Color Computer, but they can be loaded and saved using tape or disk). Controllers can be cascaded to connect more stations. All cables are included.


Our TRS-80 Education Management Systems

TRS-80 School Administrative Software

The **Student Information System** (26-2729, $249) helps school administrators simplify the burden of record-keeping. Schools can easily collect, record, update, retrieve and distribute student data. A special inquiry feature lets you enter criteria into the computer and print a list of all students meeting those criteria. Address labels for students or parents can also be printed. The Student Information System requires a TRS-80 Model II or Model 12 computer with one floppy disk drive and a hard disk, or a Model 12 with two floppy disk drives.

Additional modules for attendance, grades and scheduling will soon be available. These programs, the Student Information System and the CR-510 Card Reader (right) will allow administrators to compile and analyze large amounts of data.

Card Reader



Automate data compilation, evaluate surveys and polls, or correct multiple choice tests with the new **CR-510 Card Reader** (26-1266, $1595). It provides single, demand or continuous feed operation, reads marked or punched cards, and is controlled through manual switches or software. The CR-510 includes a diskette with COBOL and BASIC driver routines, and requires a TRS-80 computer with RS-232C port. Cables available separately.

Football Analysis




Store and analyze scouting information on your opponent's offense with **CHAMPS**™ (26-2703, $149.95). Designed for high school and college levels, CHAMPS provides various charts and statistical reports. Includes ten CHAMPS Scouting Manuals. **Additional Scouting Manuals** (26-2708, package of 10 for $39.95) are available. Requires a Model III or Model 4 disk system and a 132-column printer.

Get Quick Access to Student Data



REKORD Planner is a data management system adaptable to your own needs. A program and tutorial diskette, plus sample formats are included. Choose from **Administrator's Version** (26-2725, $499), **Counselor's Version** (26-2726, $499) and **Special Programs Version** (26-2727, $499). A Model III or 4 disk system is required.

Our Colorful Programming Language For Learning

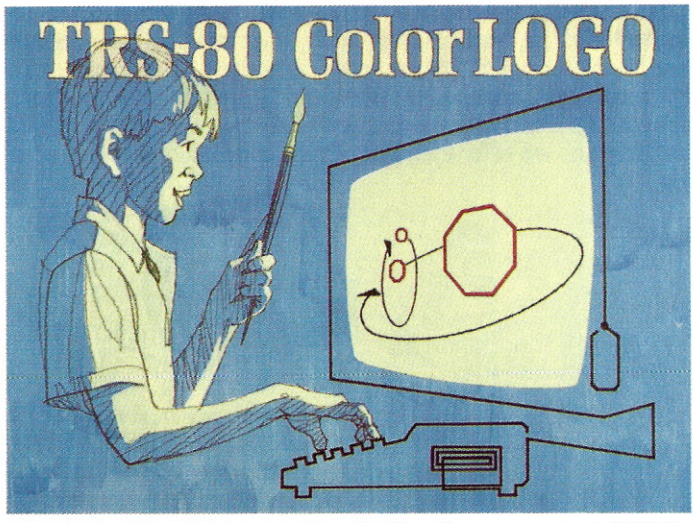

Our Color LOGO programming language is designed to help students grasp fundamental programming concepts. Through manipulation of a "turtle" on the screen, students learn to program. The computer becomes a friendly learning tool, and students gain valuable insight into advanced mathematical, geometric and logical concepts. In addition, Color LOGO is versatile. Children under reading age can use Color LOGO's "doodle" mode to create their own graphics using predefined one-key commands. For older children, Color LOGO features a "hatch" command which allows creation of multiple turtles that are capable of running separate programs simultaneously. Our **Disk Color LOGO** (26-2721, $99) requires a 32K Extended BASIC Color Computer and disk drive. The **Program Pak™ Color LOGO** (26-2722, $49.95) requires a Standard BASIC Color Computer. Use your own TV with either version.

Our **Color LOGO Teacher's Book** (26-2761, $3.95) gives you instructional ideas and activities for presenting LOGO in the classroom. It includes special pages that can be photocopied and used as class handouts.

The **Color LOGO Parent's Book** (26-2763, $3.95) is designed for parents and children to learn LOGO together at home.

Color LOGO Lab (26-2770, $199) provides a complete guide for teaching Color LOGO. Includes teacher's manual, student workbooks and overhead transparencies. **Additional Student Workbooks** (26-2771, $2 each) are available.

Radio Shack Makes Courseware Development Easy



Our authoring systems make it easy to create courseware. No programming knowledge is required. Each program requires a Model III or Model 4 disk system.

TRS-80 AUTHOR I (26-1727, $149.95) is a screen-oriented authoring system with full-screen editing, graphics and score-keeping option. Sample lesson included.

TRS-80 AUTHOR I Lesson Presentation Package (26-2707, $64.95) presents lessons that have been created using TRS-80 AUTHOR I. (Not required if you have TRS-80 AUTHOR I).

TRS-80 Network 3 AUTHOR I Lesson Presentation Package (26-2713, $299) allows you to use the Network 3 Controller to present lessons created with TRS-80 AUTHOR I. Keep a lesson score file on diskette. Requires host computer with two disk drives.

TRS-80 MicroPILOT™ (26-2718, $119.95) is a command-oriented language that lets you create your own courseware or adapt it from any curriculum suitable for computer assisted instruction. MicroPILOT is based on the PILOT computer language, but offers extended graphics and disk file handling capabilities. Features one-letter commands, upper and lower case characters and branching. Requires a Model III or Model 4 disk system.

Color PILOT lets you mix text and high-resolution graphics. It features a line editor and easy one-letter commands. Graphics operators include color, line, box, window and more. Display options include upper and lower case characters. **Disk Color PILOT** (26-2710, $79.95) requires an Extended BASIC Color Computer with disk drive. **Tape Color PILOT** (26-2709, $59.95) requires a Standard BASIC Color Computer. Use your own TV with either.

Quick Quiz: A Mini-Authoring System (26-1728, $39.95) makes it easy to create, store, and give multiple-choice tests. It provides a pre-designed format for typing up to 40 questions with four answer choices per question. Scores can be printed or stored on disk. Requires a Model III or Model 4 disk system.

Helpful TRS-80 Educational Resource Materials



The second edition of our **TRS-80 Educational Software Sourcebook** (26-2764, $6.95) is a complete guide for educational courseware for TRS-80 computers. It contains over 1200 vendor-furnished listings of programs classified under 14 subject areas. Each listing gives program content, grade level, instructional technique used, and hardware required. Many listings contain user-site references. Also includes publisher profiles.

The **TRS-80 Microcomputer Information Handbook for Educators** (26-2757, $2.50) describes what microcomputers and courseware are, and how they can be used.

Radio Shack's Proposal Writing Guide (26-2754, $9.95) is a guide for educators who want to write proposals for funding from an outside source for computer-related education projects.


My TRS-80 Likes Me (26-2751, $2.50) is a teacher's guide to helping elementary students understand BASIC.

Number Patterns (26-2752, $2.50) shows how to introduce sequences and series using computers.

creative computing equipment evaluation

The Sharp PC-5000

A Desktop Computer in a Portable Package

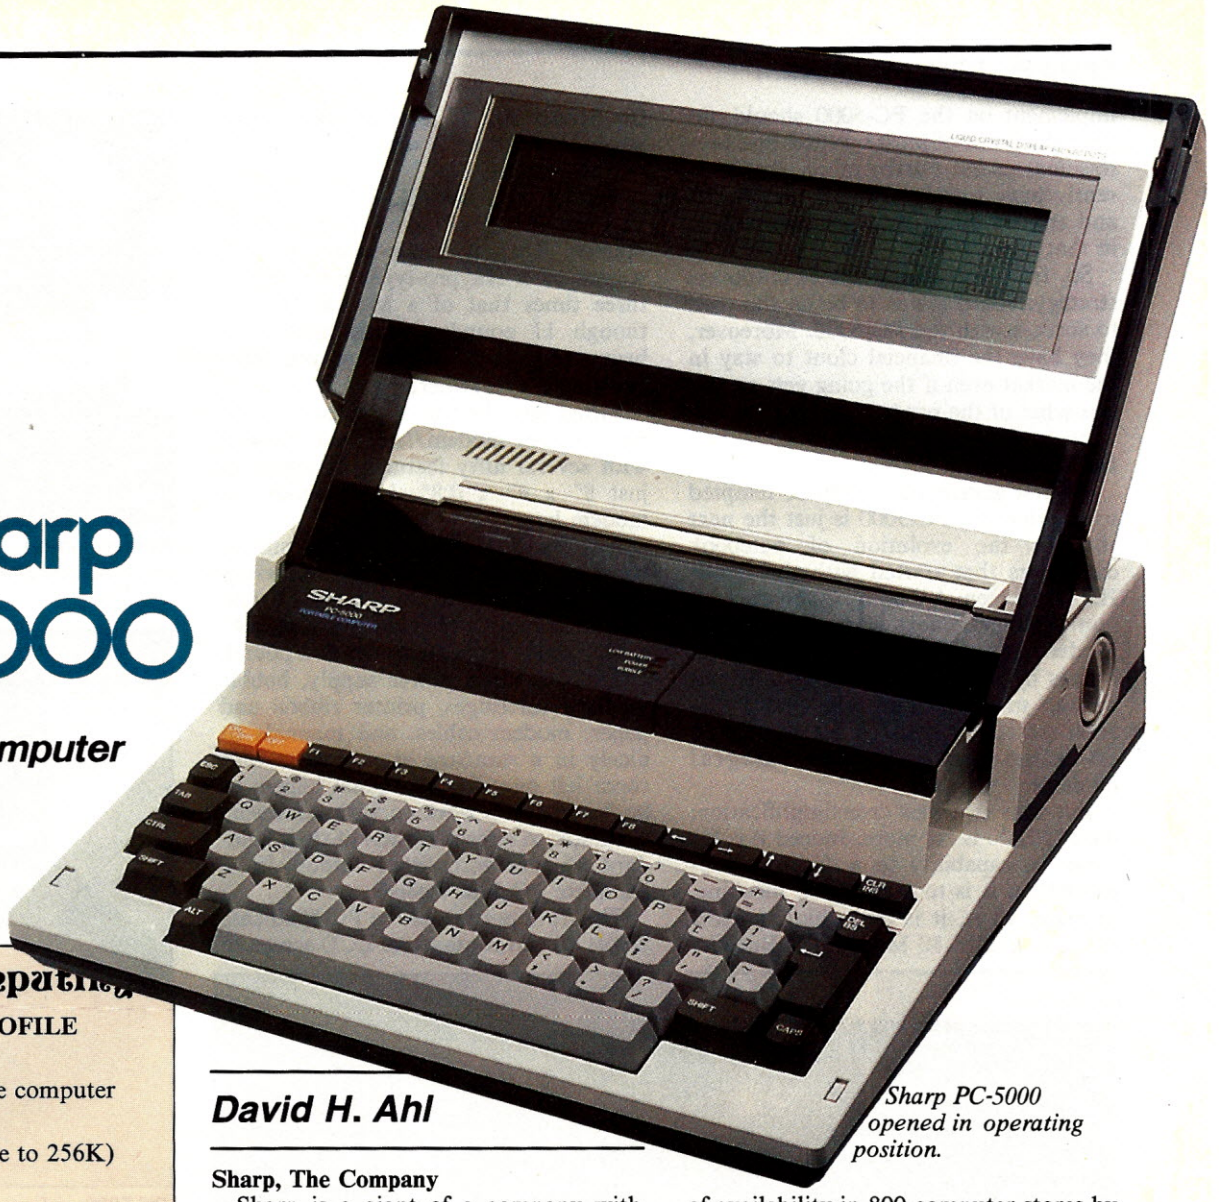

Sharp PC-5000 opened in operating position.

David H. Ahl

creative computing

HARDWARE PROFILE

Name: Sharp PC-5000
Type: Notebook portable computer
CPU: 16-bit 8088
RAM: 128K (expandable to 256K)
ROM: 192K
Keyboard: 57 full-stroke keys, 15 special keys
Display: LCD, 8 lines x 80 characters
Graphics: 80 x 640 pixels
Printer: 80-col. built-in thermal
Ports: Bus extender, RS-232, audio cassette, modem
Dimensions: 12.8″ x 12″ x 3.4″
Documentation: User's Guide, Basic manual, manual for each software package
Summary: Notebook portable with removable bubble memory cartridges, 8-hour battery pack, MS-DOS and Basic; text editor and comm software included. Optional built-in printer, modem, spreadsheet, and other software packages available.
Price: $1995 (printer $399, modem $349)
Manufacturer:
Sharp Electronics Corp.
10 Sharp Plaza
Paramus, NJ 07652

Sharp, The Company

Sharp is a giant of a company with sales of $3.8 billion in sales worldwide and nearly $800 million in the U.S. U.S. sales are divided approximately equally between consumer products and industrial products such as copiers, calculators, cash registers, facsimile equipment, electronic typewriters, and hand-held computers.

In their home country, Japan, Sharp is number 2 in computers behind industry leader NEC. Why then, is Sharp practically a non-factor in the computer market in the U.S.? Two reasons. First, their current channels of distribution are primarily NOMDA (office products) dealers which, for the most part, have been less-than-successful in marketing computers. Second, Sharp's first computer entry some two years ago did not have the software that buyers were demanding.

Sharp thinks that the PC-5000 is the product that will turn all that around. We think they are right. It is significantly different from other products, and computer stores should jump over themselves to handle it. Sharp has a goal of availability in 800 computer stores by the end of 1984; we think that goal is modest, and that far more stores than that will want to handle the PC-5000.

Furthermore, Sharp is not planning any distribution through mass merchandisers. This will help to avoid the price wars now creating havoc in the low end of the market.

The software that Sharp has chosen to



Buttoned up, the PC-5000 measures about 12" square.

implement on the PC-5000 should answer the needs of most business and professional users. Furthermore, they currently have a wide array of peripherals and are committed to being competitive in that area.

So, from the standpoint of corporate strategy, Sharp seems to be on the road to success with the PC-5000. Moreover, they have the financial clout to stay in the market even if the going gets rough. But what of the product itself?

On The Outside

At first glance, one might be tempted to say that the PC-5000 is just the next step in the evolution of notebook computers that started with the Epson HX-20 (screen: 4 lines by 20 characters, mini printer). Next came the Tandy Model 100 and NEC 8201 twins (screen: 8 lines by 40 characters, no printer but built-in modem). Then the Sharp PC-5000 (screen: 8 lines by 80 characters, 80-column printer, and integral modem).

But that is a vast oversimplification; the PC-5000 is far more. Indeed it is far closer in capability to a desktop computer than it is to a notebook machine. In many ways, it is more like an IBM PC than a TRS-80 Model 100. But like the Model 100, it is a battery-powered portable, and that is where we will start our evaluation.

Folded up, the PC-5000 measures 12.8″ x 12″ x 3.4″ and weighs 11.02 pounds. That is about one third the weight of a Kaypro-type portable and three times that of a Model 100. Although 11 pounds sounds light, it is heavy enough to discourage you from carrying it everywhere.

Fitted into the top of the case is a direct-connect modem/telephone handset with several nifty features. It measures just 8″ x 4″ x 0.8″. More about the modem later.

Not included in the dimensions or weight of the basic unit is the AC power supply/charger. This is a hefty 12 volt, 850 ma. supply which measures 3″ x 4″ x 2.2″ and weighs a bit over one pound.

The computer, power supply, bubble memory cartridges, printer ribbon and paper, modem cables, and manuals fit nicely in a standard attaché case with room left over for additional papers or books. Sharp is working with American Tourister to offer a version of their standard 6″ case with fitted cutouts for a complete PC-5000 system.

The front portion of the PC-5000 case pivots up and contains an LCD screen of eight lines by 80 characters. The active portion of the display measures 1.3″ x 9.3″. This is smaller than the Model 100 display (2″ x 7.5″); thus to fit eight lines of 80 characters each requires a mighty small character size.

The graphics resolution of the screen is 80 x 640 pixels, each one of which is individually addressable from Basic using the PSET (on) and PRESET (off) commands.


Characters are formed within a 5 x 7 dot matrix, with two dots allocated for letter descenders and one dot for interlinear spacing. That means that each character is 0.15″ high, the same as a dot matrix printer set to print six lines per inch. As we said, this is mighty small. This diminutive size coupled with the usual black-on-gray LCD display means that it is critical to adjust the angle of the display and the contrast of the LCD elements correctly (a thumbwheel is provided on the side of the case for this).



Review set-up. We took notes on paper and a Model 100 about various aspects of the Sharp.



PC-5000 and power supply in fitted attache case.

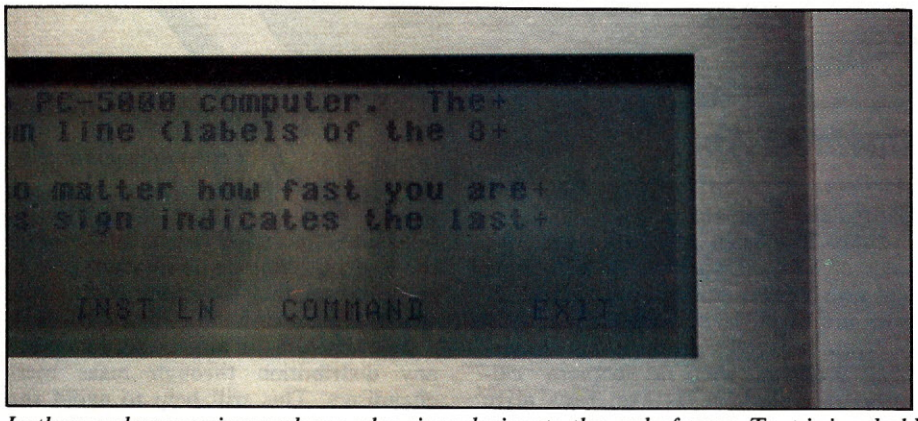

In the word processing package, plus signs designate the end of rows. Text is in a bold display face while the bottom line of functions is in the "normal" display face. Photo is actual size.



Keyboard has 57 full-stroke keys arranged in a standard pattern, and 15 special keys in a line above.

THE COMMUTER COMPUTER™

SHARP INTRODUCES THE PORTABLE OFFICE.

With Sharp's Commuter Computer™ you can take your entire office with you, wherever you go. Do word processing on the train, order entry from a customer's office or spread sheet analysis in your hotel room. It goes anywhere.

It's small.

It weighs under 12 lbs. and fits in a standard briefcase.

It prints. Quietly, with a correspondence-quality printer.

It comes with software. Word processing and communications. Also available are spread sheeting, executive planning and scheduling.

It remembers over 80 (128K) typewritten pages. And can be expanded to handle over 500 (896K).

It's compatible with a wide array of 16-bit IBM software.

It communicates with other computers and databases.

It's AC/DC with rechargeable 8-hour batteries.

It all means travel time and commuter time no longer have to be downtimes.

For more information call toll-free 800-447-4700 or send in the coupon.



SHARP

FROM SHARP MINDS COME SHARP PRODUCTS

Sharp Electronics Corp., P.O. Box 204, Wayne, NJ 07470

☐ Please send me more information about Sharp's Commuter Computer.

☐ Please set up a demonstration.

Name_____ Title_____

Company_____

Street_____ City_____

State_____ Zip_____

Phone ( )_____

CIRCLE 203 ON READER SERVICE CARD

Sharp Electronics Corp., 10 Sharp Plaza, Paramus, NJ 07652



THE HIGH TECH TAROT

FOR THE WORTHY

Only $39.95 (postage included, USA and Canada only) for the Apple II+ and //e, 48K*.
Unprotected for your convenience.
SATISFACTION GUARANTEED
C.O.D., check or money order


WARLOCK SOFTWARE
DIVISION OF TYLOS INC.

1900 Emery St., Suite 318
Atlanta, GA 30318 (404) 352-1015

* Apple II+ and //e are registered trademarks of Apple Computer Inc. Graphics created with Penguin Software's Graphics Magician

CIRCLE 230 ON READER SERVICE CARD

YOUR CHILDREN'S FUTURE



BEGINS TODAY

Discover how you can help your children grow with educational software from Opportunities for Learning. Write for your FREE catalog today!

OPPORTUNITIES FOR LEARNING, INC.
8950 Lurline Ave., Dept. L62
Chatsworth, CA 91311
(213) 341- 2535

CIRCLE 279 ON READER SERVICE CARD

Sharp PC-5000, continued...

The PC-5000 is turned on with a rocker power switch at the rear. This calls up MS-DOS which allows you to choose one of the internal programs in ROM (for now, only Basic) or a program from any one of the devices accessible from MS-DOS. Input devices that can be accessed are bubble memory cartridges A and B, disk drives C and D, and a cassette recorder. Later, Sharp promises ROM availability of *Easy-Writer* and some of the other Easy packages from BSG Software.

The PC-5000 keyboard is almost 100% standard with no unexpected keys to confuse a touch typist.

Bubble memory cartridges (128K each!) measuring just 2" x 2" x 0.3" are inserted in a slot at the top of the keyboard beneath a hinged cover. To the left of the cover are three small LEDs. A yellow one indicates that power is on, a red one warns that the battery is getting low and needs a charge, and a green one indicates that the bubble memory is being accessed (just like a disk drive indicator).

Standard Keyboard

Unlike so many other computers which have all kinds of extra keys in unexpected places, the PC-5000 keyboard is almost 100% standard with no unexpected keys to confuse a touch typist. SHIFT and TAB keys are double size where they belong, and the RETURN key is double height and width—again, where it belongs.

The only exception to the standard layout is the CAPS LOCK key which is to the right of the rightmost SHIFT key. As expected, it toggles caps lock on and off but it does not stay down when it is on. Thus, you must look at the screen to determine whether caps lock is on or not—a curious oversight in an otherwise excellent keyboard.

The alphanumeric keys are light gray with black markings, and the control keys are dark gray with white markings. The keytops are all matte finished and concave sculpted, a nice touch.

There is a slight "give" to the keyboard in the center, typical of keyboards mounted on a PC board supported only at the sides. It is not a major problem, but we think Sharp should consider putting in some additional supports, assuming they do not interfere with the circuitry beneath the keyboard. But as we said, it is not a serious drawback, and, in its current design, the keyboard has a better feel than the Model 100.

Above the alphanumeric portion of the keyboard is a row of 15 rectangular keys. The two at the left are orange and are marked ON/BRK and OFF. The OFF key temporarily puts the computer to sleep to await incoming modem traffic or program input, while the ON key awakens it. It also acts as a Break in Basic programs.

The next eight keys are function keys.

32		33	!	34	"	35	#	36	$	37	%	38	&	39	'
40	(	41	)	42	*	43	+	44	,	45	-	46	.	47	/
48	0	49	1	50	2	51	3	52	4	53	5	54	6	55	7
56	8	57	9	58	:	59	;	60	<	61	=	62	>	63	?
64	@	65	A	66	B	67	C	68	D	69	E	70	F	71	G
72	H	73	I	74	J	75	K	76	L	77	M	78	N	79	O
80	P	81	Q	82	R	83	S	84	T	85	U	86	V	87	W
88	X	89	Y	90	Z	91	[	92	\	93	]	94	^	95	
96	`	97	a	98	b	99	c	100	d	101	e	102	f	103	g
104	h	105	i	106	j	107	k	108	l	109	m	110	n	111	o
112	p	113	q	114	r	115	s	116	t	117	u	118	v	119	w
120	x	121	y	122	z	123	{	124	¦	125	}	126	~	127	
128	Ç	129	ü	130	é	131	a	132	ä	133	à	134	å	135	ç
136	e	137	ë	138	è	139	ï	140	ı	141	ì	142	Ä	143	Å
144	É	145	æ	146	Æ	147	o	148	ö	149	ò	150	u	151	ù
152	ÿ	153	Ö	154	Ü	155	¢	156	£	157	¥	158	₧	159	ƒ
160	á	161	í	162	ó	163	ú	164	ñ	165	Ñ	166	ª	167	º
168	¿	169	⌐	170	¬	171	½	172	¼	173	¡	174	«	175	»
176		177	▒	178	▒	179	▒	180	▒	181	▒	182	▒	183	▒
184	▒	185	▒	186	▒	187	▒	188	▒	189	▒	190	▒	191	▒
192	▒	193	▒	194	▒	195	▒	196	▒	197	▒	198	▒	199	▒
200	▒	201	▒	202	▒	203	▒	204	▒	205	▒	206	▒	207	▒
208	▒	209	▒	210	▒	211	▒	212	▒	213	▒	214	▒	215	▒
216	▒	217	▒	218	▒	219	▒	220	▒	221	▒	222	▒	223	▒
224	α	225	ß	226	Γ	227	π	228	Σ	229	σ	230	µ	231	τ

Figure 1. A portion of the character set of the PC-5000 as printed by the internal printer on thermal paper.

"I TRIED TO GIVE UP SMOKING BY EATING PRUNES. THEN I GAVE UP PRUNES."

These are days when more and more people decide that smoking really isn't healthy. Then, they decide to give it up.

But, it's not an easy experience. Which explains why there are all sorts of remedies around. Prunes. Toothpicks. Dummy cigarettes. Chewing gum. Candy that tastes like cement. Even hypnosis.

Now, there is an alternative way to control smoking.

Watch television. Your favorite programs. While **EXPANDO-VISION™** transmits positive, subliminal messages to your subconscious, which reinforce your will to succeed.



All you need is an inexpensive home computer.* A TV set. The **EXPANDO-VISION** Interface Device ($89.95) and the **EXPANDO-VISION** Smoking Control Program ($39.95).**

EXPANDO-VISION isn't a gimmick. Nor is it a panacea. Instead, **EXPANDO-VISION** is a new technology of self improvement based upon sound research into subliminal behavior motivation. It is a long-term method you can apply as often as you need. In the privacy of your home. It is legal, and backed by a 30-day money-back guarantee.

If you've decided to stop smoking and don't care for prunes, you should investigate **EXPANDO-VISION** now.

ASK FOR A FREE BROCHURE. Call toll free 1-800-543-7500 (operator 828), or charge your purchase to VISA,® MasterCard,™ American Express® or Diner's Club.® To pay by check or money order, write: Stimutech, Inc., P.O. Box 2575, Dept. 308 B, East Lansing, Michigan 48823. (Mich. residents add 4% sales tax.) Add $3.00 shipping/handling. Allow 4-6 weeks delivery.

*Atari 400 or Atari 800, VIC 20,® Commodore 64®

**Programs also available for weight, stress and drinking control, golf, study habits, career success, and sexual confidence.

EXPANDO-VISION™
Straight To The Mind's Eye



Expando-Vision (pat. pending) is a trademark for home computer behavior modification systems owned by Stimutech, Inc., East Lansing, Mich. 48823. VIC 20 and Commodore 64 are trademarks of Commodore Business Machines; Atari 400 and Atari 800 are trademarks of Atari, Inc. Expando-Vision warranty information available without charge. Call toll free 1-800-821-2424 (In Michigan 1-800-821-2423).

©Stimutech, Inc., 1983

CIRCLE 215 ON READER SERVICE CARD

These have different meanings in various software packages or can be user-set from either Basic or MS-DOS.

Continuing to the right, the next four keys are cursor control keys. Why did Sharp not lay them out in a logical diamond pattern as on the NEC 8201, but choose instead a straight line? We'll probably never know, but in our minds this is not at all user-friendly. To make matters worse, there is no space between the left arrow key and function key 8. Why is this bad? Because function key 8 is normally the one used to exit a program, and it is all too easy to hit it when you intend to hit the left cursor key—the one used most frequently. More than once we exited the word processing package inadvertently and turned TRACE on in Basic (function key 8) when intending to hit the left arrow.

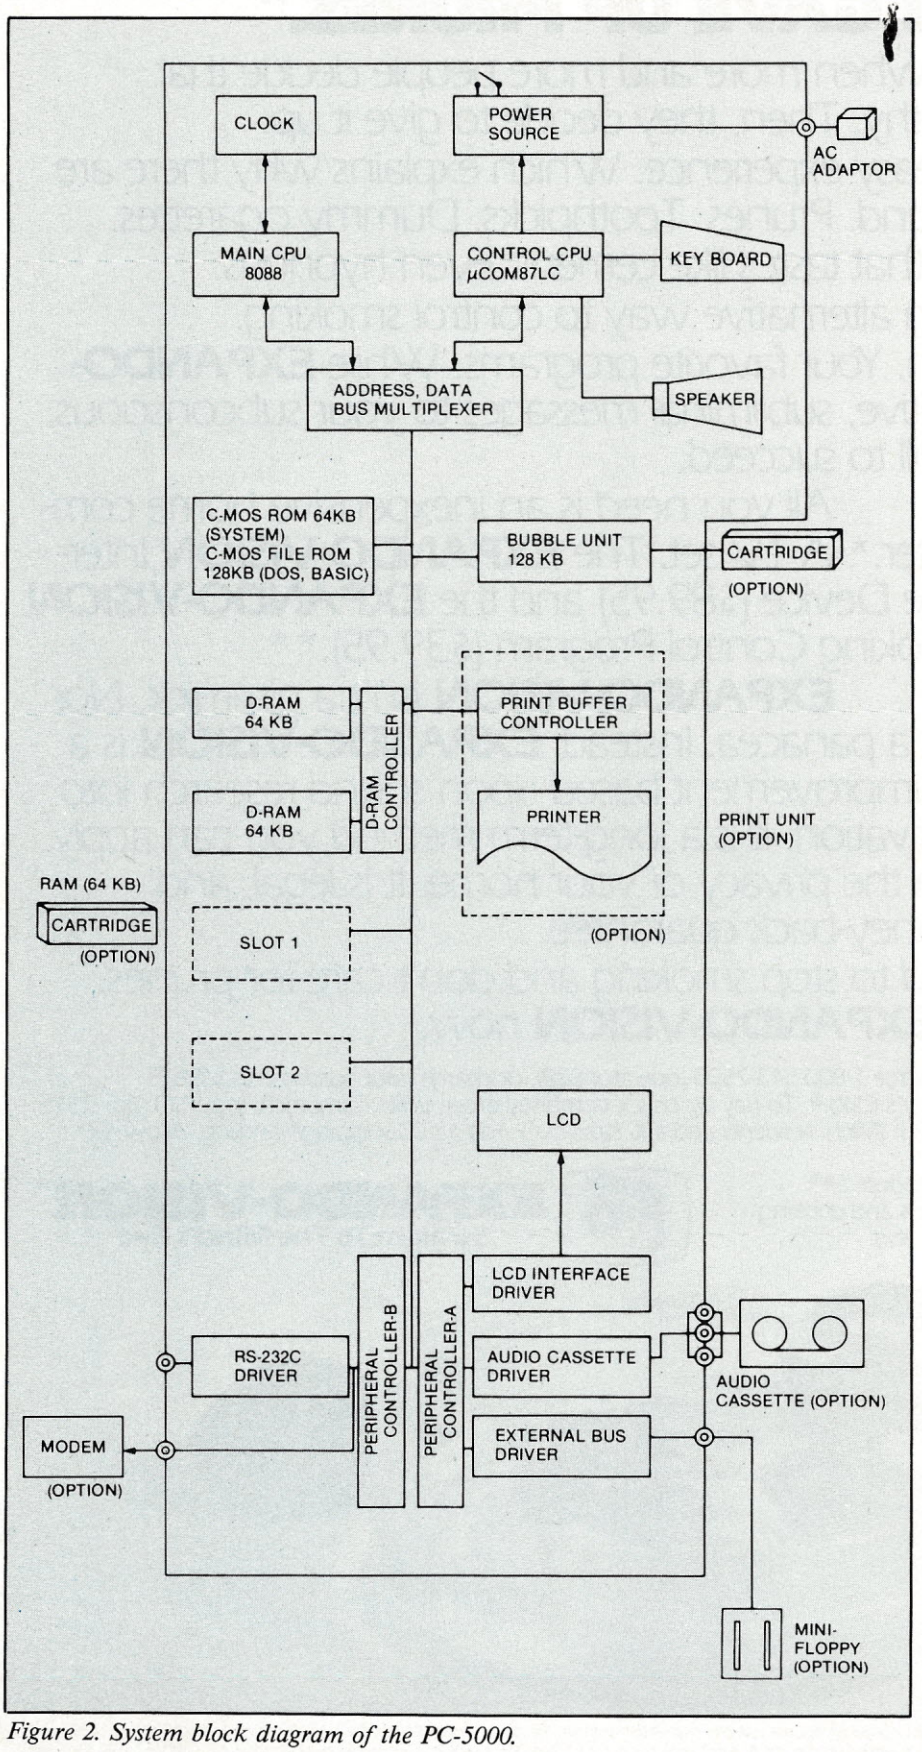


Figure 2. System block diagram of the PC-5000.

The last key in the top row is an orange CLEAR/INSERT key. In both Basic and *SuperWriter*, insert is toggled on and off with this key. In Basic, when insert is on, the cursor (normally a one-dot underline) changes to a two-dot underline. It is canceled by hitting the INSERT key a second time, any one of the cursor keys, or the RETURN key. However, in *SuperWriter*, there is no indication on the screen that insert mode is on, and it can be canceled only by hitting the INSERT key a second time. We found this inconsistency somewhat disconcerting, and feel that the software packages ought to be consistent.

An ALT MODE key is at the left of the spacebar. It toggles the keyboard into an alternative mode which, in Basic, causes most of the keys to produce a Basic keyword such as GOTO, RESTORE, and PRINT. The various graphics symbols and foreign letters can be produced directly from the keyboard by holding down the SHIFT and toggling on the CAPS LOCK. This is less convenient than a single graphics key, but at least it provides keyboard access to characters above ASCII 128 (see Figure 1).

On The Inside

The PC-5000 is built around a 16-bit 8088 mpu. It has a whopping 192K of CMOS ROM memory, 64K for the operating system, and 128K for DOS and Basic. The basic machine is equipped with 128K of RAM; an additional 128K is available. As mentioned earlier, it has a slot into which a bubble memory cartridge (128K of non-volatile memory) can be installed. A very thoughtful feature is the warning that appears on the screen when the bubble memory is 97% full.

Also on the main bus are a real-time clock, external bus driver (for floppy disks or other external devices), audio cassette interface (1600 bps), RS-232 interface, modem interface (300 baud), as well as an address and data bus multiplexer. This latter item directs data to and from either the main 8088 mpu (actually very little goes to it) and the CMOS controller. This is an important

Enjoy a world of learning and leisure with the Sakata Model SC-100 Color CRT Monitor

Model SC-100 accepts a composite video signal; has a modern streamlined design; includes an audio speaker and an earphone jack for privacy of operation and is compatible with fine popular personal computers.

Your SAKATA monitor will enhance your picture comparable to the most expensive computers available.

Improve your education and increase your fun with SAKATA CRT DISPLAY MONITORS . . . . "We Promise Performance",..

Also available: Model SC-200 13" RGB high resolution COLOR CRT MONITOR. Model SC-300 13" RGB super high resolution COLOR CRT MONITOR. Model SG-1000 12" monochrome high resolution CRT MONITOR (green). Model SA-1000 12" monochrome high resolution CRT MONITOR (amber).

SAKATA CRT MONITORS are available wherever personal computers are sold or write for technical and illustrated literature and prices.

SAKATA U.S.A. CORPORATION
651 Bonnie Lane, Elk Grove Village,
Illinois 60007 / (312) 593-3211
800-323-6647 (outside Illinois)

CIRCLE 211 ON READER SERVICE CARD

Sakata

"Serving industry worldwide since 1896"



Illustrated:
Model SC-100 13" CRT
COMPOSITE COLOR
DISPLAY MONITOR

Inside Apple

Vol. 1, No. 4

A dot matrix printer that will improve your image.

Meet the Apple® Imagewriter, the newest dot matrix printer for your Apple Personal Computer.

And with all that it has going for it, just maybe the best dot matrix printer on the market.

Take legibility, for instance.

The Imagewriter crams 140 x 160 dots into each square inch. So you get text that's highly readable and high resolution graphics, besides.

And is it fast.

The Imagewriter cruises at an unbelievable 120 characters per second. And that's just in the text mode. It's even faster printing graphics. 180 characters per second, to be exact.

What's more, the graphics dump is up to 60% faster than other comparably priced dot matrix printers. And that makes the Imagewriter fast enough to handle the Lisa.™


Yet it's just as at home with an Apple III or Apple IIe. Thanks to Apple software experts who designed the control electronics to give the Imagewriter perfect compatibility. Not to mention some special capabilities like superscript and subscript, to name just two.

Now, with all this high-speed performance, you'd expect the Imagewriter to make the Devil's Own Noise. It doesn't. In fact, the Imagewriter is specially constructed — with overlaid seams and special sound-deadening materials — to achieve a remarkable 53 dB. How loud is a remarkable 53 dB? You'd make more noise if you read this aloud.

The Imagewriter even has quiet good looks, since we designed it to look like the rest of the Apple Family.

Yet even with all its improvements, the Imagewriter is a better deal than any other dot matrix printer with comparable performance. And you can print that.

APPLE PRESENTS TH
E IMAGEWRITER APPLE PR
ESENTS THE IMAGEWRITER APPLE PRESENT
S THE IMAGEWRITER APPLE PRESENTS THE IMAGEWRITER APPL

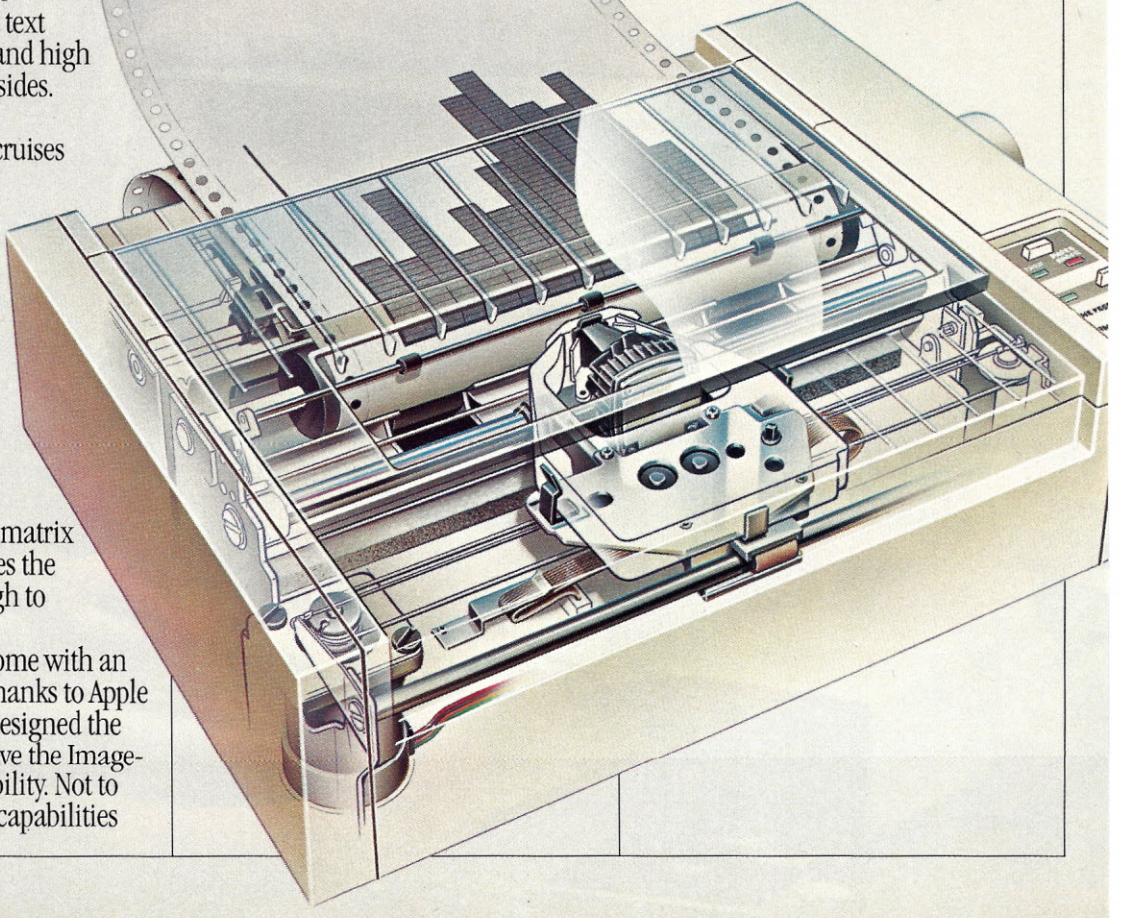



Charge!

Go out there and get the Apple Personal Computer System you really want. Now. Without laying out your extra cash. Without tying up your other lines of credit. With the Apple Card. The only consumer credit card reserved exclusively for the purchase of Apple Computers, peripherals and software.

Like all our products, it works simply:

Fill out an application (short, to the point and annotated in English) at an authorized Apple dealer honoring the Card. Your salesperson will call in the application and in most cases get an approval for you right on the spot.

You can then take your Apple system home. You don't even have to wait for the Card; we'll mail it out to you. And by the time you get it, you'll probably be well into doing whatever you bought your Apple system to do.

There is no annual fee for the Card, although a couple of restrictions do apply. The first purchase must include an Apple Personal Computer and you have to put 10% down. And subsequent purchases need to be at least $100 if made with the Card. Oh, yes — you'll also have a credit limit.

When you use the Apple Card to make additional purchases, all you have to do is show the Card and sign the invoice. As long as it's within your credit limit, of course. Our dealers get a little nervous when someone signs for half their inventory. You understand.

You'll also receive monthly statements that include the latest purchases, credit available, and the minimum payment due. You'll also be happy to know Apple Card credit terms are affordable and the payments can be spread out. It's all spelled out for you at the time your Card is approved.

So stop by a participating authorized Apple dealer and get an Apple Card. Just think of it as credit where credit is due.

Give your floppy disks the boot.

We call it the "floppy disk shuffle." It happens when you have two or more software programs on floppies and you need to work with both. What do you do? You put one disk in, boot it, do your work, take it out, put the other disk in, boot it, do your work — you get the idea.

Well, you can stop shuffling any time now.

Thanks to a unique new software program called Catalyst™ from Quark, Inc. Specially designed for your Apple III and ProFile™ hard disk.


Catalyst allows you to take a wide variety of software programs and store them on your ProFile. Once they're on your ProFile, you just select the program you want from the Catalyst menu that appears on your monitor — then Catalyst does the rest. You'll never have to boot those programs again.

What kinds of programs will work with ProFile and Catalyst?

Almost anything written for the Apple III including copy-protected programs like VisiCalc,® Quick File™ and Apple Writer III. Or languages like Pascal, BASIC, or COBOL.

And once you've loaded these programs into your ProFile, the only diskette you may ever need is the Catalyst.

So if you have an Apple III and a ProFile and more floppies than you care to flip through, get yourself a Catalyst. And boot those disks for good.

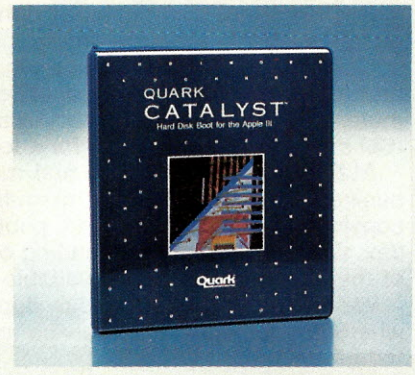

Apple Computer Inc., 20525 Mariani Ave., Cupertino, CA 95014. For the authorized Apple dealer nearest you, call **(800) 538-9696.** *In Canada, call* **(800) 268-7796** *or* **(800) 268-7637.** *© 1983 Apple Computer Inc.*

VisiCalc is a trademark of VisiCorp, Inc. Catalyst is a trademark of Quark, Inc. Apple, the Apple logo, Quick File and ProFile are trademarks of Apple Computer Inc.


function since the 8088 requires more power and runs hotter than the CMOS circuitry, so it is desirable to use the 8088 only for essential functions. (See Figure 2.)

Also on the inside are the printer controller, LCD display controller, and keyboard interface.

Connectors are provided on the back of the PC-5000 for cassette cables, external bus, RS-232, modem, and AC power supply.

The PC-5000 can operate on either an AC power supply (which doubles as a charger) or an internal lead acid battery. Acid, acid? Why not NiCad like everyone else uses? Several reasons. First, an acid battery has a much longer shelf life than a NiCad. Second, it is smaller and lighter for the same power output. And third, it charges faster.

The battery provides eight hours of continuous run time—slightly longer if the machine is used intermittently. A full recharge takes about four hours. As mentioned, a red LED indicates when the battery is getting low. For the user on the move, an extra battery is probably a smart buy.

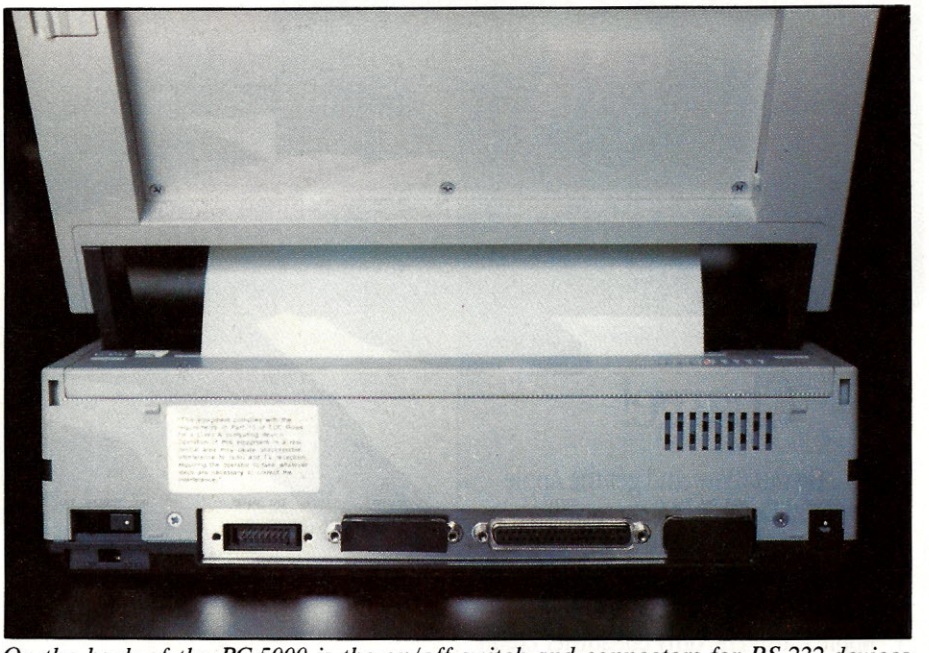

On the back of the PC-5000 is the on/off switch and connectors for RS-232 devices, serial I/O, external bus, cassette recorder, and AC adapter.

Bubble Memory Or Floppy Disk?

The PC-5000 has two types of external memory available, bubble memory and floppy disk. Obviously, in the portable mode of operation, bubble memory is the only choice. Each 2" square cartridge holds 128K, and preprogrammed bubble cartridges can contain applications programs or different versions of the operating system.

To the operating system, the bubble cartridge looks just like a double-density single-sided disk drive. MS-DOS recognizes the bubble cartridges as device A and B. Data is stored 512 bytes per sec-

ALF COPY SERVICE

1315F Nelson Street Denver, CO 80215 (303) 234-0871

FAST • RELIABLE • LOW COST

If you produce software, ALF's disk copying service is the quick, convenient answer to your duplication needs. Most orders are shipped in less than a week. Every disk we copy is verified bit by bit and guaranteed 100% flawless.

We can copy virtually any soft-sectored mini format. Standard formats: Apple II (including nibble-copy proof, double-boot, and fast load), Apple III, Atari, IBM PC, Kaypro, NEC PC8000, Osborne, TRS-80 I and III, Zenith Z-90 and Z-100, and more. Copy protection is available for most formats.

Our "no frills" pricing means you don't have to buy extras you don't need—set-up charges start at $10, and copying charges are 30¢ to 40¢ per side. (See blank disk prices at right. Minimum: 50 copies.) Quantity discounts available for large orders.

Of course, we have the frills too: label application, 3-hole vinyl pages, printing of labels and sleeves, shrink packaging, heat sealing, and much more. We can put your product in a customized package—vinyl folder or IBM-style binder/slip case—for a low price in small or large quantities.

ALF is one of the oldest and most trusted names in the duplication business. ALF designs and manufactures copying machines that other copying services and software publishers around the world rely on every day. Our complete understanding of duplication technology assures you of the finest reproduction available.

We're eager to solve your duplication and packaging problems—whether you want one service or a total package. Give us a call today!

BLANK DISKS

ALF buys large quantities of disks for our disk copying service—and we can pass our savings on to you. If you're buying hundreds of disks, ALF is your ideal source for top quality disks at a reasonable price. We buy our disks in bulk packages, avoiding the expense of fancy printing and labeling.

The disks listed below are 5 1/4", single sided, double density (except as noted), unlabeled, with hub reinforcement ring. Other disks are available, call for details.

3M	**$165** per 100
MEMOREX	**$165** per 100
NASHUA	**$160** per 100
NASHUA (single density)	**$140** per 100
VERBATIM	**$190** per 100

Without sleeves: add $2.50 shipping per 100.

With tyvek sleeves: add $7 plus $2.50 shipping per 100.

Packed in boxes of 10 with tyvek sleeves: add $15 plus $3.00 shipping per 100.

Now NRI takes you inside the new TRS-80 Model 4 microcomputer with disk drive to train you at home as the new breed of computer specialist!



NRI teams up with Radio Shack advanced technology to teach you how to use, program and service state-of-the-art microcomputers...

It's no longer enough to be just a programmer or a technician. With microcomputers moving into the fabric of our lives (over 1 million of the TRS-80™ alone have been sold), interdisciplinary skills are demanded. And NRI can prepare you with the first course of its kind, covering the complete world of the microcomputer.

Learn At Home In Your Spare Time

With NRI training, the programmer gains practical knowledge of hardware to design simpler, more effective programs. And, with advanced programming skills, the technician can test and debug systems quickly and easily.

Only NRI gives you both kinds of training with the convenience of learning at home. No classroom pressure, no night school, no gasoline wasted. You learn at your convenience, at your own pace. Yet you're always backed by the NRI staff and your instructor, answering questions and giving you guidance.



Now training includes either the TRS-80 Model 4 Microcomputer with Disk Drive or TRS-80 Color Computer with Computer Access Card; professional LCD multimeter; the NRI Discovery Lab; and hundreds of demonstrations and experiments.
(TRS-80 is a trademark of the Radio Shack division of Tandy Corp.)

TRS-80, Model 4 plus Disk Drive to Learn on and Keep

NRI training is hands-on training with practical experiments and demonstrations. You not only learn to program your computer, you learn all about it... how circuits interact... interface with other systems ...gain a real insight into its nature. Under NRI's carefully planned training, you even install a disk drive, verifying at each step its operation.

You also work with a professional 4-function, 3½ digit digital multimeter and the NRI Discovery Lab,® performing over 60 separate experiments. Both microcomputer and equipment come as part of your training for you to use and keep.


Same Training Available With Color Computer

NRI offers you the opportunity to train with the TRS-80 Color Computer as an alternative to the Model 4. The same technique for getting inside is enhanced by using the new NRI-developed Computer Access Card. Only NRI offers you a choice to fit your specific training needs.

The Catalog is Free. The Training is Priceless.

Get all the details on this exciting course in NRI's free, 104 page catalog. It shows all equipment, lesson outlines, and facts on other electronics courses such as Electronic Design, Industrial Electronics, Video/Audio Servicing... 12 different career opportunities in all.

Keep up with the latest technology as you learn on the latest model of the world's most popular computer. If coupon has been used, write to NRI Schools, 3939 Wisconsin Avenue, Washington, D.C. 20016.



NRI Schools
McGraw-Hill Continuing Education Center
3939 Wisconsin Avenue
Washington, D.C. 20016
We'll give you tomorrow.

All career courses approved under GI bill.
☐ Check for details

The catalog is free.
The training is priceless.
Please check for one free catalog only.

- ☐ Computer Electronics including Microcomputers
- ☐ Color TV, Audio, and Video System Servicing
- ☐ Electronics Design Technology
- ☐ Digital Electronics
- ☐ Communications Electronics • FCC Licenses • Mobile CB • Aircraft • Marine
- ☐ Industrial Electronics
- ☐ Basic Electronics
- ☐ Small Engine Servicing
- ☐ Appliance Servicing
- ☐ Automotive Servicing
- ☐ Auto Air Conditioning
- ☐ Air Conditioning, Heating, Refrigeration, & Solar Technology
- ☐ Building Construction

Name (Please Print) Age

Street

City/State/Zip

Accredited by the Accrediting Commission of the National Home Study Council 175-014

IIe OR NOT IIe?

Sams answers all your questions.

Sams introduces two new books on the new Apple IIe® computer. So if you're new to Apple IIe programming, Sams has the answers you've been looking for.

For a detailed understanding of Applesoft programming, start with APPLESOFT FOR THE APPLE IIe. Brian and George Blackwood, authors of Sams APPLESOFT LANGUAGE, wrote this book especially for new Apple IIe owners. Read it and you'll quickly learn Applesoft syntax, programming techniques, commands, functions, and more. You get all this for only $19.95. And that's a value you won't find in any other IIe Applesoft book around.

Sams APPLE IIe PROGRAMMER'S REFERENCE GUIDE is a must for IIe owners of all experience levels. It provides quick answers to your day-to-day programming questions. And includes short applications and demonstration programs written in Apple BASIC and 6502 assembly language. Written by David L. Heiserman.

So when it comes to your Apple IIe questions, Sams answers with APPLESOFT FOR THE IIe, No. 22259, $19.95, and APPLE IIe PROGRAMMER'S REFERENCE GUIDE, No. 22299, $19.95.

Buy yours today! Or call Operator 471 at 317-298-5566 or

800-428-SAMS


SAMS™

Howard W. Sams & Co., Inc.
4300 West 62nd Street • P.O. Box 7092 • Indianapolis, IN 46206

Offer good in U.S.A. only. Prices subject to change without notice. In Canada, contact Lenbrook Electronics, Markham, Ontario L3R 1H2.
Apple IIe is a registered trademark of Apple Computer, Inc.

AD471

CIRCLE 202 ON READER SERVICE CARD

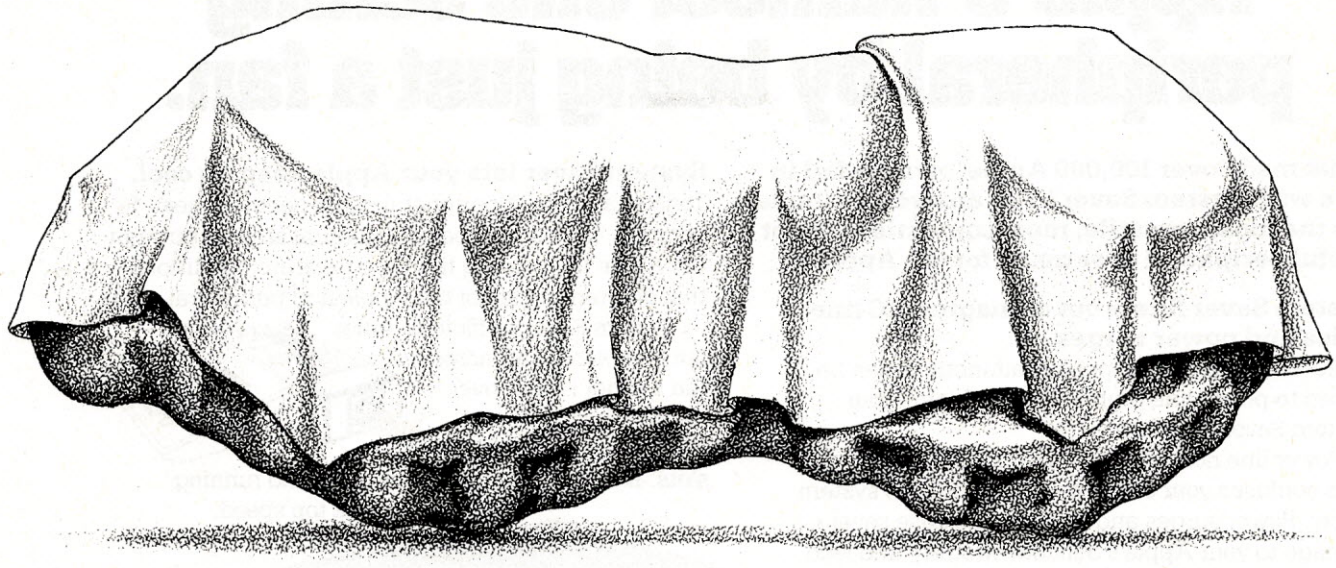

When IBM® Delivers Its New Computer, Sams Will Have It Covered.

Soon IBM® will release a new computer. And once it's out, you'll be able to read all about it in a new series of Sams books.

One book, a User's Guide, will answer the questions you may have on the new IBM computer. You'll learn all the basic operating procedures, how to buy the right software, and how you can expand the system. Plus many other valuable programming tips.

Another one will introduce you to the new IBM's graphics capability. It will cover everything you'll need to know to program graphics including the commands, functions, software, and more.

A third book in the series will explain how to operate the new IBM in general, and by each hardware component. Its many 4-color illustrations will also show you how to connect the computer to the rest of the system, and how each function entry looks on screen.

Watch for Sams new IBM computer books. Coming soon to your local computer and book stores.

SAMS™

Howard W. Sams & Co., Inc.
4300 West 62nd Street
P.O. Box 7092
Indianapolis, IN 46206

IBM is a registered trademark of International Business Machines, Inc.

AD475

CIRCLE 233 ON READER SERVICE CARD

System Saver® didn't become the Apple's number one selling* peripheral by being just a fan.


What made over 100,000 Apple® owners fall in love with System Saver? The answer is simple. It's the most versatile, most convenient, most useful peripheral ever made for the Apple.

System Saver filters out damaging AC line noise and power surges.

70-90% of all microcomputer malfunctions can be traced to power line problems.** Problems your System Saver guards against.


Power line noise can often be interpreted as data. This confuses your computer and produces system errors. Power surges and spikes can cause severe damage to your Apple's delicate circuitry and lead to costly servicing.

System Saver clips surges and spikes at a 130 Volts RMS/175 Volts dc level. A PI type filter attenuates common and transverse mode noise by a minimum of 30 dB from 600 kHz to 20 mHz with a maximum attenuation of 50 dB. You end up with an Apple that's more accurate, more efficient and more reliable.



System Saver makes your Apple more convenient to use.

No more reaching around to the back of your Apple to turn it on. No more fumbling for outlets and cords to plug in your monitor and printer. System Saver organizes all your power needs.

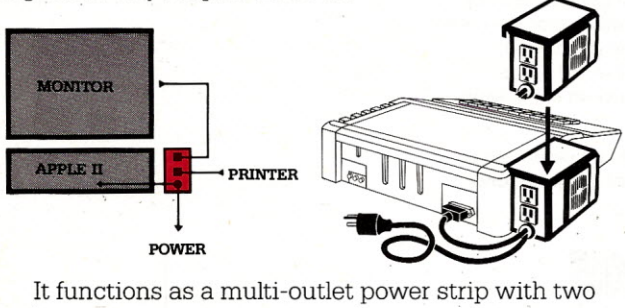



It functions as a multi-outlet power strip with two switched outlets. Plus System Saver offers the ultimate convenience, a front mounted power switch for fingertip control of your entire system.

System Saver lets your Apple keep its cool.

Today's advanced peripheral cards generate heat. In addition, the cards block any natural air flow through the Apple IIe creating high temperature conditions that shorten the life of the Apple and peripheral cards.

System Saver's efficient, quiet fan draws fresh air across the mother board, over the power supply and out the side ventilation slots. It leaves your Apple cool, calm and running at top speed.



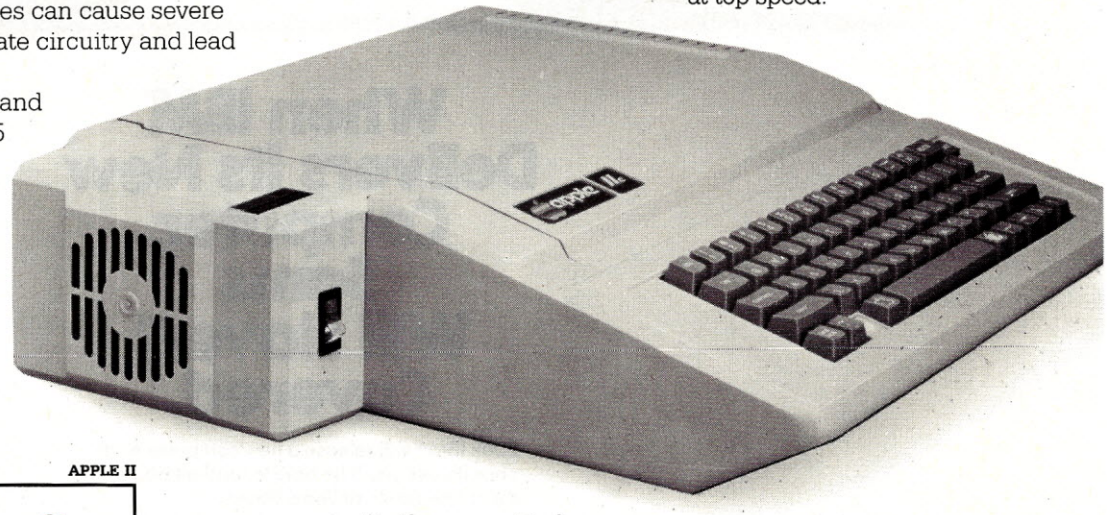

So if you want to keep damaging heat, line noise and power surges out of your system for good, pick up the only peripheral that's in use every second your computer is in use. The System Saver. You'll soon come to think of it as the piece Apple forgot.

Compatible with Apple stand



Please send _____SYSTEM SAVER(S), $89.95 each. Total $_____

Include $2.50 for shipping and handling.
New York State residents add applicable sales tax.

☐ Check enclosed ☐ Visa ☐ Master Card

Card No. _____ Expires _____

Name on Card _____

Name _____

Address (UPS delivery) _____

City _____ State _____ Zip _____ Phone _____

251 Park Avenue South
New York, NY 10010
486-7707 Tlx.: 236200 KEN UR

KENSINGTON™ MICROWARE

*Softsel Computer Products Hot List. **PC Magazine: March 1983.

System Saver is UL Listed. System Saver's surge suppression circuitry conforms to IEEE specification 507 1980, Category A. Available in 220/240 Volts, 50/60 Hz.

System Saver is a registered trademark of Kensington Microware Ltd.
© 1983 Kensington Microware Ltd. System Saver is patent pending.

CIRCLE 170 ON READER SERVICE CARD

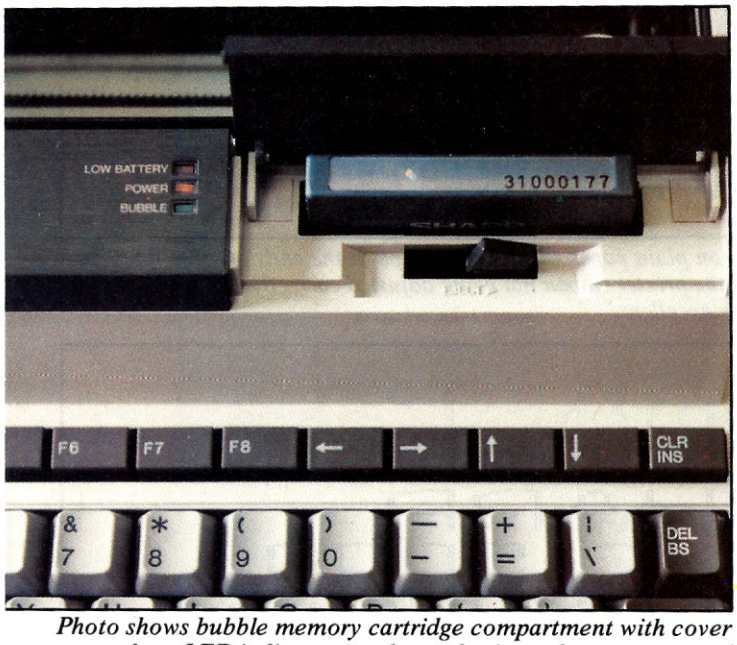


Photo shows bubble memory cartridge compartment with cover open, three LED indicators, and poor horizontal arrangement of cursor control keys.



Bubble memory cartridge is just over 2" square.

tor, eight sectors per track. Bubble cartridges are formatted as delivered.

Also like a floppy disk, bubble cartridges can be write protected by placing a silver sticker on the right side of the cartridge. Like floppy disks, bubble cartridges should be treated carefully and kept away from strong magnetic fields. Like a disk, it is sensitive to temperature, and the bubble cartridge has a built-in temperature lock that prevents operation below 32° or above 104°.

The disk drive available for the PC-5000 is the CE-510F, a double-density, double-sided 5¼" unit with a capacity of 320K per disk. The drive, of course, must be operated wih AC power and is not portable.

Built-in Printer

The printer built into the PC-5000 is a thermal unit which uses individual sheets of either thermal paper or plain bond. It is simple to install the printer in the event it is not purchased with the basic unit. One cable connector, four screws, and a platen feed knob do it.


In the thermal mode of operation, you simply put a piece of thermal paper in the printer from the rear, turn the knob a few turns, and that's it. Paper loading was considerably simpler than with the thermal unit on the Computer Devices DOT machine. An automatic paper sensor halts printing when there is less than 1" of paper remaining.

There is a contrast selector on the printhead which can be used to adjust for the best output.

The printer can be set for either 10 or 12 characters per inch. At 10 cpi, print speed is 30 cps, and at 12 cpi, the speed is 37 cps. Thus a single spaced page takes approximately two minutes to print, not a speed demon, but no slouch either. Moreover, the thermal mechanism is whisper quiet. Four of us carried on a normal conversation around a table with the printer churning away in the center, something you couldn't do with a dot matrix unit.

Like floppy disks, bubble cartridges should be treated carefully and kept away from strong magnetic fields.

To print on plain paper, a one-time thermal ribbon cartridge is inserted in the printer. In this mode of operation, the printed image is burned into the ribbon and transferred to the paper. It does not smudge at all and is similar to a good Xerox copy. As with a photocopier, rag bond or textured paper cannot be used; a smooth-finish copier paper gives the best results.

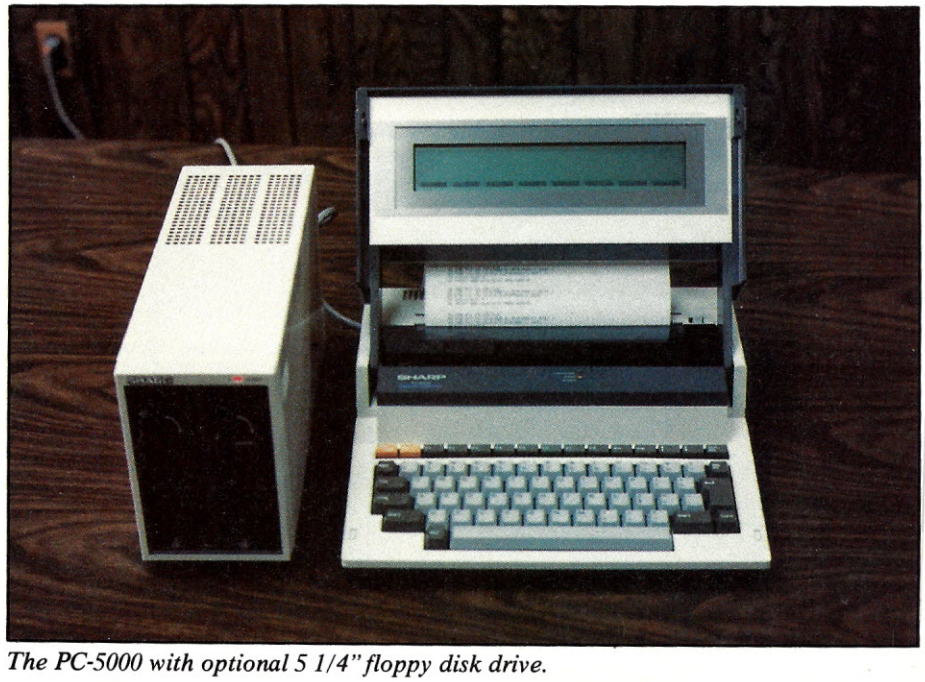

The PC-5000 with optional 5 1/4" floppy disk drive.

Although plain paper printing sounds wonderful, we think that thermal paper may be a better choice. Plain paper printing requires a one-time ribbon cartridge ($5.99). Moreover, the ribbon tension must be carefully adjusted; Figure 3 shows the result of it being slightly loose. Nevertheless, it is nice to have the capability for the few things that must be on plain paper.

The printer can print standard characters at 10 and 12 cpi as well as dot graphics in the same density as the display (640 dots per 6.67" line). See Figure 4.

```
- PRINTER  Type       Thermal transfer method
           Capacity   80 chracters per line (12 characters per inch)
                      66 charcters per line (10 characters per inch)
           Graphic    1197 dots per line
           Speed      37 characters per second (12 character per inch)
                      30 characters per second (10 character per inch)
                      555 dots per second (graphic)
           Paper      Plain paper or thermal paper
                       (A4, B5, letter size)
```

Figure 3. Print sample on plain paper shows partial type at the ends of some lines, the result of the tension of the printer ribbon not being adjusted correctly. With the correct tension, print quality is excellent.

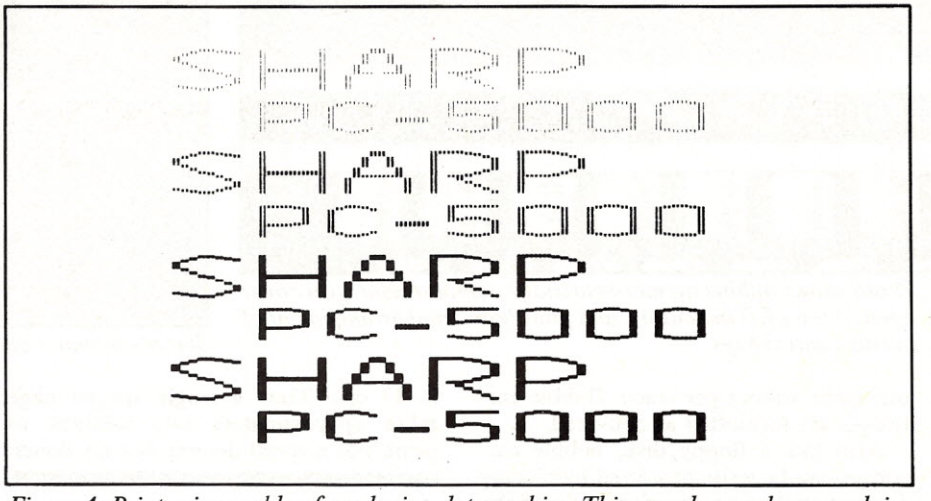



Figure 4. Printer is capable of producing dot graphics. This sample was done on plain paper.

Operating System

The standard operating system in the ROM of the PC-5000 is Microsoft MS-DOS. The system must be started with either a bubble memory cartridge or a disk drive installed. Whichever is installed becomes the system unit. If both are connected, pressing A or B selects the bubble memory and C or D selects a disk drive.

Upon a correct power up or warm start, the standard MS-DOS v. 2.02 dialog is displayed along with the current date. MS-DOS then looks for an auto-execute file which, if found, is executed. This is useful if you plan to use the machine mostly for word processing, spreadsheet calculations, or some other function. If there is no auto-execute file, MS-DOS displays the standard A> or C> prompt. You may then call up any utility, applications program, or other file.

MS-DOS has the expected utilities (copy, format, directory, delete, rename, etc.). Specific to the PC-5000 are commands to stop and resume scrolling on the display, turn on printer echo (to turn your PC-5000 into an expensive typewriter), set printer cpi, set the communications parameters, and put the machine to sleep.

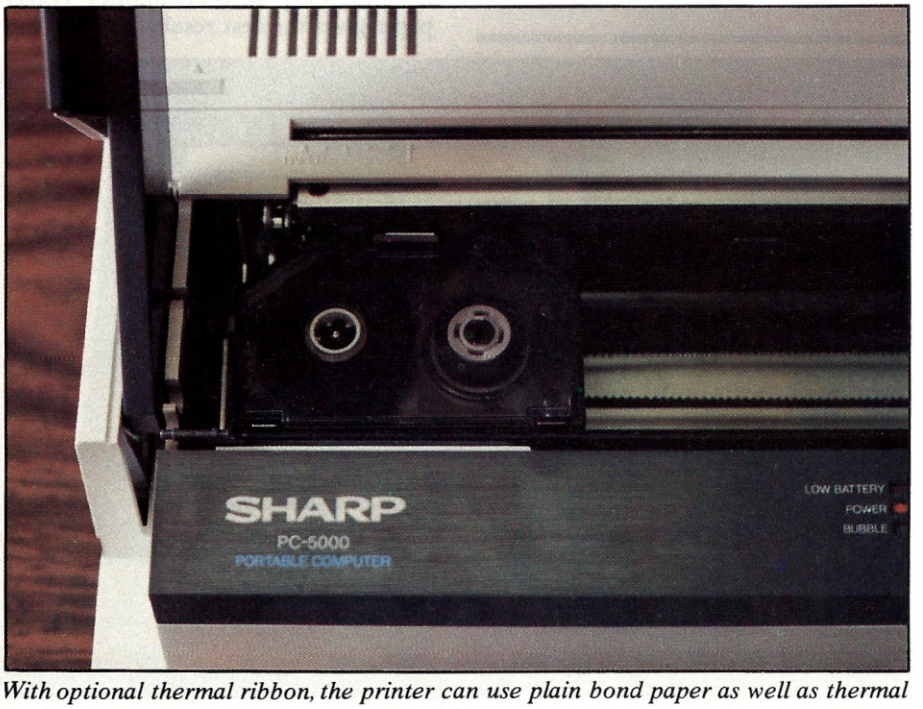

With optional thermal ribbon, the printer can use plain bond paper as well as thermal paper.

GW Basic

As available on other 8088-based computers, the PC-5000 has Microsoft GW (Gee Whiz) Basic available. We have reviewed this before and will not go into the many extended features of this outstanding Basic.

Variables in GW Basic can be integer, single or double precision, or string. Default mode is single precision. In our benchmark, accuracy and randomness were the same as the TI Professional and Computer Devices DOT, and better than the IBM PC. Speed was excellent also. See Table 1 for some interesting comparisons.


GW Basic has six Boolean operators including XOR, EQV, and IMP. For program chaining, it has COMMON, CHAIN, and MERGE. For random-access data

Computer	Time	Accuracy (Smaller is better)
TI Professional	0:15	.005859375
Sharp PC-5000	0:18	.005859375
Computer Devices DOT	0:22	.005859375
IBM PC	0:24	.01159668
NEC PC-8201	1:44	.187805
Tandy Model 100	4:54	.0000002058

Table 1. Speed and accuracy of selected 16-bit and portable computers.

Flight Simulator II

For Apple, Atari, & Commodore 64™

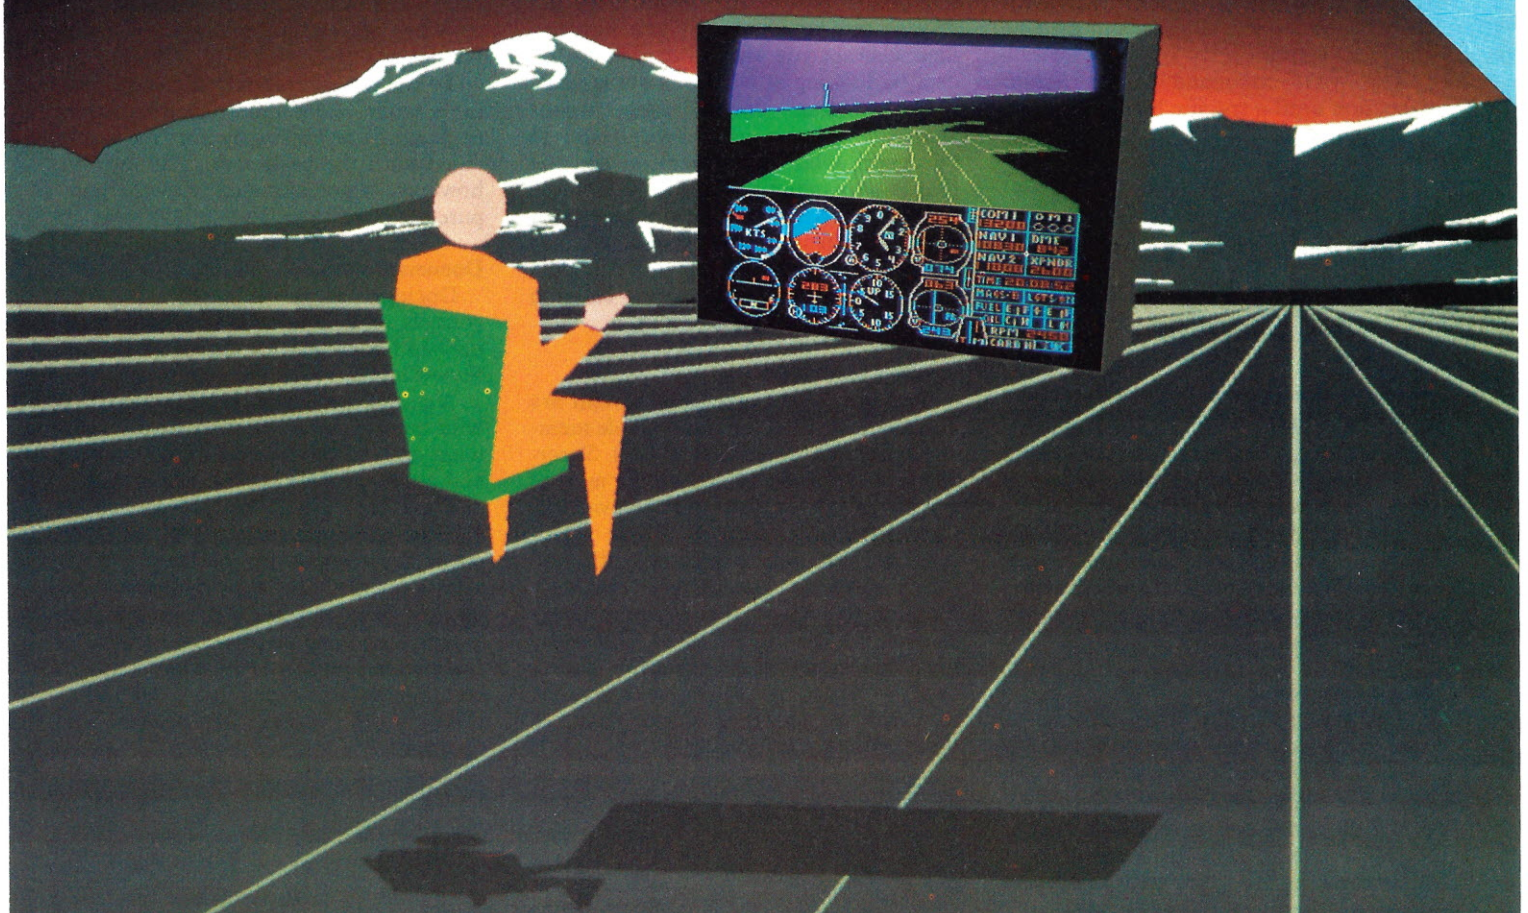

Put yourself in the pilot's seat of a Piper 181 Cherokee Archer for an awe-inspiring flight over realistic scenery from New York to Los Angeles. High speed color-filled 3D graphics will give you a beautiful panoramic view as you practice takeoffs, landings, and aerobatics. Complete documentation will get you airborne quickly even if you've never flown before. When you think you're ready, you can play the World War I Ace aerial battle game. Flight Simulator II features include ■ animated color 3D graphics ■ day, dusk, and night flying modes ■ over 80 airports in four scenery areas: New York, Chicago, Los Angeles, Seattle, with additional scenery areas available ■ user-variable weather, from clear blue skies to grey cloudy conditions ■ complete flight instrumentation ■ VOR, ILS, ADF, and DME radio equipped ■ navigation facilities and course plotting ■ World War I Ace aerial battle game ■ complete information manual and flight handbook.

See your dealer . . .

or write or call for more information. For direct orders please add $1.50 for shipping and specify UPS or first class mail delivery. American Express, Diner's Club, MasterCard, and Visa accepted.

Order Line: 800/637-4983

CIRCLE 234 ON READER SERVICE CARD

subLOGIC Corporation
713 Edgebrook Drive
Champaign IL 61820
(217) 359-8482 Telex: 206995

files, it has FIELD, GET, PUT, LSET, and RSET. USR calls machine language routines, but there is no documentation on writing machine language code. ON KEY tests to see if a function key has been pressed, and ON COMM activates a communications trap routine.

An interesting statement we hadn't seen before is OPTION BASE which sets the first value in dimensioned arrays to either 0 or 1. Arrays, incidentally, can have up to three dimensions.

The graphics capabilities are extensive and include PSET, RESET, and LOCATE (cursor positioning). CIRCLE automatically draws circles, ellipses, and arcs on the LCD screen.

The WAIT command halts program execution until a specific bit appears at a port you specify. The manual admonishes caution when using this command: "Be careful! You could wait forever if the bit you want doesn't appear."

Limited sound capability is available with the tiny built-in speaker.

Limited sound capability is available with the tiny built-in speaker. BEEP provides a single tone while SOUND provides a tone of any duration with a frequency between 37 and 32767 Hz.

Word Processing

The standard word processing package supplied with the PC-5000 is *SuperWriter* from Sorcim Software. We have not evaluated *SuperWriter* in *Creative Computing* and were unable to convince Sorcim to send us a manual, so these remarks are based on a few hours of use on the PC-5000 *sans* manual.

SuperWriter appears to be quite user-friendly and inadvertently pressing the exit key several times did not result in the loss or destruction of anything vital (like our text).

The package is completely menu driven, and does not seem to burden the user with extraneous or inexplicable commands. The screen wraps automatically and, no matter how fast you type, does not drop characters (like some other word processors we know). A plus sign indicates the last character on a screen line, a nice feature for keeping track of imbedded spaces.

Curiously, the display does not scroll. Instead, when seven lines have been typed, the text jumps up five lines leaving the previous bottom two lines as the top two lines on the new screen.

One not-so-friendly feature is that the cursor disappears if it is held down. What is acutally happening is that the cursor is moving in the direction specified, only to reappear when you release the key. Reappear where? Well, as far as it has traveled while the key was depressed which might be three characters away or 30 characters or 100 characters. We quickly abandoned the cursor repeat feature in favor of individual keystrokes to move the cursor exactly where we wanted it.

An insert mode is available but, as mentioned earlier, the cursor does not change size or shape, so you have no idea whether you are in insert mode except by looking at what you are typing.

Nevertheless, despite these minor shortcomings, we judge *SuperWriter* to be a good, solid word processor, and one that is well-suited to the PC-5000.

Sharp tells us that before too long, *EasyWriter* from BSG Software will also be available in ROM for the PC-5000, thus giving the user a choice between two excellent packages.

Applications Software

Two other packages from Sorcim are also available on a separate bubble memory cartridge, *SuperCalc-2* and *SuperPlanner.* Thus for users with the need of a spreadsheet, at least one is available immediately.

In addition, Sharp informs us that 17 other software houses are currently working to convert one or more packages to run on the PC-5000. Given the host environment of MS-DOS and a screen width of 80 characters, it shouldn't be too long before many of these packages are available.

Communications

Communications on the PC-5000 is accomplished using the CE-510T modem/dialer. This is a 300 baud direct-connect unit with a built-in dialer, speaker, and microphone. The modem stores up to ten 16-digit telephone numbers which can be dialed automatically by pressing one button. Of course, numbers may also be dialed manually. In case of a missed connection or busy signal, a recall button is also available.

Unlike other modems, the CE-510T has a speaker and microphone built in; thus it can be used as a standard handset or, when placed flat on a table, as a conference phone.

To use the computer in a communications mode, a communications software package, *SuperComm* by Sorcim, is provided with the basic unit. The modem, however, is not included with the computer; it is an extra cost ($349) item.

Documentation

Documentation with the PC-5000 consists of a User's Guide, Basic manual, and manuals for *SuperWriter* and *SuperComm.*

We had preliminary documentation with our evaluation unit so we can comment only on the content of the manuals and not their final appearance or size.

The User's Guide has seven chapters and seven appendices. The chapters cover the components of the PC-5000, setting up, installing the options, starting up, installing and using the printer, and a very long chapter (more than 60% of the manual) on MS-DOS. The manual is comprehensive, clear, and well-illustrated with scores of photos and diagrams.




Optional modem fits into the lid of the case. It doubles as a portable conference telephone.

The Bear essentials.



Stickybear ABC
Award Winner

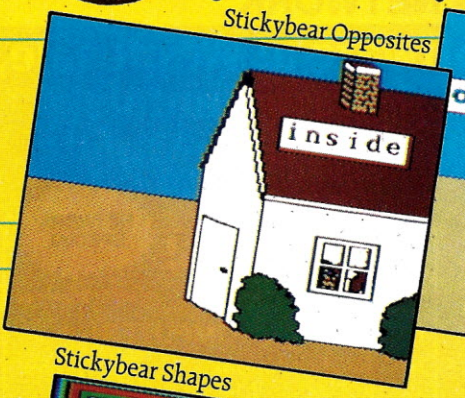


Stickybear Opposites





Stickybear Numbers

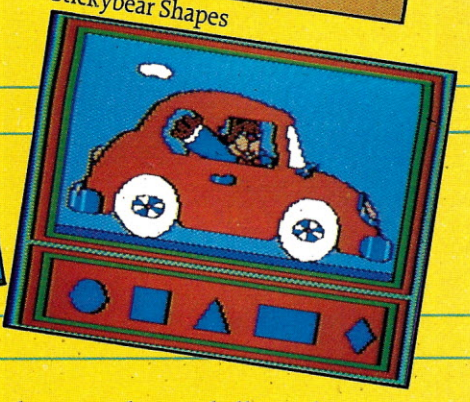

Stickybear Shapes

New!

Stickybear Shapes
Three games – Name a Shape, Pick a Shape, Find a Shape. Correct answers make animated pictures come alive.

Stickybear Opposites
Big, colorful animated pictures – Stickybears, unicycles, balloons, more – teach opposites. Up/down, full/empty, in front/behind, more.

Stickybear ABC Award-Winner
Full-screen, full-color animated pictures represent each letter in the alphabet.

Stickybear Numbers
Colorful moving objects – trucks, ducks, planes, more – teach numbers and counting. Over 250 picture combinations.

Runs on Apple II or Apple II + with 48K and one disk drive, 3.3 DOS; and Apple IIe or Apple III.

Stickybear is a registered trademark of Optimum Resource, Inc. Apple and Apple II, II +, IIe and III are registered trademarks of Apple Computer, Inc.

Give preschoolers a head start in basic skills with these total learning programs!

Here's a fresh, exciting way to treat 3- to 6-year-olds to a wonderland of learning...and help them discover important concepts – Shapes, Opposites, Numbers and ABC's – they'll need to succeed in school.

These 4 delightful programs for the Apple® Personal Computer are chock-full of Stickybears,™ plus dozens of charming critters, ice-cream colors, music...plus the most advanced animation ever for the Apple – all created by world-famous children's illustrator, Richard Hefter.

Each program includes a full-color poster, stickers, Parent's Guide, plus 32-page hardcover book – to help bridge that critical gap between books and computer!

Look for Stickybear software in finer computer stores everywhere. Or, call toll-free 800-852-5000, Dept. AC-2. Only $39.95 each.

Created by Richard Hefter, Janie and Steve Worthington and Spencer Howe for Optimum Resource, Inc.

A/M28-L2

Weekly Reader Family Software

A division of Xerox Education Publications
Middletown, CT 06457



CIRCLE 231 ON READER SERVICE CARD

The Basic manual is the usual Microsoft GW Basic manual customized for the PC-5000. It has six chapters covering editing, structured programming (aw, come on now), statements, commands, and functions. As we've said before, this is not a substitute for a good Basic programming text, but mainly is a reference guide to the particular implementation.

Service

Service, if needed for the PC-5000, is available from most (but not all) selling dealers. More interesting is a program called EXTRA (Extended Time Replacement Agreement) available to either the dealer or end user. This provides three options: (1) mail or carry in to one of the five Sharp regional service centers for repair, (2) Over-the-counter exchange at a regional center, and (3) next business day replacement direct from Sharp.

EXTRA also gives the user access to a toll-free telephone line for hardware and software advice. Dealers using EXTRA can telephone a special number that will download diagnostic routines into a computer; we can forsee the day when this will be made available to end users.

Pricing

The basic PC-5000 with 128K, MS-DOS, *SuperWriter*, and *SuperComm* sells for a suggested retail price of $1995. Other components are priced as follows:

128K Bubble memory	$269
Modem/dialer	349
Printer	399
Dual floppy drive	999
64K RAM upgrade	169
SuperCalc/SuperPlanner on 182K bubble	369

We see the most desirable configuration for portable use being the basic unit with printer and *SuperCalc* extra bubble memory—total cost, $2763. If it is your only computer, the floppy drives are probably necessary, for a total of $3762—rather heady for a portable compared to the TRS-80 Model 100, but quite a bargain compared to an IBM PC or high-end portable such as a Gavilan ($4000 plus) or Grid Compass ($8500 plus).

The Bottom Line

Frank Barbosa, general manager of computer systems at Sharp, confided to us that they were having a difficult time deciding how to position the PC-5000 in a 30-second TV commercial. Now, having used the machine, we see the problem. Is it a full-capability 16-bit desktop computer in a compact package? Sure is. Is it a notebook computer with full-size features and power? Yup. Is it a state-of-the-art machine with bubble memory, nifty modem, big LCD display, and whisper quiet printer in an 11-pound package? Right on.

That is not to say that the PC-5000 is perfect. It isn't. The cursor control keys should be arranged in a logical diamond pattern. It would be nice if the LCD screen were somewhat larger. The keyboard should have more support in the center and the CAPS LOCK key should give some indication of being depressed. And the software packages should be consistent from one to another.

But frankly, these problems are nits against the astonishing capability, speed, and memory capacity of the PC-5000. Furthermore, Sharp is a large, profitable company with an excellent service organization. The outstanding use of state-of-the-art technology coupled with well-proven software augers well for the success of the Sharp PC-5000. Would we buy one? You bet! END

PC NETWORK

Buy Hardware/Software at Wholesale, And Save On Software Rentals, As A NETWORK™ Member Only!

Save hundreds of dollars when you buy DIRECT from America's Number 1 Computer Buying Service at just 8% above DEALER WHOLESALE PRICES, plus shipping.

Receive The Personal Computer NETWORK's Giant Catalog featuring thousand of products and the lowest prices on the widest selection of computer products in the nation!

RENT BEFORE YOU BUY— Members are eligible to join The NETWORK's Business and Game Software Rental Libraries for a much smaller fee than other software rental services. And The NETWORK's rental charges are far less — just 20-25% of the Member WHOLESALE PRICE!

Join The NETWORK today for as low as $8 for one year (or $15 for two years) and receive these 10 exclusive, money-saving benefits:

1. REAL BUYING CLOUT
2. SHOP-AT-HOME CATALOG
3. EXPERT CONSULTANTS
4. INSURED FAST DELIVERY
5. BUSINESS SOFTWARE RENTALS*
6. GAME SOFTWARE RENTALS*
7. SPECIAL SAVINGS BULLETINS
8. DISCOUNT COMPUTER BOOKS
9. MEMBERSHIP GUARANTEE
10. PRODUCT GUARANTEE

*extra charge

ASK ABOUT OUR SPECIAL V.I.P. PLAN!

PORTABLES! NETWORK SPECIAL

	Retail	Wholesale
NOTEBOOK COMPUTERS		
NEC 8201 Notebook 16K RAM, 32K ROM, Text Editor, Communications, Basic, 8-line 40-Char. Display	799	559*
Epson HX-20 16K RAM, 32K ROM, MS Basic, WP, Cassette Drive	795	600*
CP/M PORTABLES		
Pied Piper 64K, 1Mb Floppy, Perfect Software	1395	925*
Televideo Teletote 9" screen, 64K Z80-A, 1 368K Disk, WP, Calc, Graphics	$1499	$1049*
IBM COMPATIBLES		
Columbia VP 128K, 9" Monochrome, 2 320K Floppies, 128K CPU, Perfect Software, More	2995	2097*
Corona PPC 9" Monochrome, 2 320K Floppies, 128K CPU, 4 exp. slots, Multimate WP	2945	2121*
Eagle Spirit 10 MB Hard Disk, 9" Monochrome, 128K CPU, 1 320K Floppy, WP, Calc	4700	3359*

*NETWORK Members pay just 8% over the wholesale price, plus shipping.
All items subject to availability, prices subject to change

CALL TOLL FREE
1-800-621-S-A-V-E
IN ILLINOIS CALL (312) 372-4488

The Personal Computer NETWORK
180 North Michigan Avenue
Chicago, Illinois 60601

Membership Validation No.: R989
You can validate your membership number and, if you wish, place your first money-saving order over the phone by using your VISA, MASTERCARD or AMERICAN EXPRESS. Our knowledgeable service consultants are on duty Mon-Fri 8 AM to 7 PM. Sat 9 AM to 5 PM CST.

Copyright ©1983, PC NETWORK INC.


CIRCLE 188 ON READER SERVICE CARD

BASF QUALIMETRIC™ FLEXYDISKS®. A GUARANTEED LIFETIME OF OUTSTANDING PERFORMANCE.

BASF Qualimetric FlexyDisks feature a unique lifetime warranty, firm assurance that the vital information you enter on BASF FlexyDisks today will be secure and unchanged tomorrow. Key to this extraordinary warranted performance is the BASF Qualimetric standard... a totally new set of criteria against which all other magnetic media will be judged.*

You can count on BASF FlexyDisks because the Qualimetric standard reflects a continuing BASF commitment to perfection in magnetic media. One example is the unique two-piece liner in our FlexyDisk jacket. This BASF feature traps damaging debris away from the disk's surface and creates extra space in the head access area for optimum media-head alignment. The result is a guaranteed lifetime of outstanding performance.

For information security that bridges the gap between today and tomorrow, look for the distinctive BASF package with the Qualimetric seal. Call 800-343-4600 for the name of your nearest supplier.

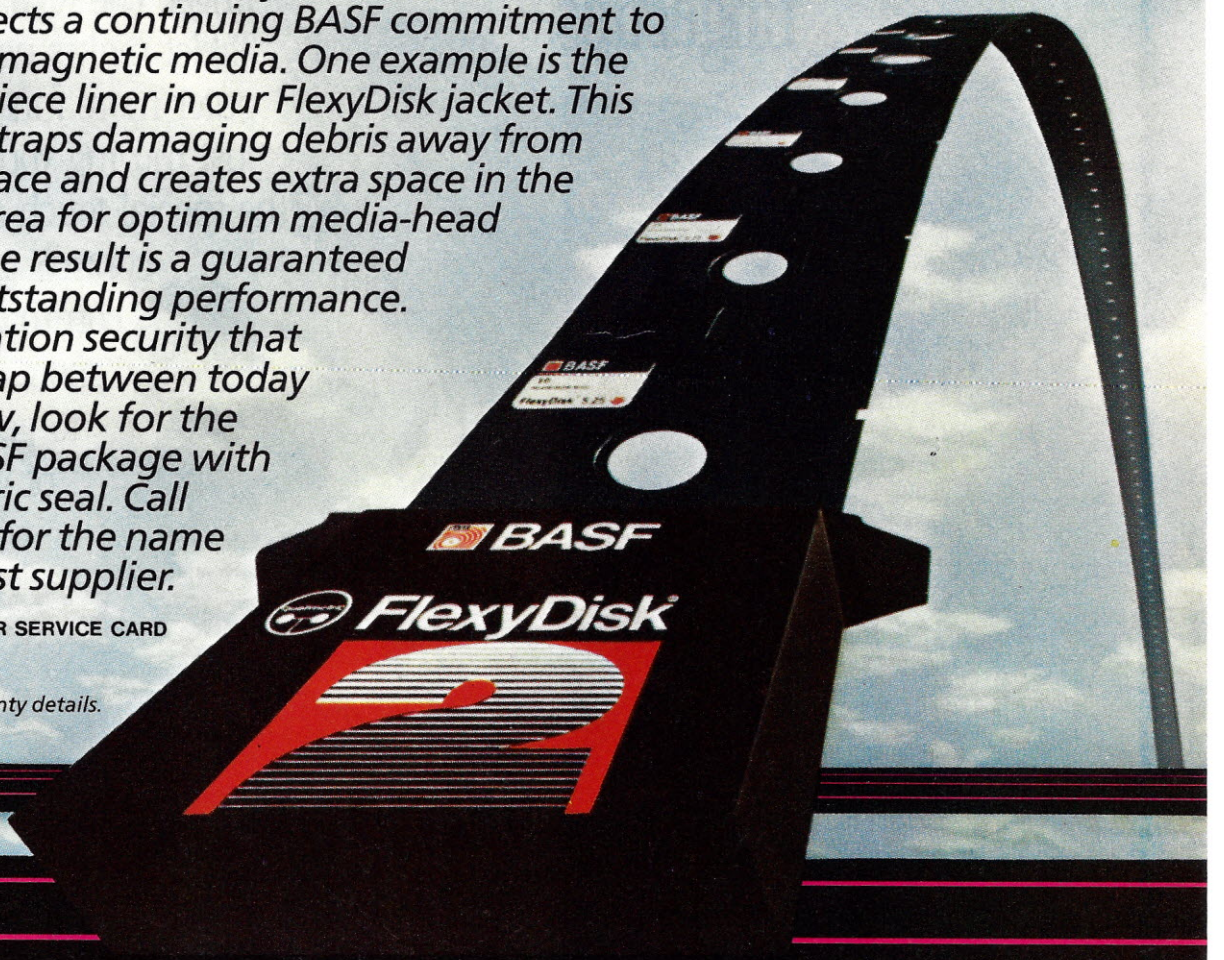

CIRCLE 107 ON READER SERVICE CARD

**Contact BASF for warranty details.*

ENTER TOMORROW ON BASF TODAY.

BASF

© 1983 BASF Systems Corp., Bedford, MA

How to get in touch

KoalaPad™ Touch Tablet puts the controls at your fingertips.



Paint the screen with colorful graphics or play lightning-fast games with just a touch of your finger. The KoalaPad™ Touch Tablet makes using your computer more fun than ever before. Just moving your finger across the special touch-sensitive surface controls graphics, game commands, and much more. It's a great way to get the most out of your computer while you just sit back and

with your computer.

relax. The KoalaPad fits comfortably in the palm of your hand for easy use. And once you have it in your hands, it's hard to put down. That's because the KoalaPad does much more than joysticks, paddle controllers or the "mouse." Each KoalaPad set is packaged with a KoalaWare™ graphics program* for creating beautiful, high-resolution graphics right on the screen. And that's just the beginning.





Dancing Bear™ *brings a funny, furry cabaret star right into your home where your own programmed performances will win applause every time.*

There's a full line of KoalaWare programs to choose from with a perfect combination of entertainment and education.

Logo Design Master™ *uses computerized graphic design to help children and adults learn the basics of programming and prepare for more advanced applications.*

Spellicopter™ *takes off into the world of spelling with aerial acrobatics to challenge young students.*

Add a touch of excitement today to your Apple,® Atari,® Commodore® or IBM® computer.



Spider Eater™ *the game that attacks musical education with a voracious appetite, taking a bite out of the task of learning the musical scale.*

See the KoalaPad Touch Tablet at the computer store nearest you. To locate the dealer in your area, call toll free 800-227-6703. (In California, 800-632-7979.)

Koala™ Technologies Corporation

We make computing more personal.™

CIRCLE 184 ON READER SERVICE CARD



*Software included with Touch Tablet varies with computer type.

KoalaPad, KoalaWare, Logo Design Master, Spider Eater, and Dancing Bear are trademarks of Koala Technologies Corporation. Spellicopter is a trademark of DesignWare, Inc.

Koala Technologies Corporation,
3100 Patrick Henry Drive,
Santa Clara, Ca. 95050

The MicroOffice RoadRunner

creative computing equipment evaluation

David H. Ahl

Apparently it is in vogue to delete the spaces between two words. We have been noticing this trend increasingly with software packages. But now we have the RoadRunner computer from MicroOffice Systems Technology with *SuperCalc* software. Well, perhaps we are saving lots of bytes of memory by not using those spaces, but, frankly, we don't think readability is enhanced. Be that as it may, the RoadRunner is a new entry in the notebook computer sweepstakes.

Like the Gavilan, the product is being aimed primarily at OEMs and large-volume end users. It probably will not be found on the shelves of your local computer store, at least not by the name RoadRunner. However, one or more OEMs may well market the machine through retail outlets.

On The Outside

The RoadRunner comes in a compact package measuring only 11.5" x 7.8" x 3" and weighing five pounds. When the display is opened, the machine automatically comes to life with a high-pitched beep and menu on the LCD display.

Opening the computer reveals an 8-line x 80-character LCD display, a standard QWERTY keyboard with 73 full-stroke keys and an extra row of 14 special keys at the top, and four small plug-in slots above the keyboard.

The active portion of the LCD display measures 1.3" x 9.3". It tilts back and forth, but does not have a contrast adjustment for the LCD elements thus making it difficult to read under certain lighting conditions. We were told by



January 1984 © Creative Computi

WELCOME TO APSHAI. YOU'RE JUST IN TIME FOR LUNCH.



Boy, have you taken a wrong turn. One moment you're gathering treasure and the next you're being eyed like a side of beef.

You're in the Gateway to Apshai.™ The new cartridge version of the Computer Game of the Year,* Temple of Apshai.™

Gateway has eight levels. And over 400 dark, nasty chambers to explore. And because it's joystick controlled, you'll have to move faster than ever.

But first you'll have to consider your strategy. Is it treasure you're after? Or glory? You'll live longer if you're greedy, but slaying monsters racks up a higher score.

The Apshai series is the standard by which all other adventure games are judged. And novices will not survive.

They'll be eaten.

One player; Temple of Apshai, disk/cassette; Gateway to Apshai, cartridge, joystick control.



EPYX COMPUTER SOFTWARE

STRATEGY GAMES FOR THE ACTION-GAME PLAYER.

*Game Manufacturers Association, 1981

CIRCLE 159 ON READER SERVICE CARD

MicroOffice that production models would include a contrast knob.

Characters are quite small on the display, about the same size as dot-matrix printer print. Characters are formed within a 5 x 7 dot matrix with one row of dots between lines; there are no letter descenders. Thus, readability of a full screen of text leaves much to be desired. The screen has 64 x 480 individually addressable pixels.

According to the published specifications, 255 characters can be displayed. Perhaps so, but we ran a short program to display all the CHR$ characters and counted only 221 different ones. Frankly, that's a nit since the RoadRunner provides all the foreign letters and graphics symbols you would ever want.

Full-Stroke Keyboard

The keyboard has a good feel with no give in the center. The keys are concave sculpted with a matte finish. Alphanumeric keys are light tan with dark brown markings while control keys are a darker tan. This subtle color scheme is carried throughout giving the RoadRunner an attractive, contemporary appearance.

Unfortunately, MicroOffice has followed the IBM school of keyboard layout, i.e., pepper the keyboard with extra keys in unexpected places. Next to the M on the bottom row, we expect to find



Cursor control keys are arranged in a logical pattern, but unfortunately the up cursor key is where the question mark is usually found.

a left arrow, right arrow, question mark, and SHIFT. The RoadRunner puts the up cursor key in place of the question mark (the other three cursor keys are to the right of the spacebar). It is nice that the cursor keys are in a logical pattern, but what an ill-chosen location!

The CMD (control) key is under the right SHIFT and is all-too-easy to press inadvertently bringing on all kinds of undesirable results.

On the other hand, millions of people tolerate, perhaps even like, the keyboard on the IBM PC, so perhaps we are being overly harsh toward this one. Acutally, it is more standard than that on the IBM PC, so it is likely that RoadRunner users will adjust after a week or two.

On the top row are several special keys including HELP, SAVE, and MENU (functional in most software packages). Next come eight function keys which have default meanings in most software packages, but which also can be set by the user from either Basic or CP/M. Keys to delete, insert, and exit programs are to the right of the top row.

Memory Cartridges

The standard RoadRunner comes with a 16K of ROM and 48K of RAM built in. The built-in ROM contains a CP/M-compatible operating system, and editing, scheduling, phone directory, and terminal emulation (DEC VT100) software.

Four slots labeled A to D are provided above the keyboard into which memory cartridges can be plugged. Cartridges can be blank or contain software. Currently available are 16K blank cartridges; 32K and 64K ones are promised later.

Each cartridge measures just 2.5" square and weighs one ounce. It contains CMOS memory and a lithium battery which will keep the memory refreshed for five years.

Software packages such as Microsoft Basic and Sorcim *SuperCalc* are also available on cartridge.

Unfortunately, MicroOffice has followed the IBM school of keyboard layout.

Each of the four slots is addressed just as though it were a disk drive. Although a 37-pin bus connector is accessible at the back of the machine, no floppy disk unit is available or even promised for the RoadRunner. The design philosophy seems to be that if you need a disk unit, the RoadRunner can easily be connected to another machine—we saw it done with an IBM PC—and data up- and down-loaded through the RS-232 port.

On The Inside

The RoadRunner uses a CMOS version of the Z80A running at 2.5 MHz. Thus, we would expect performance similar to the NEC 8201 and, indeed,

creative computing
HARDWARE PROFILE

Product: RoadRunner

Type: Notebook portable computer

CPU: 8-bit CMOS Z-80, 2.5 MHz

RAM: 48K (optional 16K and 32K RAM packs)

ROM: 16K

Keyboard: 73 full-stroke keys

Display: LCD, 8 lines x 80 characters

Graphics: 64 x 480 pixels

Ports: Bus extender, RS-232, modem

Dimensions: 11.5" x 7.8" x 3"

Documentation: User's Guide

Summary: Notebook portable with removable memory cartridges, 8-hour battery pack, and CP/M built in. Basic, spreadsheet, and text editor available.

Price: $1695

Manufacturer:
MicroOffice Systems Technology, Inc.
35 Kings Highway East
Fairfield, CT 06430

Betcha Can't Play Just One!



Drol™






You will soon come to expect the unexpected in the hilarious and challenging underground dream world of Drol. A little red-headed girl and her propeller-beanied brother have been lured by a witch doctor's curse into the multi-leveled ruins of a lost civilization. It's your task — as a hero equipped with a rocket backpack and full-screen radar scope — to dodge hopping scorpions, monsters and snakes, flying turkeys, swords, daggers, arrows, magnets, witch doctors, and vacuum cleaners(!) in your attempts to rescue the children and reunite them with their mother. Each new level of game play is full of surprises.

Drol's wry sense of humor and amazingly detailed cartoon imagery, make this game a charmer!

For the Apple II/II + /IIe, Atari, and Commodore 64 home computers in disk format.



Gumball™





Hours of fun await you at the Sticky Sole Gumball Factory — where you'll be working against the clock to sort a tasty collection of colorful gumballs.

Your job may seem sweet at first, but after you've discovered the explosive-laced gumballs (placed by over-zealous dental assistants) or met your irritating supervisor (who is eager to undo your best efforts), you may feel that you have bitten off more than you can chew.

If, against all odds, you meet your day's quota, you'll be promptly rewarded with a promotion (to a more challenging position) and an amusing cartoon showing your higher standard of living.

Gumball — a new fast action game filled with colorful and delicious surprises.

For the Apple II/II + /IIe.

Irresistible Fun From Brøderbund!

Ask your Brøderbund dealer for Sneak Previews.

Brøderbund Software™

Discover the Difference

17 PAUL DRIVE, SAN RAFAEL, CALIFORNIA 94903

Apple II/II + /IIe, Atari, and Commodore 64 are trademarks of Apple Computer, Inc., Atari, Inc., Commodore Electronics Ltd., respectively.

CIRCLE 123 ON READER SERVICE CARD



The MicroOffice RoadRunner opened up. In the foreground are a battery pack and two memory cartridges.

the time to run our standard benchmark was virtually identical.

The machine has a real-time clock which can be programmed to "wake up" the computer at a specified time.

Connectors are provided in the rear of the unit for the main bus (for parallel devices, but alas, no printer interface is available), RS-232 serial devices, and modem module.

A battery compartment holds a removable 10-ounce NiCad battery pack. The RoadRunner will run approximately eight hours on a fully-charged battery which we are told will recharge "overnight;" no exact time is given.

Communications

A compact modem module which plugs into the back of the machine is available. It is a 300-baud direct-connect modem with auto-dial, auto-answer, and a wake-up mode of operation. This means, for example, that the computer could be set to wake up at 2:00 a.m. and send the daily sales report back to the computer at the home office.


Built in to the operating software is a terminal emulation mode which imitates a DEC VT100 terminal. In this mode, the computer can talk to many timesharing systems as a hard-wired terminal. It is not likely that one would wish to use the machine in place of a VT100, but this is another way to up- and down-load data from a larger host machine.

The machine has a real-time clock which can be programmed to "wake up" the computer at a specified time.

Software

As mentioned, the basic RoadRunner comes with a "CP/M 2.2 compatible" operating system. Why not just CP/M 2.2? Because, we are told, the RoadRunner operating system has a background print capability, and regular CP/M does not. However, all (?) CP/M software will run on the machine, as long as there is sufficient memory.

The scheduling and name/address/phone directory capability are similar to those on the Tandy Model 100. We

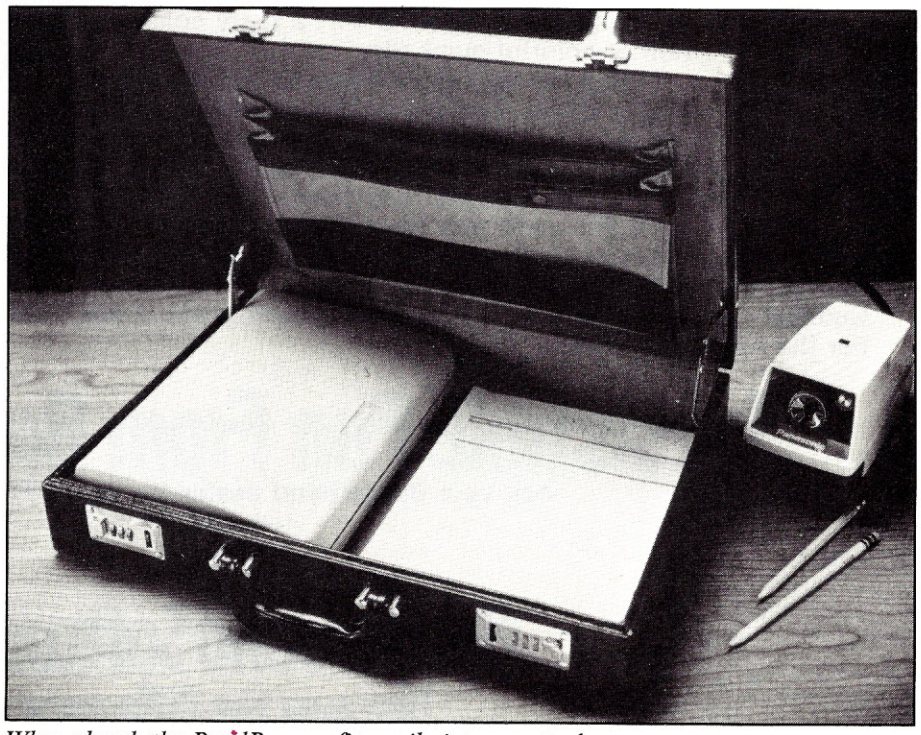

When closed, the RoadRunner fits easily into an attache case.

haven't found these especially useful, particularly since they devour memory like crazy, but perhaps other people do. The DEC VT100 terminal emulator is also built in.

Included with the basic machine is a text editing cartridge, MicroOffice 100 Editor. This is a more than adequate text editor. It is always in insert mode (like the Model 100), but it has several unexpected features such as character, word, and line delete, and global search-and-replace.

With the MicroOffice Editor, when the screen is full, it pages up seven lines, so the previous bottom line becomes the top line on the next screen.

The definitions of eight function keys can be toggled on and off on the bottom row of the display. We found the functions understandable and sensible, even without an instruction manual (the ultimate test).

Microsoft Basic is available as an extra-cost ($175) software package. It is the standard Z80 implementation except that the version we used did not have on-screen editing. The folks at MicroOffice said this may be available later.

Sorcim *SuperCalc* is also available as an extra cost ($275) option. We did not have an opportunity to try it out.

MicroOffice tells us that many software suppliers are planning to convert their packages to the machine. The availability of CP/M should make this fairly easy, so we would expect to see many more packages in the not too distant future.

With the text editor, spreadsheet program, scheduler, and communications capability, you truly have a portable office.

Servicing

The RoadRunner comes with the usual 90-day limited warranty. At the moment, no field service facilities are planned. Faulty machines must be mailed back to Fairfield, CT for repair or replacement.

Pricing

The basic RoadRunner with AC charger/adapter, blank 16K data cartridge, text editor cartridge, soft carrying case, and manual has a suggested list price of $1695.

The modem module costs $240; Microsoft Basic, $175; and Sorcim *SuperCalc,* $275. For a limited time, the RoadRunner plus these three extras (total $2385) is being offered for an introductory price of $1895.

A 16K cartridge costs $90 and an extra battery pack costs $25.

An Office On The Road

MicroOffice positions the RoadRunner as an office on the road, and the description is apt. With the text editor, spreadsheet program, scheduler, and communications capability, you truly have a portable office. With a weight of only five pounds and the compact data cartridges, you will be tempted to carry the machine everywhere.

We wish the keyboard layout could have been more standard and the display could have been larger with more room between the lines and lower-case letter descenders. We would have liked a Centronics parallel printer output too.

On the other hand, MicroOffice has done most things right. Now, how do we become an OEM so we can get a machine of our own? END



CIRCLE 268 ON READER SERVICE CARD

DIGITAL BUILDS THE FINEST PERSONAL COMPUTERS YOU CAN BUY.

And after you buy them, nobody does more to make sure you'll be satisfied.

That's because Digital is the only major computer company that supports its promise of quality and commitment to customer satisfaction with a comprehensive investment protection plan.


This plan will minimize your risk. Relieve your concerns about owning a personal computer. And it's included when you purchase any one of Digital's Personal Computers, including the Rainbow™ and the new Rainbow 100+, from a participating dealer, distributor, or Digital Business Center.

Digital's Rainbow now lets you run the widest range of popular business software—including Lotus™ 1-2-3,™ dBase II,™ TK!Solver,™ and Multiplan.™



With Digital's Rainbow, you can choose from hundreds of different software programs because only Digital's Rainbow can run these five operating systems: MS™ -DOS, CP/M®-86/80, Concurrent CP/M,* and p-System.** That means you'll have access to the broadest array of solutions for your business, today and tomorrow.

The new Rainbow 100+. More storage and more main memory.

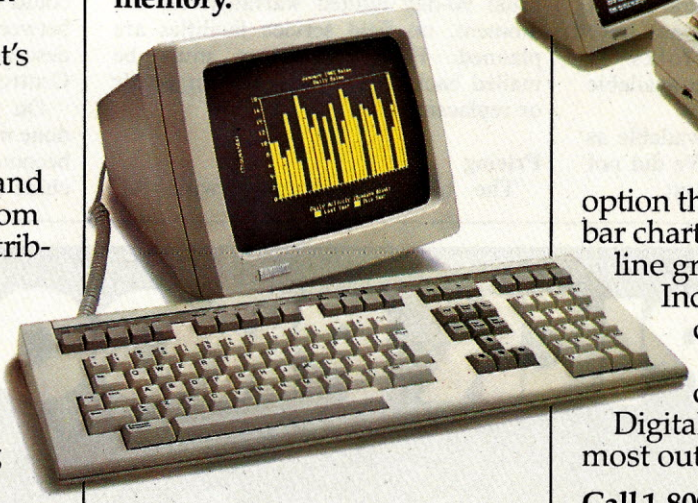

The Rainbow 100 is perfect for most businesses. But if you need more power, Digital introduces the Rainbow 100+. It lets you store the equivalent of 5,000 typewritten pages on a built-in 10 Mbyte hard disk. You'll also run the most advanced business programs faster and easier—thanks to 128 Kbytes of main memory, expandable to 896 Kbytes.

A wider choice of options and accessories, too.

With either Rainbow, you get a choice of monitors: white, green, amber, or high-resolution, full-color display. A choice of high-quality printers. A graphics



option that lets you create bar charts, pie charts, and line graphs. And more.

Including personal computer accessories and furniture custom designed by Digital to help you get the most out of your computer.

Call 1-800-DIGITAL.

Ask for the Rainbow desk and get more details on Rainbow and Digital's Investment Protection Plan.

Not even the world's largest computer company gives you so much. But the second largest does. Digital Equipment Corporation.

*Concurrent CP/M is available from Digital Research, Inc.
**p-System is a trademark of SofTech Microsystems, Inc.; available from Ticom, Inc.
Rainbow is a trademark of Digital Equipment Corporation.
1-2-3 and Lotus are trademarks of Lotus Development Corporation.
dBase II is a trademark of Ashton-Tate.
TK!Solver is a trademark of Software Arts, Inc.
Multiplan and MS-DOS are trademarks of Microsoft Corporation.
CP/M is a registered trademark of Digital Research, Inc.

© Digital Equipment Corporation 1983.

AND NOW YOU CAN BUY THEM VIRTUALLY RISK-FREE.

digital™

Investment Protection Plan

This comprehensive plan is included with the purchase of every Personal Computer Digital makes – including the Rainbow™ Professional™ and DECmate™ II.

One-Year On-Site Computer Warranty.

Digital will provide limited warranty service including repair and replacement of defective parts wherever your computer is located in the Continental U.S.

One-Year Software Warranty.

Digital will provide limited warranty support for operating systems including updates to selected operating systems, documentation and replacement of defective media.

On-Site Options Warranty.

If you add any of Digital's personal computer options (including printers) at the time of system sale, these options will be covered by your one-year On-Site Computer Warranty. Options purchased after system sale are covered for 90 days.

One-Year "Hotline" Advisory Service.

Digital's toll-free "Hotline" Advisory Service will answer questions about operating systems, Digital Classified Software and general use. There's no extra charge, use this service as often as you like during the warranty period.

30-Day Money Back Return Policy.

Covers your entire Digital system, including Digital Classified Software and Digital options purchased at time of computer sale. Limited to one return per customer. Offer expires January 31, 1984.

Investment Protection digital™ Plan

digital™

creative computing equipment evaluation

The Teleram T-3000

Steve Arrants

Within the past year, portable computers have exploded onto the market with such force, that many people are reminded of the introduction of the first TRS-80 and the Apple I. Already, there is a handful of magazines devoted solely to the portables.

I am not talking about the "sewing machine" portables. Sure, you can fold them up into one neat box. But have you ever tried to carry an Osborne from the gate to your aircraft? The true portables, notebook size units, offer portability and meet a user's minimum needs.

All portables have one thing in common—a flat screen for display rather than a CRT. Different technologies are available, with LCDs and electroluminescent displays predominating. LCD display is found on the TRS-80 Model 100, NEC PC-8201, Epson HX-20, Radio Shack Pocket Computers, and other models. The sole exception is the Compass Computer from Grid Systems which uses an electroluminescent display. This type of display offers a superb image, though the trade off is power consumption. The Compass cannot operate on batteries.

Perhaps the most obvious thing differentiating the various notebook



creative computing
HARDWARE PROFILE

Product: Teleram T-3000

Type: Notebook portable

System: CP/M, Microsoft Basic

Specifications: Z80L CPU, 64K RAM, 4K ROM 128K bubble memory. 4 x 80 LCD display, 5 x 7 matrix, full ASCII keyboard, 16 function keys. RS232C serial port. 8.75 lbs., 13" x 9.75" x 3.45". Articulating display, communications software, CP/M utilities.

Performance: Very easy to use. Communications program is excellent.

Ease of Use: Very easy.

Documentation: User's Guide CP/M reference book are excellent.

Price: $2,495

Summary: You get a lot for the price, but the competition offers more for less. The bubble memory is flawless, expandable to 256K.

Overall Mark: B

Manufacturer:
Teleram Communications Corp.
2 Corporate Park Dr.
White Plains, NY 10604
(914) 694-9270


The Computer Book Club®

"The ONLY Book Club for Microcomputerists!"


Superior Performance! Practical Price!

More programs, projects, ways to use your micro for home, hobby, education, and business!


Select 6 Books for Only $2.95 (worth up to $135.70)

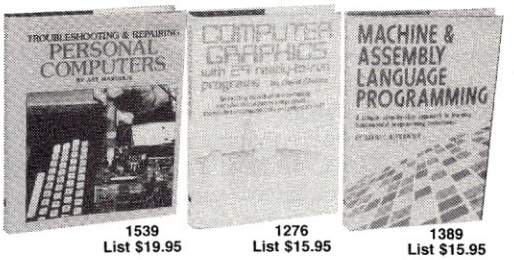


1539 List $19.95 | 1276 List $15.95 | 1389 List $15.95

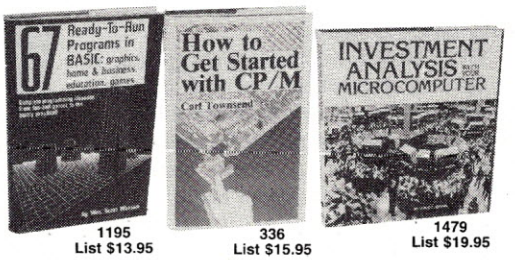

1195 List $13.95 | 336 List $15.95 | 1479 List $19.95

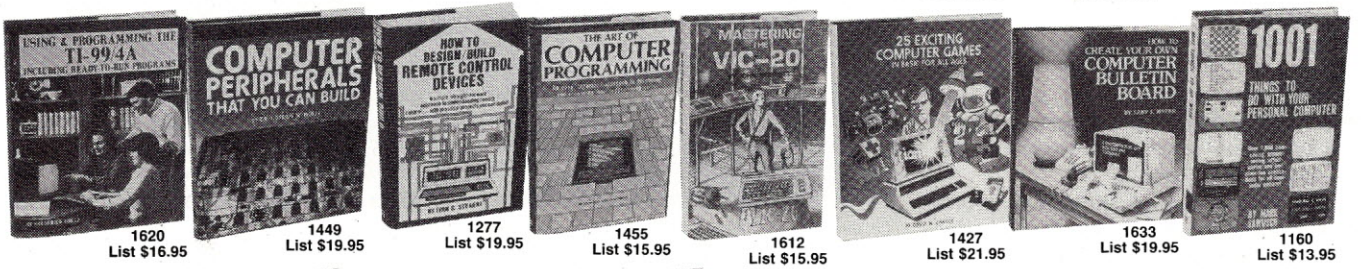

1620 List $16.95 | 1449 List $19.95 | 1277 List $19.95 | 1455 List $15.95 | 1612 List $15.95 | 1427 List $21.95 | 1633 List $19.95 | 1160 List $13.95

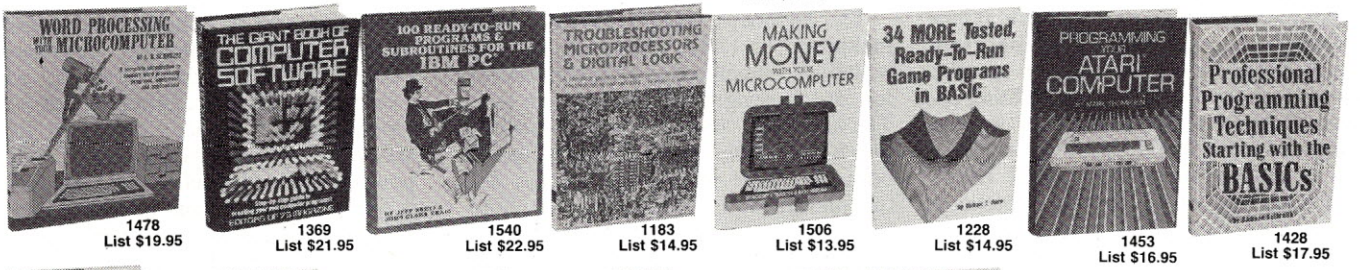

1478 List $19.95 | 1369 List $21.95 | 1540 List $22.95 | 1183 List $14.95 | 1506 List $13.95 | 1228 List $14.95 | 1453 List $16.95 | 1428 List $17.95



1421 List $21.95 | 1466 List $17.95 | 1637 List $26.95 | 1062 List $14.95 | 1295 List $16.95 | 1394 List $15.95

Free guide to BASIC Statements & Commands



Plus FREE For Joining →

7 very good reasons to join The Computer Book Club®

- **Big Savings.** Save 20% to 75% on books sure to increase your computer know-how
- **No-Risk Guarantee.** All books returnable within 10 days without obligation at Club expense
- **Club News Bulletin.** All about current selections—mains, alternates, extra—plus bonus offers. Comes 13 times a year with hundreds of up-to-the-minute titles you can pick from
- **"Automatic Order."** Do nothing, and the Main selection will be shipped automatically! But . . . if you want an Alternate selection—or no books at all—we'll follow the instructions you give on the reply form provided with every News Bulletin.
- **Bonus Books.** Immediately get a Dividend Certificate with every book purchased and qualify for big discounts of 60% to 80%
- **Extra Bonuses.** Take advantage of added-value promotions, plus special discounts on software, games, and more
- **Exceptional Quality.** All books are first-rate publisher's editions selected by our Editorial Board and filled with useful, up-to-the-minute information

CIRCLE 126 ON READER SERVICE CARD

The Computer Book Club®

P.O. Box 80 Blue Ridge Summit, PA 17214

Please accept my membership in The Computer Book Club® and send the 6 volumes circled below, *plus* my FREE copy of *BASIC Statements, Commands and Functions,* billing me $2.95 plus shipping and handling charges. If not satisfied, I may return the books within ten days without obligation and have my membership canceled. I agree to purchase 3 or more books at reduced Club prices (plus shipping/handling) during the next 12 months, and may resign any time thereafter.

336 1062 1160 1183 1195 1228 1276 1277 1295
1369 1389 1394 1421 1427 1428 1449 1453 1455 1466
1478 1479 1506 1539 1540 1612 1620 1633 1637

Name _____

Phone _____

Address _____

City _____

State _____ Zip _____

Valid for new members only. (Orders outside U.S. or Canada must be prepaid in International Money Orders in U.S. dollars. Canada must remit in U.S. dollars.) This order subject to acceptance by The Computer Book Club®

CC-184

computers from one another is the size of the display. Obviously, there are many other variables, but it is the display that one sees first. Some computers such as the TI CC-40 have a single-line display of 31 characters, some have a four-line by 20-character display, while several sport an eight-line by 40-character display. In general, the later entries have larger displays.

The Teleram 3000 is an exception. It was one of the earliest notebook computers introduced. It hit the market back in the neolithic age of portables, July 1982. Yet it has one of the larger displays—four lines of 80 characters each.

That doesn't mean that it can be used for graphics, however. The active area of the display is only 0.8″ high, hardly enough for any kind of detailed plot. Nor is it—or any of the notebook computers—much good for screen-oriented games. Even spreadsheets are a bit of a problem—your window on the entire sheet is very small.

The most ideal applications for a notebook computer are light word processing and communications. Although the small display is a bit of a problem, it can be largely overcome with scrolling. How many times have you wanted to take your Apple to the library while doing research? How about writing an article, story, letter, or memo while away from the home or office? The small handhelds can not really do this. Notebook computers can. Unfortunately, most notebook computers are not, as yet, capable of true word processing. The exception is the Teleram machine.

What Makes The T-3000 Different?

At 13″ x 9.75″ x 3.45″ and about 9 pounds, the T-3000 is not the smallest or lightest portable available. The display of 4 lines x 80 characters in an 8.25″ x 0.8″ window is smaller than that of the Model 100. Letters are formed in a 5 x 7 dot matrix and do not have descenders. The display can be adjusted to five different viewing angles, and there is a contrast control so it offers good visibility. The built-in 128K bubble memory is expandable to 256K. This is not RAM memory, but an emulation of drive A under CP/M.

The bubble memory of the T-3000 can equal the storage of one 8″ floppy. It is non-volatile, i.e., when the power is off the data are permanently retained. When not in use, the bubble memory power is off, extending battery life. 64K RAM, 4K ROM, and a low power version of the Z80 microprocessor are standard. Here is where the T-3000 bests the Model 100. With 128K of storage built in, 64K RAM, and CP/M, the T-3000 is a *full-fledged* computer in a small package.



Teleram T-3000 with case, manuals and charger.

The keyboard has 83 standard keys, including a 12-key numeric keypad, which also functions as a cursor controller, and 16 programmable function keys. The keyboard "feel" falls somewhere between that of the Apple IIe and the Osborne I. There is little keybounce, and the placement is intelligent. The function keys are preprogrammed with CP/M commands and utilities. You can reprogram keys with the KEYDEF utility. The cursor control keys are accessed by pressing SHIFT LOCK to switch the numeric keypad into the cursor mode.

The Teleram 3000 was one of the earliest notebook computers introduced.

A thoughtful touch, not found on any other notebook computer, is the LED indicators on the SHIFT LOCK and CAPS LOCK keys which are illuminated when the keys are "on."

The power switch is located on the back of the right side of the T-3000. It also functions as another angle adjustment for the display. On the back left side is a standard RS-232C interface for connecting to a modem or another computer.

On the rear of the computer is an interface bus called teleConnect.

TeleConnect is a high-speed parallel interface which connects peripherals such as CRTs, disk drives, and Teleram's 3500 Office Station. This is an "intelligent" interface, requiring little set-up or operator intervention. When power comes on, each connected device is identified and logged-into the system. They can be called into service via the CP/M Assign utility.

Using The T-3000

Flip the power switch, and the T-3000 enters a self-test mode. In about five seconds, the familiar CP/M prompt is presented. Choose utilities, MBasic, or the teleTalk communications program and begin. One glaring omission in the T-3000 is the lack of a word or rudimentary text processor. The CP/M utility Ed is available, but using it for text editing is more trouble than it is worth.

Instead, I copied a version of *WordStar* onto the bubble memory. (A text editor is available with the Teleram T-3100.) Had I needed a spreadsheet or database software, I could have done the same. Just connect the T-3000 with another computer running CP/M and transfer the software.

WordStar is not my favorite word processor. Using it on the T-3000 made me like it even less. However, it ran with only minor problems, and I was able to write some text with it.

TeleTalk

Included with the T-3000 is a software package called teleTalk. This is an advanced data communications system de-

signed for use with the T-3000 CP/M operating system. Basically, teleTalk provides "smart" terminal, auto-dial, auto-answer, data capture and dump, and error-checked file transfers between the T-3000 and another computer system.

Telephone numbers and other parameters, such as commands, key definitions, passwords, account numbers, and baud rates may be stored in command files.

The data capture feature lets you capture data in a buffer and store it on disk or in bubble memory. This is helpful if you are connected to an on-line service such as CompuServe where connect time is charged by the minute. Using this feature lets you dial up, capture the needed information, and log-off quickly.

This captured information may then be edited or printed off-line. You can also prepare a message or program for uploading and use teleTalk to call up a remote system and then send the file at full speed.

TeleTalk is interrupt-driven. That is, you can use it at terminal speeds of up to 2400 baud with no character loss. Slow printers may be driven at higher than normal speeds without data loss.

The file transfer capabilities are impressive. The complete error checking of the program assures reliable exchange even when disk systems or operating systems are incompatible. Any file can be transferred, including CP/M .COM files and word processor text files. File size can be as large as an entire disk—a feature most other terminal programs don't offer.

Groups of files can be transferred at one time, using a wild card file name. Instead of entering each text file name one at a time, you just enter *.TXT. All files with the .TXT extension are queued for transmission.

TeleTalk consists of two files: the actual command file and a help file. The help file is excellent, explaining all commands and their variations. TeleTalk is one of the easiest communications packages to use. I rank it higher than the program available on the TRS-80 Model 100.

Documentation


The documentation consists of two manuals. The first covers the use of the T-3000 and its associated programs. It is well organized, well written, and presented logically. The manual assumes no prior knowledge of computer use, and helps dispel first-time user anxiety. Although some sections are a bit wordy, you should be up and running in a short time.

Also included is a manual on CP/M. This is a mystery. The CP/M manual is very technical and could cause confusion. I doubt that many of the businesspeople from whom the T-3000 is intended actually care to learn CP/M.

Cons and Pros

I have mixed feelings about this machine. The T-3000 offers a great deal of power and storage. I think that including MBasic, an assembler, and other CP/M utilities was a waste of memory. The user for whom the machine is intended—the business user—will not use them. It would have been much better to include a text editor, a spreadsheet, and memo/address program. A built-in modem would also have been a great idea. As it is, a Novation Cat acoustic modem is included, making the T-3000 less portable. Another I/O port is needed, in addition to the RS-232 and the teleConnect ports, such as an external video interface or disk interface. The price of $2995 is at the high end of the notebook market.

I did like the articulating LED screen which made it very easy to read. And the CP/M operating system allowed me to use a variety of software. The 128K of storage is a great feature, though CMOS cartridges seem to be where the market is heading. The T-3000 is a powerful machine. It is an impressive machine. But with the market advancing so quickly, it is now possible to get similar features at a lower price. But perhaps with a bit of re-design and a drop in price, the Teleram T-3000 could have a place in the notebook market. END

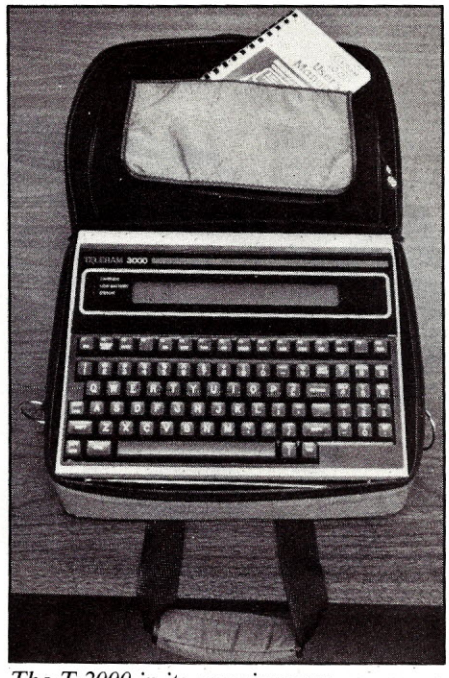

The T-3000 in its carrying case.

SOLID, OAK SOFTWARE.



DISTINCTIVE COMPUTER FURNITURE. FACTORY DIRECT. UNCONDITIONALLY GUARANTEED.

All the peripherals you can buy won't help the productivity of your computer system if you don't have an organized way to utilize them. System VII Furniture gives you an efficient, comfortable workspace. With the warmth and beauty of hand-rubbed Oak and the affordability of factory-direct delivery.

Write us, or call our toll-free number to order a full-color catalog. Send $1.00 plus $1.00 shipping and handling. *$2.00 will be credited toward first purchase.*

SYSTEM VII FURNITURE

CALL: 1-800-547-8888 Dept. G
P.O. Box 427 • Lafayette, Oregon 97127

CIRCLE 189 ON READER SERVICE CARD

creative computing equipment evaluation



Cromemco C-10SP

Updated software for the C-10SP, delivered to us as we went to press, appears to offer significantly improved performance. This review will give you a good feel for the system, but be sure to ask for a demonstration of the latest software before you buy.

The C-10SP is the latest entry from Cromemco, one of the oldest and most respected manufacturers of small business-oriented computers. This addition to the low end of Cromemco's line represents a good value at $1785 for a bundled package of hardware and software. It also has some excellent features, and a few not-so-excellent ones. Let's have a look and see whether it might be the computer for you.

Display

The CRT is a 12″ unit coated with P-31 phosphor. The image delay provided by the P-31 is one of the best features of the C-10. The character display is 25 lines of 80 characters each.

There are four character sets in ROM, but the documentation lacks any instructions on how to get to them. The pixel graphics mode provides a display of 160 x 72, and full graphics mode offers 720 x 384.

David Hilton, 503 Golf View Dr., San Jose, CA 95127.

David Hilton

The character display is very clear in the center of the screen, bleeding to a slight fuzziness around the edges. The edges of the screen display also contract about 1/8″ each time the disk drive is accessed.

CPU

The heart of the computer is a Z80 microprocessor with a 4 MHz clock. The standard configuration includes 64K of RAM and 24K of ROM. Resident in ROM are a disk boot routine, self-test routines, and the CROS, a firmware resident monitor.

The main system unit sports a disk interface port, an RS-232 port with a DB25 connector, a computer port with a DB9 connector, and the keyboard port, which uses a telephone type plug. The unit is not portable in that it does not have handles, but it is certainly light enough to be transported from place to place when necessary.

Keyboard

The keyboard that is supplied with the C-10 is also lightweight and compact. The two rubber-tipped bolts which are provided as height adjusters are inadequate, however. As the keyboard is used, the bolts revolve and the unit creeps away from the user. And since they do not revolve in unison, they soon get to be different lengths, which causes the keyboard to rock.

I solved the problem by threading a nut onto each bolt and using it as a locknut to hold the bolts in place. I also glued a piece of rubber to the bottom of the keyboard case to help hold it in place on the desktop.

creative computing
HARDWARE PROFILE

Product: Cromemco C-10SP

Type: Business-oriented computer

System: Z80A, CDOS, 64K RAM, 24K ROM

Specifications: 12" x 10" x 16", 25 lbs.

Performance: Fair because of slow disk drives.

Ease of Use: Very good with some software packages.

Documentation: Adequate

Summary: Reasonably priced CP/M system.

Overall Mark: Fair to good

Price: $1785

Manufacturer:
Cromemco
280 Bernardo Ave.
Mountain View, CA 94039

The key configuration is the normal QWERTY with some added features. There are four cursor control keys in the lower righthand corner. The TAB key is immediately above them. DELETE is in an unusual, but not awkward, position to the right of the spacebar. ESC is next to the Q. Below it is CONTROL (in red), and below that in the normal position is the SHIFT key. ALPHA LOCK is below SHIFT.

The equivalent of function keys is achieved by striking combinations of the number keys, CONTROL, and SHIFT.

Other customizable features include toggling of the audible click and changing the rate of auto-repetition. The M, J, K, L, U, I, O, 7, 8, and 9 keys can be made to function as a numeric keypad simply by pressing CONTROL-SHIFT-N, and the SHIFT key produces lowercase letters when the ALPHA LOCK is engaged. There is an undocumented status line which appears at the bottom of the screen when CONTROL-SHIFT-S is pressed.

Disk Drives

The disk drives are double sided, double density 5¼" drives with a storage capacity of 386K each. They are reasonably quiet and generate very little heat. The system can accommodate a maximum of two drives, and the operating system automatically senses the number of drives attached. All of the software packages tested worked equally well with either one or two drives.

Other Hardware

The CLQ is the letter quality printer Cromemco sells to complement the C-10. It is nothing fancy, just a solid, reliable printer, which represents a good value for the $795 retail price.

The optional second disk drive sells for $595, an average price for additional drives.

Documentation

All information about the C-10, CROS (Cromemco Resident Operating System), and CDOS (Cromemco Disk Operating System) is provided in the 170-page user manual. The sections on setup are excellent, and there are very nice examples to follow for using the utilities and a glossary and index for quick reference.

The manual provides 35 pages of setup information along with some good advice on the proper care and feeding of a computer system. This information, along with a set of unique cable connectors, removes the guesswork from the setup procedure.

Some topics, however, are simply ignored by the manual. For example, when you do a DIR on the distribution disk, you see EWS as system attributes. In the attribute command section of the manual, E, W, and R are described; S is not. All of the hardware and software manuals associated with the system suffer from the fact that the development of the system and applications software has outstripped the documentation. Hence, there are many undocumented features.

The user manual is devoid of technical information. Cromemco apparently assumes that the average C-10 user will neither need nor understand the details of the inner workings of the machine. A technical manual is available to dealers and owners who specifically request it.

Software

Software for the C-10 is of four types: ROM code, operating system, operating system facilities, and application packages. As mentioned above, CROS is contained in 24K of ROM. It provides for examining and changing the contents of memory, reading and writing to the I/O ports, reading and writing to physical locations on the disk, booting CDOS, executing programs at the machine code level, and running system test routines. CROS also provides the user with the ability to configure the I/O port connection so the C-10 can be used as a terminal. CROS does not have a debugging facility or any assembly language features.

The damning question is: why do the Master programs jump outside of themselves so often?

Also contained in ROM is the system initialization sequence, which is run when the computer is turned on. Part of this sequence sets the contents of RAM to EF hexadecimal, which is a processor "Restart 5" opcode which causes the Z80 to branch unconditionally to memory location 28 hex. This RST 5 is the mechanism for activating a feature of the C-10 which the user sees all too often while running *PlanMaster* and *WriteMaster*: the System Trap.

Like a wumpus in its cave, this cold-hearted critter lurks within the functions of the Master series. The Trap is activated when the processor tries to execute an instruction outside of the body of the currently running program. This is fine. It protects the user from some strange results when things run amok. The damning question is: why do the Master programs jump outside of themselves so often?

The machine code seems to have some basic fault that causes it to try to execute outside itself. Like the safety on a firearm, this sort of safeguard is nice to have, but you should not have to rely on it. The operation of the Cromemco C-10 depends on the System Trap.

CDOS

CDOS is a CP/M look-alike written by Cromemco specifically for their Z80-based machines. Like CP/M, it includes resident commands: DIR, REN, TYPE, ATTR, *, PRINT, and L. DIR and L both provide a list of the files on the current disk. File size and remaining free storage is displayed at the end of the file list.

REN and TYPE are the same as their namesakes in CP/M. ATTR is unique to CDOS; it allows the setting and resetting of file attributes; E for erase protectr, W for write protect, R for read protect. The aforementioned undocumented S is said to be programmer specifiable.

The * command runs the utility called Menu, about which more later. The CONTROL-P printer toggle function of CP/M is duplicated in CDOS in addition to the PRINT command which is identical to TYPE, except that text appears on the printer rather than the screen. These resident commands and any runable program may be specified to CDOS in upper- or lowercase.

CDOS has the built-in capability to execute a program at boot time. The mechanism is a special case of the BATCH command: any time CDOS is run, it looks for a file named STARTUP.CMD. If one exists, CDOS processes it.

There is partial compatibility between CDOS and CP/M. The manuals do not list the conditions which determine it, so compatibility must be determined empirically.

Menu

Menu is the utility that forms the heart and soul of the C-10 for the beginning user. CDOS automatically runs Menu when the computer is turned on (after looking for STARTUP.CMD), thus insulating the unsophisticated user from the operating system. Two screens offer the user 18 choices of programs to run. A program not on the menu may be run by typing in its name instead of a menu selection number.

If a program is entered from the menu, CDOS returns to Menu when the program exits the system. Sometimes the Master programs like to return to Menu when they are not supposed to—that is, when they don't feel like taking the user through a System Trap. I found it necessary to erase the Menu program from

the disk to shorten boot time and eliminate the penalty for reloading Menu after each command.

CopyDisk

CopyDisk formats and moves the system tracks to a new disk, copying the contents of the data tracks as an exact image of the source disk. It cannot copy without first going through the formatting and sysgen stages, however. This means that every disk in use has the system tracks active and that disks are reformatted often.

There is no real problem with this procedure except that it means that the total time required to run CopyDisk is well over seven minutes. In a single drive system, it takes even longer, because the user must physically change disks for each of the nine passes that it takes to copy the whole disk. The whole process is entirely too time-consuming to be practical.

Fortunately, there is another utility provided for file copying. CopyFile performs the same disk-to-disk file transfer functions as the PIP program in CP/M. Wildcards are allowed, and files can be copied in both single and dual drive systems. CopyFile is a nicely written program that can be invoked with a parameter string. It does, however, offer the necessary prompting if it is invoked without parameters. It is one of the nicest programs in the system.

ChekDisk

ChekDisk performs two functions. First, it can be used to check for overlapping files. The documentation states that if overlapping files are found, ChekDisk will inform the user of the appropriate corrective action. I was unable to verify this statement, because I never presented the system with an overlapping file.

The second function of ChekDisk is to read the complete disk while checking "disk integrity." I assume that this means it is checking for bad formatting, bad address mark CRC errors, and bad data mark CRC errors. I was unable to verify this as well. The only error message I ever got from ChekDisk was: Home error: Driveb:, Cylinder, Surface 00, Sector 0a, Status-34. I subsequently erased ChekDisk from all but the distribution disk.

Batch

Batch allows you to string together as many lines of CDOS level commands as you want. These commands are then processed without any further interaction with the user. The user can create files with the extension .CMD as lists of these CDOS primitives for future or repeated processing. Batch is not included in all releases of CDOS.

Printer

Printer is an interactive program which sets up the assignments for the logical printer. It has pre-defined selections for a variety of printers, both parallel and serial. This is somewhat confusing as the C-10 has only a serial printer port.

Structured Basic

Beginners won't get into Structured Basic very often, but for anyone who has ever wanted something extra in his Basic, it is here: Tracing, built-in editing, Boolean operators, long and short floating point, while-end-while, extensive output formatting, extensive I/O driver control, partitions, procedures, error handling, external library functions, the list goes on and on—long enough to satisfy the desires of any Basic programmer. The 311-page Structured Basic manual contains everything a user needs to know about the language as well as the only clues about the insides of the C-10 that you can find in the standard documentation.



"Ok, Billy, put away your 'Hologram' game and come sit with grandma while she visits!"

Bright

The normal video display of the C-10 consists of light characters on a dark background. Both the intensity of the character display and the intensity of the background can be varied over a scale of 16 settings.

Some of these settings are not very useful. Having both foreground and background at the same setting makes the characters hard to distinguish. On the other hand, the display can be tuned to whatever brightness and contrast suit the eyes of the user and the ambient lighting. Bright is the utility that makes this possible.

Screen

The user who wishes to enter text into the C-10, either as a document or as a source code file for a language, has a choice of two text input systems, *WriteMaster* and Screen. Screen is a quick, clean, and delightful two-dimensional screen editor. It is several notches above the typical line-oriented editors often distributed by manufacturers but not quite equal in complexity or functionality to a full blown word processor.

Screen is the best all round "standard equipment" editor I have seen. It maintains a banner across the top line of the display which shows all the available options. As an option is chosen, the banner changes to prompt the user for the correct input for that option.

Screen is also clever enough to protect the unwary user who creates a file that is too large for the available disk space. Left and right margins as well as paragraph indentations are selectable, and the BEAUTIFY command reformats the text. Screen is another of the good things in the C-10SP package.

MoneyMaster

Now we come to the biggies, the Master series: *MoneyMaster*, *PlanMaster*, and *WriteMaster*. *MoneyMaster* is a Basic program. It is also the one true application program in the C-10 system. It performs six financial analysis functions:

- Stock market analysis
- Stock buy price analysis
- Bond yield-to-maturity analysis
- Bond buy price analysis
- Real estate after tax yield analysis
- Equipment purchase time until break-even analysis

Each analysis is branched to from an

opening menu. All necessary input for each routine is prompted for and error checked. Allowances have been made for inconsistent input structures; where a dollar amount is expected, for example, the program doesn't care if a dollar sign is typed or not. It is, however, possible to overflow the capacity of the program for handling out of range numbers. If this happens, the program bounces the user back to CDOS.

MoneyMaster is useful for getting a sense of the growth or diminution of an asset over time.

PlanMaster

PlanMaster is Cromemco's electronic spreadsheet for the C-10. The user of *PlanMaster* works within a fixed structure which is made up of ten *plansheets* each of which is limited to 31 rows and 13 columns. The user may choose as many of the ten plansheets as he wishes for each plan. He may also choose the number of rows and columns that best fit his data.

The rows and columns always appear on the display, but when the matrix is printed out, only the labeled ones are printed. Columns can range in size from four to 16 characters wide, and each column can be declared to contain hexadecimal, normal, or scientific numbers. In normal and scientific modes, the user can select the number of decimal places from the range zero to six.

Each of the ten sheets in each plan can have one and only one *define screen*. The user must design the plan so that he will never need more than 24 lines of calculations for each 13 x 31 sheet. Fortunately, cell values can be passed between sheets in a single plan. If the definitions calculate a number too large for the size field selected, *PlanMaster* places #### in that field on the sheet and offers the user a chance to widen the field.

The program is easy to use for those whose requirements fit within the limitations it sets forth. *PlanMaster* is, however, a flaky program. It hangs, for example, if too many column widths are changed without saving the format, and it sends the user to the System Trap under circumstances that cannot be consistently reproduced. Occasionally, it copies either too much or too little information back and forth between sheets in a single plan. Sometimes it fails to read back in the data and format files that it has just written out.

I suggest that those who choose to use it follow the instructions contained in the Help functions, as they are more correct and current than those in the manual.

PlanMaster is suitable as a tool for learning about spreadsheets. Its simple form allows for a steep learning curve for the first time user. I suspect, however, that anyone who is serious about using an electronic spreadsheet will want to look elsewhere.

WriteMaster

By far the most worthwhile program in the C-10SP package is *WriteMaster*.

WriteMaster abounds with helpful little features which by making the program more forgiving of the user's mistakes, makes him more forgiving of its mistakes. For example, if the user runs out of disk space, *WriteMaster* displays the disk directory and leads him through a deleting session that allows him to clear sufficient space to save his text.

In edit mode, single keystrokes produce boldface, underlining, and centering.

Among the most useful functions included in the program are the FIND and REPLACE commands. Using FIND or REPLACE causes the 24 "function keys" to be redefined temporarily for special use within those commands. Wildcards are allowed; (ANY CHAR f1);ANY SEQUENCE, for example, finds a string when given only its beginning and ending characters. SET SEARCH sets sensitivity to upper- and lowercase and sets up conditional groupings of characters to be look for. NOT causes the conditions that have been set for the search to reject a string from a search rather than include it. With combinations of these functions, the user can perform such tasks as looking for all three-character words that begin with t but do not have e, a, or t as their third letter.

WriteMaster includes several features which are provided as extra cost options on other word processors.

WriteMaster includes several features which are provided as extra cost options on other word processors. Merge, for example, allows the user to pick names from one file and insert them in a form letter contained in another file. *WriteMaster* is used to set up both the boilerplate and the data file. The merged stream may be displayed on the console, sent to the printer, or saved back on disk.

Another useful command for those who write books and long papers is the INDEX command and its companion MARK-FOR-INDEX. Used together, these two commands can build an alphabetized index with page number references. This index is appended to the user's file and can be edited just as normal text would be edited.

WriteMaster also has the best documentation in the package.

Summary

The C-10 is a mixed bag. I gathered the information for this review over three months, during which time I was given four releases of the operating system and two different C-10 computers. Why so many changes? Because I was getting all sorts of strange results from the system. Many times while using *WriteMaster* and *PlanMaster*, the system would hang, hit the System Trap, garble and display, destroy my file, or retrench to some lower level of code on the operating system.

I did observe steady improvement through the later releases of the software, but I cannot ignore this general instability in the system. I do not nor do the people with whom I have spoken at Cromemco know just how many of the problems I experienced are bugs in the software and how many are attributable to hardware failures. Certainly, the latter part of the review process, after the original system had been replaced, went much more smoothly than the first part.

As far as I am concerned, *WriteMaster* is almost reason enough to buy the machine. Structured Basic and the Screen utility offer the user who wants to write his own software enormous power. For these people, an assembler and additional languages are available as extra cost options.

It is a shame that *PlanMaster* falls so far short of the quality of the rest of the system. It is definitely the poorest program in the package.

The C-10 is also in desperate need of communications software, not only of the modem hookup variety but of the system-to-system-through-serial-interface-variety. I sat here for over two months with four other computers within arm's reach and several hundred floppy disks and tapes full of software but no way to get any of it into the C-10.

Conclusion

When I was a little tyke, one of my favorite stories was "The Little Engine That Could." I thought of it as I watched one of the high-resolution graphics demos on the C-10: a train was chugging its way across the screen with smoke pouring from its stack and the whistle blowing. It occurred to me that the C-10 is like that little train . . . if it could just throw off some of the dead weight and get up a little more steam, it could make it to the top. END

The Choice of


SAVE THIS AD IT IS YOUR CATALOG AND CHANGES MONTHLY.

HARDWARE For The APPLE II+/IIe

APPLE IIe 128K, 80 COLUMN $1,295

APPLE IIe, STARTER SYS. BY APPLE (Sys. A)
64K and 80 column
Disk II with controller
Apple Monitor $1,650

APPLE IIe STARTER SYSTEM BY CONROY-LA POINTE [SYSTEM B]
128K and 80 column
1 Micro-Sci Drive with controller
Filer, Utility and Apple DOS 3.3 Diskette
Zenith 12" Green Monitor
RF Modulator (for color TV)
Game Paddles
Game w color graphics and sound
20 Blank Diskettes $1,650



LIMITED WARRANTY: is 100% Parts & Labor for 90 days by us.

DISK DRIVES

★ **CENTRAL PT.**, Filer, Utility & Apple DOS		$ 20	$ 15
μ-SCI MICRO-SCI	A2, 143K Disk Drive	$ 479	$ 230
	A2 Controller Card	$ 100	$ 79
	★A40, 160K, Drive	$ 449	$ 299
	★A70, 286K, Drive	$ 599	$ 299
	A40 A70 Controller	$ 100	$ 79
SUPER 5, 1/2 HIGH	ALPS, A40, Belt Drive, 163K	$ 299	$ 199
	TEAC, T40, Direct Drive, 163K	$ 349	$ 239
	TEAC, T80, Double Sided, 326K	$ 449	$ 329
	Controller Card	$ 110	$ 59
Rana	Elite 1, 163K, 40 TK	$ 379	$ 249
	Elite 2, 326K, 80 TK	$ 649	$ 399
	Elite 3, 652K, 160 TK	$ 849	$ 499
	Elite Controller	$ 145	$ 84
VISTA	DiskPak V1200, 6MB Backup Sys.	$1549	$1049

OVERSTOCK SPECIALS
WHILE THEY LAST

★ **Axlon**, 320K RAM Disk System (+ or e)	$1000	$650
★ **CCS**, Serial Interface 7710A (Set Baud)	$ 150	$ 99
★ **ComX**, 16K RAM Card, 1Yr. Wty., for II+	$ 179	$ 39
Microsoft, 16K RAMCard for II+	$ 100	$ 69
★ **Silicon Valley**, Word Handler	$ 250	$ 39
List Handler	$ 90	$ 35
Videx, Videoterm, 80 column card for II+	$ 345	$229

RAM EXPANSION

★ **ComX**, for IIe, 80 col./64K Adder Card	$ 295	$145
★ **ComX**, RAM Card, 1 Yr. Wty. (II+) 16K	$ 179	$ 39
★ **ALS**, ADDRam (II+) 16K	$ 100	$ 59
★ **Microsoft**, RAMCard (II+) 16K	$ 100	$ 69
★ **Saturn Systems**, RAM Card (II+) 32K	$ 249	$169
RAM Card (II+) 64K	$ 425	$299
RAM Card (II+)128K	$ 599	$399
★ **Axlon RAM Disk System** (+ or e)320K	$1000	$650

VIDEO CARDS

★ **ALS**, Smarterm II (+ or e)	$ 179	$139
ComX, 80 col. 64K Adder (IIe)	$ 295	$145
Videx, Videoterm 80 col. (+ or e)	$ 345	$229
★ UltraTerm (+ or e)	$ 379	$279
Soft Video Switch (II+)	$ 35	$ 25
Enhancer II (II+)	$ 149	$ 99
Function Strip (II+)	$ 79	$ 59
We Have Full Videx Line.	Call.	Up to 35% off.
Vista, Vision 80	$ 289	$199

MISCELLANEOUS

ALS, The CP/M Card V3.0 (+ or e)	$ 399	$299
Z-Card (+ or e)	$ 169	$129
Color II (+ or e)	$ 179	$139
ASTAR, RF Modulator, to use TV	$ 35	$ 25
★ **CCS**, Serial Interface 7710A	$ 150	$ 99
Eastside, Wild Card (copier, + or e)	$ 140	$ 99
Wild Card Plus	$ 190	$139
Kensington, System Saver	$ 90	$ 65
Key Tronic, KB200 keyboard (II+)	$ 298	$219
★ **Koala**, Graphics Pad	$ 125	$ 85
Kraft, Joystick (Ap II/II+)	$ 65	$ 49
Paddle (Ap II/II+)	$ 50	$ 39
M&R, Sup R fan (+ or e)	$ 50	$ 39
★ **Microsoft**, Z80 Softcard (+ or e)	$ 345	$235
Z80 Softcard Plus (+ or e)	$ 645	$459
Softcard Premium Pack (II+)	$ 695	$495
Softcard Premium Pack (IIe)	$ 495	$395
Micro Tek, Dumpling 64, Buffer	$ 349	$269
★ **Orange Micro**, Grappler Plus (e or +)	$ 175	$119
16K Buffer Board for Grappler +	$ 175	$119
Buffered Grappler +, 16K	$ 245	$179
Paymar, Lower Case Chip (II+)	$ 50	$ 39
★ **PCPI**, Appli-Card, 14 features 6 Mhz	$ 375	$275
128K Memory Expand Board	$ 495	$395
RH Electronics, Super Fan II	$ 75	$ 59
★ **Saturn Systems**, Accelerator II	$ 599	$449
Transcend, SSM, AIOII, Serial/Para I/F	$ 225	$169
TG Products, Game Paddles (II+)	$ 40	$ 29
Joystick (II+)	$ 60	$ 45

SOFTWARE for APPLE II+/IIe

BUSINESS

Applied Soft Tech., VersaForm		$ 389	$259
Artsci, MagicWindow II	NEW!	$ 150	$ 99
Magic Combo (Wind, Mail & Words)		$ 225	$149
★ **Ashton-Tate**, dBase II (Req CP/M 80)		$ 700	$385
Financial Planner (Req CP/M 80)		$ 700	$395
Friday (Requires CP/M 80)		$ 295	$199
BPI Systems, GL, AR, AP, PR or INV, each		$ 395	$295
Broderbund, Bank Street Writer		$ 70	$ 47
Continental, GL, AR, AP or PR ea		$ 250	$165
Home Accountant		$ 75	$ 49
FCM		$ 100	$ 69
Dow Jones, Market Analyzer		$ 350	$275
Market Manager		$ 300	$235
Market Microscope		$ 700	$525
Fox & Geller, Quickcode (for dBase II)		$ 295	$185
dGraph (for dBase II)		$ 295	$185
dUtility (for dBase II)		$ 99	$ 66
Hayden, Pie Writer (Specify 80 col. board)		$ 150	$ 99
Howard Soft, Real Estate Analyzer II		$ 195	$129
Tax Preparer		$ 225	$149
LJK, Letter Perfect w/Mail Merge		$ 150	$ 99
Micro Craft, (requires Z80 CP/M-Card) Verdict or Billkeeper		$ 995	$469
Micro Lab, Tax Manager		$ 180	$119
Micro Pro, (all require Z80-CP/M Card)			
★ WordStar w/Applicard & CP/M	SPECIAL	$ 495	$325
WordStar® + Training Manual	SPECIAL	$ 495	$239
MailMerge™	SPECIAL	$ 250	$129
SpellStar™	SPECIAL	$ 250	$129
★ WordStar Professional, 4 Pak	SPECIAL	$ 895	$429
Microsoft, Multi-Plan (CP/M or Apple DOS)		$ 275	$175
Financial, Multitool (CP/M or DOS)		$ 100	$ 75
Budget, Multitool (CP/M or DOS)		$ 150	$115
★ **Osborne/C.P. Soft**, (Disk and Book) (Stat., Bus. & Math)			
Some Common Basic Programs (75 each)		$ 100	$ 49
Practical Basic Programs (40 each)		$ 100	$ 49
Peachtree, Requires CP/M & MBasic, 40 columns.			
Series 40 GL & AR & AP, all 3		$ 595	$365
Series 9 Text & Spell & Mail, all 3		$ 595	$395
Perfect, Perfect Writer		$ 495	$149
Perfect Speller		$ 295	$ 99
Perfect Writer/Speller 2 Pak		$ 695	$199
Perfect Filer		$ 595	$259
Quark, Word Juggler (IIe)		$ 239	$179
Lexicheck IIe (use w/Juggler)		$ 149	$ 99
Sensible, Sens. Speller, specify 80 Col. Brd.		$ 125	$ 85
Sierra/On-Line, ScreenWriter Professional		$ 200	$135
ScreenWriter II		$ 130	$ 89
The Dictionary	NEW!	$ 100	$ 69
General Manager II	NEW!	$ 230	$155
★ **Silcon Valley**, Word Handler		$ 250	$ 39
★ List Handler		$ 90	$ 35
Software Publishing, PFS: File		$ 125	$ 84
(specify + or e) PFS: Report		$ 125	$ 84
PFS: Graph		$ 125	$ 84
Stoneware, DB Master Version 4.0		$ 350	$ 229
DB Utility I or II		$ 99	$ 69

BUSINESS

System Plus, GL, A/P, & A/R, 3 Pak		$ 995	$ 555
Videx, Applewriter II preboot disk		$ 20	$ 15
Visicalc 80 col. preboot disk		$ 50	$ 39
VisiCorp/Personal Software.			
Visicalc 3.3		$ 250	$ 169
Visicalc Enhanced (IIe)	NEW!	$ 250	$ 179
VisiFile or VisiDex, each		$ 250	$ 179

UTILITY & SYSTEM

Beagle, Apple Mechanic		$ 30	$ 22
Double-Take		$ 35	$ 25
Typefaces (Req. Ap. Mechanic)		$ 20	$ 15
DOSS Boss or Utility City, each		$ 30	$ 22
Tip Disk #1		$ 20	$ 15
Pronto DOSS		$ 30	$ 20
Alpha Plot		$ 40	$ 27
Central Point, Filer, DOS 3.3 and Utility		$ 20	$ 15
★ Copy II Plus (bit copier)		$ 40	$ 30
Einstein, Compiler, for Applesoft BASIC		$ 129	$ 85
Epson, Graphics Dump		$ 15	$ 9
Hayes, Terminal Program		$ 100	$ 65
★ **Insoft**, GraFORTH by Paul Lutus		$ 75	$ 59
Microsoft, A.L.D.S.		$ 125	$ 75
Cobol 80		$ 750	$ 559
Fortran 80		$ 195	$ 149
COMPLETE LINE IN STOCK			
★ **Omega**, Locksmith (bit copier)		$ 100	$ 75
Penguin, Comp. Grphcs. Sys.	NEW!	$ 70	$ 53
Graphics Magician	NEW!	$ 60	$ 41
Phoenix, Zoom Grafix		$ 40	$ 34
Quality, Bag of Tricks	NEW!	$ 40	$ 29

HOME & EDUCATIONAL

Beagle Bros., Beagle Bag		$ 30	$ 22
Broderbund, Choplifter		$ 35	$ 26
Arcade Machine		$ 60	$ 40
Lode Runner		$ 35	$ 25
Apple Panic		$ 30	$ 21
BudgeCo, Pinball Constr. Set		$ 40	$ 27
★ **Continental**, Home Accountant		$ 75	$ 49
Datasoft, Aztec or Zaxxon, each		$ 40	$ 27
Edu-Ware, (Large Inventory)		Call	Call
Einstein, Memory Trainer		$ 90	$ 70
Hayden, Sargon II (Chess)		$ 35	$ 29
Infocom, Zork I, II, or III, or Starcross, each		$ 40	$ 27
Koala, Full line in stock, CALL			Call
Learning Co., (Large Inventory)		Call	Call
Lightning, Mastertype		$ 40	$ 27
Micro Lab, Miner 2049er		$ 40	$ 27
Sierra/On-Line, Ultima II		$ 60	$ 40
Sir-Tech, Wizardry		$ 50	$ 39
Spinnaker, Kindercomp		$ 30	$ 20
Sub Logic, Flight Simulation or Pinball, ea.		$ 35	$ 25
Terrapin, Logo		$ 150	$ 99

OTHER BRANDS AND PROGRAMS IN STOCK. CALL.

8" CP/M-80 SOFTWARE

MUCH MORE, IN STOCK	LIST PRICE	OUR PRICE
ASHTON-TATE, dBase II	$ 700	$ 385
Financial Planning Lang.	$ 700	$ 439
Friday	$ 295	$ 249
BLUE CHIP, Millionaire	$ 70	$ 43
DIGITAL RES., CBASIC	$ 150	$ 99
CBASIC Compiler (CB80)	$ 500	$ 339
Pascal MT+	$ 350	$ 239
CIS COBOL	$ 850	$ 575
PL/1	$ 550	$ 375
C Compiler	$ 350	$ 250
FOX & GELLER, Quick Code	$ 295	$ 185
dUtil	$ 99	$ 62
dGraph	$ 295	$ 185
INFOCOM, Starcross, Zork I, II or III, each	$ 50	$ 34
Deadline or Planetfall, each	$ 60	$ 40
MICROCRAFT, Verdict or Billkeeper, each	$ 995	$ 495
MICROPRO, WordStar®	$ 495	$ 239
MailMerge™	$ 250	$ 129
WordStar Prof...4 Pak	$ 895	$ 429
MICROSOFT, Multiplan	$ 275	$ 195
COBOL-80 Compiler **SPECIAL**	$ 750	$ 350

PLOTTERS

	LIST PRICE	OUR PRICE
BAUSCH & LOMB, HOUSTON		
DMP-40, 1 pen		$ 725
DMP-29, 8 pen		$1695
DMP-41		$2250
AMDEK, DXY-100, 10" x 14", Para	$ 749	$ 599
Amplot II, 10" x 14", 6 color, S/P	$1299	$ 999
hp H P 12C	$ 120	$ 99
H P 11C	$ 90	$ 75
Call on accessories and software.		

for the ATARI

RANA 1000 Drive, 320K	$ 449	$ 369
KOALA, Graphics Pad	$ 100	$ 75


DISKETTES

	LIST PRICE	OUR PRICE
BROWN DISC		
10 each, Pulse I, DS DD, 48TPI	$ 45	$ 32
10 each, Pulse II, DS QD, 96TPI	$ 60	$ 45
CDC		
100 each, SS, SD, 35T (Apple, Atari)	$ 450	$ 169
10 each, SS, SD, 35T (Apple, Atari)	$ 45	$ 18
100 each, SS, DD, 48T (Apple, IBM)	$ 550	$ 179
10 each, SS, DD, 48T (Apple, IBM)	$ 55	$ 19
100 each, DS, DD, 48T, (IBM, H P)	$ 750	$ 295
10 each, DS, DD, 48T (IBM, H P)	$ 75	$ 35
DYSAN, 10 each, SS SD (Apple, etc.)	$ 69	$ 39
10 each, DS DD 48T (IBM, H P, etc.)	$ 89	$ 49
MAXELL, 10 each, MD-1, SS, DD	$ 55	$ 29
10 each, MD2-D, DS DD	$ 75	$ 39
MEMOREX		
10 each, SS DD, Type A (Apple, Atari)	$ 45	$ 23
10 each, DS DD, Type B (IBM, H P)	$ 60	$ 35
VERBATIM, 10 each, MD525-01, SS SD	$ 49	$ 25
10 each, MD34, DS DD	$ 84	$ 45

GENERIK™ DISKETTES – AS LOW AS $1

100 each SS, SD, 35 Track (Apple, Atari)	$ 415	$ 130
1000 each SS, SD, 35 Track (Apple, Atari)	$4150	$ 995
100 each DS, DD, 40 Track (IBM, H P)	$ 626	$ 170
1000 each DS, DD, 40 Track (IBM, H P)	$6260	$1400

W jackets, no labels, top quality. 90 day limited warranty by us.



GENERIK™ DISKETTES

SS SD $1.00 Each
DS DD $1.40 Each

CDC
SS SD $1.69 Each

Minimum order quantities apply. See above money back guarantee is by COMX Corporation not us.

© 1983 by COMX Corporaton

MODEMS AND ACCESSORIES

	LIST PRICE	OUR PRICE
ANCHOR, Signalman MK I Modem (RS232)	$ 99	$ 75
Mark XII	$ 399	$ 269
HAYES, IBM-PC Smartmodem 1200 B	$ 599	$ 439
IBM-PC Smartcom II Software	$ 119	$ 89
Stack Chronograph (RS-232)	$ 249	$ 189
Stack Smartmodem 300 (RS-232)	$ 289	$ 225
Smartmodem 1200 (RS-232)	$ 699	$ 535
Micromodem 100 (S-100 bus)	$ 399	$ 275
Micromodem II (for the Apple II)	$ 379	$ 275
Apple Terminal Program	$ 100	$ 65
IBM-PC to Modem Cable	$ 39	$ 29
NOVATION, All below require RS-232		
Applecat II Modem, 300 BAUD	$ 389	$ 269
212 Apple Cat, 1200 BAUD	$ 725	$ 559
PC-Cat with Crosstalk	$ 595	$ 419
Cat	$ 189	$ 139
D-Cat	$ 199	$ 159
J-Cat	$ 149	$ 104
212 Auto Cat	$ 695	$ 579
Smart Cat 103/212	$ 595	$ 415
SSM, Transcend 1 for Apple II Data Comm.	$ 89	$ 69
ModemCard for the Apple II	$ 299	$ 259
Transmodem 1200 (110/300/1200)	$ 695	$ 559

SOFTWARE, SEE APPLE OR IBM UTILITY SOFTWARE SECTIONS

MONITORS AND ACCESSORIES

★ **AMDEK**, 12" Green, #300G		$ 200	$ 135
★ 12" Amber, #300A		$ 210	$ 149
★ 12" Amber, 310A for IBM-PC		$ 230	$ 159
★ 13" Color I, Composite		$ 379	$ 289
★ 13" Color II, RGB, Hi Res		$ 529	$ 439
DVM, Color II or III to Apple II I/F		$ 199	$ 175
NEC, 12" Green, Model JB1201M		$ 249	$ 159
12" Color, Composite, JC1215M		$ 400	$ 299
12" Color, RGB, IBM Model JC 1203		$ 699	$ 569
★ **PRINCETON**, RGB Hi Res, HX-12		$ 795	$ 499
QUADRAM, Quadchrome 12" RGB Color		$ 795	$ 499
Quadrscreen 17", 968 x 512		$1995	$1595
SANYO, 12" Green, Model DM8112CX		$ 260	$ 199
ZENITH, 12" Green, Model ZVM123	NEW!	$ 200	$ 115

PRINTERS AND ACCESSORIES

DOT MATRIX PRINTERS:

	LIST PRICE	OUR PRICE
EPSON, MX80F/T, 80 CPS, w/Graftrax +	$ 745	$ 485
FX80, CPS		Call
MX100F/T, 80 CPS, w/Graftrax +	$ 995	$ 639
FX100, CPS		Call
Apple II Graphics Dump Program	$ 15	$ 9
LEADING EDGE, Gorilla Banana	$ 250	$ 209
OKIDATA, 82A, 80 col., 120 cps, Para.	$ 549	$ 448
83A, 132 col., 120 cps, Para.	$ 899	$ 699
92, 160 CPS, 80 Col., Para.	$ 699	$ 559
93, 160 CPS, 136 Col., Para.	$1249	$ 969
2350P, Pacemark, 350 cps, Para.	$2695	$2095
2410P, Pacemark, 350 cps, Para.	$2995	$2350
ORANGE MICRO, Grappler +, for Apple	$ 165	$ 119
PRACTICAL, Microbuffer In-Line 64K, Para.	$ 349	$ 259
Microbuffer In-Line 64K Serial	$ 349	$ 259
★ **STAR MICRO.**, Gemini 10"X, 120cps, 2.3K	$ 499	$ 289
Gemini 15"X, 120cps, 2.3K	Call	Call
IBM-PC to Epson or Star Micronics Cable	$ 60	$ 35
Apple I/F and Cable for Epson or Gemini	$ 95	$ 59

LETTER QUALITY – DAISY WHEEL PRINTERS:

JUKI, 6100, 17cps, 80 Col., Parallel	$ 700	$ 539
SILVER REED, EXP550P, 18 cps, 3 pitch	$ 895	$ 615
EXP550S, 18 cps, 3 pitch	$ 995	$ 650
Tractor Feed for EXP 550	$ 160	$ 125
★ **TTX**, 13 cps, Para. & Ser, Pin & Friction	$ 649	$ 499

SUPPLIES: Tractor Feed Paper, Ribbons, Daisy Wheels.

CORVUS

Drives Without Interfaces	6 Meg	$2095	$1695
	11 Meg	$2750	$2295
	20 Meg	$3750	$3095
IBM-PC Interface Manual, S W & Cable Kit		$ 300	$ 239
IBM-PC Omni Transporter Pack of 4		$1895	$1495
Apple Interface, Manual, S W & Cable Kit		$ 300	$ 239

Other Interfaces. Omni-Net. Constellation. Mirror. CALL.

★ MEANS A BEST BUY
AD #986

ORDERING INFORMATION AND TERMS: **All Mail: P.O. Box 23068, Portland, OR 97223, Include telephone number.** All items usually in stock. Cashiers Checks, Money Orders, Fortune 1000 Checks and Government Checks, we immediately honor. Personal or other Company Checks allow 20 days to clear. No. C.O.D. Prices reflect a 3% cash discount so ADD 3% to above prices for VISA or MC. For U.S. Mainland, add 3% for shipping, insurance and handling (SI&H) by UPS with $5 minimum for SI&H. UPS ground is standard so add 3% more for UPS Blue with $10 minimum for SI&H. Add 12% total for SI&H for US Postal, APO or FPO with $15 minimum for SI&H. For Hawaii, Alaska and Canada, UPS is in some areas only, all others are Postal so call, write, or specify Postal. Foreign orders except Canada for S,I&H add 18% or $25 minimum for SI&H except for monitors add 30% or $50 minimum for SI&H. Prices subject to change and typo errors, so call to verify. All goods are new, include warranty and are guaranteed to work. Due to our low prices, ALL SALES ARE FINAL. Call before returning goods for repair or replacement. Orders received with insufficient S,I&H charges will be refunded. ORDER DESK HOURS 6 A.M. to 6 P.M. PST, Monday through Friday and 10 to 4 Saturday. 6 A.M. here is 9 A.M. in New York.

OUR REFERENCES: We have been in computers and electronics since 1958, a computer dealer since 1978 and in computer mail order since 1980. Banks: 1st Interstate Bank, (503) 643-4678. We belong to the Chamber of Commerce (503) 644-0123, Better Business Bureau and Direct Marketing Association, or call Dunn and Bradstreet if you are a subscriber. Fastrak™ and Generik™ are trademarks of ComX Corporation. WordStar, MailMerge, StarIndex, InfoStar, are trademarks of MicroPro.

CASH & CARRY OUTLETS:
Over-the-counter sales only. Open Monday through Saturday 10:00 until 5:00.

PORTLAND, OREGON, 11507-D S.W. Pacific Hwy, Terrace Shopping Center, Tigard. On 99W between 217 and I-5. Call 245-1020.


SEATTLE, WASH., 3540 128th Ave. SE. Bellevue, WA 98006, Tele.: 641-4736, in Loehmann's Plaza near Factoria Square, SE of Hwy. 405 & 90 and at SE 36th & Richards.

Professionals™

DEALERS WE BUY EXCESS INVENTORIES

LOW PRICES TO PROFESSIONALS WHO KNOW WHAT THEY WANT AND KNOW HOW TO USE IT!

THE IBM-PC SUPPLY CENTER

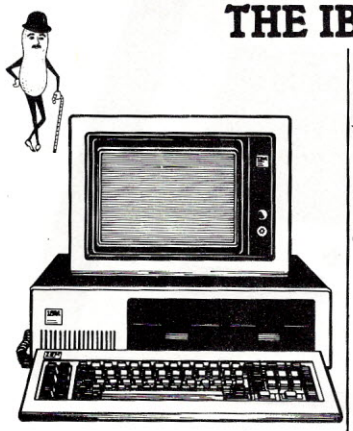

IBM is a trademark of IBM Corporation.

256K
IBM-PC
System Includes
Two 320K Disk Drives by CDC
90 Day Warranty By Us
Call For Details And
Configurations

		LIST PRICE	OUR PRICE
MEMORY CHIP KITS	Add-on to your memory cards or mother board. 100% tested. With 90 day warranty.		
★	64K Kit, 200NS, 9 chips, 4164	$ 150	$ 45
	16K Kit, 200NS, 9 chips, 4116 (for PC-1 motherboard)	$ 50	$ 16
AMDEK	4-IN-1 Multiple Board, Color Graphics, Mono, 128K	$ 599	$ 519
AST	ComboPlus, 64K S/P/C	$ 395	$ 279
	ComboPlus, 256K, S/P/C	$ 695	$ 475
	MegaPlus II, 64K, 2-S/P/C	$ 495	$ 345
	MegaPlus II, 256K, 2-S/P/C	$ 795	$ 495
	256K MegaPlus II Expander	$ 395	$ 295
	SixPakPlus, 64K, S/P/C	$ 395	$ 295
	SixPakPlus, 256K, S/P/C	$ 695	$ 495
	SixPakPlus, 384K, S/P/C	$ 895	$ 595
	I/O Plus II, 2S/P/C/G	$ 315	$ 195
	PCnet™. LAN Kit	$1490	$1290
CCS	SuperVision, monochrome board	$ 850	$ 680
	Z/Plus 64, fast Z80B, 64K para port	$ 875	$ 695
★ **ComX**	256K RAM Card with Fastrak™ RAM disk emulator and spooler software.	$ 695	$ 256
CURTIS	PC Pedestal™ for Display	$ 80	$ 65
	3 to 9 foot keyboard cable	$ 50	$ 35
	Vertical CPU "System Stand"	$ 25	$ 19
	Monochrome Ext. Cable Pair	$ 40	$ 30
HERCULES	Monochrome Board	$ 499	$ 379
Key Tronic	KB5150, Std. keyboard	$ 269	$ 199
Koala	Koala Pad™	$ 150	$ 109
	Programmer's Guide	$ 15	$ 12
MAYNARD	Multifunction (6) Card, MFC	$ 89	$ 79
	Modules for above card		Call
	SandStar, no RAM card	$ 199	$ 169
	SandStar, 256K Card	$ 499	$ 395
MICROSOFT	RAMCard 256K	$ 550	$ 385
	SystemCard 256K	$ 395	$ 275
	SystemCard 64K	$ 625	$ 435
	Mouse	$ 195	$ 145
MOUSE SYSTEMS	PC Mouse w/software	$ 295	$ 195
ORCHID	PCnet™, LOCAL AREA NET	$1490	$1190
	Monochrome Graphics Card	$ 499	$ 379
PLANTRONICS	ColorPlus, 16 color brd. w/Para Port	$ 475	$ 379
QUADRAM			
☆	Quadlink, Apple II Emulator	$ 680	$ 485
	Quadboard, no RAM, expandable to 256K	$ 295	$ 215
	Quadboard 64K, expandable to 256K	$ 395	$ 279
★	Quadboard 256K, 6 function	$ 595	$ 395
	Quadboard II, no RAM, expand to 256K	Call	Call
	Quadboard II, 64K, expandable to 256K	$ 395	$ 285
	Quadboard II, 256K, 6 function	$ 595	$ 395
	Quad 512+, 64K plus serial port	$ 325	$ 265
	Quad 512+, 256K plus serial port	$ 550	$ 420
	Quad 512+, 512K plus serial port	$ 895	$ 625
	Quadcolor I, board, 16 colors	$ 295	$ 225
	Quadcolor II, board, use with Quadcolor I	$ 275	$ 209
	Quadchrome, 12" RGB Monitor	$ 795	$ 499
	Quadscreen, 17", 968 x 512 Monitor	$1995	$1595
	Microfazer, w/Copy, P/P, 8K, #MP8 w/P.S.	$ 189	$ 129
	Microfazer, w/Copy, P/P, 64K, #MP64 w/P.S.	$ 319	$ 219
	Microfazer, w/Copy, P/P, 128K, #MP128 w/P.S.	$ 465	$ 295
	Microfazer, Snap-on, 8K, P/P, Epson, #ME8, w/P.S.	$ 179	$ 145
	Microfazer, Snap-on, 64K, P/P, Epson, #ME64, w/P.S.	$ 319	$ 235
	All Microfazers are expandable, (w/copy to 512K) (Snap-on to 64K)		
Tecmar	1st MATE, 64K	$ 389	$ 295
	1st MATE, 256K	$ 589	$ 439
	Graphics Master		Call
TG PRODUCTS	Joystick	$ 65	$ 49
WICO	IBM-PC Mouse	$ 100	$ 69




$45 $40 Ten or more.
64K CHIP KIT
9 Each 4164, 200 ns, MEMORY EXPANSION.
90 Day Warranty by us.

$256 $239 Two or more.
256K RAM BOARD
Fully Compatible. 2 Year Limited Warranty by ComX.
With Fastrak RAM/Disk Emulator and Spooler Software.
Works on DOS 1.1 or 2.0.

★ Means a BEST buy.
AD #986

for the IBM-PC **DRIVES** AND ACCESSORIES



CONTROL DATA OR Tandon
320K/360K DS DD DISK DRIVES
With Detailed Installation Instructions
60 Day Warranty by Factory Authorized Distributor

Same as now installed by IBM. **$229** $239 For One.

$199
HALF HEIGHT

		LIST PRICE	OUR PRICE
MAYNARD	Floppy Drive Control Brd. for up to 4 drives	$ 195	$ 165
	same with Parallel Port	$ 275	$ 205
RANA	2.5 Meg 5" Drive System (Jan)	$1550	$1195
	25 Meg Hard Disk System		Call
QUADISK	6 Meg, Removable	$2295	$1795
CALL ON AVAILABILITY	6 Meg, Fixed	$1995	$1595
	12 Meg, Fixed	$2250	$1750
	20 Meg, Fixed	$2650	$2050
	27 Meg, Fixed	$2895	$2295
	72 Meg, Fixed	$6500	$4950
VISTA	IBM-PC XT 6MB Backup for Hard Disk, V1200	$1549	$1049

SOFTWARE for the IBM-PC or XT

BUSINESS

		LIST PRICE	OUR PRICE
ASHTON-TATE			
★	dBase II, requires PC-DOS & 128K	$ 700	$ 385
	dBase II User's Guide	$ 30	$ 20
	Everyman's DB Primer (Book)	$ 15	$ 12
	The Financial Planner	$ 700	$ 395
	Friday	$ 295	$ 199
APPLIED SOFT. TECH., Versaform		$ 389	$ 265
★ **CONTINENTAL**, Home Accountant +		$ 150	$ 89
	FCM (Filing, Cataloging, Mailing)	$ 125	$ 89
	Property Management	$ 495	$ 329
DATAMOST, Write-On (Word Processor)		$ 130	$ 89
DOW JONES, Market Analyzer		$ 350	$ 279
	Market Manager	$ 300	$ 239
	Market Microscope	$ 700	$ 525
EAGLE SOFTWARE, Money Decisions		$ 150	$ 129
★ **EINSTEIN**, Writer	NEW!	$ 300	$ 199
	Memory Trainer NEW!	$ 80	$ 55
	Speller NEW!	$ 150	$ 95
	Mailer NEW!	$ 80	$ 55
	Letter Scenes NEW!	$ 300	$ 195
FOX & GELLER, Quickcode (MSDOS)		$ 295	$ 179
	dGraph (MSDOS)	$ 295	$ 179
	dUtil for IBM PC DOS	$ 99	$ 59
HAYDEN, IBM Pie Writer		$ 200	$ 135
	Pie: Speller	$ 100	$ 69
HOWARDSOFT, Real Estate Analyzer II		$ 250	$ 189
INFOR. UNLIMITED, EasyWriter II (WP)		$ 350	$ 259
	EasySpeller II	$ 225	$ 149
	EasyFiler (a DBMS)	$ 400	$ 299
	Inventory Control	$ 595	$ 395
★ **INSOFT**, Data Design (easy to use DBMS)		$ 225	$ 169
	Data Base Made Easy (Book)	$ 17	$ 12
LIFETREE, Volkswriter		$ 285	$ 195
★ **LOTUS**, 1-2-3		$ 495	$ 329
MICROCRAFT, Verdict or Billkeeper, each		$ 995	$ 469
MICRO LAB, Miner 2049		$ 40	$ 29
MICROPRO, WordStar®		$ 495	$ 239
	Mail Merge™	$ 250	$ 129
	SpellStar™	$ 250	$ 129
★	WordStar Professional, 4 Pak	$ 895	$ 429
	StarIndex™	$ 195	$ 109
	InfoStar™	$ 495	$ 259
	Report Star™	$ 350	$ 199
	DataIndex™	$ 295	$ 195
	StarBurst™	$ 195	$ 115
★ **MICROSOFT**, Multiplan		$ 275	$ 175
	Word	$ 375	$ 275
	Word with Mouse	$ 475	$ 339
	Financial Statement	$ 100	$ 69
	Budget	$ 150	$ 109

BUSINESS

		LIST PRICE	OUR PRICE
MONOGRAM, Dollars & Sense		$ 165	$ 110
NORTH AMERICAN BUS, The Answer		$ 250	$ 169
★ **OSBORNE/COMX**, (Book & Business, Statistics & Math Programs on DS/DD Disks)			
	Some Common Basic Prog. (70 each)	$ 100	$ 69
	Practical Basic Programs (40 each)	$ 100	$ 69
PBL CORPORATION, Personal Investor		$ 145	$ 94
PEACHTREE, Peach Pak 3 (GL, AR & AP)		$ 595	$ 239
	Peach Text 5000	$ 395	$ 239
PEARLSOFT, Personal Pearl (DBMS & MIS)		$ 295	$ 195
★ **PERFECT**, Perfect Writer™		$ 389	$ 149
	Perfect Speller™ or Perfect Calc™, each	$ 295	$ 99
	Writer + Speller, 2 Pak	$ 695	$ 199
	Perfect Filer™	$ 595	$ 199
SOFTWARE ARTS, TK! Solver		$ 299	$ 219
SOFTWARE PUBLISHING, PFS:File		$ 140	$ 94
	PFS:Report	$ 125	$ 84
	PFS:Write NEW!	$ 140	$ 95
	PFS:Graph NEW!	$ 140	$ 95
SORCIM, SuperCalc II		$ 295	$ 195
	SuperWriter	$ 295	$ 199
SSI/SATELLITE, WordPerfect		$ 495	$ 375
	Personal WordPerfect	$ 195	$ 149
STC/SOFTEC, The Creator		$ 300	$ 195
STONEWARE, D.B. Master (a DBMS)		$ 596	$ 396
SYNAPSE, File Manager		$ 100	$ 67
SYNERGISTIC, Data Reporter		$ 250	$ 169
T/MAKER, T/Maker III		$ 275	$ 169
VISICORP, VisiCalc/256K or Visidex, each		$ 250	$ 179
	VisiFile or VisiSchedule	$ 300	$ 219
	Desktop Plan I	$ 300	$ 219
	VisiWord with VisiSpell (128K)	$ 375	$ 269

UTILITY & SYSTEM

1983 CL SOFTWARE AWARD:
"Copy II PC by Central Point Software is still the best software buy of 1983 and 1984. It will copy more copy protected software and faster than any other backup system. Unlike other copiers it makes an exact duplicate of your original and it does 100% verification of copy. Documentation is excellent."

★ **CENTRAL POINT**, Copy II PC. Backup		$ 40	$ 35
★ **COMX**, Fastrak™, RAM Disk emulator and printer spooler program. Works on any PC DOS version or RAM Card. Menu Driven.	NEW!	$ 100	$ 59

UTILITY & SYSTEM

		LIST PRICE	OUR PRICE
DIGITAL RESEARCH			
	Concurrent CP M-86™	$ 350	$ 225
	CBASIC 86™	$ 200	$ 135
	CP M-86™	$ 60	$ 40
	Pascal MT+ (CP M-86)	$ 400	$ 169
	Pascal MT+ (MSDOS)	$ 600	$ 399
	PL I (MSDOS)	$ 750	$ 499
	Access Manager (MSDOS)	$ 400	$ 179
	Display Manager (MSDOS)	$ 500	$ 339
	Speed Prog. Pkg. (CP M-86)	$ 200	$ 135
	CIS COBOL-86	$ 850	$ 525
	DR. LOGO-86	$ 150	$ 90
	CBASIC Compiler (86 or MSDOS, each)	$ 600	$ 365
HAYES, Smartcom II (Data Comm.)		$ 119	$ 89
MICROCOM, Microterminal (Data Comm.)		$ 100	$ 65
MICROSTUF, Crosstalk XVI (Hayes & IBM)		$ 195	$ 129
MICROSOFT, muMath muSimp		$ 300	$ 225
	Business BASIC Compiler	$ 600	$ 450
	Pascal Compiler	$ 350	$ 255
	C Compiler	$ 350	$ 225
	BASIC Compiler	$ 395	$ 285
	Fortran Compiler	$ 350	$ 255
	COBOL Compiler	$ 750	$ 559
	BASIC Interpreter	$ 350	$ 255
NORTON, Norton Utilities. 14 programs		$ 80	$ 65

HOME & EDUCATIONAL

EPYX/Auto. Sim., Temple of Apshai		$ 40	$ 29
	Oil Barons	$ 100	$ 75
★ **ARMONK**, Executive Suite		$ 40	$ 27
BLUE CHIP, Millionaire or Tycoon, each		$ 60	$ 39
BPI SYSTEMS, Personal Accounting		$ 195	$ 139
★ **BRODERBUND**, Apple Panic (Color)		$ 30	$ 19
COMPREHENSIVE, PC Tutor (DOS 1.1)		$ 60	$ 40
CONTINENTAL, Home Accountant +		$ 150	$ 89
DATAMOST, Pig Pen or Space Strike, ea.		$ 30	$ 22
DAVIDSON, The Speed Reader II		$ 75	$ 49
INFOCOM, Deadline		$ 50	$ 33
	Zork I or Zork II or Zork III, ea.	$ 40	$ 27
★ **INSOFT**, Word Trix or Quotrix, each	NEW!	$ 35	$ 29
MICRO LAB, Miner 2049		$ 40	$ 29
MICROSOFT, Flight Simulator		$ 50	$ 33
MONOGRAM, Dollars & Sense		$ 165	$ 110
PBL CORP., Personal Investor		$ 145	$ 99
SPINNAKER, Snooper Troops (1 or 2)		$ 45	$ 35
	Story Machine or Face Maker	$ 35	$ 24
STRATEGIC, the Warp Factor		$ 40	$ 30
SUBLOGIC, Night Mission Pinball		$ 40	$ 27

THE WORLD'S LARGEST COMPUTER MAIL ORDER FIRM

CONROY-LA POINTE™

VISA master charge

SHOWROOMS AT: PORTLAND, OR. or SEATTLE, WA. BOTH OPEN M-SAT 10-5
ALL MAIL: P.O. BOX 23068, Portland, Or. 97223

Formerly **Computer Exchange™**

NATIONAL ORDER DESK **TOLL FREE (800) 547-1289**
Order Desk Hours: 6AM to 6PM PST

Oregon TOLL FREE	Hot Line For Information
[800] 451-5151	On Your Order
Portland: 245-6200	[503] 245-1030

CIRCLE 136 ON READER SERVICE CARD

A Detachable Replacement Keyboard for Atari

creative computing equipment evaluation



Commander Keyboard

Arthur Leyenberger

It has been over four years since the Atari 400/800 computers made their debut on the home computer scene. At first, there was very little software. A few games and a couple of educational packages was about the extent of it. Those who had foresight recognized that the Atari computers were state-of-the-art machines and began supplying software.

Additional software became available. More games, application software like word processors, database programs, and even a spreadsheet appeared. Suddenly, about two years ago the flood gates burst open and a wealth of software arrived for the Atari machines. Now, over a thousand programs are available which means that the Atari user can choose from as much software as just about any other computer owner.

The hardware story is a little bit different. At first, Atari was very tight-lipped about their machines. In fact, most people were unaware of either the components that made up their home computer or the power that lay beneath the keyboard. Then, hardware modifications gradually became available. An 80-column board, a voice synthesizer, and even a couple of keyboards to replace the membrane keyboard on the 400 were made. This growth in aftermarket hardware products was spurred on by Atari themselves, who by then, published the specifications and schematics for the computers in the form of a hardware manual.

Amid the recent avalanche of alternate operating systems, resident monitors, and memory cards comes a new product manufactured by Ralston-Clearwaters Electronics, the Commander keyboard.

RCE actually makes three keyboard products for the Atari 400 and 800 computers. Called the Commander series, a detachable keyboard (#2400-2), a detachable keyboard with keypad (#2400-1), and a separate keypad (#2400-5) are available. The Model #2400-1 is a full-stroke, full size keyboard containing the Atari special function keys, special macro keys, and a numeric keypad on the right side. A host of additional features have also been incorporated into this deluxe hardware addition to the Atari computer. Before I describe them, let me discuss the way the keyboard is installed.

I am not a hard core hardware person. Sure, I have built a few Heathkits in my time, learned digital electronics on my own by experimentation, and am pretty fast with a soldering iron. But I have a general rule that I always try to follow: if it works, don't fix it. So it was with trepidation that I dared to open my Atari 800 and install the RCE keyboard interface. As it turned out, my fears were unfounded. I am using the keyboard now to type this review and all is well.

Installation

The first step in installing the Commander keyboard was to read the five pages of instructions to familiarize myself with the procedure. The instructions looked simple enough. All I had to do was follow along step-by-step and refer to the easy to read diagram.

First, I placed the computer upside down with the keyboard side toward me and removed the five screws holding the bottom cover on. Next, the speaker was detached and placed out of the way.

creative computing

HARDWARE PROFILE

Name: RCE Model #2400-1

Type: Detachable keyboard

System: Atari 400/800

Summary: A quality separate keyboard with many features.

Price: $199.95

Manufacturer:
Ralston-Clearwaters Electronics
530 N. E. E St.
Grants Pass, OR 97526

Arthur Leyenberger, c/o Creative Computing, 39 E. Hanover Ave., Morris Plains, NJ 07950.

Three more screws, which hold the top half of the cover on, were removed to complete the disassembly.

Removing the top cover exposed the mother and power boards containing the ribbon cables coming from the existing keyboard. The interface consists of two sets of gold-pin connector plugs that are attached to the existing keyboard jacks; two insulated alligator clips are attached to both sides of a capacitor.

The Commander keyboard provides many useful features at a reasonable price.

The cover was placed back on the computer and the flat ribbon cable was routed to the side and sandwiched between the 800 keyboard and its associated cable. The speaker was reattached, and the bottom cover fastened with the screws. That completed the installation and I was ready to try out the new keyboard.

A total time of 47 minutes had elapsed from the time I first began to unscrew the bottom cover of the 800.

Operation

The detachable keyboard has a six-foot cable terminating in a male plug. Sticking out of the left side of my 800 is a female jack. I chose not to install the female jack permanently; therefore, it simply dangles from between the top and bottom halves of the computer cover. Connecting the jack and plug, turning on the power to the computer and loading a Basic program revealed that all was in perfect working order.

There are several useful features on the Commander 2400. At the lower left corner of the keyboard, are three keys labelled L, S and R. These are macro function keys and represent three separate functions—list, stop/start, and run. With a Basic program in memory, pressing the L key lists the program on the screen. It is equivalent to typing L. or LIST. In fact pressing this key actually sends those characters to the computer.

The S key is equivalent to pressing CTRL-1. If you are listing a Basic program, this freezes the listing on the screen. Pressing the key one more time resumes the listing at the point at which it stopped. The S key also temporarily suspends the execution of a Basic program or a directory listing when in DOS.

The R key is a macro for the RUN command. Pressing R runs a Basic program that is currently in memory. It is equivalent to typing R-U-N and pressing RETURN.

In addition to having the separate numeric keypad, which is handy for entering data, a built-in calculator is also provided. There is a slide switch underneath the keyboard which enables the calculator function. When switched on, a green LED is lit and calculations may be performed without disturbing your program. Pressing the second = key activates and initializes the keypad.

This calculator mode places a PRINT statement before the next entry so all you have to do is type in your calculation and press =. The answer is immediately displayed on the screen—a nice touch.

Comment

I have a few minor comments about the Commander keyboard. The cable that comes out of the keyboard is quite thick. When I attached the cable plug to the female jack that dangles just outside of the computer, I noticed that it put some stress on the ribbon cable. If I were to have this keyboard permanently installed, I would certainly mount the female jack on the side of the computer. The instructions provide details for doing this.

I do a lot of word processing on the Atari computer and have grown accustomed to the placement of the keys. Although I am not a touch typist I feel for the right edge of the keyboard to find the RETURN, DELETE, CAPS, and cursor control keys. On the Commander keyboard, the START, SELECT, OPTION, and SYSTEM RESET keys are not separated from the main cluster of keys. Also they are the same size as the other keys. Hitting the special function keys while typing has not caused any problems because the word processor I use does not recognize those key presses. Accidently pressing reset while programming, for example, may have more serious consequences.

Overall, the Commander Model #2400-1 is an excellent detachable keyboard. It is easy to install, provides many useful features and is reasonably priced. The tactile feedback of the keys is stiffer than that of either of my two Atari 800s. In just the short time I have been using the Commander, I have become used to it and now prefer its feel. I think the numeric keypad is great. It really makes typing numbers much easier, and for those who can enter data via a keypad without looking, there is a raised dot on the 5 key for centering your fingers.

There is one missing feature on the Commander that I would have liked to see implemented. That is to reverse the function of the cursor control and arithmetic keys. Instead of having to press and hold the CTRL key with any of the cursor keys, the cursor keys would be one-press keys. The arithmetic keys would then require the use of the CTRL key. This arrangement makes sense given that the cursor keys are used much more often than the arithmetic keys.

Is the Commander #2400-1 worth the cost and time required to install it? I believe it is. Although the addition of a detachable keyboard to the Atari computer is really a professional touch that may not be required by everyone. If you do a great deal of typing or entering data, you should definitely consider this quality product. END



"Let's get one thing straight right off, I'm the programmer, you're the programmee."

creative computing equipment evaluation

The PCPI Appli-Card

Loftus E. Becker

Microsoft has lost its monopoly on CP/M cards for the Apple. At least half a dozen manufacturers now offer Z80 cards for Apples; most are considerably cheaper (albeit generally with far less software and documentation) than Microsoft's Z80 card. Moreover, the new generation of fast Z80 chips, running at 4 and 6 MHz—two or three times the speed of Microsoft's—has spawned several new cards.

One of the available alternatives to the Microsoft card for all forms of the Apple II is the Appli-Card from PCPI, Personal Computer Peripherals, Inc. The Appli-Card is available in 4MHz and 6MHz versions; the 6 MHz Appli-Card is the subject of this review. As compared with other CP/M cards, it has several features of special interest in addition to its high processing speed.

Features

The Appli-Card is effectively a whole computer on a plug-in card. It contains not only the microprocessor, but also 64K of RAM used for CP/M and the running program. The 64K of Apple memory is used only for drivers controlling input and output. The net effect of this is that the available memory for CP/M programs is about 57K—somewhat more than is available to users of the Microsoft card. No use is made of the additional 64K of memory on the Apple IIe extended 80-column card.

The Appli-Card has been configured to accept additional plug-on boards. At the moment, the only such board available is a RAM extension, which can be configured for 64K or 128K of additional memory. The RAM extension can be used as a RAM disk under CP/M, giving either 64K or 128K of phantom disk space. Since some of this space is used for the directory, the usable space for programs or data is slightly less—about 110K on the 128K board. In addition, software is provided by PCPI to use both the 64K on the Appli-Card and any additional RAM as a pseudo-disk under DOS.

Finally, the Appli-Card provides several interesting options for screen display. Users who lack an 80-column card can choose between a scrolling display of up to 255 columns per line and a 70-column display created using the high-resolution graphics page. (Since the Appli-Card does not use Apple RAM except for I/O drivers, there is no loss of program space when this option is chosen.) Hence it can be operated quite usefully in CP/M for applications such as word processing without buying an 80-column card for display.

Installation is not difficult; nor is it well explained in the manual.

The Appli-Card comes packaged with four disks, two of which are superseded versions, provided as "backups" to the useful ones: a brief 28-page manual; a copy of Murtha and Waite's excellent *CP/M Primer*; and, thoughtfully for Apple II owners, a useful kit for easy installation of the SHIFT-key modification. The disks are not copy-protected.

Installation

Installation is not difficult; nor is it well explained in the manual. You must, of course, plug in the card. In addition, however, you must determine which of many options (mostly regarding video display) to choose for the installed system. This requires first running a program to configure SFTVIDEO, the driver that runs the console output, and then running a second program, INSTALL, to patch CP/M for the drivers chosen and create a file containing those drivers for loading at boot time.

Both programs are menu-driven, a real blessing since the documentation is quite fuzzy on these points, and leaves many of the available options unexplained. In any event, however, you can always keep rerunning the program until you obtain satisfactory results. If you dislike experimentation, you should purchase the card from a dealer who will hold your hand through the installation process.

Supplied Programs

In addition to the programs provided for installation, the Appli-Card comes with nine standard Digital Research utilities: ASM (the 8080 Assembler); LOAD (used with the assembler to create executable programs); DDT (a very useful debugger and monitor); DUMP (which displays a disk file in binary form); ED (a primitive, line-oriented text editor); PIP (a general-purpose file transfer program); STAT (a utility to display and change disk and system information); and SUBMIT and XSUB (used with text files in a manner similar to Applesoft EXEC files).

All of these utilities except DUMP are documented in the Murtha and Waite *Primer*. This program needs little documentation (DUMP A:NAME.EXT will show A:NAME.EXT, in hex on the screen), but that nothing is said about it is some indication of the hasty manner in which the current documentation was apparently compiled.

Finally, PCPI provides two (four if you have purchased the RAM extender)

Loftus E. Becker, Jr., 3110 N St., N.W., Washington, D.C. 20007.

additional and necessary programs. COPYFRMT substitutes for the COPY and FORMAT programs familiar to Microsoft mavens; it allows copying and formatting of disks. COPYFRMT is a bit slower than the Microsoft version, but also more user-friendly. It is slower because it displays more information while operating and does more verification of the copied or formatted disk.

ADOSXFER transfers files (text, Applesoft, Integer, or binary) between DOS and CP/M disk formats. DOSRDSK allows use of the Appli-Card and extra RAM as a RAM disk under DOS (128K or 192K). And ERADIR is a program necessary for use of the extra memory as a RAM disk under CP/M.

Compatibility

Compatibility is a serious problem on nonstandard high-performance Apple accessories. With the Appli-Card, compatibility problems arise with both software and hardware. As far as software is concerned, PCPI claims that all "generic" CP/M programs—that is, programs not written with the Apple and Microsoft card specifically in mind—will run with the Appli-Card, and I have no reason to doubt this. Certainly all the ones I have tried—public domain and commercial programs—have run without a flaw.

Compatibility is a serious problem on nonstandard, high-performance Apple accessories.

However, that is not the end of the matter. PCPI says (on the phone, but nowhere in their advertising or documentation) that very few of Microsoft's programs will work with the Appli-Card. The only ones I own are MBasic and GBasic, and it is certainly true that they will not run properly with the Appli-Card.

PCPI claims that this is because the programs regularly check for the presence of a Microsoft card and hang if the card is not present. Perhaps, but I question this explanation. MBasic works perfectly on my machine *except* when one of the cursor movement commands (HOME, VTAB, HTAB) is called; GBasic also bombs with graphic commands. My own suspicion is that the reason for the failure is that both programs use the Apple monitor built-in subroutines for cursor (and graphics) control: Microsoft CP/M even comes with a specific explanation of how 6502 subroutines can be called from Z80 assembly language programs. Although PCPI provides nothing in its documentation to answer the question one way or another, I suspect that PCPI's CP/M either does not support this (occasionally useful) feature or implements it in a different manner.

If I am correct in this supposition, two conclusions follow. First, it should be possible for PCPI to develop patches to allow MBasic and GBasic to run with their card. And second, that *any* Apple-specific programs that rely on calls to 6502 subroutines as implemented under Microsoft CP/M will similarly bomb.

The final compatibility problem relates to hardware. Microsoft has been the standard for so long that manufacturers (of, for example, nonstandard, high-capacity disk drives) routinely refer to drives as "CP/M compatible" when they are compatible only with Microsoft CP/M. Whether a particular peripheral will also be compatible with the Appli-Card is always a question.

In general, unless the peripheral manufacturer provides specific support for the Appli-Card, it will not be. Vista (at a small extra charge) supports the Appli-Card for its V1200 drive and presumably for its other high-capacity drives as well. Since many CP/M programs require large quantities of disk space, CP/M users quite often add high-capacity drives, so you should investigate this question thoroughly before investing in an expensive disk drive.

The compatibility problem is not insoluble. Indeed, the Appli-Card, since it can be installed with many complicated drivers, is well-adapted to conform with disparate equipment. However, on this matter in particular, PCPI's documentation is woefully inadequate. Additional information is available from PCPI at a $45 charge and at PCPI's discretion; whether the additional information provided would be sufficient for the technically-oriented user to make the required patches I do not know. Almost certainly the nontechnical user could not.

Operation

If compatibility problems are overcome (and I should emphasize that many or most users will never encounter compatibility problems) one can *almost* forget about the card and simply go about the business of running whatever CP/M programs you choose. The "almost" in the previous sentence refers to one aspect of operation. When CP/M is first booted, a file called DRIVERS must be on the boot disk. This file will vary in length depending on the drivers loaded; on my system it is about 8K. What this means is that you must reserve the extra space (in addition to the boot tracks) on the disks from which you plan to boot the system. If you are content always to boot from one master disk and then switch to whatever program disk you use, this presents no problem at all. The DRIVERS file need not be the disk for a warm boot.

Once up and running, the card functions admirably. How much you will notice the increase in speed depends to some extent on the programs you run. Of those that I have tried, word processing programs, in particular, benefit from the quicker operation. The notoriously slow print-spooling operation of *WordStar* is speeded up sufficiently that editing while printing is quite tolerable. Formatting and printing operations in *Final Word* are now quite fast, and I have yet to lose even a character during print spooling. *dBase II* benefits substantially in some operations, such as sorting or indexing, but not noticeably in others. MBasic computational programs that formerly ran slower than Applesoft equivalents now run substantially faster.

Word processing programs benefit from the quicker operation.

The RAM Extender

The optional RAM Extender functions as a RAM disk drive with software provided for CP/M and DOS. (Hopefully, if and when PCPI provides CP/M 3.0 for the Appli-Card, it will be useful for this as well.)

Under CP/M, the RAM disk functions perfectly and is an enormous boon for programs that require a great deal of disk access. The 64K version is useful for some things, but the 128K version is more than twice as good, since an entire disk can be dumped to the pseudo-drive. The software functions perfectly with my Vista V1200.

Under DOS, the RAM disk is less useful: it works quite well, but I have several reservations. First, installing the software lowers HIMEM by about 700 bytes. The documentation never mentions this; and the consequence is that programs which expect HIMEM to be in a particular location may bomb. *Screenwriter II,* for example, will not work with the RAM disk.

PCPI is reported to be testing a revised version of the software that will disable the INIT command but not alter HIMEM. This is a mixed blessing, since

such a modified DOS would make it incompatible with most high-capacity disk drives. If both versions are made available, however, the user would have a useful choice.

In any event, the speedup under DOS is not as dramatic as one might hope. Although BLOAD, BRUN, CATALOG, and RUN are, indeed, speeded up dramatically, text file manipulations are less impressive. A program to write 1000 38-character records to a text file took about two minutes to run with the RAM disk and normal Apple DOS. The same program ran in only 50 seconds with Diversi-DOS and a real disk drive. Interestingly, the RAM disk is apparently compatible with Diversi-DOS; using both, the program ran in only 25 seconds.

Conclusion

The PCPI Appli-Card is an excellent product. The technically-oriented user will find the documentation poor by any standard, and awful when compared with that provided by Microsoft. The nontechnical user, however, may find the lack of specifics and detail more than outweighed by PCPI's inclusion of the excellent Murtha and Waite *CP/M Primer* at no extra charge.

Apple owners who do not have 80-column cards will find that the Appli-Card gives them a quite acceptable 70-column display. The RAM Extender is extremely useful in CP/M; if you are willing to put up with a short delay at the outset, a diskful of programs can be dumped to the RAM disk and operation of heavily overlaid programs (which includes most commercial CP/M programs with which I am familiar) speeded immensely.

The problem is the incompatibility with Microsoft Basic and GBasic.

The most serious problem with the card is its incompatibility with Microsoft Basic and GBasic. Owners of Microsoft cards who have an extensive library of programs in these languages will find the graphics programs unusable, and will have to purchase another Basic (and probably rewrite at least some of the programs) to get even nongraphic programs to run properly. If this is important to you, the cost of the additional Basic ($100 or more) must be factored into the equation. (PCPI does say that if you can get a copy of Microsoft's "plain Vanilla" Basic as supplied on 8" disks and download it to your computer, it will run properly.) And if graphic capabilities in a CP/M Basic are critical, you may have to eliminate this card from consideration.

Customer support appears decent. My one call was not taken immediately but was returned by PCPI (a long-distance call at their expense) quite promptly. As mentioned above, I am a bit dubious about the accuracy of the explanation they provided but they were quite open about the fact that Microsoft Apple Basic and GBasic would not run.

The Appli-Card presently lists at $375. It is also available, bundled with *WordStar* for $500 list—good value if *WordStar* is the word processing program you want. The RAM Extender is another $200 or so, depending on whether you get the 64K or 128K version. The 64K version is said to be upgradable to 128K by the addition of eight 150ns 4164 chips, at a cost of about $50.

PCPI, 16776 Bernardo Center Dr., San Diego, CA 92128. (619) 485-8411. END



"POWER FAILURE"

Goodbye valuable data. Unless you have a Guardian Angel uninterruptable power source on duty.

Guardian Angel switches to 150 watts of backup power in 1/100 of a second or less while alerting you of blackout or brownout conditions. Its rugged 12V battery gives you up to six minutes (15 at half-rated power), enough to save your data and shut down your system if line power does not return.

Guardian Angel is compatible with virtually every major microcomputer system, including Apple, IBM, H-P, TRS-80, Xerox, Eagle and Osborne. Its transient voltage suppressor also prevents system damage from power spikes.

Guardian Angel simply plugs in between your power source and your microcomputer. Its compact size permits either desktop use or out of the way placement.

Protect your investment: see your R.H. Electronics dealer today about Guardian Angel or contact us at 566 Irelan Street, Buellton, CA 93427, (805) 688-2047.



Guardian Angel, with LED power status indicator, automatically safeguards data from blackouts, brownouts for just $595.*

RHELECTRONICS, INC.

*Patents pending, UL listed, FCC approved, 240V/50 Hz version available. Dealers and OEM inquiries invited.

CIRCLE 282 ON READER SERVICE CARD

creative computing equipment evaluation

Multi-Function Back for Minolta X-700 Camera

Stephen B. Gray

Minolta's top of the line single-lens reflex camera is the X-700, a "state-of-the-art quartz-control electronic 35mm SLR," as the product guide calls it. It is one of the new breed of 35mm cameras that are almost idiot-proof; you load it, set the film speed, then simply focus and shoot.

The X-700 offers Programmed Automatic Exposure, which "requires absolutely no manual setting of aperture or shutter speed . . . The X-700 program mode automatically selects aperture and shutter speed for proper exposure, maintaining the fastest practicable speed as light dims, giving visible indication and audible beeps, if desired, to guard against blur from subject/camera movement." The X-700 is said to be the first shutter-weighted system: it is programmed to favor faster speeds in low light.

The X-700 is one of the new breed of 35mm cameras that are almost idiot-proof.



Figure 1. The rear of this Minolta X-700 camera shows two accessories attached: a motor drive and the Multi-Function Back. The control panel cover is open to show the operating keys.

For those who wish to exercise some control, the X-700 has two other modes. In Aperture-Priority Auto Exposure mode, you select the lens opening, and the camera selects a shutter speed for proper exposure, allowing you to control the depth of field.

In Metered Manual mode, you set the shutter speed and adjust the aperture until the LED next to that speed (in the viewfinder) lights up.

Automatic features of this type are usually based on integrated circuits. However, one of the accessories for the X-700 is the Multi-Function Back, which Minolta calls "the world's first microcomputer-controlled back to offer three camera-control modes for time-lapse, timed long-exposure, and multi-frame sequence photography, plus six data-imprint modes for indentifying or classifying photographs."

Other X-700 accessories include a motor drive, wireless controller, two flash units, and a Power Grip power source (which has a handle and mounts a flash unit on a swivel for "bouncing" the light).

Multi-Function Back

The Multi-Function Back (Figure 1), easily installed in place of the standard back, protrudes only about a quarter of an inch more than the original back. Yet it performs a variety of functions that weren't available before or required much more hardware than could be attached directly to the camera.

The back consists of a six-character liquid crystal display, a control panel with half a dozen keys, control panel cover, and battery chamber, plus a microprocessor, quartz clock, and an automatic calendar that keeps track of dates up to the year 2099. Once set, the date automatically changes, with leap years and varying number of days in a month all taken care of.

Block Diagram

The unofficial block diagram (Figure 2) was drawn during a discussion with a Minolta manager. It is quite simple: the control panel operates the microprocessor, which controls the camera and the display and also sends signals to the Power Grip when flash is required in interval mode.

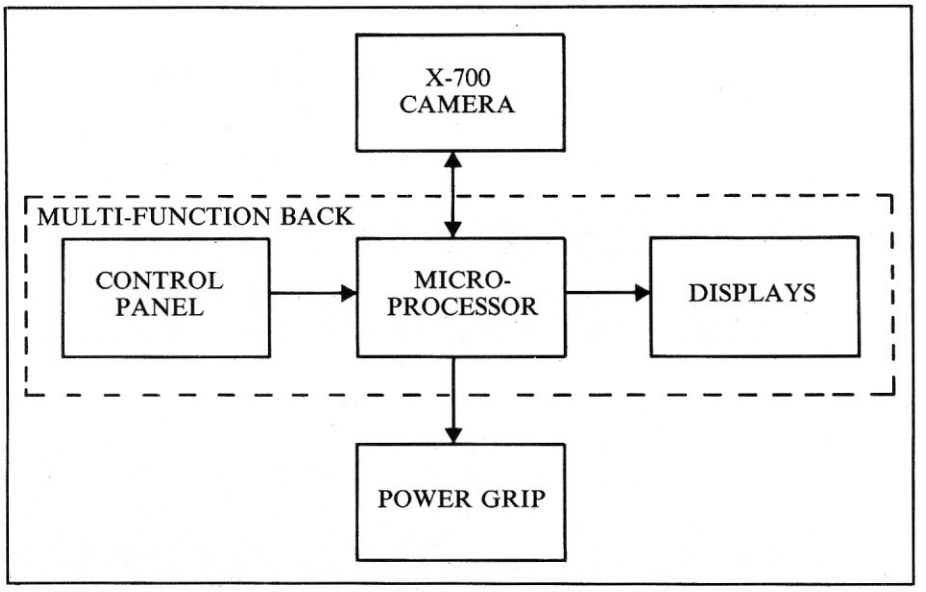


Figure 2. This unofficial block diagram of the Minolta X-700 Multi-Function Back shows how simple the accessory is, yet it operates in nine different control and imprint modes.

Camera Control Modes

Press the FII key on the back, then the MODE key, and you are ready to set one of the three camera-control modes. These modes can be used alone or in combination to control the shutter of the X-700.

You can set the camera to take a picture every three seconds, or every two hours, or every 33 hours, for example. You can set the X-700 to take one picture at each of those times, or several dozen. You can also control how long the shutter stays open.

Using all three modes together, you could set the X-700 to take three frames every four hours, with the shutter open two seconds for each shot. It does all this automatically, without your having to be there.

Interval Mode

The time set in Interval mode determines how long the camera waits between exposures. This mode usually requires using a motor drive or the slower auto winder, although the film can be advanced by hand if the interval is long enough.

Put the X-700 on a tripod, and in Interval mode you can photograph a scene such as traffic patterns, cloud movement or a flower coming into bloom automatically every few minutes, from dawn to dusk. (Figure 3.)

Interval can also be used with flash. The flash turns on, warms up, fires at the precise moment, and shuts off, and the film automatically winds to the next frame. This can be used to photograph plants and animals at night, for example.

The interval can be set for any time between one second and 99 hours, 59 minutes, 59 seconds, the limit of the LCD display.

The interval is set on the LCD display much as you would a digital watch.

Frames Mode

The number set when the Multi-Function Back is in Frames mode determines how many photographs are taken at the interval you set. The number of frames you can set is theoretically the limit of the display—999,999.

Long Exposure Mode

The Long Exposure mode controls how long the shutter stays open to take the photograph. The range is from one second to a maximum of three or six hours, depending on the type of batteries used, and how fresh they are. This mode is used mostly for night scenes or astrophotography.

Put the X-700 on a tripod, aim it at the North Star, set the exposure to several hours, and you can get a spectacular

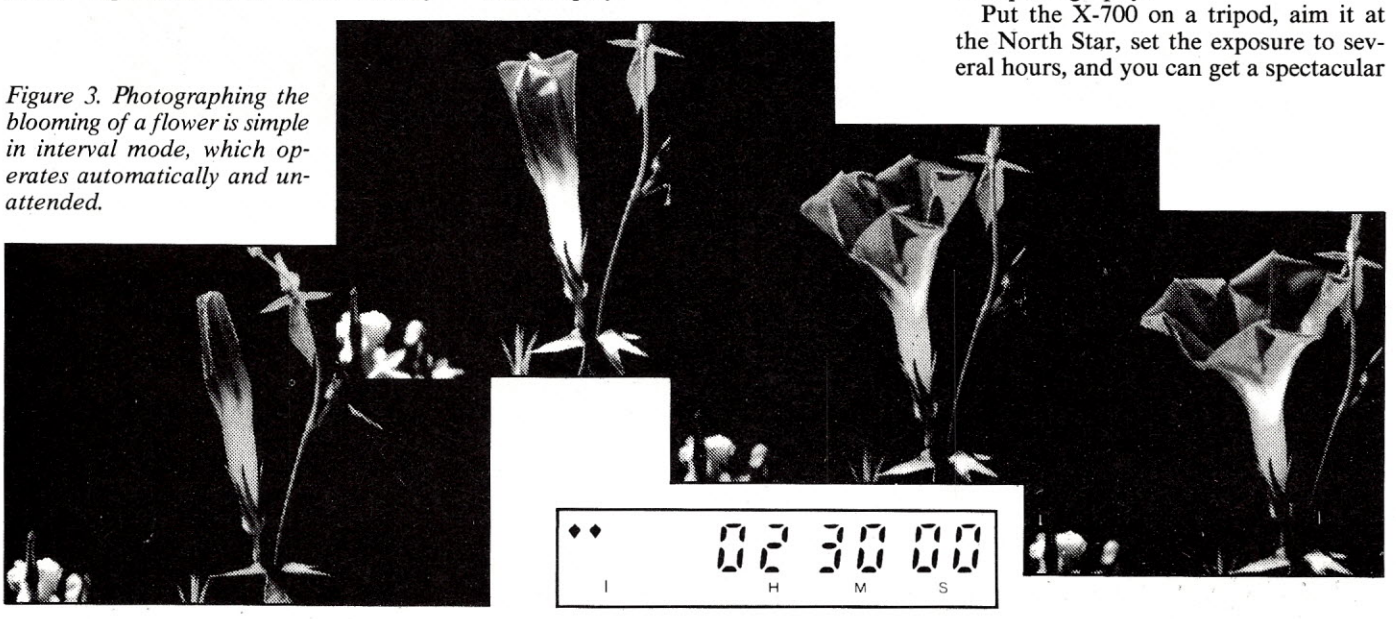


Figure 3. Photographing the blooming of a flower is simple in interval mode, which operates automatically and unattended.

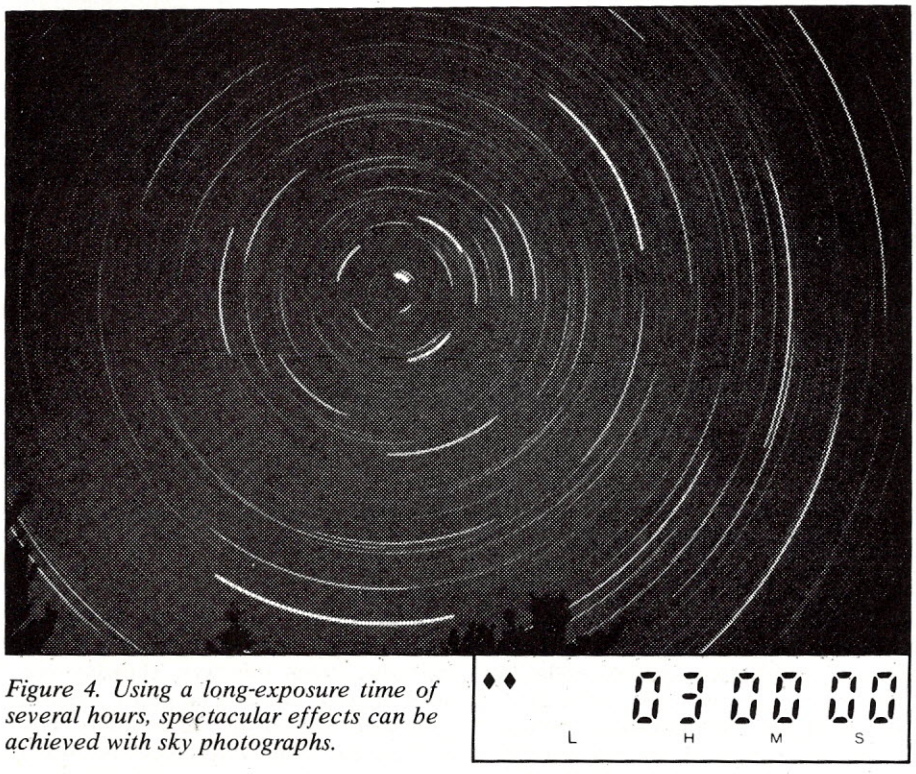


Figure 4. Using a long-exposure time of several hours, spectacular effects can be achieved with sky photographs.

photo showing dozens of concentric rings, as the sphere of stars seemingly circles around the earth's axis. (Figure 4.)

Data-Imprinting Modes

Less interesting photographically than camera-control functions, but just as valuable to those who need them, are the data-imprinting modes. In these six modes, numbers are imprinted in the lower right corner of the film for identifying or classifying the photographs.

The LCD display on the back of the Multi-Function Back is duplicated by a small group of light emitting diodes (LEDs) on the inner side. The LEDs also form six figures in three pairs, but they are only about 3.5 mm high.

These LEDs are mounted in the film pressure plate, and are thus pressed against the film. When turned on in different combinations, they imprint data directly onto the film.

You can imprint the time or date of exposure. You can imprint one number or consecutive numbers, starting at zero or anywhere else.

Imprinting and camera-control functions can be used simultaneously.

Time

Recording the time a photograph is taken can be important in legal and scientific work, and in sports. Thus, you can pinpoint the precise moment a volcano erupts, a space rocket lifts off, or a runner crosses the finish line.

First you set the quartz clock in the Multi-Function Back, which operates in 24-hour time, as in 19 33 42. With the DATA IMPRINT switch set to AUTO, the film will record the time of each shot. When the switch is set to MAN, you can push the blank button at the lower right of the control panel to imprint the time data at any time before, during, or after exposure. If you don't want to imprint the time on a particular frame, just set the switch to OFF.

Date

In Date mode, you have three choices for recording the information. You can set the display and data-imprinter to record the date as year, month, and day (83 12 25). Or month, day, year (12 25 83). Or day, month, year (25 12 83).

Date mode keeps track of special occasions, such as recording a child's growth, or important events such as birthdays, vacations, weddings, graduations, and so on.

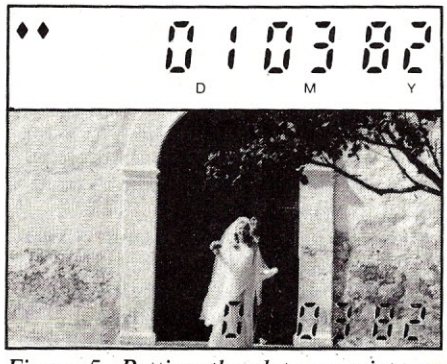


Figure 5. Putting the date on pictures helps keep track of special occasions.

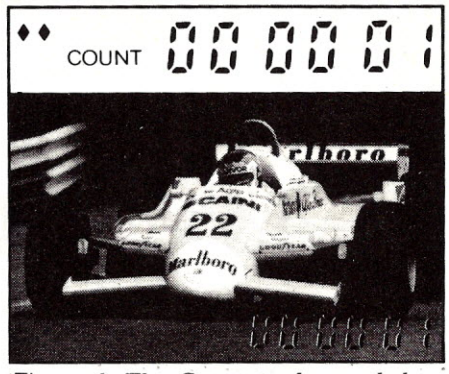


Figure 6. The Count mode can help a sports photographer record the order of finish in a car race.

Number and Count

In Number mode you can imprint any desired number from 00 00 00 to 99 99 99 on every frame. Or in Count mode you can number the frames consecutively, starting with 00 00 01 or anywhere else.

Using Number mode, you can encode photos with any number up to 999,999, according to your individual filing system.

Count mode is very useful for numbering in sequence the order of finish in a marathon or an auto race, for example.

Film Setting

Minolta's engineers took a small but important item into account when designing the LED data-imprinter. Some films are more sensitive to LEDs than others; for these films the LEDs should not be lighted as long as for the others. So you press the FI key, then the MODE key until only diamonds appear in the LCD display. Next press the diamond key until the correct number of diamonds appears; several dozen films have been categorized by their sensitivity to LEDs, and their settings (by number of diamonds) are given in the owner's manual. For Kodachrome 25/40, for example, you should light four LCD diamonds.

Added Details

Several nice little extra details help make the Multi-Function Back as user-friendly as possible. An LED above the control panel flashes every time data are imprinted on film, so you will know whether the DATA IMPRINT switch is set to AUTO or not. The LCD panel blinks every two seconds when the batteries are low.

Prices

The Minolta X-700 camera is available in New York camera stores for $230 or less and the Multi-Function Back at $179 or less. END

creative computing software evaluation

Good Words

Four New Word Processors For The Apple

Stephen Arrants

It seems that there are more word processors for the Apple than for any other machine. It is a crowded field. Hardly a day goes by that a new software announcement does not cross my desk. I have to admit, I sometimes got a small thrill out of testing each one. It is like a game. How much further can an author push the Apple? What new tricks can he squeeze out of the 6502?

Word Juggler IIe lets you edit in 80 columns, but you can display on screen in more than 80 columns.

Friends are used to this by now. I am forever raving about some new word processor, comparing it to my standard, *AppleWriter.* Forget the games! Give me a good, solid word processor! I think my friend Ted said it best. I was talking up *Word Juggler IIe,* rambling on and on, when he said "OK, fine. But tell us, Steve—What's your highest score on *Screen Writer II?"* Sometimes I think PC users have no sense of humor.

To get this madness out of my system for a while, I recently tested four new word processors for the Apple. One is specifically for the IIe, one was a hit when it was shown to a third grade class, one is more than just a word processor, and the fourth is good, but perplexing.

Word Juggler IIe

Word Juggler started its life as a word processor for the much maligned Apple III. (See our review in the June 1983 *Creative Computing.*) Apparently, the people at Quark were not going to adapt it for the Apple II. Apple was going to have to adapt the machine to the software!

If you have ever worked on a dedicated word processor, you know how smooth and easy operation can be. There are not complicated control codes to memorize, no finger-twisting keystrokes. Each command has its own key. Now, Quark can't give you a new keyboard for the Apple. Instead, they supply replacement keycaps for the IIe keyboard. The keys look just like the normal Apple keys with one important difference. Printed on the front of the new keys are the special *Word Juggler IIe* commands. That's good.

One problem with using a word processor is memorizing a long list of commands. Does CONTROL-C mean Catalog or Change Case? Is CONTROL-S a Search command or a Save command? With the new *Word Juggler IIe* keys, you can almost forget the commands before you learn them. Not only are the command keys labeled, but they are logically grouped, not placed all over the keyboard.

Formatting Text

Formatting text is simple. A plastic template placed over the top row of keys lists printing options and how to generate them. Hit ESC and the proper key, and you have control over spacing, justification, pitch, and other printing commands. It is then inserted at the current cursor location and shown in inverse to distinguish it from text.

Information from DIF files can be inserted; variables can be used for form letters and can be defined within a document and made conditional.

One difficult part of using *AppleWriter* is using WPL to spool files together for printing. *Word Juggler IIe* lets you insert document names into a text file in such a way that it automatically retrieves the named file and prints it out. No WPL to struggle with, and no limit on the number of spooled files that other word processors hit you with.

Printing


Suppose you want to print in 80 columns. Many word processors will format the screen this way, showing you how the text will look on paper. What if you want to print in 132 columns? Unfortunately, other word processors aren't set up to allow this display. You end up with word wrap and must guess at how the printout will look. *Word Juggler IIe* lets you edit in 80 columns, but you can display on screen in more than 80 columns. What you do is scroll left and right, moving the entire text. It is like having the left or right part of text off screen, but available.

Word Juggler IIe is written to operate under ProDOS, Apple's new operating system. ProDOS is compatible with the Apple III SOS, giving access to the ProFile hard disk drive. You can also access files written under SOS. If you need a word processor that can handle large files, must be easy to learn, and be in constant use. *Word Juggler IIe* is an excellent choice. Coupled with Quark's *Lexicheck IIe,* this is a full-fledged, fully configured system.

creative computing SOFTWARE PROFILE

Name: Word Juggler IIe
Type: Word processor
System: Apple IIe
Format: Disk
Language: Machine
Summary: Easy to learn, able to handle large files.
Price: $239
Manufacturer:
Quark Software
2525 W. Evans Ave. #220
Denver, CO 80219

LEARNING with LEEPER™

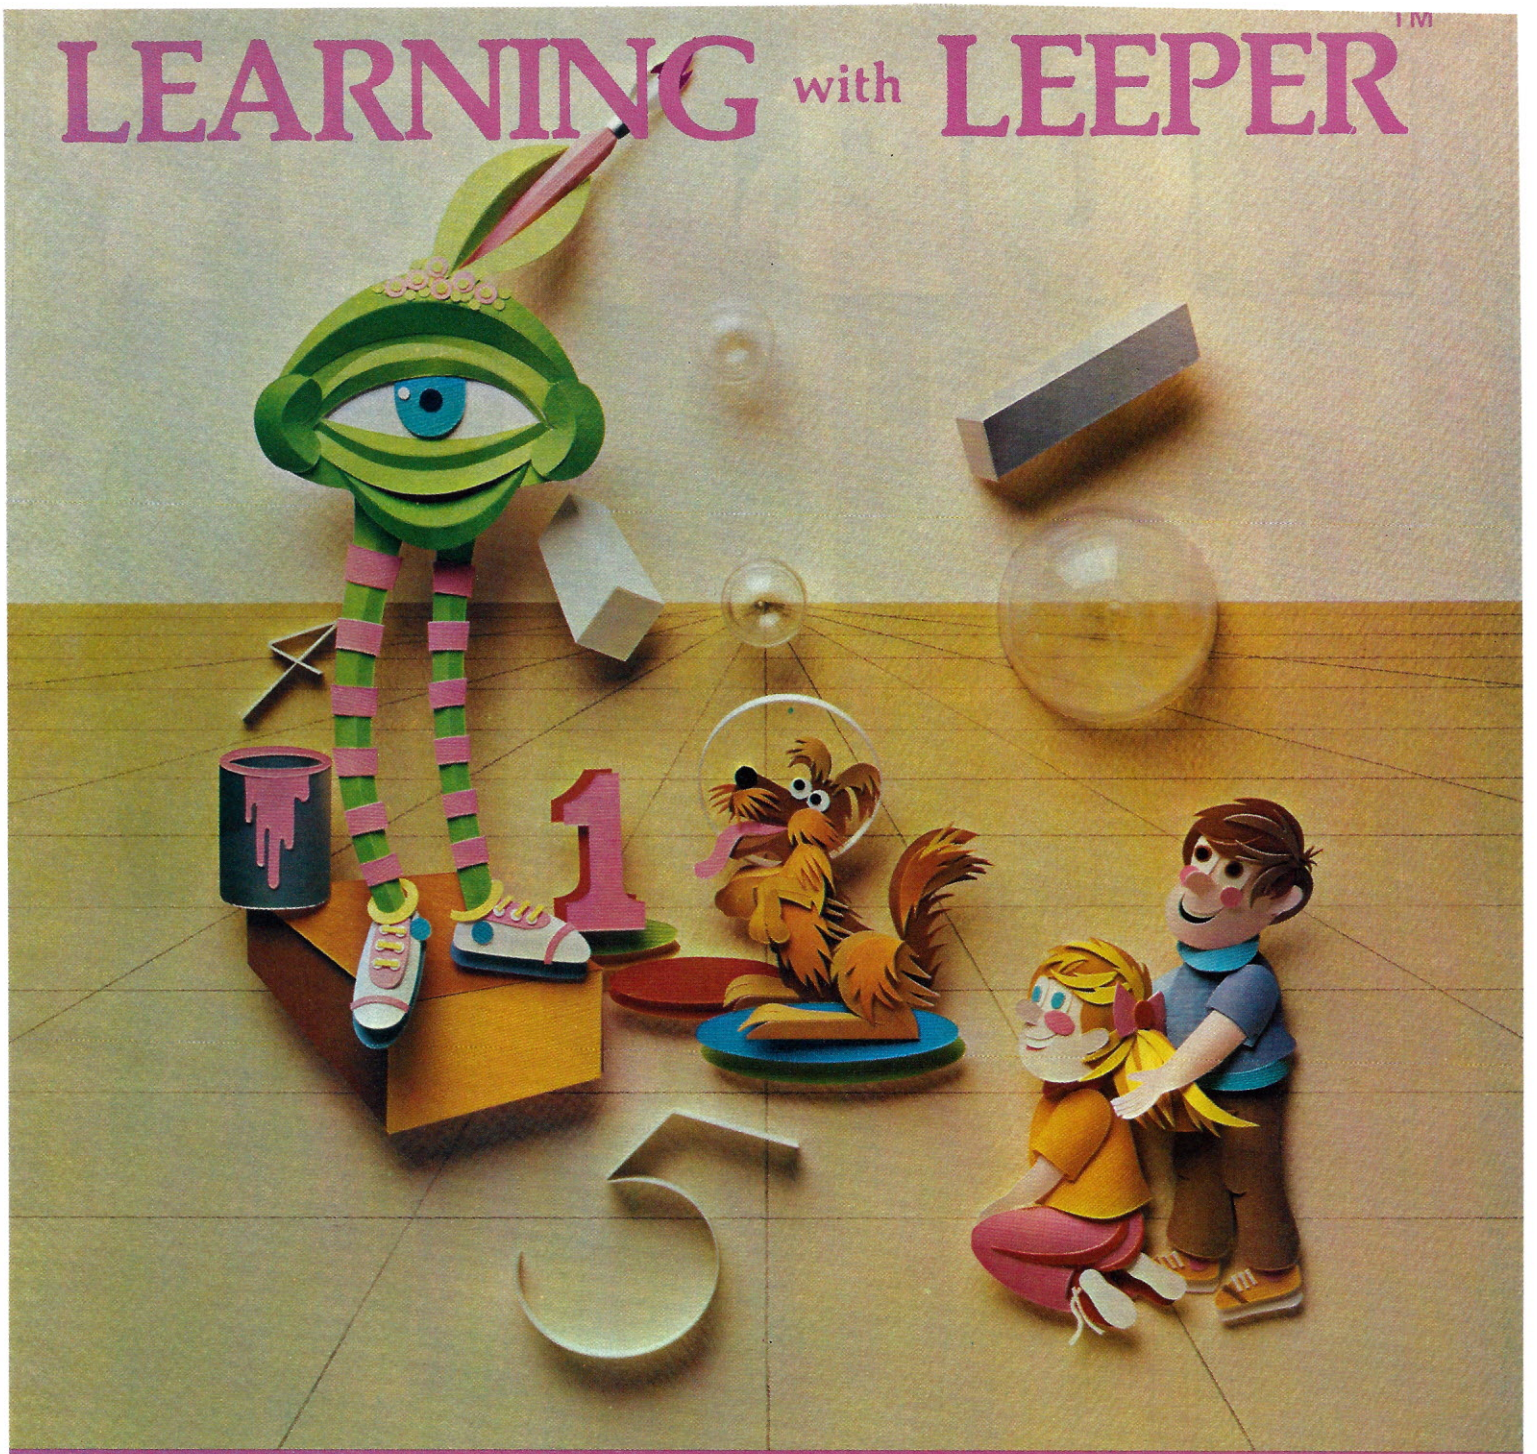

WHY WAIT UNTIL YOUR KIDS ARE IN SCHOOL?

Let Leeper give them a head start in reading, writing and math.
An award-winning collection of four preschool games for the Apple computer.

electronic GAMES Magazine's Best Educational Game of 1983

CES 1983 SHOWCASE AWARD

Sierra ON-LINE

TM designates a trademark of Sierra On-Line, Inc.


CIRCLE 205 ON READER SERVICE CARD


NOW AVAILABLE FOR COMMODORE 64 AND ATARI


NOBODY

DOES IT BETTER



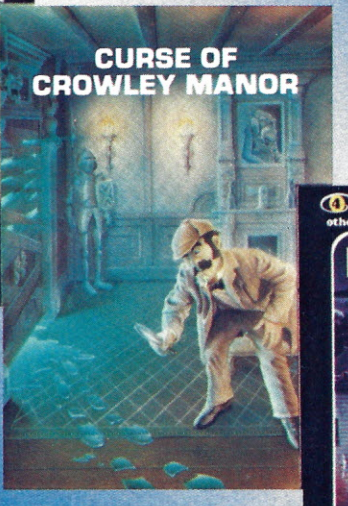

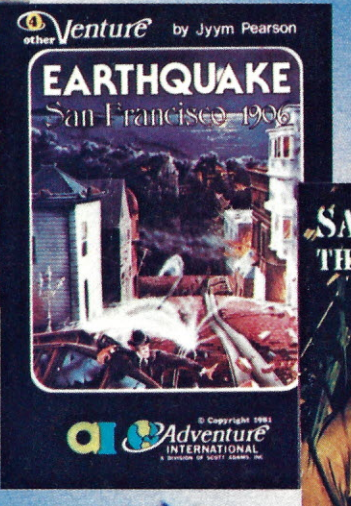

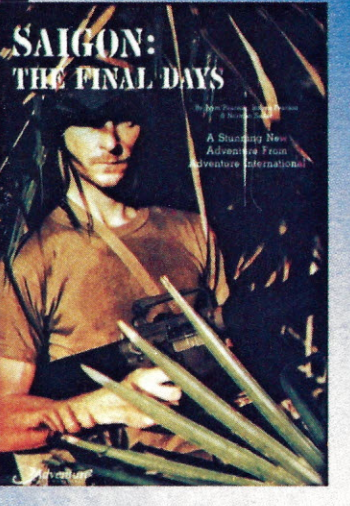

Because we know Adventures best. We're Adventure International, the company that started it all. And whether you prefer your Adventures based on Fact or Fiction, Jyym Pearson's unique story lines will provide unlimited hours of Adventure entertainment.

Choose a journey into the past with **Earthquake — San Francisco 1906,** or a wild ride into the Future in **Escape From Traam.** And for those of you who are intrigued by the supernatural, there's the **Curse of Crowley Manor.**

NEW SAIGON: THE FINAL DAYS

by Jyym & Robyn Pearson

Gritty realism and historic fact blend to form one of the most truly unique Adventuring experiences ever. SAIGON: THE FINAL DAYS will plunge you into the chaos and urgency of the last days of America's involvement in Southeast Asia. All of the features you expect are here: two-word command acceptance, extensive computer vocabulary, game save, and more, whisking you into a critical and controversial chapter of recent American history.

JYYM PEARSON'S ADVENTURES
WITH GRAPHICS BY NORMAN SAILOR

Brought to you by Adventure INTERNATIONAL

159

Apple WITH GRAPHICS! (48K Disk)	$34.95 each
Atari (32K Disk)	$24.94 each
TRS-80 Model 1, 3, & 4 (32K Disk)	$24.95 each
Atari/CoCo/TRS-80 Model 1, 3, & 4 (16K Tape)	$24.95 each

1-800-327-7172

CIRCLE 103 ON READER SERVICE CARD

Get Jyym's Adventures from your local dealer today! If they're not in stock, get the Adventures you want by calling us toll-free.

A Subsidiary of Scott Adams, Inc.
PO Box 3435 • Longwood, FL 32750 • (305) 862-6917
Dealer inquiries are always invited!

Write Away

From a small, relatively unknown company comes a word processor that is extremely powerful and easy to learn. *Write Away* is a good choice for a word processor to grow into.

What can it do? Quite a lot! Five tutorials ease you into the difficult aspects of word processing. You can manage a mailing list, read and use DIF files, use macros (or "glossary" terms) by defining a key sequence to represent a word or phrase, and much more. For example, say you use the phrase "Apple IIe" throughout a document. Define the A key as the macro, and it is saved in a special buffer to be recalled when needed. A-ESC ESC will then retrieve the macro and insert it into the text.

You can tab through the text by letter, word, paragraph, or page. Search and replace is a standard feature in many word processors. However, *Write Away* also makes use of logical operators, which insert certain text depending upon which criterion is met. Logical operators are analogous to IF . . . THEN . . . ELSE statements in programming. If you are writing a form letter, you can program *Write Away* to find a person's title—Mr., Mrs., Miss, or Ms. Depending on which is found, you can then have *Write Away* change all gender references in the text. I can't think of *any* other word processor that offers this feature.

Two Modules

Write Away consists of two modules, the word processor and the print drivers. With an 80-column extended memory card, both modules are loaded. Without it, the Apple must switch between them. But because *Write Away* contains The DOS Enhancer, disk access is very fast. I clocked *Write Away* at about one-fourth to one-third faster than *AppleWriter.*

There are five printer drivers provided. One each for the Anderson-Jacobson 831/832; the Centronics 737; the Diablo, NEC, and Qume printers; the Epson MX-80 with Graftrax; and the Epson MX-80/100 with Graftrax Plus. There are instructions for configuring *Write Away* for use with other printers.

The files created by *Write Away* are standard Apple text files, readable by many other Apple word processors. You can also use *Write Away* to create EXEC files or to edit Applesoft programs—a great help when dealing with a long listing. Once you learn all of the features of the program, it can almost do *all* your writing for you.

Documentation

The documentation is a bit rough, but the tutorials are very helpful. If something in the manual is confusing, the tutorial examples clear it up. A few evenings or afternoons is all you will need to use most of *Write Away.*

Write Away has excellent error trapping, constantly prompting you when you are about to make a permanent change or delete a file. It is one of the few word processors that is *not* copy protected. I welcome this. Chances are that a word processor is in frequent use. The constant read/write access can cause a disk to crash at the worst possible time. Making your own backup is better than waiting three or four weeks for a replacement from the manufacturer.

The files created by Write Away are standard Apple text files, readable by many other Apple word processors.

Write Away is written for the Apple II, II+, and IIe. If you do not have upper/lowercase, they will send you a free E-Z Hook to make the necessary modifications, and you can also order a lowercase adapter.

Write Away from Midwest Software Associates has so much going for it—so many great features—that it can hold its own among the top sellers. It is an excellent choice for almost any user.

creative computing
SOFTWARE PROFILE

Name: Write Away
Type: Word processor
System: Apple II, II+, IIe
Format: Disk
Language: Machine
Summary: Holds its own among the top sellers.
Price: $175
Manufacturer:
Midwest Software Associates
2707A Ridge Ct.
Lawrence, KS 66044

Format II—Enhanced Version

OK, I'll be honest from the beginning. *Format II* is a perplexing package. I found it difficult to use, exasperating, and a general pain in the buffer. But, lest you think I plan to trash it totally, read further.

Some word processors are designed for long manuscripts, such as books, master's theses, and the like. Others are designed for short, one- or two-page documents. *Format II* falls somewhere in between, and that is my main gripe with it.

creative computing
SOFTWARE PROFILE

Name: Format II, Enhanced Version
Type: Word processor
System: Apple II, II+, IIe
Format: Disk
Language: Machine
Summary: Perplexing storage method, but has redeeming features.
Price: $150
Manufacturer:
Kensington Microware
919 3rd Ave.
New York, NY 10022

After booting *Format II,* the screen clears and a menu appears at the top. At the bottom of the screen two question marks and a cursor ask for input. All you need do is enter one letter—no RETURN is required. To load a page from disk, just follow the prompts and press RETURN. A CONTROL-D sends you into the Editor.

Editing

At the Editor level, you can enter text and do simple editing. With *Format II,* what you see on the screen is what you get on paper. Solid bars at both top and bottom show the current margin settings, and a status display tells the current line and position on the page. To edit and change previously written text, press ESC to get to the Format Text mode. Here, you can search and replace text in either direction, both locally and globally. Novel features include a command to align columns of numbers, and a command to compress text, removing multiple spaces.

The printing capabilities of *Format II* are very powerful. A self-prompting menu lets you use almost any printer. By typing OPEN-APPLE and a number from 1 to 9, you have software control of print fonts—useful if your printer has enhanced, bold, or shadow printing. In some respects, the print features seem *too good* for *Format II.* Since text is stored as pages, you can print them in any order. The print features are very easy to use, and almost totally idiot-proof.

A mail system is included with *Format II,* organizing data in index card style. Data are entered onto a screen area of up to 16 fields. Up to 450 records or cards can fit on one disk. Sorting is

easy and powerful. You do not have to set up a sort field at the beginning of the operation as you must with high priced database packages. Retrieve names and addresses for use in documents or for printing as mailing labels. This mini-database is much more powerful than I thought.

Documentation

The documentation is the best I have seen for a word processor. It was prepared by professional writers who slowly and gently lead you into using *Format II*. They realize that some people are impatient, so the Quick Guide Tutorial gives the bare bones. Don't stop there, though; the manual lets you in on every aspect of *Format II*.

My main complaint with *Format II* is that text is stored as individual pages. You can edit whole documents across pages; *Format II* searches through the disk for pages stored under the document name. But if you want to review a different page, you must reload it. That is time-consuming and frustrating. But that is really my only complaint.

Format II takes time to learn, offers some great features, and is a good choice for simple, light word processing and database storage. You can also back up the disk, freeing yourself from "crash-anxiety."

Home Word

The unfortunate fact about word processors is that it takes time to learn how to use them—more time than a casual user wants to invest. There is a market for a word processor that is quick to master and easy to use. Sierra On-Line produces *Screen Writer II,* one of the most popular word processors for the Apple. Their newest product is *Home Word,* a program that is easier to use than a game.


Home Word uses icons—pictorial representations—instead of control codes for most commands. It is specifically designed for a casual user—someone who just wants to write letters, simple papers, and memos.

After you boot the program, the screen is divided into three areas—the text page, the icon area, and an area representing what a completed page will look like. There are six main icons: Print, a printer; Edit, a page; File, a file cabinet; Format, a ragged page with an arrow leading to a neatly organized page; Customize, a question mark; and Disk Utilities, a floppy. A joystick or cursor keys move a frame over an icon. You hit RETURN or a joystick button to enter the selected mode. A second icon display replaces the first. At each command level, there are more icons.

Editing

As text is entered, a representation of the finished product is shown in the lower right of the screen. Words are small dots separated by tiny spaces. This area is updated after every few keystrokes. The icons are replaced by a graphic display of free disk space and free memory.

Home Word has many features found on more expensive and more complicated word processors. Global and local search and replace, underlining, boldface text, and print spooling and formatting are all here. Text can be taken from one file and inserted wherever you decide. A rudimentary outline generator is included for marking off specific areas of text with "bullets." The text can be previewed on screen before printing, giving you an idea of what the final copy will look like.

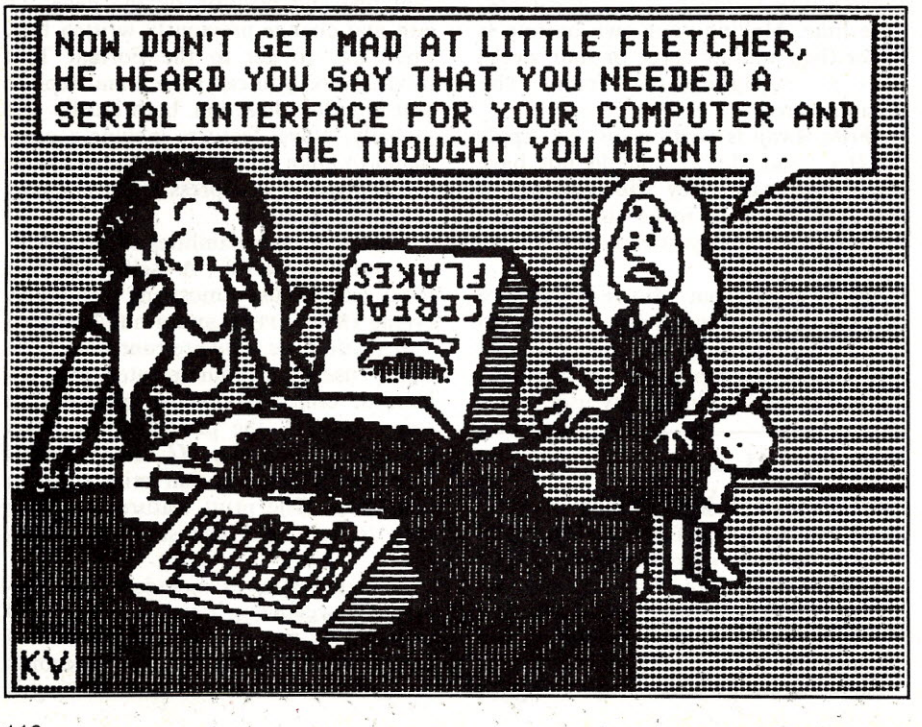

creative computing
SOFTWARE PROFILE

Name: HomeWord

Type: Word processor

System: Apple II, II+, IIe, soon to be available for others

Format: Disk

Language: Machine

Summary: Lisa-like competition for *Bank Street Writer.*

Price: Not set at press time.

Manufacturer:
Sierra On-Line
Sierra On-Line Building
Coarsegold, CA 93614

Documentation

I saw only the preliminary documentation, but that was fine, because *Home Word* doesn't *need* documentation. Keep it as a reference, and learn *Home Word* by using it. An instruction cassette is included. To use it, connect your cassette player to the Apple cassette I/O. The cassette player can be turned on and off with the joystick or cursor keys.


I like *Home Word.* I use it instead of *AppleWriter* if I want to write a letter to friends or a memo. *Home Word* will have enormous success, in banishing fear of computers. It is almost too easy to use!

Of course, *Home Word* will never replace *AppleWriter* or *Screen Writer II.* It isn't intended to do that. We all know people who don't use a computer because they think it is too complicated. *Home Word* will change that. The students in that third grade class had no problems using this software. Within an hour, they were writing short essays and letters without having any instructions or documentation on *Home Word.* I think that is the real test of user-friendly software.


Well, which word processor is best for you? Sorry, this is where I bow out. Each of the programs has its own strengths and weaknesses. The market is full of good word processing software. Try some out at your dealer and make a choice. Keep in mind that you will be using it for a long time. Try to predict what you might need to do in the future.

END


a.d. 2082. Diskettes duplicated by Allenbach in 1983 will still be guaranteed.

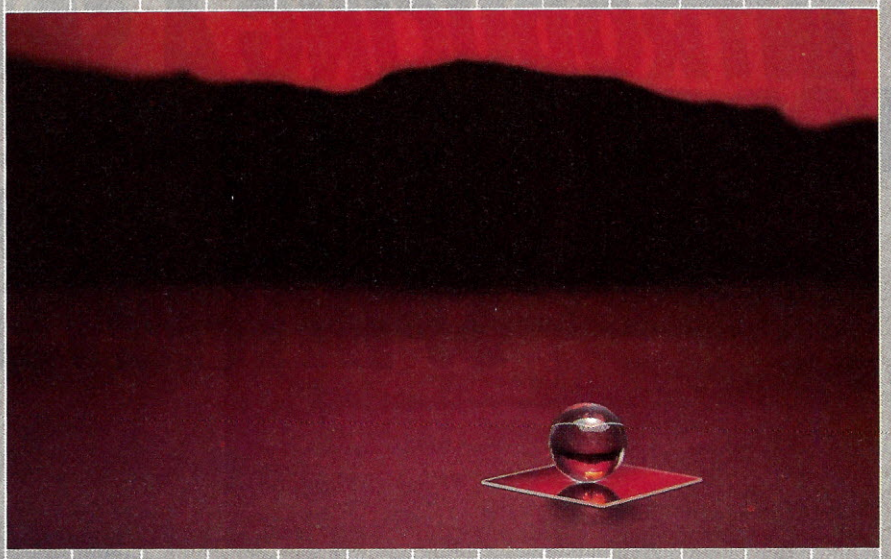

This Lifetime Guarantee, exclusive to Allenbach, adds quality and consumer confidence to your software products. While this alone is reason enough to let Allenbach handle your software duplication, most software developers initially choose us for convenience. We can probably complete your production faster than you can. Additionally, your whole project can become one-easy-step by having us perform all packaging requirements from printing to assembly.



You'll also appreciate the high standard of excellence demanded by Allenbach. Software duplication for practically any format is our primary business. We've established a team of professional technicians who specialize in all phases of software duplication. Your software is effectively reproduced on specially designed precision duplicating equipment. Also used are exacting verification methods unique in the industry to guarantee 100% accuracy. Plus your software will be duplicated onto the Allenbach diskette, the OEM diskette that is Guaranteed for Life.



ALLENBACH INDUSTRIES INC

Allenbach *really* is the logical solution for your software duplicating needs. So feel free to call us with your questions. Take advantage of our years of experience and knowledge. Have Allenbach do what we do best, so you can do what you do best.

2101 Las Palmas
Carlsbad, California 92008
619-438-2258
800-854-1515 (Toll Free)
Telex: 19-4561 LSA

CIRCLE 158 ON READER SERVICE CARD

INTRODUCING A SPINWRITER FOR EVERYONE WHO THOUGHT THEY COULDN'T AFFORD A SPINWRITER.



The newest Spinwriter prints at 200 words per minute.

Spinwriter 2000 gives you famous Spinwriter features, quality and reliability for a new low price.



Our new Spinwriter® 2000 retails for only $1095. And prints at 200 words per minute.

Even though the Spinwriter 2000 Series costs less, they are nothing less than true Spinwriters. The 2000 offers the same superior quality and reliability as the rest of the family.

So if low-volume, letter-quality printing is what you need, the Spinwriter 2000 is letter-perfect for you. And your budget.

Now, for about the same price as an ordinary printer, you can have a letter-quality Spinwriter.

Spinwriter is the letter-quality printer preferred by more PC owners.

The Spinwriter name is one of the legends of the computer industry. That's why NEC Information Systems is the number one supplier of letter-quality printers to PC users.

In fact many famous personal computer makers recommend the Spinwriter, not only for letter-quality printing, but because it can bring out the full capabilities of their system.




SPINWRITER IS A REGISTERED TRADEMARK OF NEC CORPORATION.

CIRCLE 181 ON READER SERVICE CARD

Spinwriter has capabilities you can't get on other printers.

Spinwriter's unique "thimble" print head gives you impeccable printing. You can choose from over 60 different type faces with up to 128 characters. And even have two type faces, or scientific and arithmetic symbols on the same thimble.

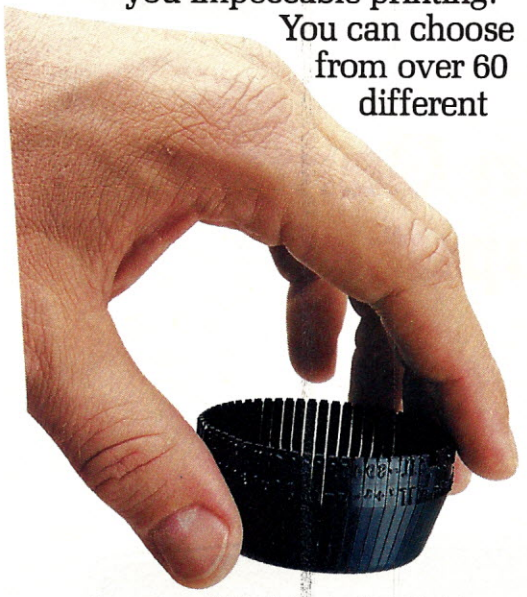

Our unique "thimble" print head holds up to 128 characters, enough for any special need.

The 2000 also lets you change forms handlers quickly and easily. Seven NEC-built forms handlers give a custom look to all of your forms-oriented applications. Which means you can shift from word processing to billing, shipping or inventory control in moments.

Want to send an original letter to a few hundred customers? Our sheetfeeder mechanism handles printing on your letterhead and second page or envelope.

Other Spinwriter advantages include continuous forms handlers that take paper up to 16 inches wide, variable size forms and multi-part forms.




The 2000 plugs directly into your PC's printer port.

Every Spinwriter is built to work as hard as you do.

Spinwriters have long been known for their reliability. Five years without a failure is not unusual. Which is twice as good as any other printer.

That's not to say that someday you won't need a little service. Not only will you find it nearby, you'll find it fast. NEC-trained experts can repair a Spinwriter in less than 20 minutes.

For the Spinwriter distributor nearest you, call 1-800-343-4418 (in Massachusetts call 617-264-8635). And find out why more and more PC users are saying "NEC and me."

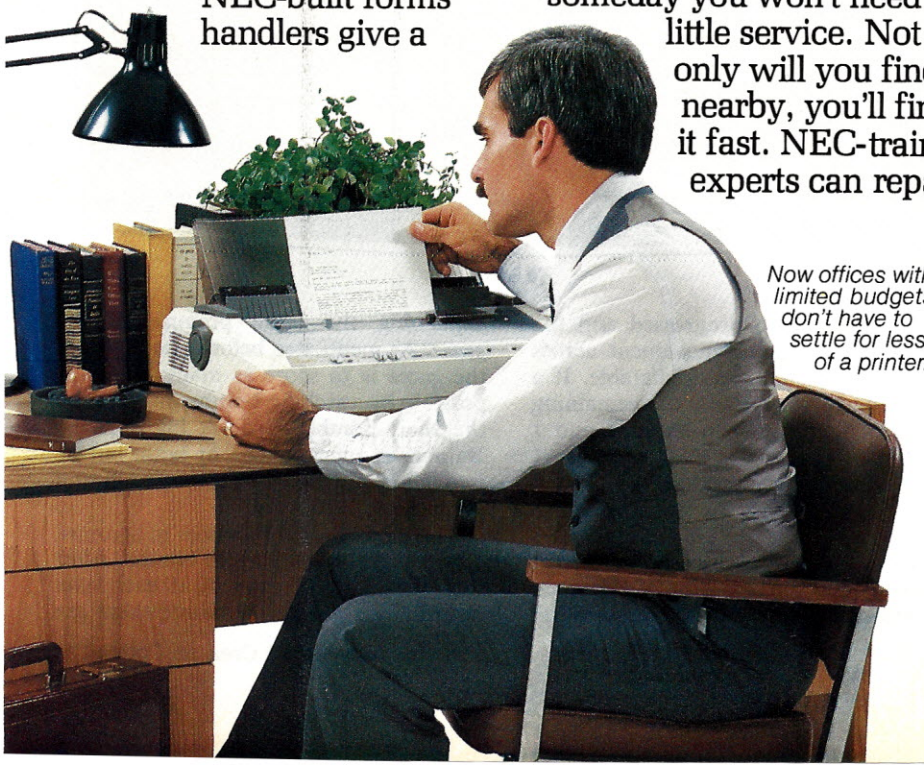

Now offices with limited budgets don't have to settle for less of a printer.

NEC AND ME

NEC Information Systems, Inc.

1414 Massachusetts Ave.
Boxborough, MA 01719



A Baker's Half Dozen Games for the Atari Computer

Arthur Leyenberger

Kaboom!

Like many Atari computer owners, I began my gaming/computing career with an Atari VCS. This was about the time that after-market companies began producing video games for the 10 million or so existing units. The scenario unfolded in a predictable fashion. Ex-Atari employees got together to form their own small video game company, producing games for the popular home unit. The rest is history.

One of the first of these entrepreneurial ventures was a company called Activision. Their hallmark was the VCS game that stretched the hardware to its limits and beyond. Graphics were usually better than anything seen before. They continue to be a leader in this area and have now begun to convert some of the more popular titles to the Atari 400/800.

When I first played *Kaboom!* I was impressed by its graphics. Moreover, I was amazed that a game with such a simple theme could be so engrossing. A cartoon convict, called the Mad Bomber, dropped an endless supply of bombs with lighted, crackling fuses from the top of the screen. My task was to catch these bombs in one of my water buckets.

Initially I was armed with three buckets, and the bombs came faster and faster as the game progressed and the Bomber's zig-zagging movement across the screen became less predictable. If a single bomb was missed, the remaining on-screen bombs would explode and I would lose one of my buckets. Since I was a videogame novice at the time, I could never get past the third or fourth wave.



Kaboom!

The new computer version of *Kaboom!* has some additional features, but before I describe them let me finish explaining the basic premise of the game. As mentioned before, the object of the game is to score as many points as possible by catching bombs dropped by the Mad Bomber. I don't know if the Bomber is angry, crazy, or both, but he is relentless. This is a game of skill and stamina.

The bombs are dropped in groups. The first level contains 10 bombs. After that, the count increases by 10 each level until level 6 is reached where there are

Arthur Leyenberger, c/o Creative Computing, 39 E. Hanover Ave., Morris Plains, NJ 07950.

AARDVARK *Action Software*

PRESENTS . . .

NOW - ADVENTURES AND D&D FOR IBM-PC!

BAG IT MAN



BAG-IT-MAN . . . This one feels so arcade like, you'll want to put quarters in. You'll be amazed and excited over three screens full of arcade style fun. We have: bags of gold, elevators, mineshafts, rolling carts, and two of the nastiest guards you'll see in a long time, trying to protect it all! All machine code with super color, excellent sound and continuous action and excitement.


Available on: TRS-80C 32K CMD64
Stock #1061 Tape $24.95 Disk: $29.95



DUNGEONS OF DEATH . . . a serious D & D type game for up to 6 players at a time. You get a choice of race and character, on screen mapping of the maze, a chance to grow from game to game, and a 15 page manual. Requires extended basic on TRS-80C.

Available On: TRS-80C 16K, CMD 64, VIC 20 13K, TRS-80C 32K Disk
Stock #7001, Tape $19.95, Disk $24.95

ALSO ON: IBM-PC & MC-10-16k

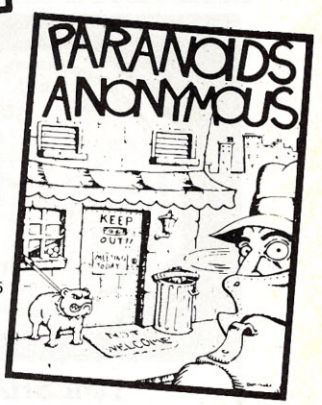

PARANOIDS ANONYMOUS . . . This is one of our most delightful Adventures. You've been invited to a meeting of Paranoids Anonymous, but, of course, they won't tell you where it is! It all makes perfect sense if you remember the particular brand of nut you are dealing with. You'll love this one.

Available On: TRS 80C-16K, TI/99-4A, VIC20-13K, CMD 64

Stock #5090, Tape $19.95, Disk $24.95

Aardvark Action Software is available at software retailers everywhere. If your local computer or software store doesn't carry it - ask them why not. Dealer inquiries invited.

CATALOG SPECIAL . . send one dollar for current catalog. Receive also, $1.00 cash certificate, good towards next purchase.



WIZARDS TOWER . . . this D & D adventure is played on a map of forest and dungeons. Similar in play to Quest, it has dungeons and dragons and more. Two to five hour playing time, and different every time. TRS-80C and TI/99-4A require extended basic.

Available On: TRS-80C 16K, CMD 64, VIC 20 13K, TI/99-4A

Stock #7010, Tape $19.95, Disk $24.95

ALSO ON: IBM-PC & MC-10-16k



PYRAMID . . . our toughest and most intriguing adventure. Average time through the pyramid is 50-70 hours. Clues everywhere and some very ingenuous problems. This one is popular around the world.

Available On: TRS-80C 16K, CMD 64, VIC 20 13K, Timex Sinclair, TI/99-4A

Stock #5002, Tape $19.95, Disk $24.95

ALSO ON: IBM-PC & MC-10-16k

TO ORDER: Send amount indicated plus $2.00 shipping, per order. Include stock number, quantity desired and your preference of tape or disk. Be sure to indicate type of system, amount of memory, etc. When using charge card to order by mail, be sure to include expiration date.

MasterCard · CHARGE CARDS WELCOME · VISA

1-800-624-4327

PHONE ORDERS ACCEPTED
8:00 a.m. to 8:00 p.m. E.S.T., MON-FRI

AARDVARK *Action Software* 2352 S. COMMERCE • WALLED LAKE, MI 48088 • (313) 669-3110

MC10 - VIC 20 - CMD 64 - TI/99 - TIMEX - IBM-PC

CIRCLE 101 ON READER SERVICE CARD

creative computing

SOFTWARE PROFILE

Name: Kaboom!

Type: Twitch Game

System: Atari

Author: Larry Kaplan and Paul Wilson

Format: Cartridge

Language: Machine language

Summary: More fun than the VCS version.

Price: $34.95

Manufacturer:
Activision
2350 Bayshore Frontage Rd.
Mountain View, CA 94039

75 bombs. Level 7 has 100 bombs and level 8, the highest, has 150. The point values for each bomb caught equals the level number. The rate at which the Bomber drops the bombs steadily increases to the hectic pace of 13 bombs per second by level 8. That's 13 per *second*, Obiwan, so the Force had better be with you.

When a bomb is missed, you lose a bucket, and the number of bombs drops to half the number of the previous level. This is to give you a short breather, since the game cannot be paused. Let's hope that future Activision translations incorporate a pause feature. The individual point value also comes from the previous level.

For every 1000 points you get an extra bucket if you have less than the full complement of three. As each bomb is caught, part of the 1812 Overture is played. This musical feature is just one of the several enhancements the game received during its translation to the computer.

There are three game variations: one player vs. the Mad Bomber, two players taking turns against the Bomber and a pitch and catch game in which the two players alternate roles of playing the Bomber and catching the bombs. There are several control modes, and the control action is quite good. You may choose either large or small buckets and either paddle or joystick controllers. Your selection is displayed at the top of the screen with a little symbol of a large or small joystick or paddle.

This type of reaction game typically requires a paddle controller to make the game last more than a few microseconds. However, using the joystick was equally as good, and playability did not suffer at all. New features for the computer version in addition to the musical theme and the pitch and catch variation include a high scorers screen for the top four players' initials and a grin on the Mad Bomber when you miss.

Kaboom! for the Atari computer is just as much fun as the VCS version, and the additional features make it more enjoyable. It was initially designed by Larry Kaplan and adapted for the computer by Paul Willson. Good job, fellas.

Jumpman Junior


There are several climbing games for the Atari computer. One of the most popular is *Miner 2049er* by Big Five Software. Many of the other games are look-alikes that don't really add anything to the genre. *Jumpman Junior* is different. It is a climbing game that has enough challenge, features, and variation to satisfy any gamer. Let's take a closer look at this exciting game from Epyx.

The Jupiter Command Substation is being attacked by the Alienators who are bent on destroying this valuable outpost.

The situation is grim. The Jupiter Command Substation is being attacked by the Alienators who are bent on destroying this valuable outpost. Jumpman, Jupiter's super secret agent, is busy trying to restore communications at the Command Station. He is too busy to find and diffuse the bombs that have been placed throughout the twelve levels of the Station. That's where you, Jumpman Junior, come in.

Your task is to roam up and down the ladders, ropes, and elevators to reach and disarm the bombs. Your only weapons: your speed, agility, and jet boosters that let you leap away from bullets, electrocution traps, and moving walls.

Up to four players can compete, with each player taking a turn at the one joystick control. At the beginning of the game, the Jumpman's speed is selected for each player and lasts for the remainder of the game. Each player gets four lives. There are 12 different screens. Since the first two levels are fairly easy you begin the game with a feeling of confidence. This feeling is short-lived since,

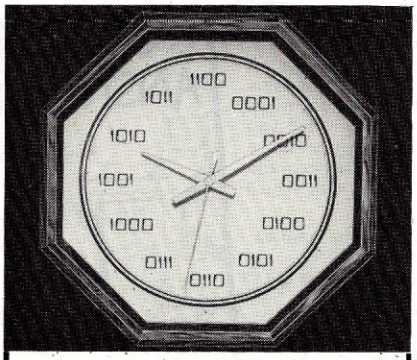

TIMESHARE


Only you and your fellow computer experts will know what time it is with this binary numeral wall clock. Handsome simulated walnut finish, accurate quartz movement, sweep second hand, perfect for office or home. Runs on one AA battery. (not incl). 11¼" diagonal. 1 yr. warranty. 10 day money-back. $39.95

Call Toll-Free 1-800-237-9338
In Fla.: (305) 687-9338, or mail coupon.

sweet gum inc. CC014
15490 NW 7th Ave., N. Miami, FL 33169
Please send me the "Timeshare" wall clock.
Quant. ___ @ $39.95 Add $3.50 each ship. & hand.
Fla. residents add 5% sales tax. Total $_____
Encl. is Check ☐ MO ☐ Charge my MasterCard ☐
Visa ☐ Credit Card #_____
Exp. Date _____
★☐ Just send me your free COMPUTERMANIA Catalog for now. ★
Signature _____
Name _____
Address _____
City _____
State _____ Zip _____

CIRCLE 218 ON READER SERVICE CARD

The Mean Little Kit



New compact 24-piece kit of electronic tools for engineers, scientists, technicians, students, executives. Includes 7 sizes screwdrivers, adjustable wrench, 2 pair pliers, wire stripper, knife, alignment tool, stainless rule, hex-key set, scissors, 2 flexible files, burnisher, miniature soldering iron, solder aid, coil of solder and desoldering braid. Highest quality padded zipper case, 6 x 9 x 1¾" inside. Satisfaction guaranteed. Send check, company purchase order or charge Visa or Mastercharge. We pay the shipping charges.


JTK-6 Tool Kit **$95.00**

Free Catalog!
Page after page of hard-to-find precision tools. Also contains complete line of tool kits and tool cases. Send for your free copy today!




JENSEN TOOLS INC.
7815 South 46th St., Phoenix, AZ 85040
Phone: 602-968-6241 TWX:910-950-0115

CIRCLE 167 ON READER SERVICE CARD

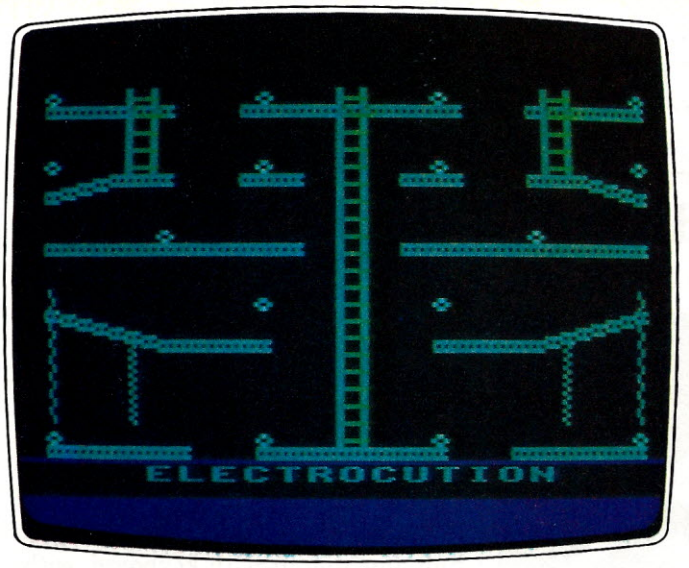

Jumpman Junior

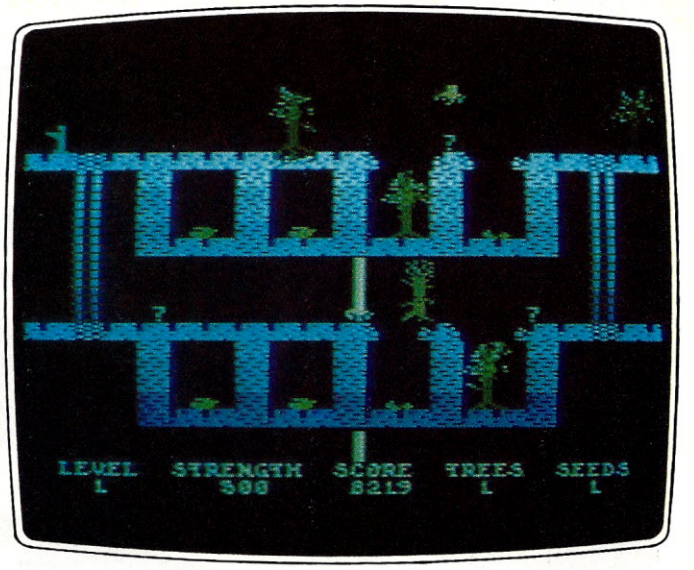

Necromancer

creative computing
SOFTWARE PROFILE

Name: Jumpman Junior
Type: Climbing Game
System: Atari
Author: Randy Glover
Format: Cartridge
Language: Machine language
Summary: A very playable game.
Price: $39.95
Manufacturer:
Epyx/Automated Simulations
1043 Kiel Ct.
Sunnyvale, CA 94086

by the fifth level, the challenge is considerable.

You would expect the jumping movement to be short and precise given the increased gravity of the planet Jupiter, but it is actually quite the contrary. The jumps are slow and J-man Jr. appears to drift in the direction that he is headed. A nice effect.

Jumpman Junior was designed and programmed by Randy Glover. In addition to giving us a very playable and enjoyable game, Randy included a pre-game show. That's right, when the title screen is first displayed, a group of Jumpmen perform a little dance to the sound of a light-hearted tune. This is just one of the many nice features of this game.

Necromancer

Necromancer is one of the strangest, yet most imaginative, games I have ever played on the Atari computer. This old gamester has seen a lot of games and very few match the originality and playability of this one. It is a fascinating combination of fantasy and action.

The title screen depicts a lonely tree sparkling like a gem while a hauntingly beautiful melody sets the mood for a trip into the world of fantasy. Darkness is upon the land. You are Illuminar, a druid, defender of truth and protector of the human race. You alone must face the mighty conjurer, the Necromancer.

The game resembles a three-act play. The first screen is the problem definition and sets the mood for the players. Screen 2 is the conflict and screen 3 is the resolution.

As you move your druid and trees about the vaults, you must avoid the Hands of Fate that descend from the ceiling.

In the first act of this fantasy, you must restore the forests by planting a glade of enchanted trees and protecting them from hordes of attacking Troglodytes. Your only weapon is a magical wisp that is hurled at an opponent and obediently returns to your hand. The wisp is also used to plant the seedlings that will eventually become your army of trees.

The ogres like to stomp down young trees, so as the trees are growing you must destroy the ogres while planting new seedlings. This is all done with your joystick-controlled wisp. Full grown

creative computing
SOFTWARE PROFILE

Name: Necromancer
Type: Game
System: 32K Atari
Author: Bill Williams
Format: Disk
Language: Machine language
Summary: One of the strangest and most appealing games ever.
Price: $34.95
Manufacturer:
Synapse Software
5221 Central Ave.
Richmond, CA 94804

trees are safe from the attacking Troglodytes but are prey for the forest spider.

The spider will poison any adult tree that he finds. When this happens, a face appears on the tree, and it begins to cry for help. You must then wipe off the face with your wisp before it dies and becomes a useless stump. Your goal is to grow as many trees as you can since they will aid you in attacking the evil Necromancer himself.


When your strength runs out in act one, you and your trees are transported to the spider vaults. In act two your mission is to destroy as many spider larvae as you can before descending to meet the Necromancer. As bizarre music plays, you use your wisp to pick up a tree from the tree bin and walk it to the top of a spider vault. Once the tree is placed there, its roots begin growing and eventually break up the bricks, causing the tree to come crashing down on top of the spider larvae. After the larvae are destroyed, the tree is returned to your bin

Educational News

Orange Plus Educational News located at 23801 Calabasas Road / Suite 2050 / Calabasas, CA 91302 / (213) 999-5210

Legal Apple^Type Compatible

New Computer runs CP/M & Apple^Type Software

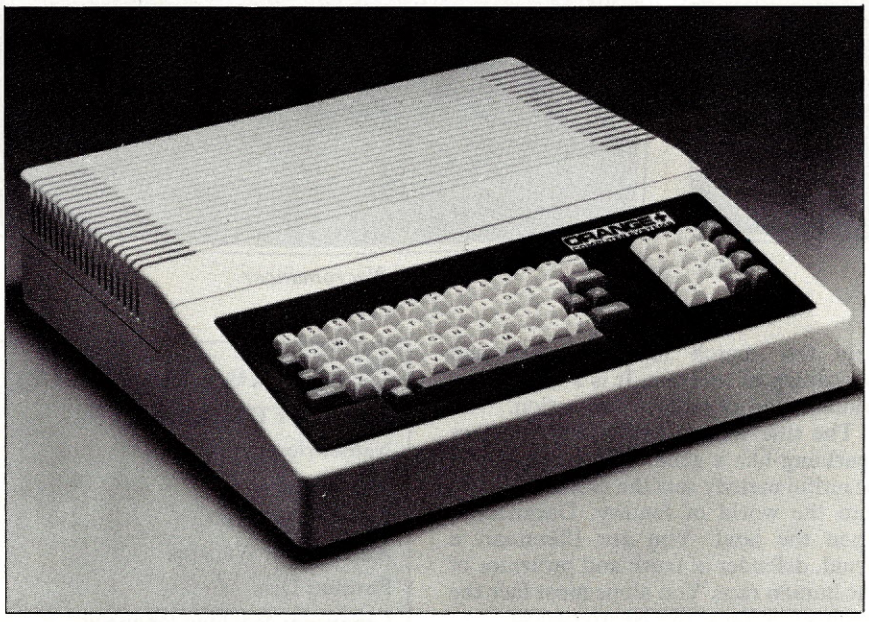

CALABASAS - Now instructors can teach Apple-type programs such as LOGO in one class and professional-style word processing in another without any hardware changes. Dual microprocessors (Z80-A & 6502, two computers in one case), with the radical new Orange Plus development, the "EuroROM", allows the machine to read/write/work with Apple-type software as well as CP/M programs and access either CPU via the keyboard.

The ***"ORANGE+TWO"***™ is a brand new direction in the evolution of the personal computer. ORANGEFORTH-83, a derivative of Fig-FORTH — a readily available public domain language, is resident in ROM*. Also included is CP/M 3.0, Digital Research's latest CP/M version. There is also a built-in disk drive controller for two Apple-type drives, a cassette interface, joystick port, color graphics and ASCII keyboard with numeric keypad. For expert word processing, the keyboard features upper and lower case (lower case characters are true descenders) with auto repeat.

This new breed of computer is a break-through for educators and school systems throughout the world. The ability to run both Apple-type and CP/M software on the same machine relieves financially-pressed educators from expensive equipment burdens, allowing them to spend more money where it counts... **on the teachers.**

*Available on disk at extra cost.

Orange Plus Koala Pad

With the touch of your finger, the Orange Plus Koala Pad (Touch Tablet with Micro Illustrator) takes control of your computer to create beautiful, high-resolution computer graphics. Finally, a full-featured graphics tablet at an affordable price.

Collins International Trading Corporation
23801 Calabasas Road, Suite 2050 / Calabasas, CA 91302
(213) 999-5210

CIRCLE 113 ON READER SERVICE CARD

MORE FOR LESS

The ***"ORANGE+TWO"***™ 64K computer includes these standard features:

Built-in CP/M 2.2 ..... **n/c**
Digital Research's CP/M 3.0 ..... **n/c**
Built-in disk drive controller card for two Apple-type drives ..... **n/c**
Numeric keypad with separate return key ..... **n/c**
110/220 volt switch selectable power supply, 50-60 Hz ..... **n/c**
Full function ASCII keyboard with auto repeat ..... **n/c**
Cassette Interface ..... **n/c**
Grounded metal base plate ..... **n/c**
Adjustable audio volume ..... **n/c**
ORANGEFORTH-83, Z80-A FORTH language, resident in ROM ..... **n/c**
Z80-A CPU, a 2nd computer ..... **n/c**
6 slot two-sided logic board ..... **n/c**
Bank switchable RAM, fully socketed, expands to 256K ..... **n/c**
Programmable 2764 EPROMS ... **n/c**

TOTAL
"ORANGE+TWO"™ **$1295.00**

Compare the features included in the ***"ORANGE+TWO"***™ *with the competition's and you will find that most competitors are priced over $2,000.*

MORE PRODUCTS FROM ORANGE+ COMPUTER SYSTEMS

Disk-based ORANGEFORTH-83 language with full documentation
$99.95

Digital Research's™ CBasic with disk and documentation
$49.95

Orange Plus KoalaPad™ Touch Tablet w/Micro Illustrator™
$124.95

Orange Plus Joystick (works on "ORANGE+TWO", Apple II, II+ & IIe)
$29.95

Orange Plus Self-Centering Joystick
$39.95

10MB (Formatted) 5¼" half-height Winchester Hard Disk Drive
$1495.00

Controller & Interface for Hard Disk**
$395.00

**Includes everything necessary to be installed in "ORANGE+TWO", Apple or Franklin Computer

The above are suggested retail prices. Prices may vary from state to state.

to be used again. The tree bin contains the arsenal of trees that were grown in act one.

As you move your druid and trees about the vaults, you must avoid the Hands of Fate that descend from the ceiling. If they grab you, you will be pulled screaming into the sky. If they grab one of your trees, you have lost that tree for good. The hands occasionally drop objects such as mystery prizes and janitors.

Mystery prizes are indicated by a question mark and are claimed by walking over one with your druid. The first mystery prize lowers ladders which offer access to the level below. Additional mystery prizes may raise ladders, give you bonus points, or deplete your strength.

The Necromancer employs Ceygolian Janitors to pick up stray question marks left by the hands. The janitors wander aimlessly around the vaults until they are picked up by the hands or walk off the screen. If your druid happens to bump into a janitor, you will get extra strength.

Throughout act two, you must avoid the deadly salivating spiders which evolve from the spider larvae. These nasty devils eat trees and spit poison. Your wisp is the only defense against the spiders. When you exit the fifth level of the vaults, you get a bonus for every tree you have left in your tree bin. You also enter act three and get a chance to meet the Necromancer.

Act three is the Necromancer's lair. Your mission is simple: destroy all of the Necromancer's graves to rid the world forever of his evil. The gravestones are removed by walking your druid over them. The evil one appears only on graves that still have their headstones. He appears and disappears. If he touches you, he will suck your strength until you either kill him or escape. Killing the Necromancer with your wisp gives you strength, but he will reincarnate himself.

The Necromancer hatches all of the spider larvae you have left behind in act two and turns them into zombie spiders which can also suck your strength away or be killed by you. You can never destroy all of the zombie spiders because the Necromancer continually reincarnates them.


If things were not bad enough, there is also a mother spider that looks for zombie spiders and mutates them into immortal spiders. Immortal spiders cannot be killed. When you have removed all 13 headstones, you get bonus points and advance to the next level. When you grab the last headstone on level 5, you have succeeded in ridding the world of the evil Necromancer. The forest explodes in a rainbow of colors.

Bill Williams has created a game that has real staying power. *Necromancer* is well conceived and beautifully implemented. The sound and graphics are out of this world. This game has and will continue to get a great deal of play on my Atari. Synapse, you have done it again.

Archon

What do you get when you cross chess, dungeons and dragons, and combat? Give up? You get, to quote Monty Python, something completely different: Archon.

Archon from Electronic Arts combines the strategy of a board game with the excitement and action of an arcade game. It depicts the classic struggle between light and darkness, good and evil. The battle between the opposing forces is drawn from myth and legend and begins as an electronic boardgame. The strength and number of the Light Side and the Dark Side are equal. However, the players and their individual powers are not.

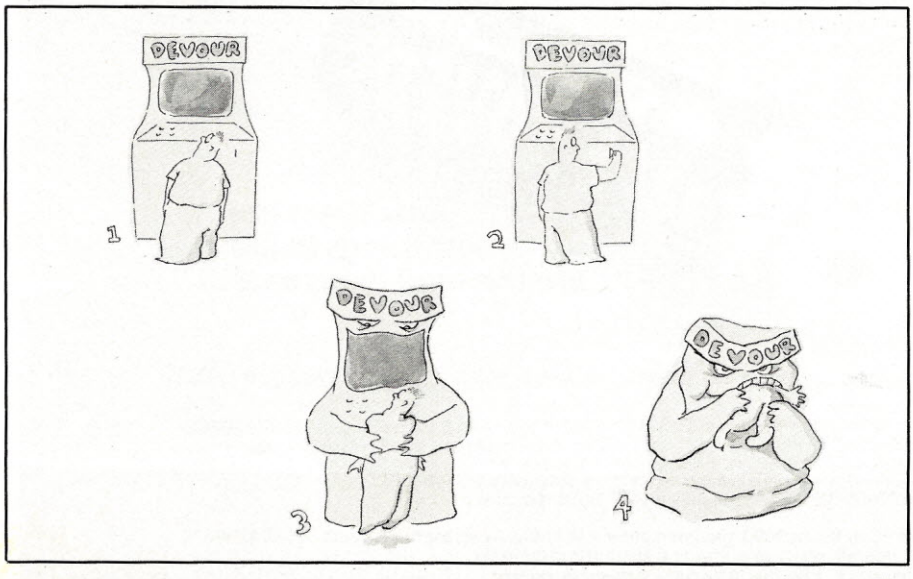

There are 18 icons per side, each made up of eight different players. Each piece can move in a particular manner which is displayed at the bottom of the screen as the piece is moved. The first screen is the board screen. A 9 x 9 grid composed of black, white, and luminosity squares. The black and white squares maintain their color throughout the game while the luminosity squares vary in brightness during the game.

The luminosity cycle continues throughout the game, back and forth from dark to light, shifting gradually after every other turn. The lighter the square, the more power the light icons have doing battle on that square and vice versa for the dark pieces.

Did I say battle? I sure did! Unlike chess where mere possession of a square grants ownership, landing on an occupied square in *Archon* requires that the two icons battle it out for ownership. The battle is a real-time fight under joystick control displayed on the second screen, the battlefield. Good coordination, a quick wit, and a thorough understanding of the various weapons that each piece possesses is mandatory for success. It is tantamount to suicide to challenge an opponent on his own colored square.

In addition to the luminosity squares, there are five Power Points. Their position is indicated on the board screen by flashing dots. Capturing all five points wins you the game, as does eliminating all of your opponent's pieces. Icons residing on Power Points heal faster than usual and are protected from the effects of magic spells.

Archon is primarily a two-player game. You can challenge the computer but you would probably be more successful trying to jump start a 747.

creative computing

SOFTWARE PROFILE

Name: Archon

Type: Strategy/Action Game

System: 32K Atari

Author: John Freeman, Anne Westfall, Paul Reiche

Format: Disk

Language: Machine language

Summary: An excellent game that goes beyond chess.

Price: $39.95

Manufacturer:
Electronic Arts
2755 Campus Dr.
San Mateo, CA 94403

LIFESAVER FOR THE FLOUNDERING COMPUTER USER.

Frustrating isn't it? You've decided to computerize. And now you're face to face with a computer of unprecedented power and versatility, squatting there on your desk like the inscrutable Buddha. And you don't have a handle on it. Not a clue.

They said your business would benefit tremendously, and you can dimly perceive what they meant. Instant information. Instant alternatives. Fantastic vistas of electronic communication. Hundreds, no, thousands of possibilities. And not a clue.

You need an EDP Manager. An affordable EDP Manager that speaks your language. It's called FMS-80, and it will change the way you feel about computers forever.

You can use FMS-80 to handle information... any information... in any way you want. It will comb the files and pick out similar items, using any relation you name. It will automatically update and do math for you. It will print any kind of report you want. And its memory is virtually unlimited.

It's easy to use because it's easy to learn. It gives you a menu to choose from and you tell it what to do in plain language. It has on-line help, and supports you all the way.

Computer professionals were quick to understand the power of such a versatile system. All over the world, multi-user vertical application packages are being developed, based on FMS-80. There's *FMS LifePak*, an insurance sales person's program developed in Australia. There's *FMS Vision*, a 17-module international accounting package developed in the United Kingdom that can support an entire multinational corporation's accounting program or a one-man office. There's *FMS EasyLink*, an electronic communication package that accesses Western Union's EasyLink service for worldwide Telex, TWX, Mailgram, Telegram, Cable and message service... right at your computer screen! There's *FMS Telex*, a program that turns your computer into a Telex machine. There's *FMS Graph*, a series of business graphic programs under development now. And that's just the beginning.

Choose a vertical package, or choose FMS-80 and customize your own. Either way, get smart... get FMS. It's not a lot of money; it's is a lot of help.

FMS-80™

The affordable Multi-User Relational Database Management System.



Sometimes the best things in life are the least expensive.

DJR Associates, Inc. ☐ 303 South Broadway, Tarrytown, NY 10591 ☐ (914) 631-6766 ☐ Telex 646792 DJR NTAR


Distributors: North East (212) 679-6180. (203) 431-4966. ▪ Mid-West (313) 478-4400. ▪ Mountain & Plains States (712) 255-4362. ▪ South-West (214) 445-1312. ▪ West (415) 965-8000. ▪ Other Areas (914) 631-6766. ▪ International Canada (416) 821-3311. ▪ Great Britain 44 (962) 69344, 44 (274) 309386, 44 (278) 662611. ▪ France 33 1 5548284. ▪ Greece 30 1 958 9862. ▪ Israel 972 03-28-875. ▪ South Africa 27 11 377-423. ▪ Australia 61 2 922-3977. ▪ Singapore 65 748-2483. ▪ Philippines 63 2 817-4315. ▪ Hong Kong 852 3-857091. Priced slightly higher internationally.

If you have a DECmate II, DEC Rainbow, IBM PC or Victor 9000 microcomputer, call today. Available for use with CP/M, MP/M II, MmmOST, TurboDOS, CP/M-86 or MS-DOS operating systems. Visa and MasterCard honored.

CIRCLE 149 ON READER SERVICE CARD



Archon

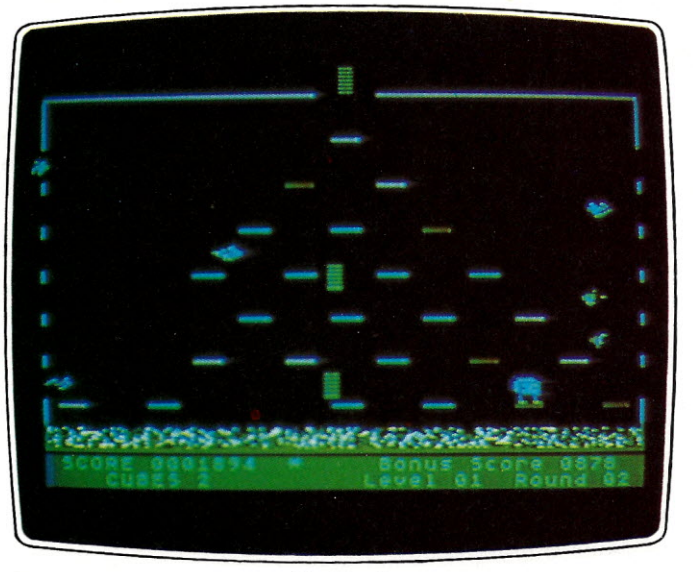

Mr. Cool

The best way to learn the game is to watch the computer play itself. This will occur within two minutes after the game is loaded. With the excellent manual in hand, watch the strategy and action take place on the screen and follow along. The game can be paused at any time to give you a chance to see who is fighting whom and what their specific powers might be.

Archon is a great game, a classic. Like all of the games from Electronic Arts, it requires total involvement. Electronic Arts views the computer as a new creative medium. They view their program authors as artists and their product managers as producers.

Jon Freeman, Anne Westfall, and Paul Reiche III are the artists responsible for *Archon*. The packaging resembles a record album, complete with liner notes and artist biography.The manual is also excellent. It contains the rules, strategy, tips, and even a question and answer section.

Archon is one fine game from Electronic Arts, a company from which I look forward to hearing more.

Mr. Cool

The hundreds of games for the Atari computer fall into a handful of categories. There are shoot-'em-ups, adventures, climbing games, simulations, maze games, and jumping games. In the latter category is a new game called *Mr. Cool* from Sierra On-line.

Mr. Cool is a jumping or hopping game that pits the player against such formidable dangers as sizzling hot plates, fireballs, and hot and cold running springs. No, I am not making this up. Our hero must turn the fireballs into snowballs and cool off the hot plates.

Mr. Cool is really a square—er, a cube. His goal is to match the color of the hot plates with the top border of the playing field. If he is hit by a fireball or spring he melts to death at the bottom of the screen. If he is lucky, he can absorb the springs and fireballs and earn extra points.

The joystick action is diagonal which, for some people who tried the game, posed a coordination problem. There are 15 rounds per level, and the levels go on forever, or at least until your fingers fall off. The main task is to hop onto a plate and change its color to match the color at the top of the screen. Sometimes one bounce is all that is needed. At higher rounds, several hops onto a plate are required to get it to the correct color. Extra points are awarded for completing a screen within a specified time period.

Programmed by Peter Oliphant, this game resembles the popular arcade game Q-Bert,but without the beautifully colored screen. That is not to say that the game is not fun to play or challenging enough.

Indeed, the game is very difficult above the second level and results, at least for this gamester, in frustration. Perhaps someone under 30 would fare better with *Mr. Cool*. But for some reason I like *Mr. Cool* and at least until Q-Bert becomes available for the Atari, I'll put my mittens on and keep trying to beat *Mr. Cool*.

creative computing

SOFTWARE PROFILE

Name: Mr. Cool

Type: Hopping Game

System: Atari

Author: Peter Oliphant

Format: Cartridge

Summary: Playable until Q-Bert arrives.

Price: $32.95

Manufacturer:
Sierra On-Line, Inc.
Sierra On-Line Building
Coarsegold, CA 93614


Atari bought the rights to E.T. for more money than the gross national product of most third-world countries.

E.T.

Joining the glut of such movie spin-off products as Pac-Man cereal, T-shirts, and lunchboxes, is the recent rash of E.T. dolls, bubblegum cards, and jewelry. Why not, then, have an E.T. game for the Atari computer? A better question might be: Why *have* an E.T. game?

Atari bought the rights to E.T. for more money than the gross national product of most third-world countries. They then rushed the product to market faster than you could say, "E.T. Phone Home." As a result, the game is simplistic and will appeal primarily to children under the age of ten.

The scene opens with Elliot, E.T.'s friend, searching his neighborhood for parts that can be used to build an intergalactic telephone. The joystick-controlled Elliot is scrolled through a map

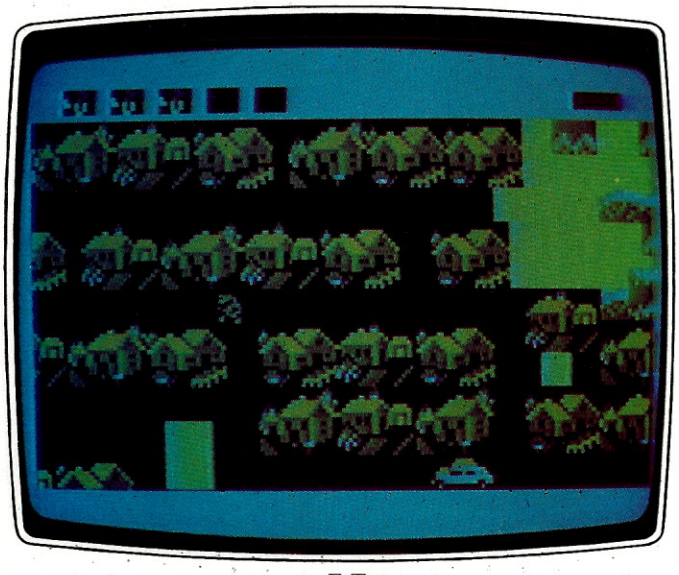

E.T.



Super Cobra

of suburbia and the forest. Elliot gets telepathic messages from E.T. concerning what parts are needed.

During play, scientists and other bad guys roam the area in search of the extraterrestrial. The parts are invisible to them unless Elliot is carrying one, in which case they can take and hide it. E.T.'s life energy continually diminishes so Elliot must hurry.

Once all of the parts are located and returned to Elliot's house, the player hears "E.T. Phone Home" through the television speaker and must guide E.T. to the forest landing site to be picked up by his pals. The space ship lands, and E.T. slowly disappears into the waiting ship. E.T. goes home.


The easier levels require Elliott to collect only four parts. At higher levels, as many as ten parts must be returned to Elliot's house before E.T. runs out of energy. Each time E.T. is asked to telepathically remind the player what parts are needed, some of his energy is drained.

Nine different difficulty levels lengthen the duration of the game rather than add to the excitement of it. The graphics are crude and the game does not have much staying power. Clearly a child's game, *E.T.* from Atari is a disappointment for anyone old enough to be reading this review.

creative computing

SOFTWARE PROFILE

Name: E.T.
Type: Game
System: Atari
Format: Cartridge
Summary: Atari, Phone for Help.
Price: $49.95
Manufacturer:
Atari, Inc.
1265 Borregas Ave.
Sunnyvale, CA 94086

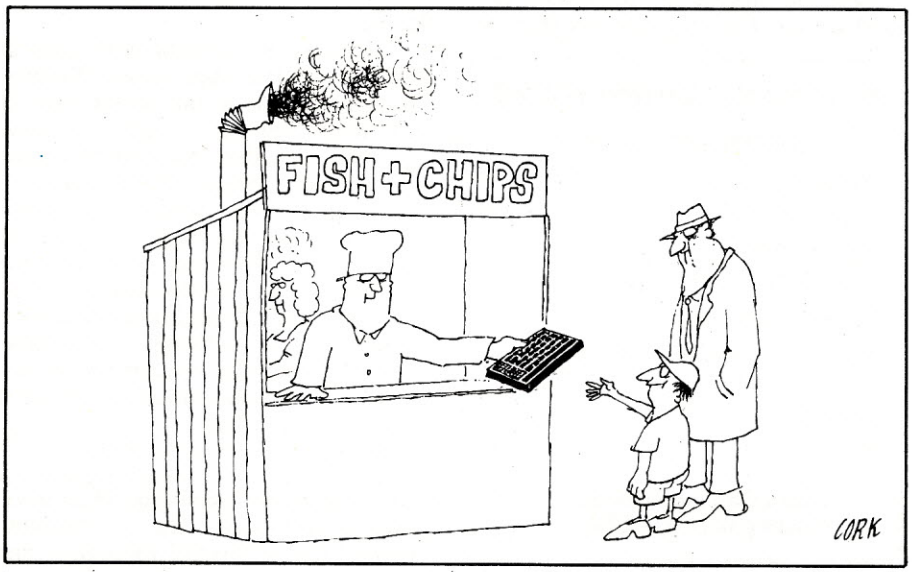

Super Cobra

When I first booted *Super Cobra*, I thought, "Oh, no, just another horizontally scrolling shoot-'em-up like Caverns of Mars II." After logging over a dozen hours at the controls, I have changed my mind.

The game scenario puts you in the pilot's seat of a helicopter equipped with two weapons. You have a machine gun that fires directly in front of the ship. The sound of the machine gun is excellent and almost requires that you attach an amplifier and speakers to the video/audio monitor jack of the Atari 800.

Bombs, your other weapon, are released from the bottom of the 'copter. They have a good trajectory and sound

creative computing

SOFTWARE PROFILE

Name: Super Cobra
Type: Game
System: Atari
Format: Cartridge
Summary: Nice rendition of the arcade classic.
Price: $39.95
Manufacturer:
Parker Brothers
50 Dunham Rd.
Beverly, MA 01915

very realistic when they explode. But what do you use these weapons for? That depends on the particular screen you happen to be viewing.

Throughout the game, the horizontal movement is always from left to right. Your speed is constant but you may move forward or backward within a window. At first your enemies are below. Missiles are launched vertically and tanks fire at you diagonally as you fly over the cityscape. The graphics are very colorful and add to the enjoyment of the game.

The scene changes every two screens. After the cityscape, you must fly through a cave. Sometimes the cave width is quite wide. At other times, the opening is very narrow and requires absolute concentration to navigate correctly. Then meteors appear in open space. The rocks appear out of nowhere, and you must maneuver quickly and shoot accurately to destroy them.


The game can be paused at any time, which is quite useful given the hectic pace of the game.

This scene is followed by meteors guarding the cave openings. The meteors must be dealt with before the cave can be entered. Next come flying saucers over a mountain range followed by flying saucers in the caves. The final screen, and the one I have yet to complete, is a maze with right angle corners. Moving forward and backward while climbing or descending is extremely challenging. This one screen alone will keep you busy for hours.

The game can be paused at any time, which is quite useful given the hectic pace of the game. An especially good feature of *Super Cobra* is that when you have lost all of your ships and continue playing, you can resume at the same level. This is a very intelligent arrangement that should be implemented by more game vendors.

Parker Brothers has done a respectable job translating this arcade hit to the Atari computer. Although similar to other horizontally scrolling games, *Super Cobra* is much more challenging and has better graphics. It will please any shoot-'em-up fan, especially if the sound is cranked up all the way. END

UNICORN TREASURES MAKE LEARNING A PLEASURE™

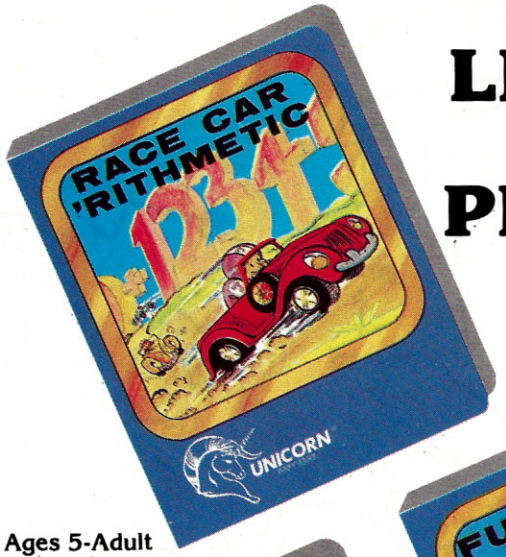


Ages 5-Adult
(1 to 4 players)



* Available on three levels
* Elementary (grades 1-6)
* Intermediate (junior high school)
* College Prep (high school-adult)



Ages 2-7

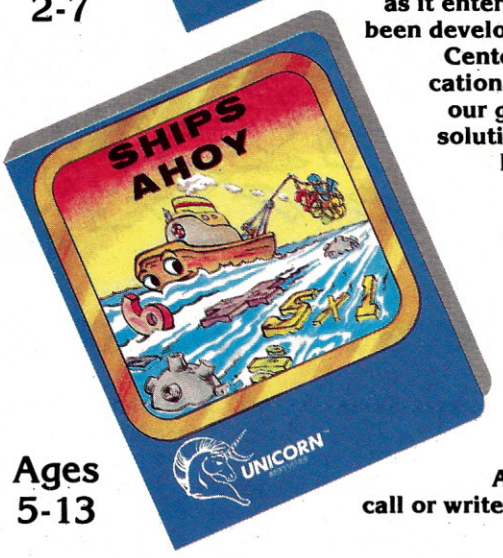

Ages 5-13

Each Unicorn educational game teaches as it entertains. All of our treasures have been developed at The Computer Learning Center for Children. Written by educational experts who make them fun, our games feature colorful, high resolution graphics, multiple difficulty levels, beautiful music, and are completely user friendly with simple on-screen instructions. You'll be delighted to use them year after year as your child's educational needs change.

Look for our growing line of quality educational games. You won't know what you're missing until you've seen a Unicorn.

Available at your local dealer or call or write Unicorn for our free brochure

Available for Apple, Atari, Commodore 64 and IBM-PC Computers.

Disk versions only.

Apple, Atari, Commodore 64 and IBM-PC are trademarks of Apple Computer Corp., Atari Inc., Commodore Electronics LTD and International Business Machines Corp. respectively.

Copyright 1983 by Unicorn Software Company. All rights reserved.

UNICORN SOFTWARE™
1775 East Tropicana Avenue #8
Las Vegas, Nevada 89109
(702) 798-2727 or
(702) 798-5990

CIRCLE 248 ON READER SERVICE CARD



Our Readers Are More Responsive

In the September 1983 issue of *Creative Computing*, we ran a small contest for readers to write a legible listing program. The contest announcement was buried on page 150 in the last paragraph of an article about the TRS-80 Model 100.

By September 7, we had received over 50 entries. They were for all kinds of computers—Apple, Atari, Osborne, IBM XT, Compaq, Heath, NEC, Eagle, Commodore and others. A week later, the volume of entries had become a tidal wave.

It is not only contests to which our readers respond. For the first six issues of 1983, with only half of the results for May and June counted, *Creative Computing* delivered 1,881,730 inquiries to advertisers. For the year, the number will easily top four million.

While full-page color ads generate barrels of inquiries, readers don't overlook the small ones. It's not unusual for a 1/4 page ad to generate 1000 or more inquiries.


Why are the readers of *Creative Computing* so responsive? Because they are enthusiastic about computers and want to get the most out of their systems.

The average *Creative Computing* reader has a college education, is 37 years old, has a household income of $43,840, and is a zealous computer user.

So if you want to reach nearly a third of a million responsive users, why not give us a call?

creative computing

January 1984 © Creative Computing

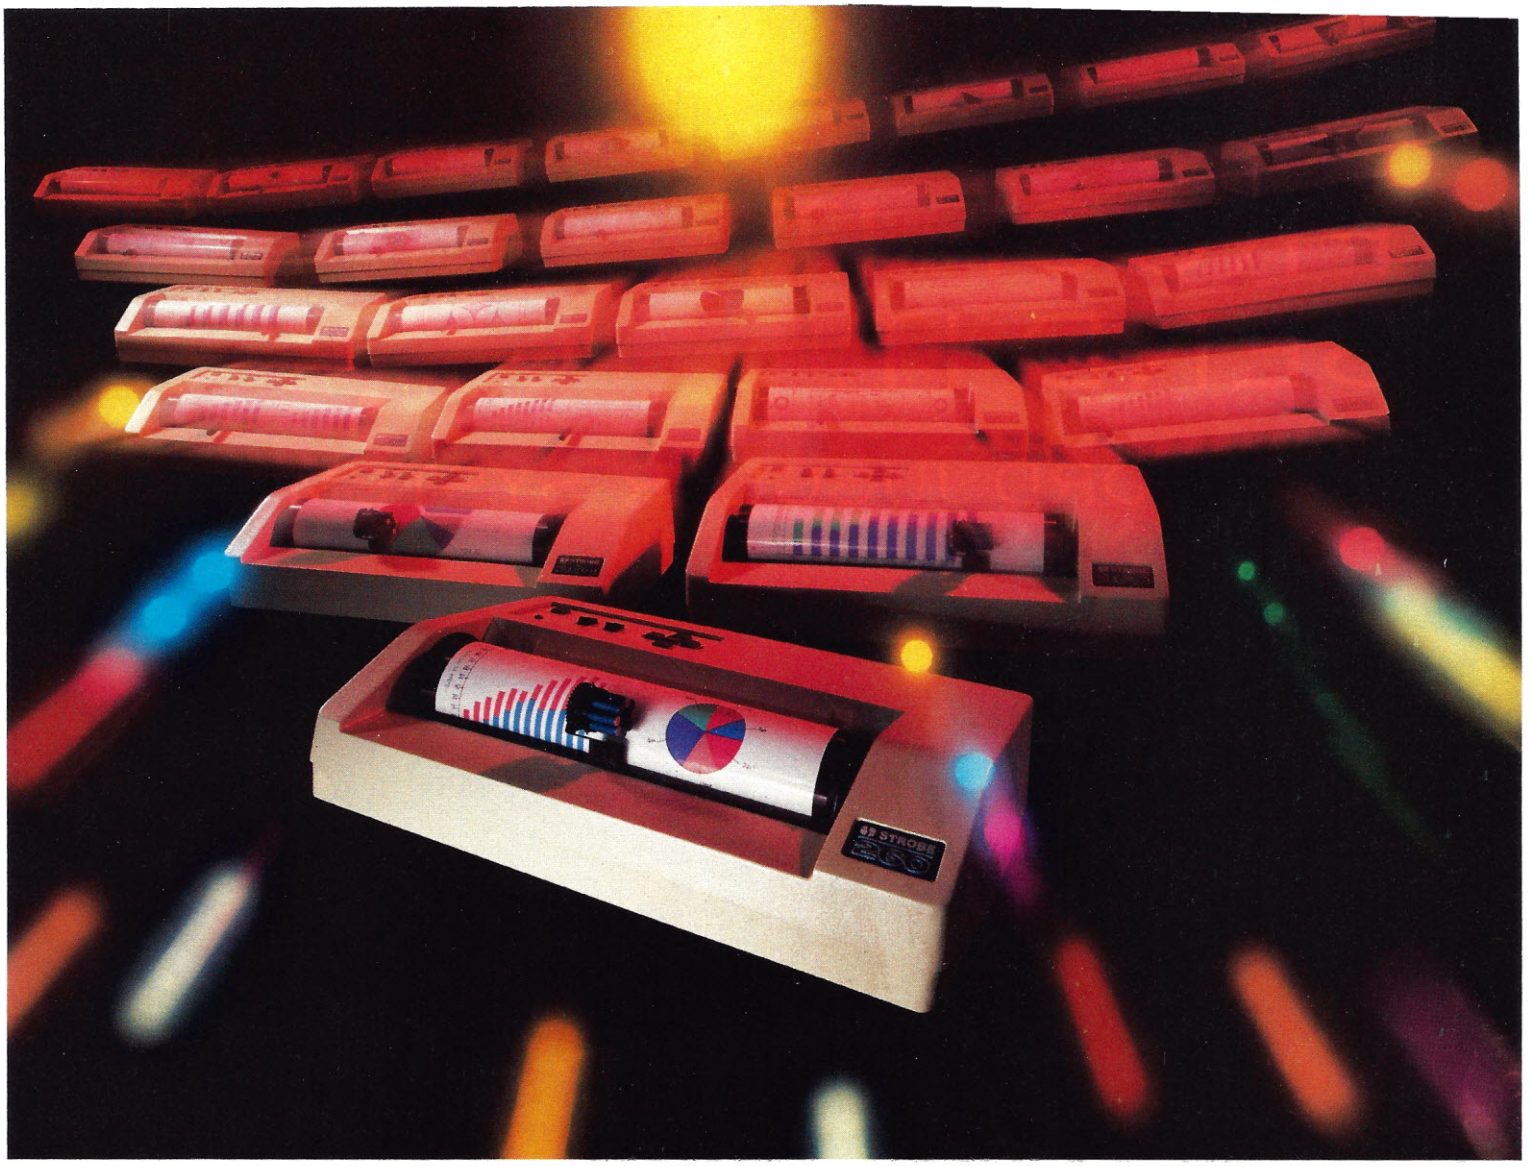


The Best Just Got Better

Introducing the new Strobe Models 260 and 200 Graphics Plotters. How do you make the world's most cost-effective graphics system even more remarkable? Simple. Make it easier to use, more powerful, more versatile and more attractive. The hard part is doing all of the above while holding the line on a very affordable price. With the new Models 260 and 200 Graphics Systems, Strobe has done it all. And the benefits are all yours.

The Strobe 260 is the first eight-pen plotter and software package available for under $1,000. With just a few keystrokes on your computer, the system produces superb high-resolution charts, drawings and transparencies with up to eight automated color breaks. The even more economical Model 200 produces the same wide range of graphics with a single pen which may be changed manually.

The new Strobe plotters interface with virtually every popular microcomputer made today, including the Apple II, IIe and III, Victor, IBM PC, Kaypro and Osborne systems. What's more, the StrobeWare software programs provide every graphic format you will probably ever need, including multicolor pie charts, bar graphs, line graphs, text processing, and a broad selection of symbols and character styles. To further increase your capabilities, the new Strobe systems also interface with over 40 other popular graphics programs.

Every feature of the new Strobe Graphics System is designed to give you the highest quality graphics quickly, easily and inexpensively. The system also looks very nice on your desk. So visit your local dealer today and see how much better the best can be.

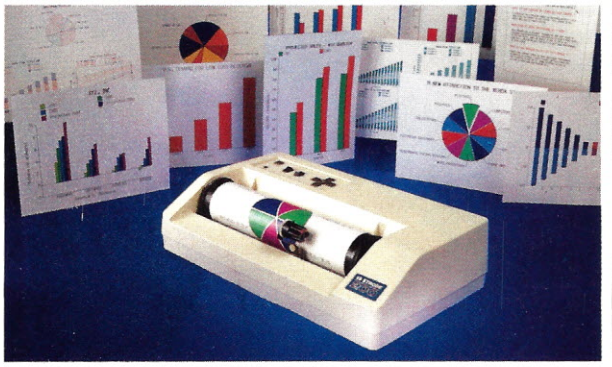

Apple II, IIe and III, Victor, IBM PC, Kaypro and Osborne are trademarks of Apple Computer, Inc., Victor United, Inc., International Business Machines Corporation, Kaypro Corporation, and Osborne Computer Corporation, respectively.

STROBE INCORPORATED

Strobe Inc.
897 5-A Independence Ave.
Mountain View, CA 94043
415/969-5130

The Strobe Graphics System

Seeing is believing

CIRCLE 249 ON READER SERVICE CARD

WRITE IT.
PROOF IT.
SEND IT.

THE WORD JUGGLER™ SYSTEM FROM QUARK.


If you're serious about word processing on your Apple IIe or Apple III, you should test the Word Juggler System from Quark. Integrated tools that combine ease of use with extraordinary power.

WRITE IT WITH WORD JUGGLER.

The anchor of the system is Quark's Word Juggler word processor, a program that lets you easily perform the most intricate editing tasks. For example, you can delete characters, words, even paragraphs with just a single keystroke. You can instantly copy, move or delete entire blocks of text. Then display or print your document by simply pressing a key.

And there's virtually nothing to memorize. Because editing and formatting commands are always right there on the keyboard. Word Juggler for the Apple III comes with special templates which identify principal word processing functions. On our version for the IIe, the editing commands are labeled on easy-to-install, replacement keycaps.

Plus, Word Juggler lets you generate form letters from existing mailing lists, because the program has a built-in interface with both PFS:File and Apple's Quick File.

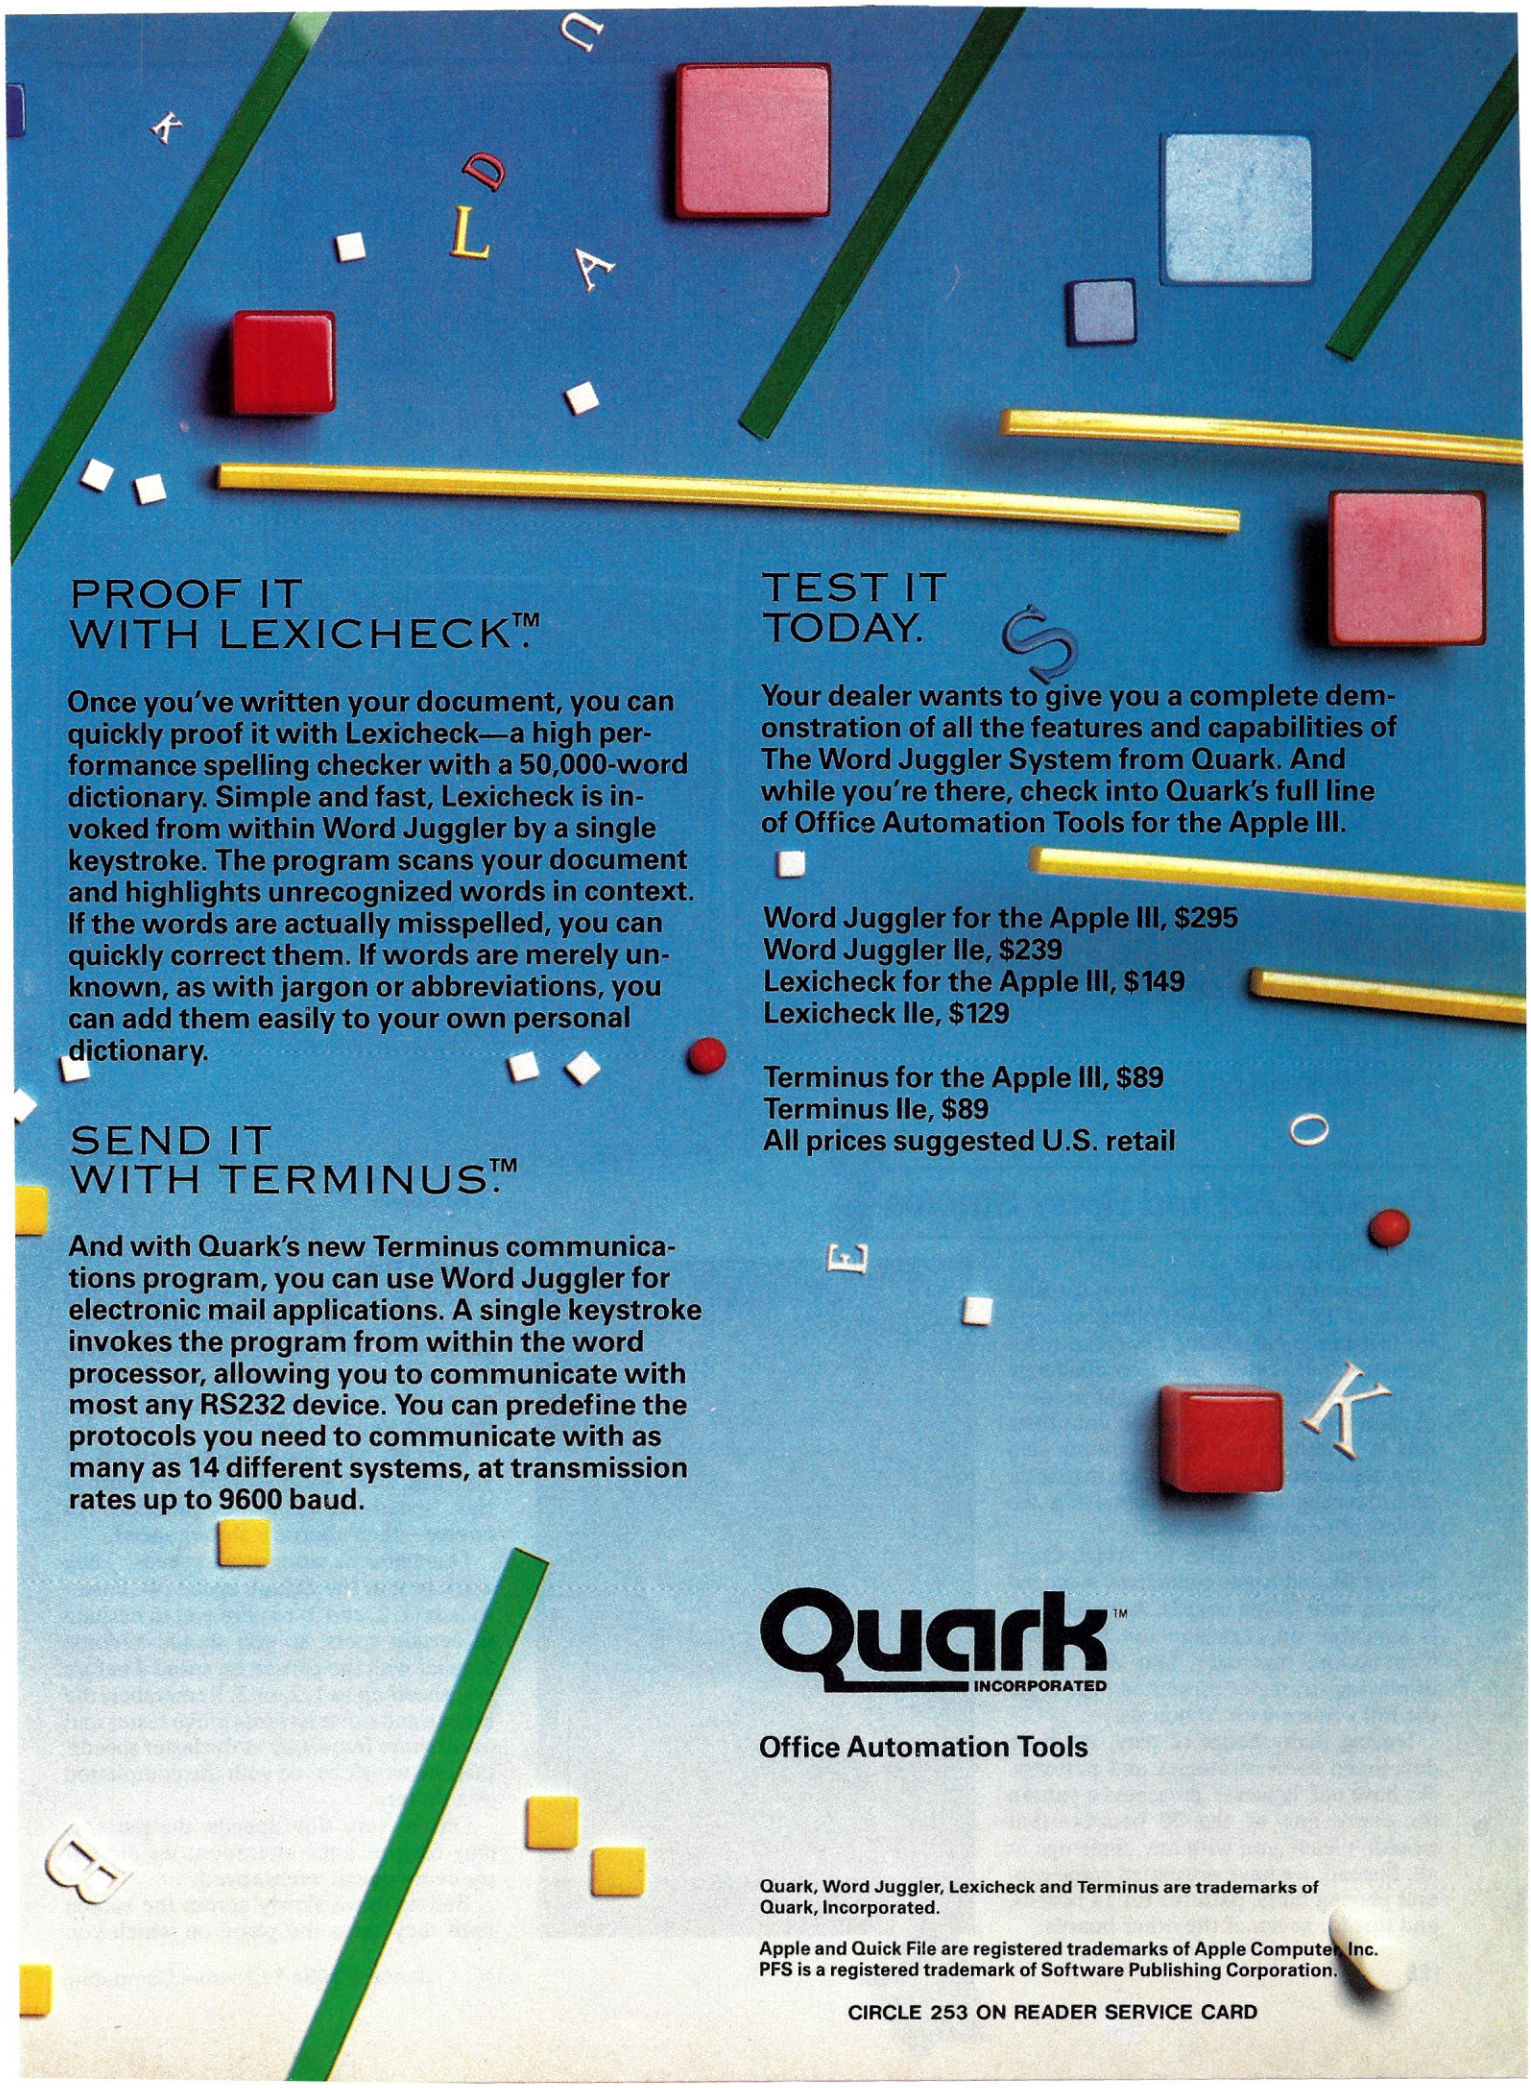

PROOF IT WITH LEXICHECK™.

Once you've written your document, you can quickly proof it with Lexicheck—a high performance spelling checker with a 50,000-word dictionary. Simple and fast, Lexicheck is invoked from within Word Juggler by a single keystroke. The program scans your document and highlights unrecognized words in context. If the words are actually misspelled, you can quickly correct them. If words are merely unknown, as with jargon or abbreviations, you can add them easily to your own personal dictionary.

SEND IT WITH TERMINUS™.

And with Quark's new Terminus communications program, you can use Word Juggler for electronic mail applications. A single keystroke invokes the program from within the word processor, allowing you to communicate with most any RS232 device. You can predefine the protocols you need to communicate with as many as 14 different systems, at transmission rates up to 9600 baud.

TEST IT TODAY.

Your dealer wants to give you a complete demonstration of all the features and capabilities of The Word Juggler System from Quark. And while you're there, check into Quark's full line of Office Automation Tools for the Apple III.

Word Juggler for the Apple III, $295
Word Juggler IIe, $239
Lexicheck for the Apple III, $149
Lexicheck IIe, $129

Terminus for the Apple III, $89
Terminus IIe, $89
All prices suggested U.S. retail

Quark™ INCORPORATED


Office Automation Tools

Quark, Word Juggler, Lexicheck and Terminus are trademarks of Quark, Incorporated.

Apple and Quick File are registered trademarks of Apple Computer, Inc.
PFS is a registered trademark of Software Publishing Corporation.

CIRCLE 253 ON READER SERVICE CARD

mastering JUMPMAN

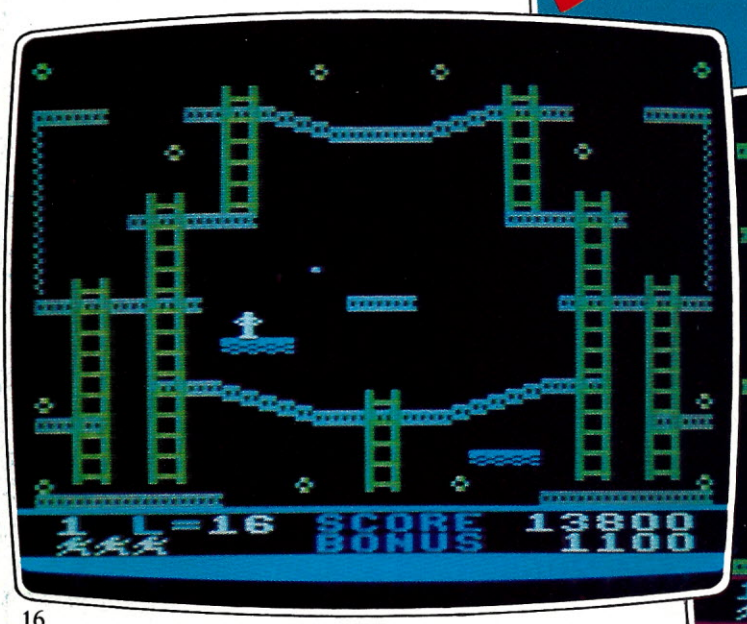

16


Ride Around



24

The Jungle

David H. Ahl and Betsy Staples

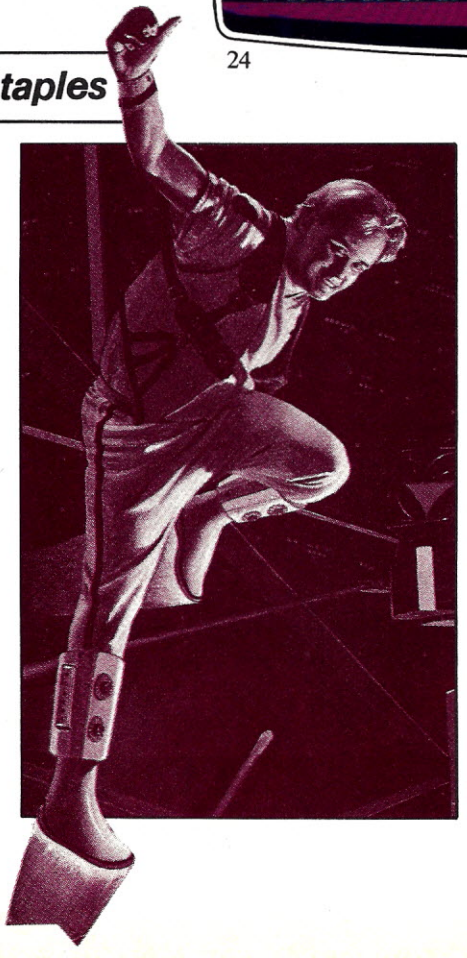

Who is Jumpman?

Jumpman gets our nomination for Best Game of 1983. It has everything we look for in a game: playability, opportunity for improvement, clever tricks to challenge your intellect, and just the right amount of randomness to keep you on your toes. But it certainly can be frustrating and time-consuming as you sacrifice man after man devising patterns and studying the effects of your movements.

Jumpman is available for Atari, Commodore 64, and Apple computers. A second version with fewer boards, *Jumpman Jr.*, is available on cartridge for Atari and Commodore machines. Our description of playing strategies presented here is for the full version with 30 boards.

During many hours of play, we have developed some strategies and patterns. We have not, however, presented a pattern for every one of the 30 boards—that wouldn't leave you with any challenge at all. Instead, we have presented some general playing hints, patterns for 14 boards, and tips for seven of the other boards.

General Hints

First hint: read the instructions. This may sound silly; it is easy to play the game without reading the instructions. However, there are many valuable tips in them, including some hints from game designer Randy Glover.

Start off with the default speed (4). If you just can't seem to clear a board at this speed—after some practice, of course—then choose a slower speed.

Our patterns work at all speeds. They work best at the default speed (4). Faster speeds (1, 2, and 3) require you to hesitate in certain spots, so you should become familiar with the pattern on speed 4 before you speed up to 1, 2, or 3. Remember, the bullets and other hazards move faster and occur more frequently at the faster speeds; this can wreak havoc with the completion of a pattern.

On the very slow speeds, the patterns may require some alteration; we did not try every one at every speed.

Bullets move slowly across the screen until they cross the plane on which you

ARCADE CLASSICS.
A BLAST-FROM-THE-PAST.









Remember those great arcade games of the past?

Games like Bally Midway's™ Seawolf II.™ As sub commander, you torpedo enemy ships moving at different speeds. Sink as many as you can, but watch out for the mine fields.

And Bally Midway's Gun Fight.™ In the most famous shootout of all time, you'd better be a straight shooter and fast on the draw.

Exidy's™ Starfire™ gives you outerspace graphics that are out of this world. Plus a starship with laser cannons to help you rid yourself of alien forces.

And there's Exidy's Fire One!™ Hone in on the enemy with sonar. Then it's up periscope and torpedoes away.

EPYX has brought the arcade classics home—at the right price for you. We've combined the Bally Midway classics Seawolf II and Gun Fight on one disk and Exidy's classics Starfire and Fire One on another. So get the arcade classics today and have a blast-from-the-past on us.

One or two players; joystick controlled; arcade style graphics and sound.



EPYX
COMPUTER SOFTWARE™

Strategy Games for the Action-Game Player

CIRCLE 153 ON READER SERVICE CARD

are located. They then explode and sail toward you with frightening speed and accuracy. Watch for them and try to get them to explode when you are in a position to change planes rapidly. If necessary, wait for them to fly by before continuing. Don't alter your pattern because a slow bullet or two appears on the screen; keep going, but always have in mind a possible escape route should the bullet speed up.

Learn to recognize up and down ropes quickly (Up—blue, small links; Down—green, large links). A rope occasionally apears after you collect a bomb, and you should know immediately which kind it is.

It is possible to jump on and off ropes, but it is more hazardous than jumping on and off ladders. You will get lots of rope jumping practice on board 3, Bombs Away.

You can jump over most of the hazards if they are reasonably close to the girders. These include bullets, barrels, vampires, and blocks. You can jump some of the robots but not others. In general, we prefer to avoid the hazards instead of risking a life trying to jump over one, but if you are cornered, try it; you have no other choice, and you may be successful.


The beginner level consists of boards 1 to 8, intermediate level is boards 9 to 18, and advanced level is boards 19 to 30.

Screen by Screen


1. Easy Does It

On this board, simply follow the diagram. You should pause only to let a bullet go by, although very few bullets speed up on this board, so you frequently can outrun them.

On the bottom level, do not jump on the platform at the center; just walk onto it and jump first to the right to get the bomb. Then walk onto it again and jump off to the left as you continue around. After getting the next-to-last bomb (A), a portion of the ladder below you will break away. Go down it a short way, but immediately jump to the left to get the last bomb. This is a suicide leap—you will not live if you miss the bomb, but if you touch the bomb, the screen ends and you do not lose your life. After a bit of practice, you will make it every time.

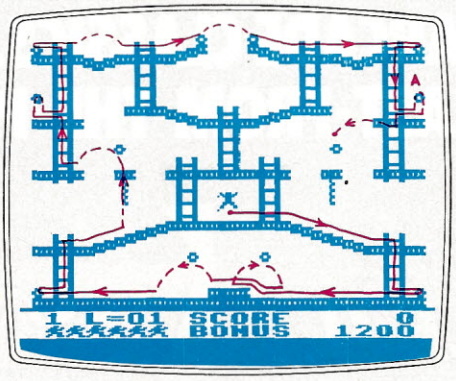

1 *Easy Does It*

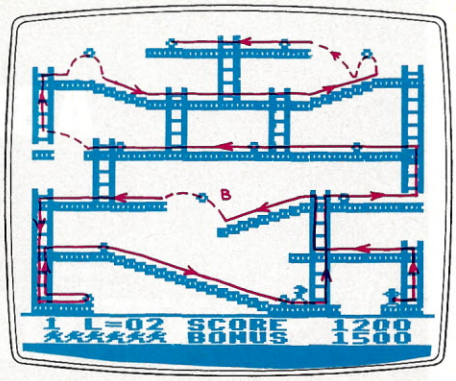

2 *Robots I*

At the normal speed, you will get 1200 points for collecting the 12 bombs, and 800 to 1000 bonus points, for a total of around 2000.

2. Robots I

The pattern for Robots I should be followed without hesitation. The only tricky jump is the first one (B). Don't wait until you are at the very bottom of the ramp to leap, but don't leap too soon either. Practice makes perfect.


There are no bullets on this board, only the pesky robots.

As you climb the ladder at the right side of the board, you will notice the robot at the top start to descend. Don't stop to watch or he will cut off your path to the left. You ignore him, and he will ignore you.

You may want to try to leap up to the top girders from the left side. It is possible, but it seems to be easier to do from the right. If you do make it up on the left side, then simply jump off the right side in a suicide leap to get the last bomb. If you complete the lefthand leap successfully, it is worth an additional 100 bonus points; otherwise you will have to be satisfied with 1200 regular points and 800 to 900 bonus points on this board.

3. Bombs Away


On this board you will get some good practice jumping from platforms to ropes that will help you later on. As you get the bombs on the left side, portions of the platforms will drop away, forcing you to go to the very top. Here you are most vulnerable to the falling bombs, so your best strategy is to run and leap to the center as fast as possible to start your descent down the center rope.

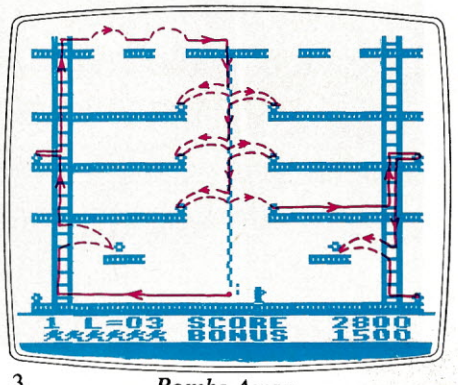

3 *Bombs Away*

This is a down-only rope, so if you get past a level, you have no recourse but to get off on the next level and make your way back up, or to go all the way down and climb a ladder back to the top.

If you are anywhere but on the top level, you can usually move or jump out of the way of a falling bomb and let it go past. You can look for 1200 regular points and 600 to 800 bonus points on this board.

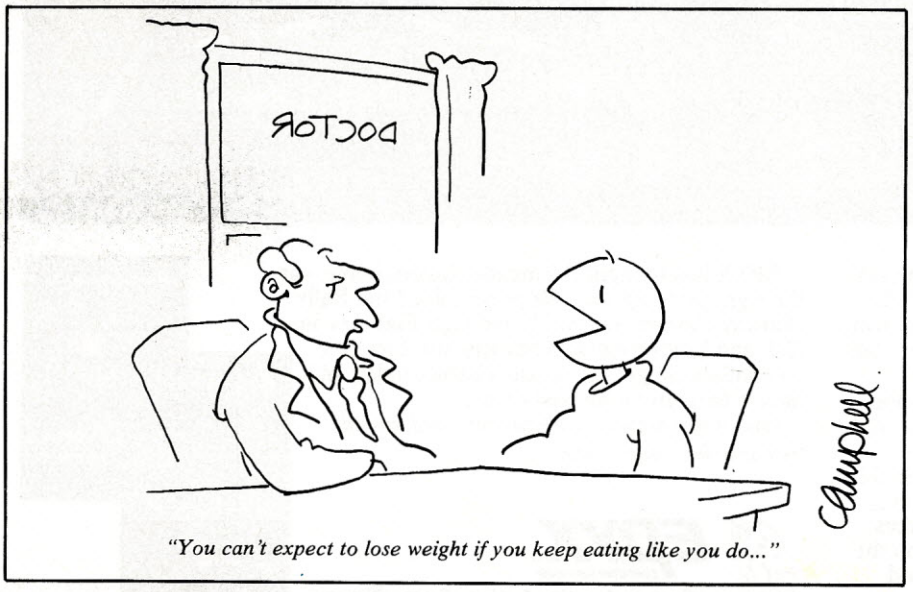

"You can't expect to lose weight if you keep eating like you do..."

When you're ready to add disk drives to your system, pick them carefully. Get all the options you need, but don't pay for features you'll never use.

You get that flexibility in Micro-Sci 5¼" floppy disk drives. Choose from a selection that includes everything from a beginner's first add-on to large capacity, high-speed subsystems right for the busiest office environment.

Micro-Sci's Model A2 is a superbly crafted, 35-track drive which is completely compatible with all Apple II® and Apple IIe® hardware and software. It features a jumper-selectable boot PROM and a price tag its competitors envy. Just right for the budget-conscious consumer!

Programmers and word processors rejoice! You need no longer sacrifice pre-packaged software compatibility in favor of large storage when you buy a disk drive for your Apple II or IIe. The new Model A82 from Micro-Sci combines a full 328K capacity—more than twice the space of a Disk II®—with the ability to read standard 35-track software.

Apple III® owners will crave the Model A3. It offers all the features and capabilities of the Disk III® at a fraction of the price. Ideal as a second drive!

At 286K, Micro-Sci's Model A73 provides Apple III users with twice the capacity of the Disk III, and it plugs right in to the built-in controller—no extra board or power cord!

The king of all Apple compatible drives is the Micro-Sci Model A143, the largest 5¼" floppy disk storage system available for the Apple III. 572K storage capacity and the 5msec access time make the A143 a powerful back-up device for hard disk systems.

One option you'll never see on a Micro-Sci drive is a princely price tag—we control your costs as carefully as we control our quality. So drive carefully to your nearest computer center for a demonstration of Micro-Sci craftsmanship and quality. Do it today!



DRIVE CAREFULLY.


μ-SCI

®Apple II, Apple IIe, Apple III, Disk II and Disk III are registered trademarks of Apple Computer Inc.


MICRO-SCI

MICRO-SCI IS A DIVISION OF STANDUN CONTROLS INC.
2158 SOUTH HATHAWAY STREET • SANTA ANA, CALIFORNIA 92705 • (714) 662-2801 • TELEX: 910-346-6739


CIRCLE 193 ON READER SERVICE CARD

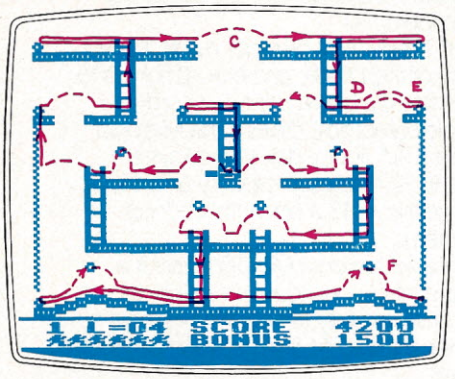

4 *Jumping Blocks*

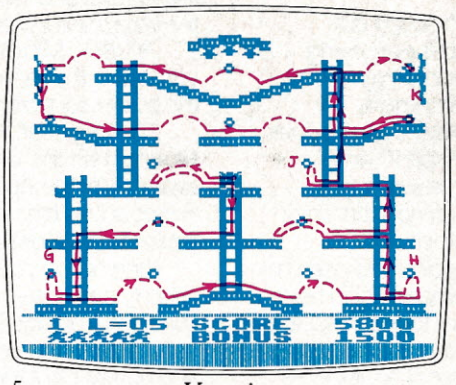

5 *Vampire*

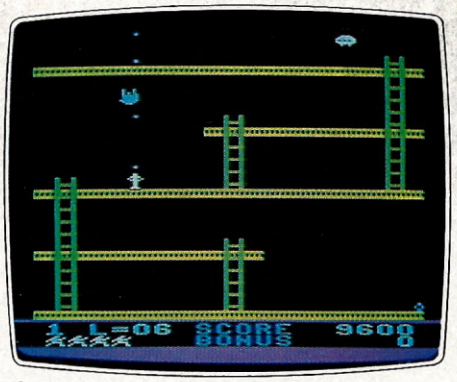

6 *Invasion*

4. Jumping Blocks

On this board, there are glowing blocks that are similar to bullets, although not nearly as lethal. When a block hits you, it will make you jump—usually straight up—but sometimes in an unpredictable direction. Hence, if you see a block approaching, it is usually best to get away from the edge of a platform. Then, even if the block forces you to jump in an undesired direction, you will still land on a solid surface. You can jump over the blocks, but it is usually not worth the trouble.

You are most vulnerable to the blocks when you ascend the two ropes at the sides, since a jump while on a rope results in instant death. Hence, our pattern minimizes the use of these ropes.

The really nasty jump is the one at the top (C). Start running from the left, keep your joystick pressed right, don't hesitate, and press the jump button at the last moment. Even if Jumpman just catches the right platform with his hand, at least he is over, and you can go on.

When leaping to the right platform (E), press the jump button a little way back from the edge of D, otherwise you will jump beyond the platform.

Be careful making the jump for the next-to-last block (F); if you jump too late you will crash into the up-rope, which is generally lethal.

5. Vampire

Vampire is a nasty board with nasty creatures that most players come to hate. At least there are no bullets.

The three vampires cling to their perch until you have collected a certain number of bombs. In general, they fly from top to bottom, and then reappear again at the top, but this pattern is altered if they get the smell of blood—then they stay on your trail. The first vampire comes out after you capture the third bomb, the second after the sixth, and the third after the ninth.

If you follow our pattern, the first vampire is released after you get the bomb at the bottom left (G). The second is released when you get the bottom right bomb (H). Here you need to exercise a bit of judgment; you should get the bomb at the second level when the first vampire is below you (going off the bottom of the screen) and the second one is above the bomb.

When you get it, jump immediately back right and go up the ladder. The second vampire now should be below you. Taking the bomb at J releases the third vampire. As you complete the pattern, vampires occasionally get quite close, but you should be able to avoid them.

It is possible to leap over a vampire, but it is better to avoid them. Remember, you are a much better target for the vampires when you are standing still than when you are moving. You can generally outwit one vampire, but when there are three on your tail, forget it! This board is very discouraging at first—be sure to keep moving and your chances of survival will increase.

A quirk. The rope from the top right platform (K) is very difficult to climb down (could it be a bug in the program?). It is best to avoid this if at all possible.

Look for 1400 regular points and 600 or so bonus points on this board.

6. Invasion


This is a trivial board, but a good place to amass points if you are very patient. All you have to do to finish it is get the bomb at the bottom right. The only hazards are some flying saucers which fly in random patterns, but they don't zero in on you like the robots and vampires. On the other hand, if one hits you, you're dead.

You get 25 bonus points for shooting a saucer. Just point your joystick in the direction you want to shoot, and hit the button. You can have only four shots in the air at a time.

The only dangerous place on this board is on the top platform because if a saucer approaches from above, you can't see it until it is too late. Your best defense is a good offense. Since the saucers fly away from your bullets, shoot around yourself in all directions as you move to the right across the top platform.

Move to the center of the middle platform and stay there as long as you want to continue shooting saucers. Actually, it gets quite boring after a short while, and you will want to move on.

As a general rule, if you are playing the beginner or grand loop option, at this point you should have 10,000 to 11,000 points.

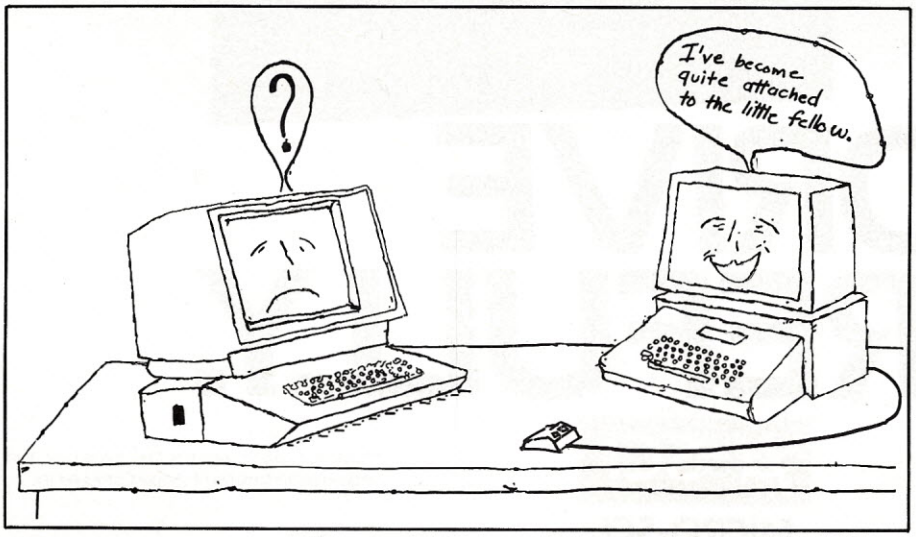

PRO-MODEM 1200



It's about time.

Time for your computer to make the telephone connection – with an intelligent, full 212A 300/1200 baud modem – with a real time clock/calendar – and with the capability to expand into a complete telecommunications system. It's time for PRO-MODEM 1200. Much more than just a phone modem.

When you're on-line, time is money. PRO-MODEM telecommunication systems help you save. By monitoring the duration and cost of your phone calls. And by sending and receiving messages, unattended, at preset times when the rates are lower. . . with or without your computer.


Compare the $495 PRO-MODEM 1200 with any other modem on the market. For example, you'd have to buy both the Hayes Smartmodem 1200 plus their Chronograph for about $950 to get a modem with time base.

PRO-MODEM 1200 is easy to use. A convenient "Help" command displays the Menu of operating command choices for quick reference whenever there's a question about what to do next. Extensive internal and remote self-diagnostics assure that the system is operating properly. Some of the other standard features include Auto Answer, Touch Tone and Pulse Dialing, and Programmable Intelligent Dialing.

PRO-MODEM does more. It lets you build a full telecommunications system with features like Auto Dialer, Incoming and Outgoing Message Buffering, Business/Personal Phone Directory, Programmable Operating Instructions, a 12-Character Alpha-Numeric Time and Message Display, and versatile PRO-COM Software. PRO-MODEM commands are Hayes compatible so you can use most existing telecommunications software without modification.

There's much more to the PRO-MODEM story. See your local dealer for complete details. He'll show you how to save time. And money.


Prometheus Products, Inc., 45277 Fremont Blvd., Fremont CA 94538, (415) 490-2370

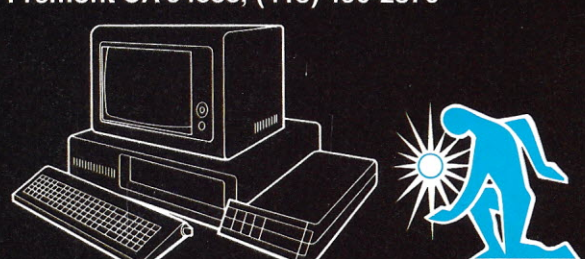

PROMETHEUS

CIRCLE 201 ON READER SERVICE CARD

READER'S DIGEST INTRODUCES SOFTWARE GOOD ENOUGH TO GO OUT AND BUY A COMPUTER FOR.

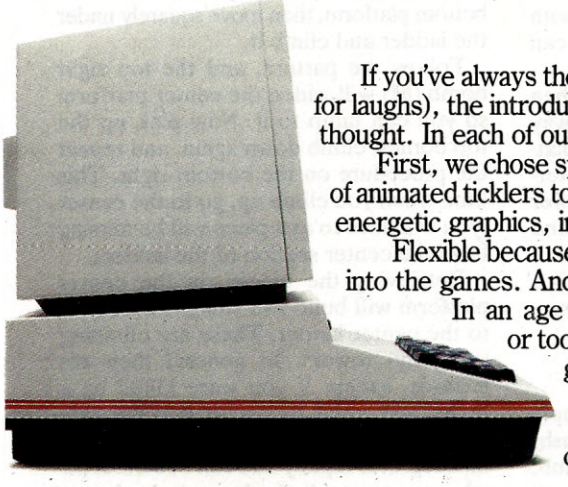

If you've always thought of a computer as an expensive toy (or if the one you own now is used for laughs), the introduction of Reader's Digest Software™ games will give you pause for a lot more thought. In each of our programs we have done something quite unique.

First, we chose specific educational objectives. Then we created the games – a terrific series of animated ticklers to satisfy the most devoted computer buffs. And finally, we designed colorful, energetic graphics, in each case with a flexible format.

Flexible because most of our programs leave room for players to substitute their own ideas into the games. And the others never play the same way twice.


In an age when a lot of software is either too heavy-handed for much repetition or too frivolous to be taken seriously, Reader's Digest Software has broken fresh ground by striking an easy balance. Between a good learning experience and a good time.

Fun and games for fun and brains. Your children, your teenagers, your computer will approve.


See your dealer for Reader's Digest Software or call Customer Service at 800/431-8800. (In NY, AK, HI: 914/241-5727.)

READER'S DIGEST SOFTWARE IS A TRADEMARK OF THE READER'S DIGEST ASSOCIATION, INC.

CIRCLE 194 ON READER SERVICE CARD

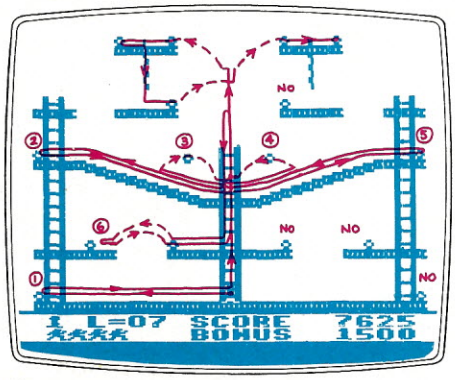

7 *Grand Puzzle I*

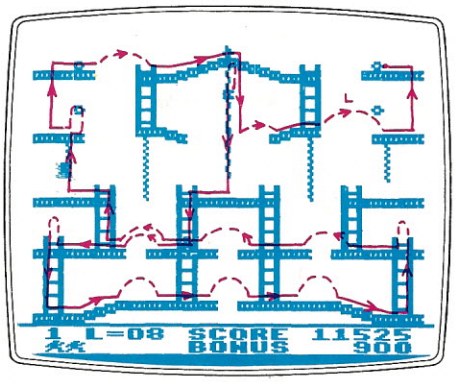

8 *Builder*

7. Grand Puzzle I

The secret to this board is knowing in what order to add six sections to the center ladder to build it higher so you can collect the 500-point bombs at the top.

Basically, the ladder sections, which you get by retrieving the six bombs near the outside ladders, can be placed in any order on the center ladder.

But to save building time, the two pieces next to the center ladder (3 and 4) may be used anytime after at least two ladder sections have been put up.

The board will automatically end when there are four bombs left. Hence, you should leave the bombs marked "No."

The leap from the top of the ladder to the top platforms is a dangerous one, but helped by you, Jumpman can make it. Each of the four bombs at the top is worth 500 points, so it is worth some practice to get them.

The major hazard on this board is the bullets. There are far more than on any previous board, but generally only one at a time. You can avoid them or jump over them; we find avoidance more reliable.



"Just as I thought—a nested loop."

8. Builder

Builder is the last board (whew!) of the beginner level. It is the first board with multiple bullets, and, for that reason, can be somewhat troublesome.

Start by jumping straight up, and then climb down the rope (it is the only way you can go). Clear the bottom two platforms in either a clockwise or counterclockwise direction. Getting these lower bombs will build the upper two levels and cause four additional bombs to appear.

Be careful making the jump at L; it is a long leap that sometimes results in Jumpman plunging to an untimely death.

9. Look Out Below

Look Out Below is a deceptively simple board, but one that can trip up (or squash) the unwary. Each time you take a bomb, a block drops from either the platform you are on or from one overhead. A given bomb always triggers the same block. Don't jump over the holes in the girders or the fallen blocks—simply walk or run over them.

If you follow our pattern, be sure to pause at the two places marked with a P to avoid falling blocks. When retrieving a bomb at the end of a platform, be sure just to barely touch it and turn around quickly; otherwise you get a bump on the noggin (and lose a life).

Watch the bullets. There aren't too many, but when you are at the edge of the board, all it takes is one with your name on it, and bang—you're dead.

10. Hot Foot

No one we know likes Hot Foot. Our pattern is one of the best ways to complete it—there are others—but it is not foolproof.


First head straight down before the bullets start flying—there are lots of them on this board. Jump over the bomb closest to the center ladder. If you retrieve it, blocks will cover the outside bomb making it impossible to get. Retrieve the outside bomb, then get the one closer to the center. Then jump the pile of rubble to get to the ladder. Inevitably, you will land on the side of the ladder. To recover, you must jump straight up until you land on the bottom platform, then move squarely under the ladder and climb it.

Follow the pattern, and the top right bomb (M) will widen the center platform so you can jump to it. Now pick up the top bombs, climb down again, and repeat the procedure on the bottom right. This time when you climb up, go to the center (you will have to as a piece will be missing from the center section of the ladder).


Retrieving the pieces on the center platform will build two small towers next to the center ladder. These are climbing (up only) towers. In general they are hazards, except if you were killed by a bullet and need to get to a lower side bomb (N or P). Since the center ladder disintegrates rapidly and can't be descended, you must climb down it as far as possible, take a small jump to the right or left to the top of the tower and then jump to the down-sloping ramp.

If by some accident, one of the bottom bombs was covered by rubble, the only possible way to get it is to stand on top of the rubble pile, wait for a bullet to kill you, and hope you fall on the bomb. This, of course, is a sacrifice play, and it doesn't always work, but it is the only way.

9 *Look Out Below*

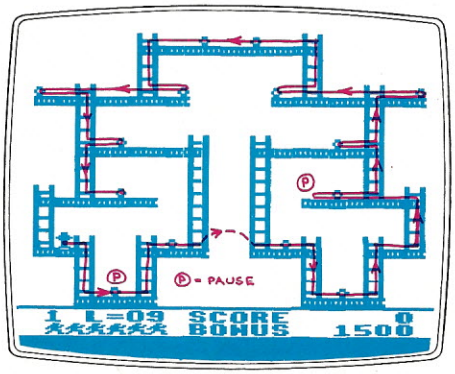


10 *Hot Foot*

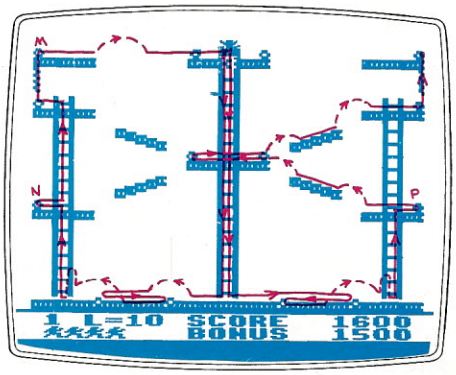

GET THE JUMP ON MATH

With Scott, Foresman Math Action Games

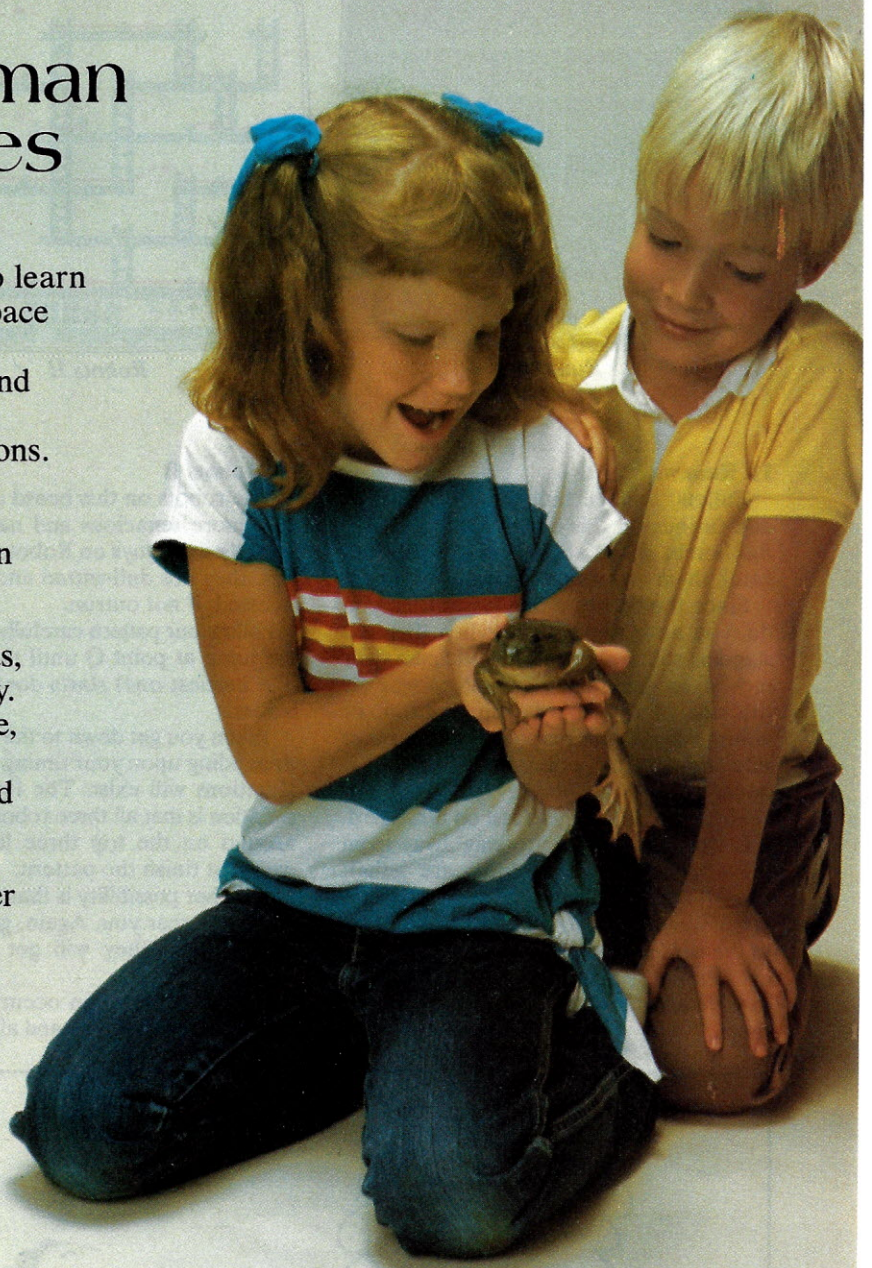

Frog Jump is a great way for your children to learn to work with numbers. Or they can take a Space Journey to learn how to work with percents. Pyramid Puzzler, Star Maze, Picture Parts, and Number Bowling help with multiplication... division... basic facts... decimals and fractions.

Math Action Games get youngsters deeply involved in the excitement of discovering and mastering fundamental mathematics. Children have fun and learn at the same time.

There's a **Math Action Game** for every age group. Exciting formats challenge participants, moving them through three levels of difficulty. Games can be competitive or non-competitive, so children play them again and again. Each game uses color, music, animation, and sound effects to trigger quick thinking and accurate response.

Math Action Games can give your youngster the incentives and the satisfaction he needs to master math. It's an ideal supplement to any school mathematics program. Games are available for most popular microcomputers.

SCOTT, FORESMAN...
Products with tomorrow in mind.







For fast information about MATH ACTION GAMES, call TOLL FREE: 800-323-3728. Illinois residents call: 800-942-6251. Then after the tone, dial 341.

Scott, Foresman and Company
Electronic Publishing Division
1900 East Lake Avenue Glenview, Illinois 60025


CIRCLE 168 ON READER SERVICE CARD

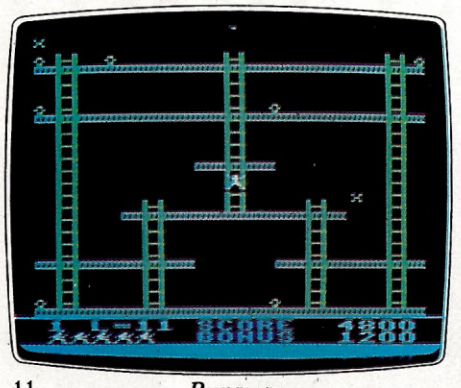

11 *Runaway*

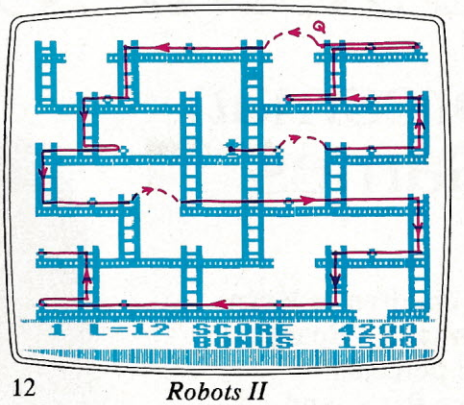

12 *Robots II*

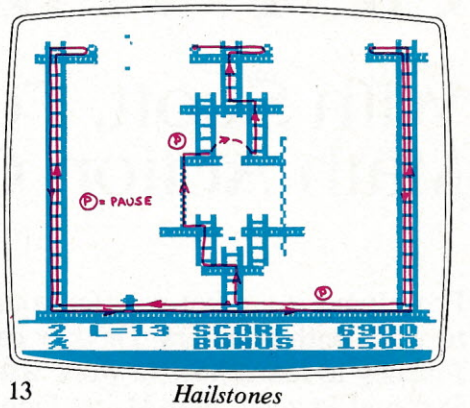

13 *Hailstones*

11. Runaway

Bullets, bullets, bullets. They fly fast and furious on this board. On Runaway, the bombs move about and you have to catch them any way you can.

Since the bombs move faster than you do, you have to get them when they are standing still or, better yet, anticipate their moves. In general, if a bomb moves off the side of the board (top, bottom, or either side), it will reappear on the other side or at the point from which it departed.

Since the bullets fly so fast on this board, it is worth your while to stay away from the edges. The side ladders are lethal; stay off them at all costs. The top platform is bad news too; avoid it if possible. Stick to the center area of the board where you can see the approaching bullets and take evasive action or, if you want, jump over them.

12. Robots II

The robots on this board are considerably more tenacious and nasty than the friendly little guys on Robots I. Nevertheless, they are dull-witted and can be outsmarted, if not outrun.

Follow our pattern carefully. Don't make the jump at point Q until the gray robot (the nastiest one) starts down the center ladder.

When you get down to the bottom level, depending upon your timing, one of three situations will exist. The first (and best) situation is that all three robots are dashing around on the top three levels; in this case just finish the pattern.

Another possibility is that some of them are fairly near you. Again, go ahead with the pattern—they will get out of your way.

The third situation occurs if you dilly dallied along the route and all three robots are homing in on the bottom right corner. Don't panic! By jumping the two gaps in the bottom right area of the board, and possibly going back to the third level, you can usually get away from the critters and finish the board. Remember, the robots can't jump, so you can generally escape to a platform that is safe by making a jump.

13. Hailstones


Hailstones is not a lucky 13 board—everyone hates it. No pattern is absolutely foolproof, but ours is the result of many hours of experimentation by many players.

As the board scrolls into view, jam the joystick to the left, and get Jumpman up that left ladder as fast as you can. Get the bomb and come down. Four hailstones will be following closely.

At the bottom immediately run to the right ladder, up to the top and retrieve that bomb. Down again and run to the left to a point between the center and right platforms. Wait for four hailstones to appear from the top and then dash to the center structure and up the left side. Stop at the top of the rope ladder until four hailstones drop. Just before a hailstone is about to kill you, jump to the right, head up the ladder, and get the bombs before the hailstones hit the ground and more appear.

In general, hailstones fall in groups of four, but sometimes they appear in smaller groups. Groups of four closely spaced stones are the easiest with which to deal; the smaller groups are murder. There are never more than four hailstones on the screen. As soon as one hits the ground, another falls from above—at exactly the point at which Jumpman was when the last one hit the ground. Hailstones usually bounce off the rungs of the ladders; Jumpman is usually safe on a ladder except on the top three rungs.

Don't be discouraged if you lose four or five lives on this screen at first—and even after you are an accomplished player. It is a tough one!

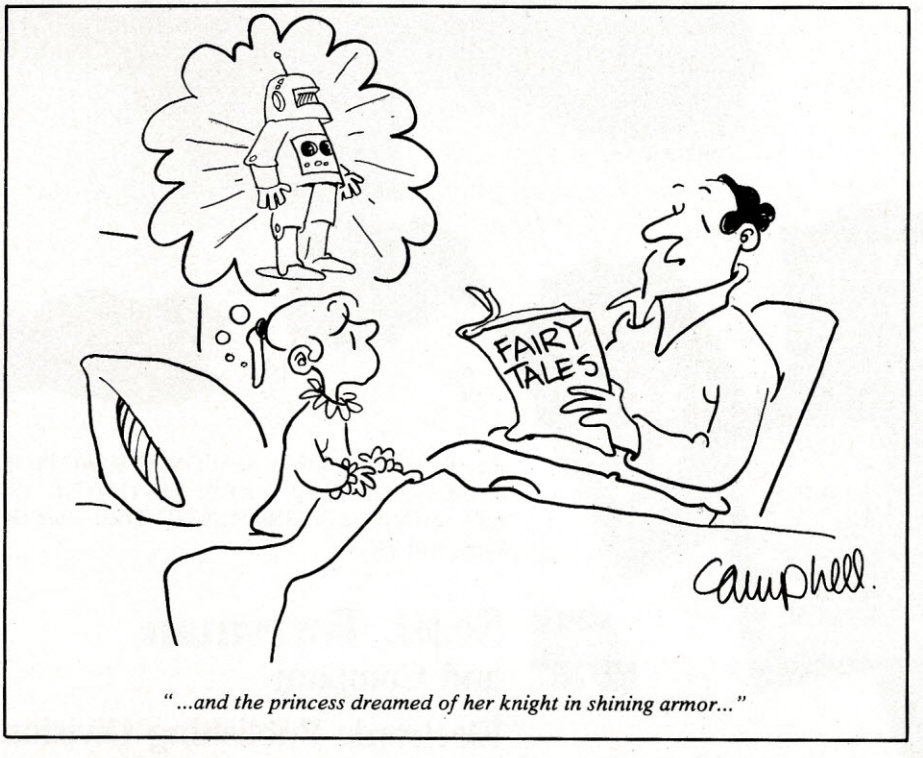

"...and the princess dreamed of her knight in shining armor..."

Instant one-button color printing.



Press here.

It's just that easy! Any time you want to print what's on your Apple's screen just hit the copy button on your Transtar 315 color printer with our PICS card installed, and it's done! No special programming, no lengthy code sequences, no need to exit your program! Just press the button and it prints!


By adding the optional PICS card to your $599 Transtar 315 color printer, you've opened up a whole new world of easy color printing. For the first time ever, our PICS parallel interface card enables you to screendump virtually any program -- graphics, charts, games -- even copy-protected software! Specially designed only for the Apple II, II+, IIe, and Franklin computers, the Transtar 315 PICS card does the work of a parallel card and a lot more and costs only $119.95.

At the push of a button, Transtar's innovative new 4-color diagonal ribbon will print up to 7 colors and more than 30 shades in a single pass.

The 315 is precision-built to exacting standards by Seikosha, the most experienced company of the famous Seiko group--recognized worldwide for quality and dependability. In fact, one of the nicest things about Transtar's 6-month warranty on parts and labor is that you'll probably never use it!

Innovative, inexpensive, dependable, easy: the Transtar 315. Color printing has never looked so good!

Only $599.

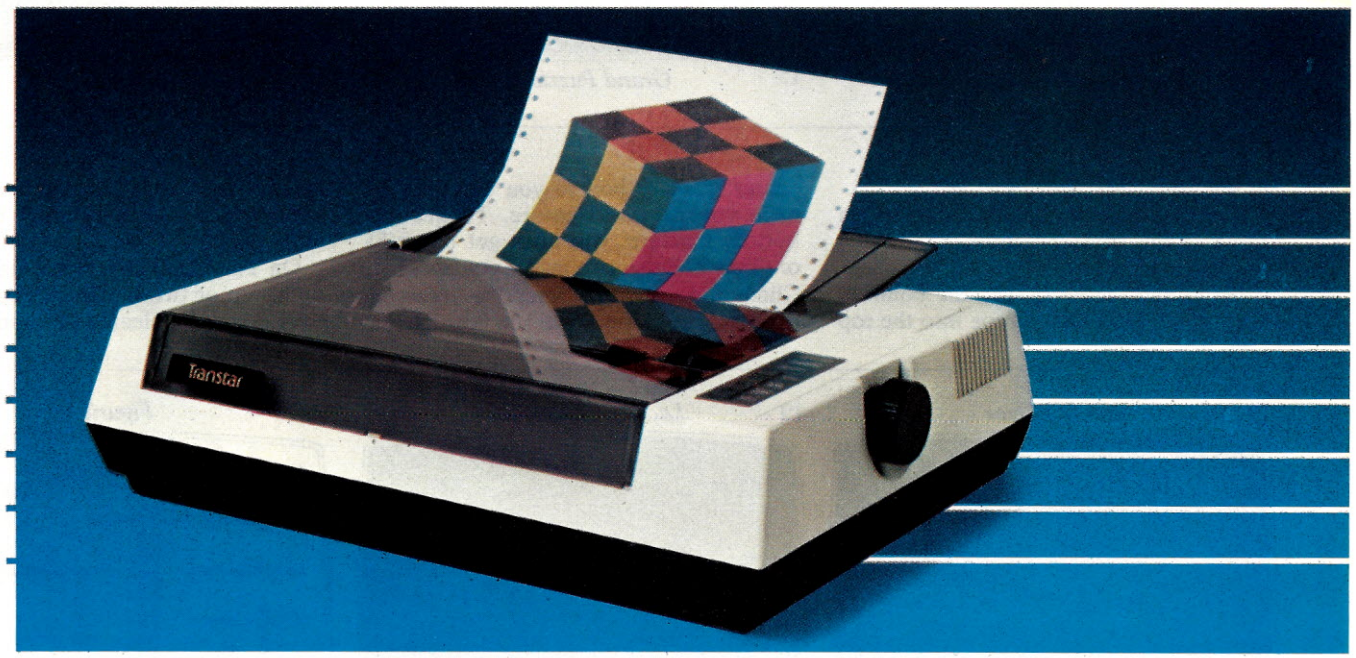

*PICS cards are currently available for Apples and Franklins. PICS cards for other computers will be available in the future.

Transtar
A **Vivitar.** Computer Product

P.O. Box C-96975, Bellevue, WA 98009

CIRCLE 236 ON READER SERVICE CARD



14. Dragon Slayer

Like Invasion, on the Dragon Slayer board, you must collect only one bomb—at the lower left. You can't use the ropes; they are reserved for the dragons. On the way down, you can slay dragons for 50 points each.

You slay a dragon by pointing your joystick to the right or left and pressing the button. That releases your spear and, assuming your timing is correct, the dragon dies. But once one dies, another is reincarnated at the lower left and heads on up to breathe dragon fire upon you. So how do you get past this never-ending onslaught of dragons?


When the board opens, run left, down, right, down, and stand still. A dragon will be approaching. Kill it. (Practice a few spear throws so you know how far it goes, and don't forget to take into account the time the spear is in the air.) Kill the second dragon, which is close behind.

Run left and down to the second level. From the base of the ladder, kill the next four dragons. The next two should be spaced much closer together than the earlier ones. Stand on top of the mound and jump straight up when the dragon runs by. Do the same for the next dragon. Then run left (you should be just a bit behind the dragon one level overhead). Go down the ladder and to the left, and the bomb is yours.


Several cautions: you cannot jump the dragons when you are moving; trying to do so merely launches a spear. While you can jump a dragon on level ground, it is much easier to do so while standing on a mound. As you kill dragons, the mounds start to flatten out until all the platforms are perfectly flat. This is trouble. Try to get to the bottom before this happens.

A Few Hints


From here on, we are not going to give you patterns for the remaining 16 boards. In the first place, we haven't figured all of them out; in the second, we don't have space in the magazine; and in the third, we don't want to deprive you of the fun

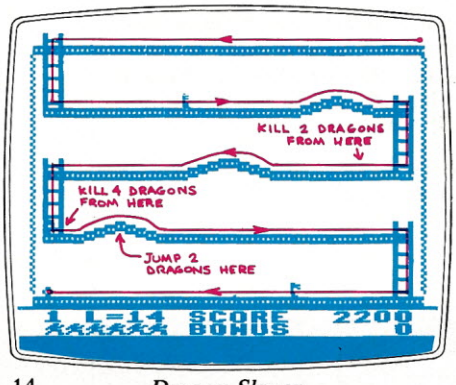

14 *Dragon Slayer*

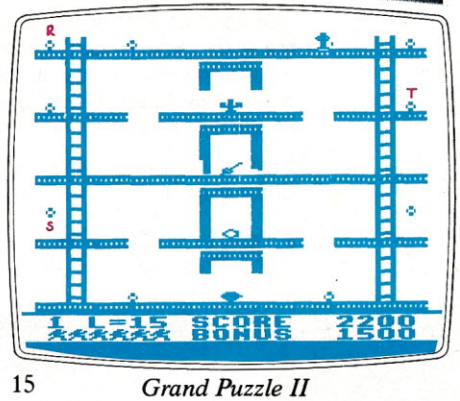

15 *Grand Puzzle II*

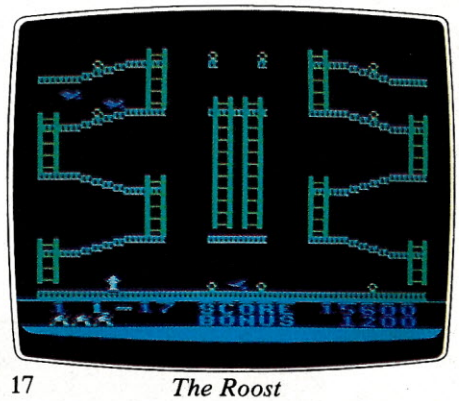

17 *The Roost*


of figuring them out for yourself.

However, just to get you started on some of the trickier boards, here are a few hints.


On Grand Puzzle II (15), the bomb at the top left (R) drops a rope into the top center treasure box so you can get out once you get the treasure. To get the bottom treasure, you must get bomb(S) or (T) first. Either one makes you invisible. Climb down (by feel), jump the bomb on the bottom platform, and run through the treasure cage to get it. As in Grand Puzzle I, the board ends when four bombs are left.

On The Roost (17), immediately climb up a step or two on the left ladder, then back down and clear the bottom platform


18 *Roll Me Over*

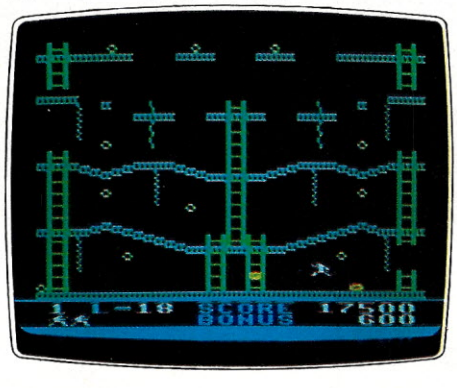


19 *Ladder Challenge*

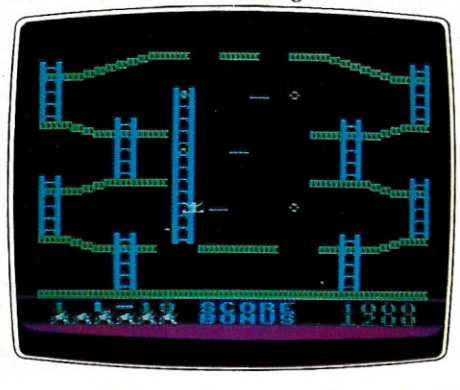

20 *Figurit*

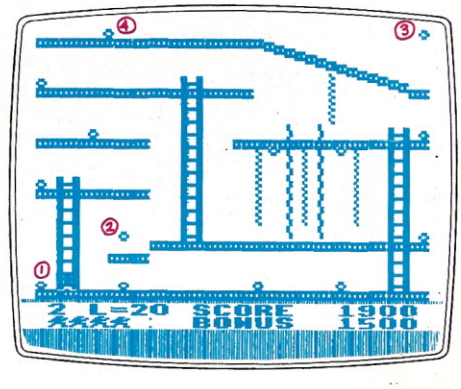

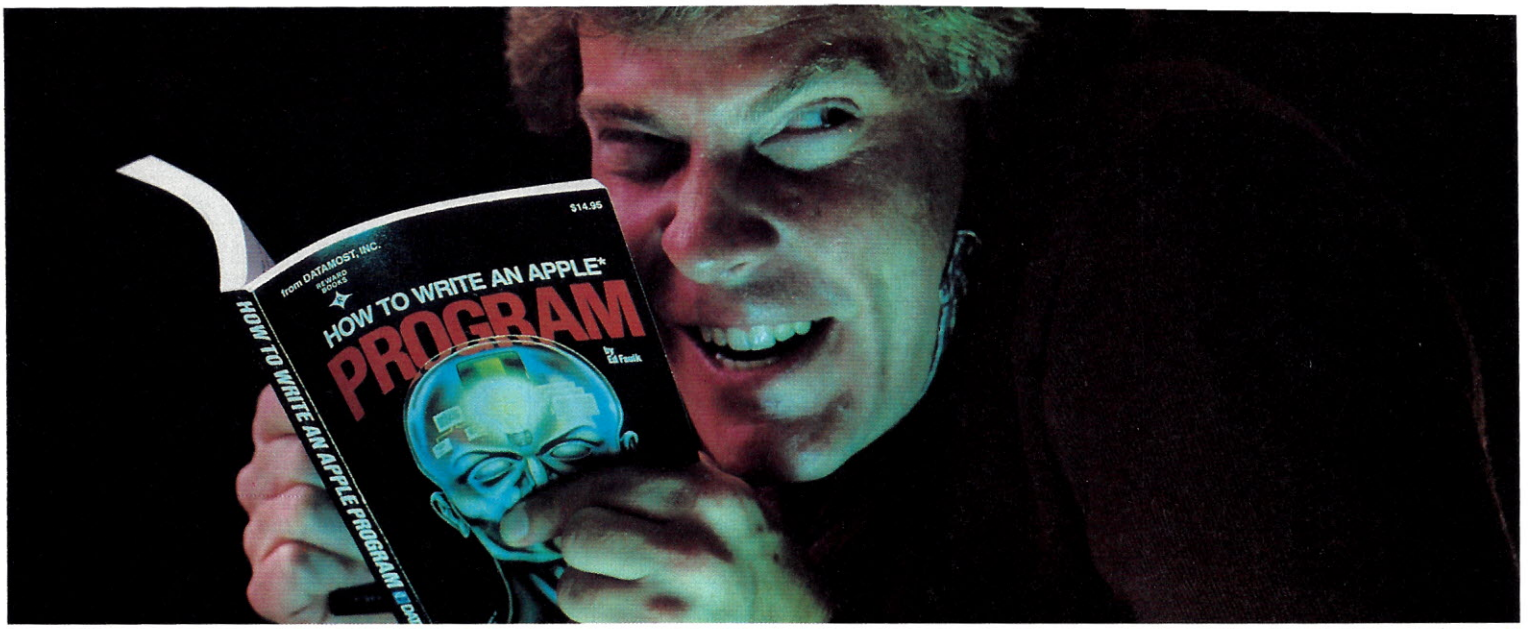

Outsmart your computer.

Show your computer who's boss. Earn its respect. With a Datamost book.

No matter what age or ability level you're at, we have the right book that talks just to you. And your computer. Whether you own an Apple.* An Atari.* Or just about any brand.

All our books are incredibly easy to understand.

Which will make it incredibly easy to understand your computer.

What If You're Scared Of Books About Computers?

Don't be.

Our books are written in friendly, familiar American English. Highlighted with cartoons. And illustrations. So they're fun to read. As well as educational.

And there's over 30 books to choose from. Basic computer learning books to programming books to coloring books.

You won't be bombarded with complicated programming routines until you're ready for complicated programming routines. And no funny technical talk until you've reached the level where you don't think it's funny.

We'll tell you what you need to know. And then, when that's understood, you can take the next step toward outsmarting your computer.

Before You Spend Big Bucks On A Computer, Spend Little Bucks.

Once you've decided, kind of, almost, nearly, what type of computer you think you'd like to buy, buy a Datamost book.

It'll help you understand the Atari or the Commodore* or the Apple of your eye.

Before you spend a lot of money. Before you take your computer home.

You'll make a better purchase decision. Because you'll understand what you're doing. And what you and your computer can do together.

So there won't be any misunderstandings to ruin your new relationship.

How To Get The Most Out Of Your Computer.

Get the most out of our minds.

DATAMOST™ INC

The most out of our minds.™

Datamost books for every computer.


Everybody. Every level.

Pretty smart, huh?


Datamost, Inc., 8943 Fullbright Ave., Chatsworth, CA 91311, (213) 709-1202
*Atari is a trademark of Atari Computer.*Apple is a trademark of Apple Computer.
*Commodore 64 is a trademark of Commodore Business Machines, Inc.

CIRCLE 145 ON READER SERVICE CARD




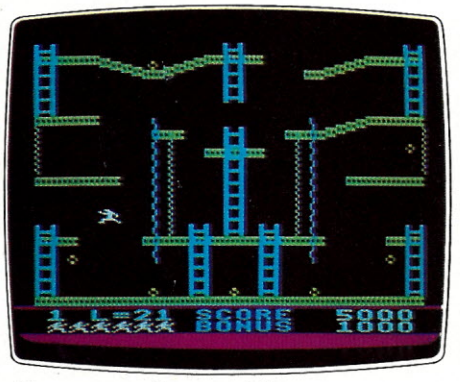

21 *Jump and Run*

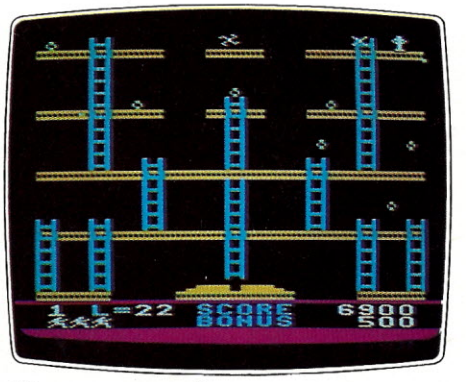

22 *Freeze*

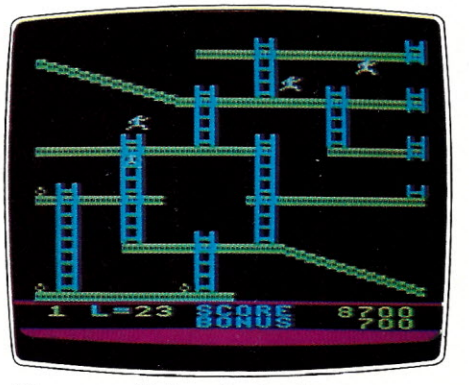


23 *Follow the Leader*


before those mad birds reappear at the bottom. The two top side bombs cause two others to appear at the bottom two corners. Vampires you can jump, but these birds are tough—stay out of their way if possible.

On Figurit (20), we have shown the first part of a pattern. Picking up these bombs in any other order makes it much more difficult, if not impossible, to finish the board.


On Follow The Leader (23), cruise back and forth along the lower part of the ramp for a l-o-n-g time before taking the first bomb. Your followers will do the same which will give you a chance to clear the rest of the board. Beware: the ladders at the lower left lose pieces which

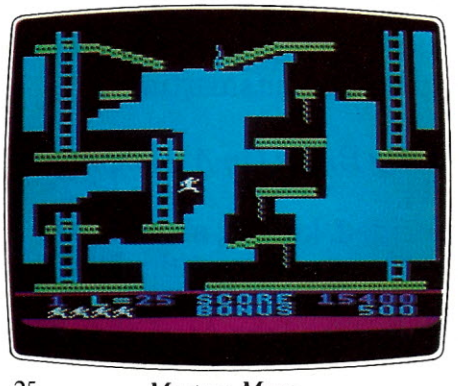

25 *Mystery Maze*

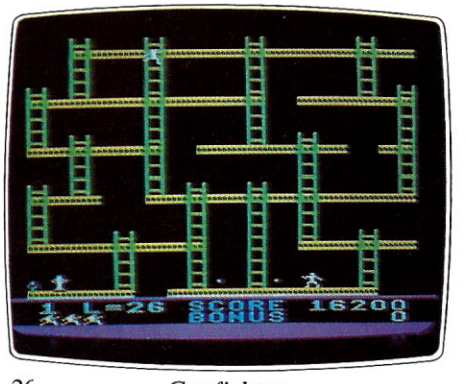

26 *Gunfighter*

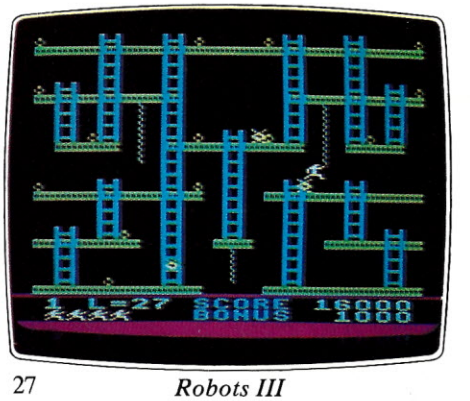

27 *Robots III*

can put you into awkward situations.


On Mystery Maze (25), there are actually two mazes that start out the same. We have included an illustration of a portion of just one of the mazes.

On Gunfighter (26), gravity is 23 times normal and you can't jump. We usually don't worry about extra points here, just hurry to the bottom and finish the screen.


In Now You See It (28), as you grab various bombs, parts of the maze, or bombs, or both disappear and reappear. In addition, some of the bombs cause portions of the platforms to drop away. So as not to spoil it for you, our illustration shows only the ladders.

Good luck, and may all your leaps be successful! END

28 *Now You See It*

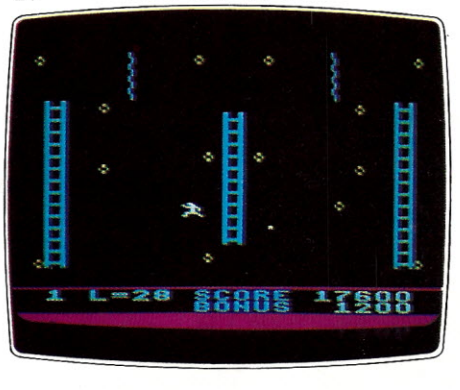

29 *Going Down*

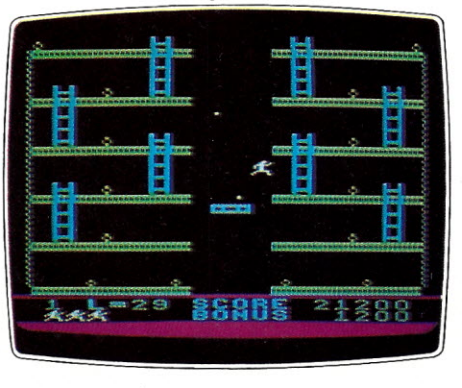

30 *Grand Puzzle III*





This Christmas, Atari and Commodore* owners will go out of their minds.

It'll take about 30 seconds.

Because once you boot a Datamost game on your Atari home computer, or your Commodore 64, you'll come face to screen with the most mind-blasting games ever.

And what better time to go out of your mind than Christmas?

Our Music Will Have You Hearing Things.

Going out of your mind never sounded so good.

Because now our games have music. You heard right. Music. Original Music. Throughout. And scored just for our newest releases. You'll go nuts over it.

Our Graphics Will Have You Seeing Things.

You and everybody else.

Because our games are so great-how great are they?-they're so great you'll want to play them again and again and again. And then your friends will go bonkers over them.



THE TAIL OF BETA LYRAE.™ Changes as you play. Unpredictable. Impossible to master. (No one has!)

And they'll want to play. And then your family will want to play. And then total strangers off the street will want to play and...

Mind-blowing arcade-quality action like this makes it one mad world, pal.

We'll Torment You Right From The Start.

No time to settle down and get comfy.

The tension begins building the moment you boot the game.

Terrific screen titles tease you with the game's objective, scenario, characters.

And while you wait, hand twitching over the Joystick, you'll find out what planet you're on.

What the fuss is all about.

Why you're involved. And perhaps of singular importance to you personally, how to keep from being obliterated. So get ready to get the most out of your mind.


By getting the most out of ours.

DATAMOST™ INC


The most out of our minds.™

Datamost, Inc., 8943 Fullbright Ave., Chatsworth, CA 91311, (213) 709-1202


Atari is a trademark of Atari Computer. *Commodore 64 is a trademark of Commodore Business Machines, Inc. TM Registered Trademark of Datamost.



COSMIC TUNNELS.™ Four games in one. Four times the challenge! Incredible graphics.




MONSTER SMASH.™ Deathly strategy. Mash the monsters! Let the visitors live.




NIGHTRAIDERS.™ Strafe a city under siege with 3D angled selective firing!



ROUNDABOUT.™ Sharpens your shoot 'em up skills. 24 different game screens. Habit-forming!



COHEN'S TOWERS.™ You're the mailboy in a big city skyscraper. Work your way to the top.



MR. ROBOT.™ Screens scream with color, action and sound! Design your own screens, too.

CIRCLE 254 ON READER SERVICE CARD

IFIP, SICOB, and PCW



Overview of a portion of the computer floor of the SICOB show in Paris.

David H. Ahl


IFIP, SICOB, and PCW—Good grief, how's that for a mouthful of acronyms? Yet, from September 19 to October 3, 1983 they assumed real meaning and dimension.

IFIP '83

IFIP, the International Federation for Information Processing, is a federation of the data processing societies of 43 nations. It exists to promote the spread of information science and technology, to advance international cooperation, and to further the dissemination of knowledge.

IFIP holds an international congress every three years; the ninth such congress was held in Paris from September 19 to 23, 1983.

Since it was practically back to back with the PCW show in London, we decided to go to both, although normally IFIP is not in our mainstream of interest. Why not? Two reasons.

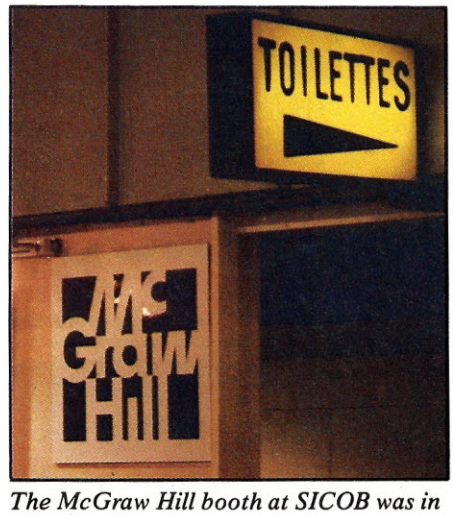

The McGraw Hill booth at SICOB was in an appropriate location.

IFIP focuses on ten areas such as Theoretical Foundations of Information Processing, Application Systems, and Database Systems. Most have more to do with the inside of the computer than the human interface. Moreover, the presentations in the two areas of interest to us—Social and Economic Implications and Computers in Everyday Life—tended to be theoretical and out of date.

We weren't alone in feeling a lack of relevance. Ken Brumbaugh of MECC mentioned to us that he found it difficult to find a common ground for meaningful discussions of computers in education when educators at the show talked in terms of having one computer at a school to service 1000 students or so. He also felt that a panel discussion which gave each of nine educators just ten minutes to state their


BE A PRO
QUICK
as a FLASH
michael shrayer's
ELECTRIC
pencil
TM
word processing system
50,000 BOOTLEGGERS
CAN'T BE WRONG...
...because they only pirate the good stuff. Electric Pencil 2.0z is versatile—it runs on TRS-80 Model I and III computers under all versions of TRSDOS® and NEWDOS™ without modifications or patching. It supports parallel and serial printers as well as single and double density disk systems. Be a legimate owner for only $89.95.
IJG products are sold at computer dealers and booksellers world wide. If your dealer is out of stock, order direct. Include $4.00 for shipping handling. Foreign residents include $11.00 in U.S. funds for shipping and handling. IJG, Inc. 1953 West 11th St. Upland, California 91786. (714) 946-5805
IJG
CompuThoughts™
There are many word processors. Electric Pencil is one of them. I know–I use it every day, incuding Saturday and Sunday. It satisfies every need I have as a writer.
We also use it at IJG for everything from correspondence to typesetting. It's versatile and "bullet proof." The only way you can lose a file is by a hardware or power failure. Many word processors have some nice features, but they are not "bullet proof."
It's also the easiest to learn–it must be because so many bootleg copies exist without documentation. It's the only word processor with a totaly integrated dictionary and automatic spelling correction add-on package. If you think this is a lot of B.S., just ask a Pencil user.
H.C. Pennington, President
IJG
The Thoughtware Company™
CIRCLE 177 ON READER SERVICE CARD

position and views did not encourage any depth in presentations or discussions. Two professors from UCLA agreed with Ken on the lack of vitality in the presentations.

We were especially disappointed in the computer art presentations. In contrast to Siggraph, the demonstrations were a real disappointment, and more and more people left after each successive speaker.

So what does IFIP have to offer? Presumably for the DP professional, particularly in a less developed nation, it has more to offer than to a personal computing enthusiast in the U.S. But perhaps the main reason for attending was that mentioned to us by Stan Winkler—the camaraderie, the renewing of old friendships, the making of new friends, and the informal sharing of ideas. Certainly for us, that was far more worthwhile than all the presentations on systolic VLSI arrays, ultra parallel microprocessor design, and the danger that computers pose to our privacy.



Demonstrations of Lisa were attracting a great deal of attention at the Apple booth at SICOB.

SICOB

SICOB is a French acronym for an international trade show for data processing, telematics, communications, office organization, and office automation. It is an immense show, the largest of its kind in Europe, covering 850,000 square feet with an attendance of well over 400,000.

As with IFIP, there was not a great deal of interest to us at SICOB. Several small computers were being shown which are not currently available in the U.S. We got a closer look at the **Canon** X-07 and a chance to use the real thing rather than the prototype we saw at CES.

Paris To London: People & Places

Betsy Staples

When long-time friend and contributor Ancellme Roichel called to ask us to spend the weekend prior to the IFIP conference at his "family chateau" near Paris, we had no idea what to expect. We know Ancellme as a pioneer in personal computing whose ideas and experiments frequently anticipate the direction of technology by several years, but he never struck us as the sort of person who would be associated with a chateau—family or otherwise.

Imagine, then, our surprise when Ancellme drove his rented car through the gate of a genuine French chateau, parts of which date from the 16th century. Furnished with Oriental rugs, antique Chinese porcelain, and ancient Middle Eastern ceramics and tended by helpful, friendly servants, Chateau d'Orval made us feel like characters in a Masterpiece Theatre production. We agreed that it wouldn't take long to become accustomed to such a life.



Chateau d'Orval.

The fantasy ended all too soon with a hair-raising drive through rush hour traffic to the Palais des Congres in Paris for opening day sessions at the IFIP conference.

I had been facing my second visit to Paris with something less than total enthusiasm. On my first trip ten years ago, I had been appalled by the indifference of the people and their complete inability to tolerate lapses in my high school French. Somehow the city seemed more hospitable this time. Perhaps the attitudes of the Parisians have changed (unlikely), perhaps my French has improved (less likely), or perhaps we just looked less like college students travelling on a budget. Whatever the reason, I began to understand for the first time the fascination that the city holds for people the world over. It will never replace

RUN "TAXES"

I/O ERROR

Disk Media Error

A Modern Day Fable.

Once upon a time there was a very diligent man, Jack. Every year the man promised his very faithful wife that he would keep accurate records to make tax time more bearable.

One sunny day, Jack traded in his family cow for a new computer. That starry night, he began to enter all of his tax records onto disk. "How easy and accurate this will be," he stated.

The months went by. Tax time approached. Confidently, Jack inserted his data file and entered "Run Taxes." "Just watch," he said to his wife. But alas. His CRT, as if it were alive, proclaimed, "I/O ERROR." "Gads," he stammered in frustration. "Oh my," said his wife.

Then entered his neighbor carrying three beans, a golden lyre and the new Discwasher® Clean Runner™ Interactive Drive Cleaner. The good neighbor told Jack, "Preventive maintenance will destroy dirt in the disk drive and keep it running clean."

The good neighbor promptly inserted the Clean Runner Interactive Drive Cleaner into the drive and cleaned the read/write heads for Jack. Saying "Bye," he left to tend to his garden. Diligent Jack then proceeded to run his tax data and this time all went well.

The moral of the story, Discwasher Clean Runner is a disk of prevention for a bit of frustration.

The End.

Not all endings are that happy. A dirty read/write head can cost not only many hours of time but also the loss of valuable data.

- *Discwasher® Clean Runner™ Interactive Drive Cleaner is one disk that contains both the program software and the cleaning surface. There is no program to enter.*
- *Clean Runner is an interactive system. It responds to your individual entries as it leads you step-by-step through the cleaning process.*
- *Clean Runner directs the head(s) of your drive to a different track for each cleaning. Clean Runner provides a contamination-free cleaning surface.*
- *Clean Runner effectively works on both single or double-sided drives.*
- *Clean Runner is programmed for 20 cleaning operations.*



A Disk Of Prevention For A Bit Of Frustration

discwasher 1407 N. Providence Rd., P.O. Box 6021 Dept. CC, Columbia, MO 65205 USA A DIVISION OF **JENSEN** an **ESMARK** Company

CIRCLE 148 ON READER SERVICE CARD



The Robo Stick is an accurate input controller for the Apple, Acorn, and other computers.

It falls into the category of a notebook computer—it is smaller than a Model 100 but larger than a pocket computer. The keyboard is laid out in conventional QWERTY fashion, but the keys are calculator style and spaced more closely than on a standard typewriter. However, they do have a good feel, and we got no key-bounce whatsoever in normal use. In our benchmark test, the X-07 was quite slow, but provided reasonable accuracy. We were quoted a price of "under 1000 francs" ($125), but we have reason to believe that is way too low. Canon USA isn't talking.


Another small machine we saw previously at CES is the **Sanyo** PHC-25. It is a nifty low end computer, although incredibly slow. We were told it would not be marketed in the U.S. because of the cutthroat price competition at that end of the market. It seems that that sort of kamikaze competition hasn't spread to Europe—at least not yet.

Surprisingly, we saw very few portable machines of the Osborne variety. Most of the European business entries seem to be more along the line of the IBM PC, at least in physical appearance.

Apple was getting a great deal of attention at their Lisa demonstration, although we found a marvelous new graphics entry device on another part of their stand (booth). It is manufactured by **Robocom** in England and is a cross between a joystick and track ball. A stick projects out of a calibrated ball and we found it much easier to maneuver the cursor accurately around the screen with this device than any joystick or mouse. We hope that either Robocom or Apple decides to market the device in the U.S. The supporting graphics software was quite amazing too.



Paris from the 14th floor.

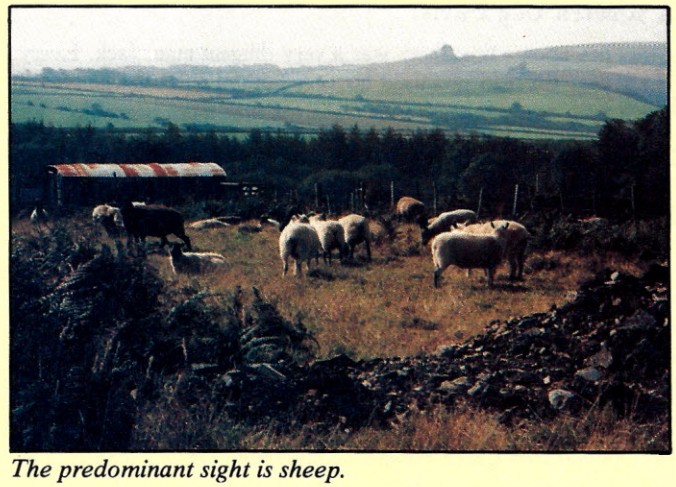

The predominant sight is sheep.

London in my affections, but it has risen to a position somewhere above New York on my list of enjoyable cities to visit.

On To Wales

Having had our plans to visit Belgium and Holland foiled by a general rail strike in Belgium, we revised our itinerary and headed for Wales with the assistance of British Rail's SeaLink.

The predominant color in Wales is green—a lush, moist green that I have never seen in the U.S.—and the predominant sight is sheep. Wool is big business in Wales, where even the smallest patches of unoccupied ground are expected to support at least a sheep or two.

We rented a car in Cardiff and spent the first night in the delightful seaside resort of Mumbles, which featured a giant rainbow striped apple on the side of one of its most prominent buildings. Apparently, delightful seaside resorts are not prime locations for computer stores, because the shop below the apple had been abandoned.

The Welsh people are, if anything, more cordial and helpful than the English. Most were happy to chat and eager to volunteer advice and information. Perhaps the most interesting bit of information we picked up was from the proprietor of a craft shop who told us about the frog migrations in his area. "In the spring," he said, "people join the Frog Patrols to help the frogs cross the roads and get to their mating places safely." We found this concern for such lowly creatures admirable. Kermit notwithstanding, we suspect that a similar situation in this country would result in either very hazardous driving conditions or the installation of teeny, tiny DON'T WALK signs on the highways.

The only place we heard Welsh spoken was on the Welsh TV station, but the place names presented sufficient chal-

THANKS

We gratefully acknowledge the many positive comments that we have received in response to **Chess 7.0, Checkers 2.1, and Odin.**

Chess 7.0 – Then and Now

In 1982, we introduced **Chess 7.0**, by Larry Atkin. For the first time, the chess player could save games to disk, take back moves easily, learn from classic games, use a **real** manual, enjoy an extensive opening library, fast play, a smart end-game, and in general work with a program **designed** to extend his or her own reach. **Chess 7.0** also played better than any other chess disk on the market. And although other programs are now beginning to offer some of **Chess 7.0's** features, **Chess 7.0** is still, by far, **the** learning, analytical tool for the chess person. Decide for yourself – ask your dealer to show you the interactive chess game where you get better, not bored.

Announcing New Versions


Chess 7.0, Checkers 2.1, and Odin are now available for the **IBM PC** and **Commodore 64**. Thanks for waiting.

More Feedback

From Neil Shapiro, Popular Mechanics "PM Software Monitor" 5/83: "The Best in Chess ... all the options make playing a game with **Chess 7.0** more like having a conversation with a chess teacher than playing against a machine."


From Jonathan Cerf, former World Othello® champion "... an extremely formidable opponent – in most situations, **Odin's** play is world class by human standards." Othello Quarterly, summer '83.

The Best are Now Boxed!

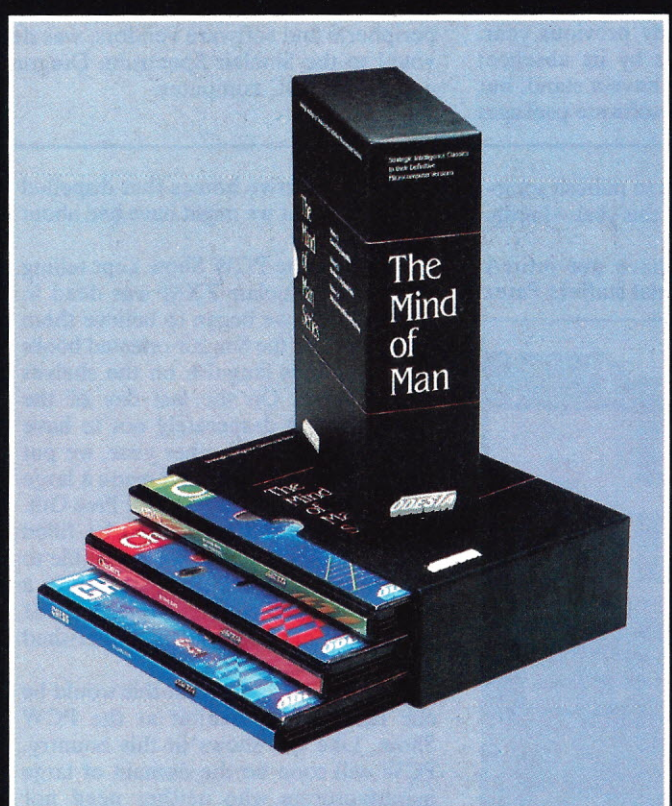

The perfect gift for the whole family. "... if you are parents looking to offer your children an alternate, non-violent learning-plus-entertainment option to arcade mindlessness, then these are simply the best products." InfoAge. Save $25.00 on this specially priced set.

Another First – A Program Designed to Teach Chess

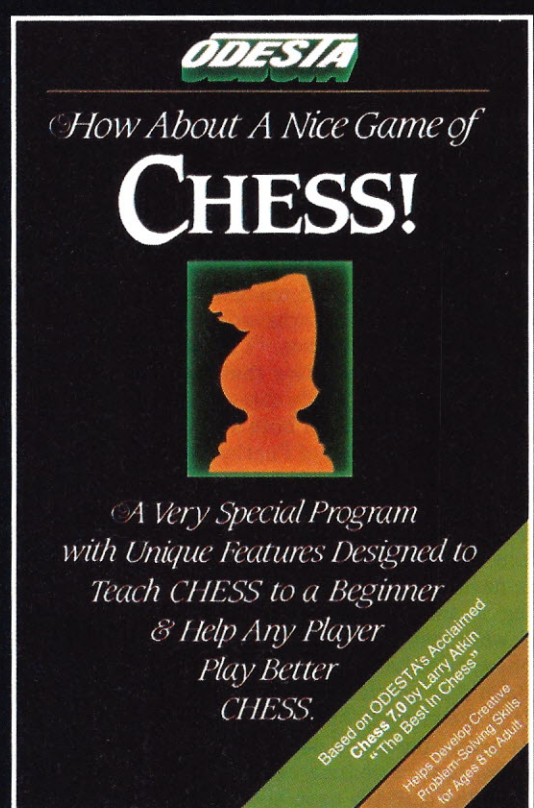

Based on **Chess 7.0**, with the emphasis on teaching as it challenges. On-screen tutorials show how pieces move and capture. Sub-menus demonstrate important principles and strategies, including development and end-game techniques. A must at $29.95.

ODESTA

3186 Doolittle Drive
Northbrook, IL 60062
(USA)

1-800-323-5423

Chess 7.0: $69.95
Checkers 2.1: $49.95
Odin: $49.95
How About A Nice Game of Chess: $29.95
Mind of Man Set: $145.00

For:
Apple® II, III
Commodore® 64
IBM® PC
Atari® 400-1400

CIRCLE 242 ON READER SERVICE CARD

©1983 ODESTA

PCW Show

PCW stands for *Personal Computer World* magazine. According to the cover, it is "Britain's Biggest Microcomputer Magazine." It has undergone the usual changes in ownership, common in the field, and is now owned by VNU. Under the previous owner, it was informally our sister publication, but that relationship no longer exists.

In any event, PCW has been sponsoring a personal computing show for six years, and we have been attending for four. It is the largest show of its kind in England, and generally a great deal of fun.

However, as with other shows, the effects of dilution are beginning to show. Today, there are so many shows, so many stores, and such widespread availability of hardware, software, and books, that the frantic activity (read *buying*) of previous years was largely absent. Also, the show was held over five days, so the activity was more widely dispersed. Not that it wasn't busy on Saturday—it was. So much so, that the narrow aisles of the Barbican Center were crowded to the point that movement was totally impossible in many places. Those, of course, tended to be around the stands exhibiting the most interesting new products. More about those later.



Players of Postern Ltd.'s 3-D games donned special goggles.

Some general observations: Britain has its own well-established computer industry, and there were fewer American machines on the floor than in any previous year. Apple was conspicuous by its absence; not only did Apple not have a stand, but very few peripherals and software packages were being shown for the Apple. Atari and Commodore both had large stands, but far more space, particularly among peripheral and software vendors, was devoted to the Sinclair Spectrum, Dragon, and Acorn BBC computer.


lenge to keep us on our linguistic toes. Imagine the scene: Rented car approaches roundabout. Driver, all the while trying to remember which side of the road he belongs on, calls to navigator, "Do we want to go to Llanrhaeadr or Llanwrtyd?" Navigator replies, "I can't find anything that sounds like that on the map. Can you spell it?" By this time, they have missed the turns for both towns and are zipping along toward Penrhyndeudraeth.

London Update

Back in London, we noticed that the showers have not improved and phone sanitizing is still a booming business. Friends were quick to inform us that telephone service has improved greatly. They claim that public telephones now not only make change, but accept your payment before the called party answers so that you have a chance of actually completing the call. We have no reason to doubt the accuracy of these reports, but all the public phones that we saw and used were of the old answer first, then pay variety.

We were pleased to discover Tim Hartnell alive and well and writing in Shepard's Bush. Much to his consternation, a recent issue of *SYNC* magazine reported Tim's retirement. He has been travelling in Australia signing up new book authors and plans to publish something like 42 new books this year—hardly a retirement schedule.

Other people who have not retired are former *PCW* editorial staffers Peter

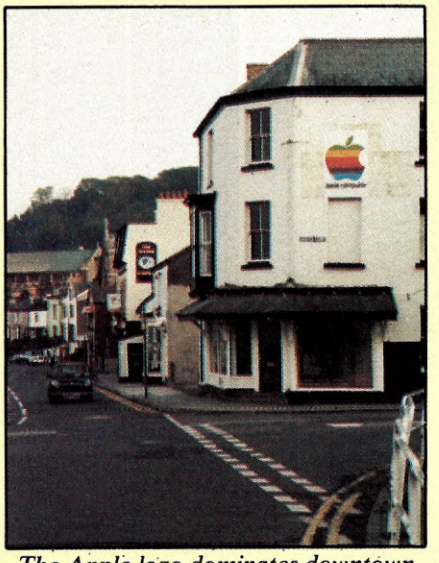

The Apple logo dominates downtown Mumbles.

Rodwell, Maggie Burton, and David Tebbutt all of whom are now engaged in independent ventures but remain involved in various projects of the magazine and its offspring. They treated us to dinners at their respective homes that dispelled any evil notions we might have had about English food.

People at the PCW Show kept telling us that the Sinclair ZX81 was dead in England, and we began to believe them as we watched the Sinclair-oriented books and magazines languish on the shelves of our stand. On the last day of the show, wanting desperately not to have to store them for another year, we put on our marketing hats and made a large poster: ZX81 Owners—Ask for Free Gift. Suddenly the hall seemed to be filled with ZX81 owners, and we were able to dispose of all the material we had in a few hours. We concluded that ZX81 owners are not dead, just impoverished or under age.

We also concluded that this would be our last year to exhibit at the PCW Show. Like the shows in this country, PCW will soon be the domain of large manufacturers who neither need nor expect to recoup the expense of exhibiting from sales at the show. We predict that fewer and fewer small companies and companies with relatively low cost products will be able to afford any but the smallest shows and flea markets.

We will, however, continue to cover the show (and environs) editorially to keep you up to date on the market wherever it may be.



INTRODUCING SARGON III. THE FIRST CHESS GAME THAT'S TOUGH ENOUGH FOR BORIS AND EASY ENOUGH FOR BOBBIE.

Sargon III from Hayden Software. It's the ultimate microcomputer chess game. Whether you're a master like Boris Spassky looking for a real challenge. Or a novice like little Bobbie Adams who wants to learn the finer points of the game.



Sargon III challenges the masters.

Sargon III can be the toughest opponent you'll ever play.

It's more difficult and moves faster than our famous Sargon II. Played at its highest level, Sargon III is the Grand Master of chess games.

If you want to see classic situations and problems, Sargon III will show you. If you want to replay sequences, Sargon III lets you. You can even stop your game in progress and save it to disk or print it out if you want.

Sargon III is the best way to learn chess.

Sargon III gives you the greatest instructional value of any chess game. It allows two players to play each other while it monitors moves for consistency with rules of play. You can also query Sargon for move suggestions. If you're playing alone, you can ask Sargon for alternate moves after it makes its best move.

Sargon III provides the most complete and informative user manual, making it easier for the novice to learn. It includes diagrams from the U.S. Chess Federation, suggestions for better play, and descriptions of 107 great games of history.

Sargon III runs on Apple II, II+, IIe, the IBM Personal Computer and other popular compatibles.

So visit your local retailer and ask for Sargon III by name. Or call 1-800-343-1218 (In MA 617-937-0200). Hayden Software, 600 Suffolk St., Lowell, MA 01853.

It's simply the best move you can make.

Sargon III is a registered trademark of Hayden Software.
Apple is a registered trademark of Apple Computer, Inc.
IBM is a registered trademark of International Business Machine Corp.

SARGON III™

HAYDEN SOFTWARE

CIRCLE 160 ON READER SERVICE CARD



The Commodore stand was crowded, but had no new products on display.



The Creative Computing booth at the PCW show was colorful and, during show hours, packed to the gills.

Sharp was showing yet another updated version of the MK-60, this one numbered MZ-700. It has nice specs, and the version with the built-in four-color printer/plotter is very nice indeed. However, as with the earlier versions, the MZ-700 is cassette-oriented (only), and "high resolution" graphics must be done with graphics symbols within a 40 x 25 character matrix.

We were interested to see that **Mattel** was making a big push for the Aquarius computer, Intellivision, and their noisy Synsonics drums. Perhaps they are hoping for success in the U.K. with products shunned by the American market.

Among the business machines, the Apricot was attracting the most attention with the Sirius 1 and IBM PC not far behind. The Pied Piper, introduced at the show, seemed to be well-received, as was the NEC 8800, DEC line, and Seiko 8600. This latter machine is a 16-bit 8086-based computer with 128K, 640K floppy disk drive, 10M or 20M hard disks, that runs MS-DOS, CP/M, or any one of four multi-user operating systems.

Elan Computers

Elan, a company started by David Levy of computer chess fame, was showing an early prototype of a powerful computer designed to sell in the $300 range. David made the point that this may be the first machine designed by a software company; thus it incorporates many features of interest to software designers and programmers.

Among the business machines, the Apricot was attracting the most attention with the Sirius 1 and IBM PC not far behind.

Briefly, it is built around a Z80A (4 MHz) with 32K of ROM and 64K or 128K of RAM, expandable through a memory management system to a staggering 3.9Mb. The graphics resolution is 672 x 512 pixels; text resolution is 56 lines x 80 columns (84 if the border area is used). The Elan employs 68 full-stroke keys and a built-in joystick (like the SpectraVideo 318). Sound capability includes four voices over eight octaves via stereo output. Many of these capabilities are produced with custom chips, so we are not likely to see them in other machines—at least not immediately.

Elan is seeking an American partner, and we expect to see them busily writing orders at the winter CES in Las Vegas.


For more information, write Elan Computers Ltd., 31-37 Hoxton St., London N1 6NJ, England.

ACT Apricot

We were frankly astonished at the interest in the Apricot. Not only did ACT have a huge stand, but many software



Timothy Hartnell, one of the most prolific authors in computerdom at his booth.

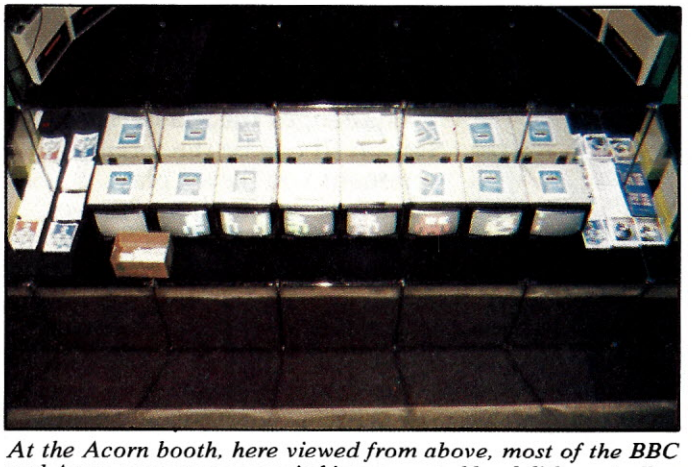

At the Acorn booth, here viewed from above, most of the BBC and Atom computers were tied into a central hard disk controller. Here, eight of the machines are running continuous graphics in a horizontally scrolling banner.

from the publishers of PC

PCjr. For IBM Personal Computers in Education, Home and Business Use



THE NEW FOUNDATION FOR IBM PERSONAL COMPUTERS

Fulfill all of your expectations for your IBM personal computer with PCjr, the applications magazine written for you and your household! Whether you're completing your banking from home, cataloging your book, record or recipe collections, teaching your pre-schooler math or the alphabet, preparing your taxes or term papers, or just playing games, PCjr. will enable you to get the most out of all IBM PC's or compatible computers!

PCjr. is written for all members of your household as a tool to utilize your computer to its fullest extent.

SUBSCRIBE TODAY AND SAVE UP TO 35%!

PCjr. For IBM Personal Computers in Education, Home and Business Use

P.O. BOX 2450, Boulder, Colorado 80322

YES, please enroll me as an Introductory Subscriber to PC JR. for:

- ☐ One year (12 issues) $14.97 and SAVE 25%
- ☐ Two years $27.97 and SAVE 30%
- ☐ Three years $38.97 and SAVE 35%

Mr/Mrs/Ms _____
please print name in full

Address _____

City _____ State _____ Zip _____

CHECK ONE: ☐ Payment enclosed ☐ Bill me later
Charge My: ☐ American Express ☐ Visa ☐ MasterCard

Card No. _____ Exp. Date _____


Savings based on full one-year subscription price of $19.97.
Please allow 30 to 60 days for delivery of first issue.

8H096

mitac LEAD THE WAY




DEDICATED FOR YOUR ADD-ONs!

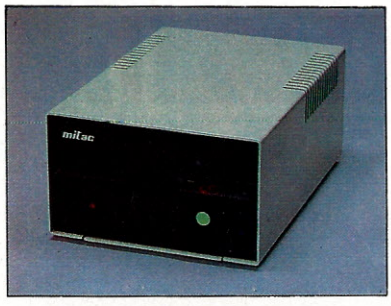


AD-1 is the most reliable and the most costeffective add-on floppy disk drive for Apple II[1], II PLUS[1] and IIe[1] computers. It matches them in quality and function but at less cost to you. There's no need for any software modifications.

MITAC is the largest computer system and peripheral engineering company in Taiwan, backed up by more than 200 computer engineers, most advanced CAD/CAM systems for designing and manufacturing and high-speed A.T.E. facilities for automatic testing. Besides, we are the third licensed manufacturer of disk drives from Shugart next to IBM and Matsushita in Japan.

MITAC has built very reputable sales and stable production of current products which are prevailed in the domestic and international market. Since this June, MITAC has been producing and selling more than 10,000 units of disk drive per month. Receiving the world-wide acceptance proves our products to be extremely reliable, and our long-term support keeps our international distributors a better margin in this highly competitive field.




AD-50/100 are series of add-on 5¼" 5MB/10MB Winchester disk drives for Apple II or IBM PC[2] computers. AD-50/100 incorporate microprocessor-based architecture, proven Winchester technology and built-in hardware ECC capability to detect and automatically correct errors.




JOY-80/100 are joysticks with microswitch technology to ensure high accuracy, super sensitivity, and autocentering feature to ease operations. With micro adjustment capability, JOY-100 lets you adjust the cursor center on the right position as you wish.

MODEL	COMPATIBILITY		CAPACITY (FORMATTED)
	APPLE II	IBM PC	
AD-1	V		143.4KB
AD-50A	V		5MB
AD-100A	V		10MB
AD-100I		V	10MB
JOY-80	V		—
JOY-100	V		—
TM-1265	V		—



TM-1265 features 12" nonglare green/amber screen, 10 degrees tiltability, 800 lines horizontal high resolution, elegant outerlook and easily accessible modules on a light weight but sturdy plastic frame that eases eyes strain and is easy to maintain.

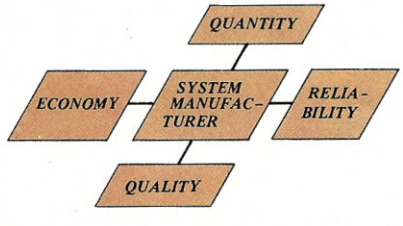

Welcome dealer inquiries.

FOR U.S.A. AND CANADA INQUIRIES PLEASE CALL:

American mitac Corp.

2906 SCOTT BLVD.,
SANTA CLARA, CA 95050, U.S.A.
TEL: (408) 988-0258 IN CALIFORNIA.
(800) 321-8344 IN OTHER STATES.
TELEX: 9103382201 MECTEL

FOR INTERNATIONAL INQUIRES PLEASE CONTACT:

mitac Inc.

3RD FL., 75 NANKING E. RD., SEC. 4, TAIPEI, TAIWAN. R.O.C.
TEL: (02) 713-6980; (02) 715-0940
TELEX: 20261 MECTAC, 11942 TAIAUTO

*Registered trademarks of ① Apple Computer Inc. ② International Business Machines, Inc.

CIRCLE 240 ON READER SERVICE CARD

Perhaps the strangest data entry device we have ever seen is the Microwriter.

manufacturers were showing packages for the machine as well.


The Apricot is termed "the 4th Generation Executive Computer' and employs an 8086 (5 MHz), 256K expandable to 768K, one or two Sony microdrives, 9" screen with 80 characters x 25 lines (or 132 x 50) text resolution, and 800 x 400 pixel monochrome graphics resolution. Outwardly, it looks like a sleek IBM PC (systems box with drives, tilt-and-swivel monitor, and detached keyboard). It uses a second 8089 processor for memory management, and an optional 8087 is offered for math calculations.

Three operating systems are included: MS-DOS, CP/M-86, and Concurrent CP/M. Both Microsoft Basic and Digital Research Personal Basic are included, along with a range of applications software.

Prices start at around $2400. American availability is promised soon. Watch for a review on these pages. For more information, write ACT International Ltd., 111 Hagley Rd., Birmingham B16 8LB, England.

Microwriter

Perhaps the strangest data entry device we have ever seen is the Microwriter. Slightly larger than an adult hand, the device has six buttons (one for each finger and two for the thumb). These six keys simulate the functions of an entire a... numeric keyboard.

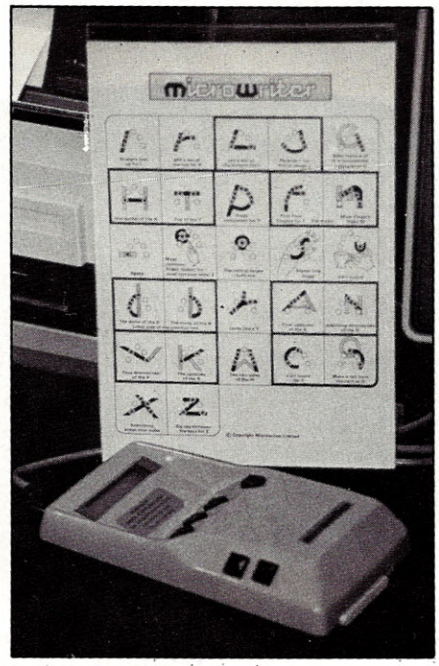

Microwriter is an interesting, new data entry device.

Microwriter can be attached directly to a computer; however, it also has a built-in 1600-word memory and battery power.

Data entry on the Microwriter compared to a keyboard is like speedwriting is to handwriting. The photo shows how several letters would be entered on the Microwriter.

U.S. price is around $500. For more information, write Microwriter Ltd., 17 E. 71st St., New York, NY 10021.

Games, Games, Games

The casual visitor to the PCW show would be forgiven if he mistook it for a full-scale invasion of aliens, Pac-creatures, worms, trolls, frogs, mutants, and assorted noisy monsters. With the exception of a small business-oriented area of Hall B, manufacturers of games software were in every nook and cranny showing their wares. Moreover, there was no prohibition on sound levels, so each stand attempted to outdo its neighbor in decibels. The effect of all this, along with the noise of the crowds, was nearly overpowering.

Postern Ltd. was showing an interesting true 3-D game. The effect was achieved with special glasses with red and blue lenses supplied with the game, *3-Deep Space*. As with most suppliers, versions are available for the Spectrum, BBC computer, and Commodore 64. Watch for our review of the 64 version soon.

Another new concept in games was

A New Kind Of BBC Home Service

John Anderson

Over the past two years, the Acorn BBC micro has taken the British Isles by storm. As part of a national program to improve computer literacy throughout the United Kingdom, the British Broadcasting Company invited computer firms to compete for the assignment to develop a new educationally focused microcomputer that met high technical specifications.

The Acorn, designed by leading educators at Cambridge University, subsequently was chosen as the official BBC micro. Today more than 85% of English schools use the Acorn to teach computer literacy. In Britain, Acorn is selling units as fast as it can turn them out.

Now Acorn is introducing the BBC micro to the United States. At a press conference in New York City last week, the U.S. version of the machine was unveiled.

Built around a 2 MHz 6502 processor, the BBC Acorn comes with 32K RAM standard, expandable to 64K inboard. It includes alongside its ROM operating system a structured version of Basic and *View*, a ROM-based word processing system. Its 73 key QWERTY keyboard includes 10 user-definable function keys.

Also built-in to the hardware are a voice synthesis module and a three-voice synthesis module with full envelope control. The video display provides 40- or 80-column text, graphics resolution of up to 160 x 200 in sixteen colors, and 640 x 200 in two colors. Fully three video outputs are offered: NTSC color, monochrome monitor, and RGB color. The RGB output video quality is superlative.

Standard interfaces include floppy disk capability, a Centronics-compatible parallel printer port, an RS-432 serial interface, which is described as an enhanced RS-232, and four-channel analog to digital conversion.

In addition, the Econet interface allows up to 254 BBC Acorns to be inexpensively tied together into a single network. This feature will be of special interest to educators. Using Econet, an instructor may monitor the progress of an entire classroom of Acorn users. A single command allows a master station to view any other display tied to the network.

The external connection dubbed the Tube affords co-processor capability. A second 3 MHz 6502 module can be added, including an additional 64K. A Z80 module also includes an additional 64K and can support the CP/M operating system.

Looks like a Ferrari. Drives like a Rolls. Parks like a Beetle.



Ask your computer dealer to take the cover off a world-class disk drive.

The all new, 1984 Indus GT.™

The most advanced, most handsome disk drive in the world.

A flick of its power switch can turn an Atari into a Ferrari.

Or an Apple into a Red Hot Apple.

Looks like a Ferrari.

The Indus GT is only 2.65" high. But under its front-loading front end is slimline engineering with a distinctive European-Gran flair.

Touch its LED-lit CommandPost™ function control AccuTouch™ buttons. Marvel at how responsive it makes every Atari or Apple home computer.

Drives like a Rolls.

Nestled into its soundproofed chassis is the quietest and most powerful disk drive power system money can buy. At top speed, it's virtually unhearable. Whisper quiet.

Flat out, the GT will drive your Atari track-to-track 0-39 in less than one second. Increasing data transfer 400%. (Faster than any other drive. And as fast as any Apple disk drive.)

And each GT comes with the exclusive *GT DrivingSystem*™ of software programs.* World-class word processing is a breeze with the *GT Estate WordProcessor.*™ And your dealer will describe the two additional programs that allow GT owners to accelerate their computer driving skills. *Included as standard equipment.

Also, the 1984 Indus GT is covered with the *GT PortaCase.*™ A stylish case that conveniently doubles as a 80-disk storage file.

Parks like a Beetle.


The GT's small, sleek, condensed size makes it easy to park.

And its low price makes it easy to buy.

$449 for Atari. $329 for Apple.

So see and test drive the incredible new 1984 Indus GT at your nearest computer dealer soon.

The drive will be well worth it.



INDUS™

The all-new 1984 Indus GT Disk Drive.

The most advanced, most handsome disk drive in the world.

For dealer information, call 1-800-33-INDUS. In California, 1-800-54-INDUS, 213/882-9600.

© 1983 Indus Systems, 9304 Deering Avenue, Chatsworth, CA 91311. The Indus GT is a product of Indus Systems. Atari is a registered trademark of Atari, Inc. Apple is a registered trademark of Apple Computer, Inc.

CIRCLE 155 ON READER SERVICE CARD

being shown by **Phoenix Software**. They announced a series of action/adventure games. First, the player must master an action game. Upon completion of each level, he receives a clue for later use. After completing the highest skill level, the player gets the loading code for the adventure portion of the game, and play continues in the style of a normal text adventure. All in all, a novel concept. We'll review one soon.

Llamasoft, originators of the wonderful *Gridrunner* game (marketed in the U.S. by HES), were showing several new entries for the Spectrum, Vic-20, and CBM 64. One really wacky one goes by the name *Hover Bover* and requires the player to mow up to 16 lawns with a power mower borrowed from a neighbor. You can sic your dog on the pursuing neighbor, but you must avoid the busy gardener and not plow through the flowerbeds or overheat your mower.

Llamasoft were also showing *Matrix*, a sequel to *Gridrunner*; *Attack of the Mutant Camels*, similar to the Parker Brothers *Empire Strikes Back* VCS game; and *Laser Zone*, an original space shoot-'em-up in which the player must control two spaceships at once. It's not easy! Reviews coming up soon.

Quicksilva, the software of which you have read in *SYNC*, was showing several nifty CBM 64, BBC, and Spectrum games. In *Quintic Warrior*, an original arcade game, you must stand alone against the sinister Crabman and mangled mutants. Like water skiing? Try *Aquaplane* in which you face Marine Maniacs and other aquatic obstacles. Reviews soon.

Across the aisle from us, **Salamander Software** was attracting a good deal of attention with several games for the Dragon 32, most of which are also available for the Tandy Color Computer. We particularly liked *Dragon Trek*, a game in the tradition of the original Star Trek, and *Wizard War*, an original game of magical conflict between the wizards of an alien planet.

Salamander also had several excellent adventures including *Franklin's Tomb*, *Everest*, and *Lost in Space*.

Rabbit Software had some nice Vic-20 and CBM 64 games. Most were arcade look-alikes and copies of board games, but the graphics were interesting and well done.

Romik was a company launched at the 1982 PCW show. In the following year they became established as a first rate games producer. They were showing a wide range of games for CBM 64, Vic-20, Spectrum, and other machines. We were impressed with *Dicky's Diamonds*, a game in which Dicky the Owl has to retrieve diamonds stolen by Stephen the Spider by weakening his webs. Quite unique! Watch for a review. *Zappy Zooks* is a Pac-creature type of game, but wildly (impossibly?) challenging at the higher skill levels.

Audiogenic was showing several utility packages for the Vic-20 and CBM 64, including *Magpie*, a user-programmable database program with "pop-up" windows and menus. Several well-known arcade-type games of other vendors, as well as Audiogenic, were produced using Audiogenic graphics utilities.

Opportunity knocked

Adam Osborne, aged 44, founder of the newly-bankrupt Osborne Computer company remained uncharacteristically quiet yesterday declining all comments on his company's problems.


A former computer industry columnist and book publisher he is known for his bravado. Earlier this year he boasted that he would knock out his competitors with a new product he called a "cherry bomb." In the event the idea backfired.

The son of British missionaries in India, Osborne was educated in England. But he regards California as the land of opportunities.

"Here it is a question of what you know, not who you know. I would not have a chance in Britain," he says.

Well, he had his chance in California.

The British press was less than kind about the demise of Osborne Computer. Above is the report from *The Financial Times* of London.

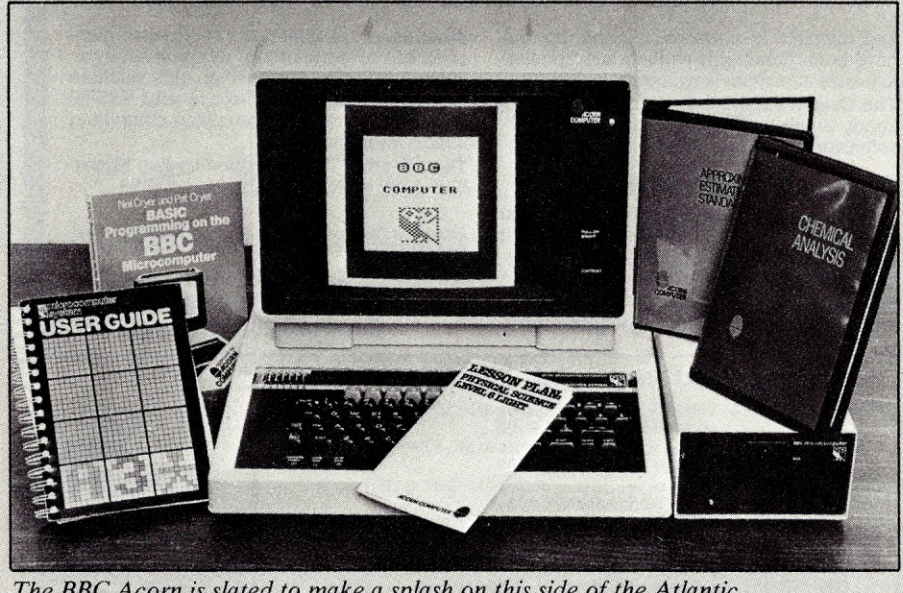

The BBC Acorn is slated to make a splash on this side of the Atlantic.

An NS16032 module brings 32-bit architecture to the Acorn, with the capacity to address up to 256K.

In addition to the many high quality educational packages currently available for the BBC Acorn, contractual agreements with many U.S. houses have been concluded to support the machine. Among these companies are Spinnaker, Muse, Micro-Ed, CDC (Plato series), and ISM. The range of software will span elementary through university level, and all packages will be reviewed by an advisory panel staffed by American educators.

As if all this weren't enough to get the machine off to a solid start in the U.S. educational market, two BBC television series underwritten by Acorn will air in the United States, prominently featuring the BBC micro. The first, aptly called "The Computer Programme," was shown last spring and will be rerun this season by 220 PBS stations. The second, "Making the Most of the Micros," will premiere later this season.

With the Acorn selling for less than $1000 in this country, it is bound to have a real impact on the educational market. As soon as a U.S. version of the unit arrives at the lab, you will see a comprehensive review in the pages of *Creative Computing*.

For more information, contact Acorn Computer, 400 Unicorn Park Dr., Woburn, MA 01801. (617) 935-1190.

Britain has beaten us by publishing the first computer comic, Load Runner.

Magazines

Personal Computer World, as any old-timer is aware, was modeled on *Creative Computing*. Even today, the two magazines and their respective offspring bear a striking resemblance to one another. Both have been acquired by large publishing empires. Both publish a Sinclair-specific magazine. Both publish a games magazine, a business computing magazine, buyer's guides, et cetera.

In many other respects,, the British computer magazine publishing industry parallels that in the United States. There are far more magazines than anyone might have imagined a year or two ago. Although we Americans pride ourselves on being first in nearly everything, Britain has beaten us by publishing the first computer comic, *Load Runner*. The comic/magazine carries six regular strips and several additional features and is aimed, as expected, at a young audience. One problem: their technical advice column, Brainy's Brainbox, regularly contains answers to readers' questions that are shallow and/or just plain wrong. Some of the comic strips, particularly Trumbull's World, are pretty good.

England boasts two computer games magazines, *Computer & Video Games* and a new one from *PCW*, *Personal Computer Games*.

C & VG is a very good magazine and runs around 160 pages per monthly issue. Each issue has 13 or so program listings with one or two games for each of the popular computers. It also runs one or two long features, lots of shorts, and lots of ads. The October issue had a 16-page feature on 3-D games with red/green illustrations that gave a 3-D effect when viewed with the cardboard glasses enclosed.

Personal Computer Games is brand new and, for now, is scheduled for quarterly publication. It also has lots of program listings and many colorful reviews with tips for beating the various games.

Lest you be tempted to think that the computer magazine explosion is confined to the U.S. and U.K., we can say definitively that it is not. While in Paris, we had dinner with Matthew White of Systems Publishers in South Africa. His firm currently has five microcomputer-oriented magazines. And Ake Fredriksson of Handic Press in Stockholm gave us a copy of *Vic Rapport*, one of several new microcomputer magazines published by his firm.

Can the publishing boom last? Probably not forever, but it certainly shows no sign of slowing down yet!

Tidbit: According to a well-placed source in Britain, the feel of the new Sinclair keyboard is like the feel of dead flesh. END



"Dear Sir: When you can find time away from your computer, I'd like to speak to you. Signed, Your Wife."

APPLE®, ATARI® and TRS-80® OWNERS!

Three fantastic books from *Creative Computing Press*...

THE CREATIVE APPLE

The best articles and features on the Apple to appear in the past four years of *Creative Computing* are gathered together in this interesting and entertaining book. Revised and updated to include the latest information, this wealth of material gives you dozens of ways to tap the tremendous potential of your Apple. Contents range from graphics, music and educational applications to word processing, software reviews, games and tips on easier programming. Whatever you use your Apple for, you'll find plenty here to help you get more out of it than you ever imagined possible.

The Creative Apple, edited by Mark Pelczarski and Joe Tate. 8½" x 11", softcover, illustrated. $16.95.

THE CREATIVE ATARI

Whether you're an Atari beginner or seasoned expert, you really shouldn't be without this extraordinarily useful guide to practical Atari "how to" and lore. You get tutorials on Atari graphics, a discussion of Atari memory concepts, programming tips, programs and much more that will help you make better use of your Atari. It's written so the average, non-expert user who knows a little about BASIC and simple programming can easily develop into a skilled Atari user. The contents have appeared as articles, columns and tutorials in *Creative Computing*, but have been thoroughly revised and updated to insure maximum learning ease.

The Creative Atari, edited by David Small, Sandy Small and George Blank. 8½" x 11", softcover, illustrated. $15.95.

THE CREATIVE TRS-80

Here's a complete guide to everything you can do with your TRS-80 and how to do it better, faster and more expertly: games, graphics, educational applications, business applications, programming aids, music and a review of handy hardware and peripherals. Whether you're interested in expense management or educational techniques, symphonies or color composition, this valuable volume will enable you to use your TRS-80 for more exciting and satisfying computing almost immediately.

The Creative TRS-80, edited by Ken Mazur. 8½" x 11, softcover, illustrated. $15.95.

Registered Trademarks: Apple: Apple Computer, Inc.; Atari: Atari, Inc.; TRS-80: Radio Shack division of Tandy Corp.

For faster service
PHONE TOLL FREE: 800-631-8112
(In NJ call 201-540-0445)

CREATIVE COMPUTING PRESS Dept. HB6H, 39 East Hanover Avenue, Morris Plains, NJ 07950

CREATIVE APPLE: Send me _____ copies at $16.95 each* plus $2 postage and handling. #18R

CREATIVE ATARI: Send me _____ copies at $15.95 each* plus $2 postage and handling. #18B

CREATIVE TRS-80: Send me _____ copies at $15.95 each* plus $2 postage and handling. #18Y

*CA, NJ and NY State residents add applicable sales tax. Outside USA add $3 postage and handling charge.

☐ PAYMENT ENCLOSED $_____

☐ CHARGE MY: ☐ American Express ☐ MasterCard ☐ Visa

Card No._____ Exp. Date_____

Signature_____

Mr./Mrs./Ms._____ (please print full name)


Address_____ Apt._____

City_____ State_____ Zip_____



☐ Check here for FREE *Creative Computing* Catalog.

What's fun to do and teaches, too?

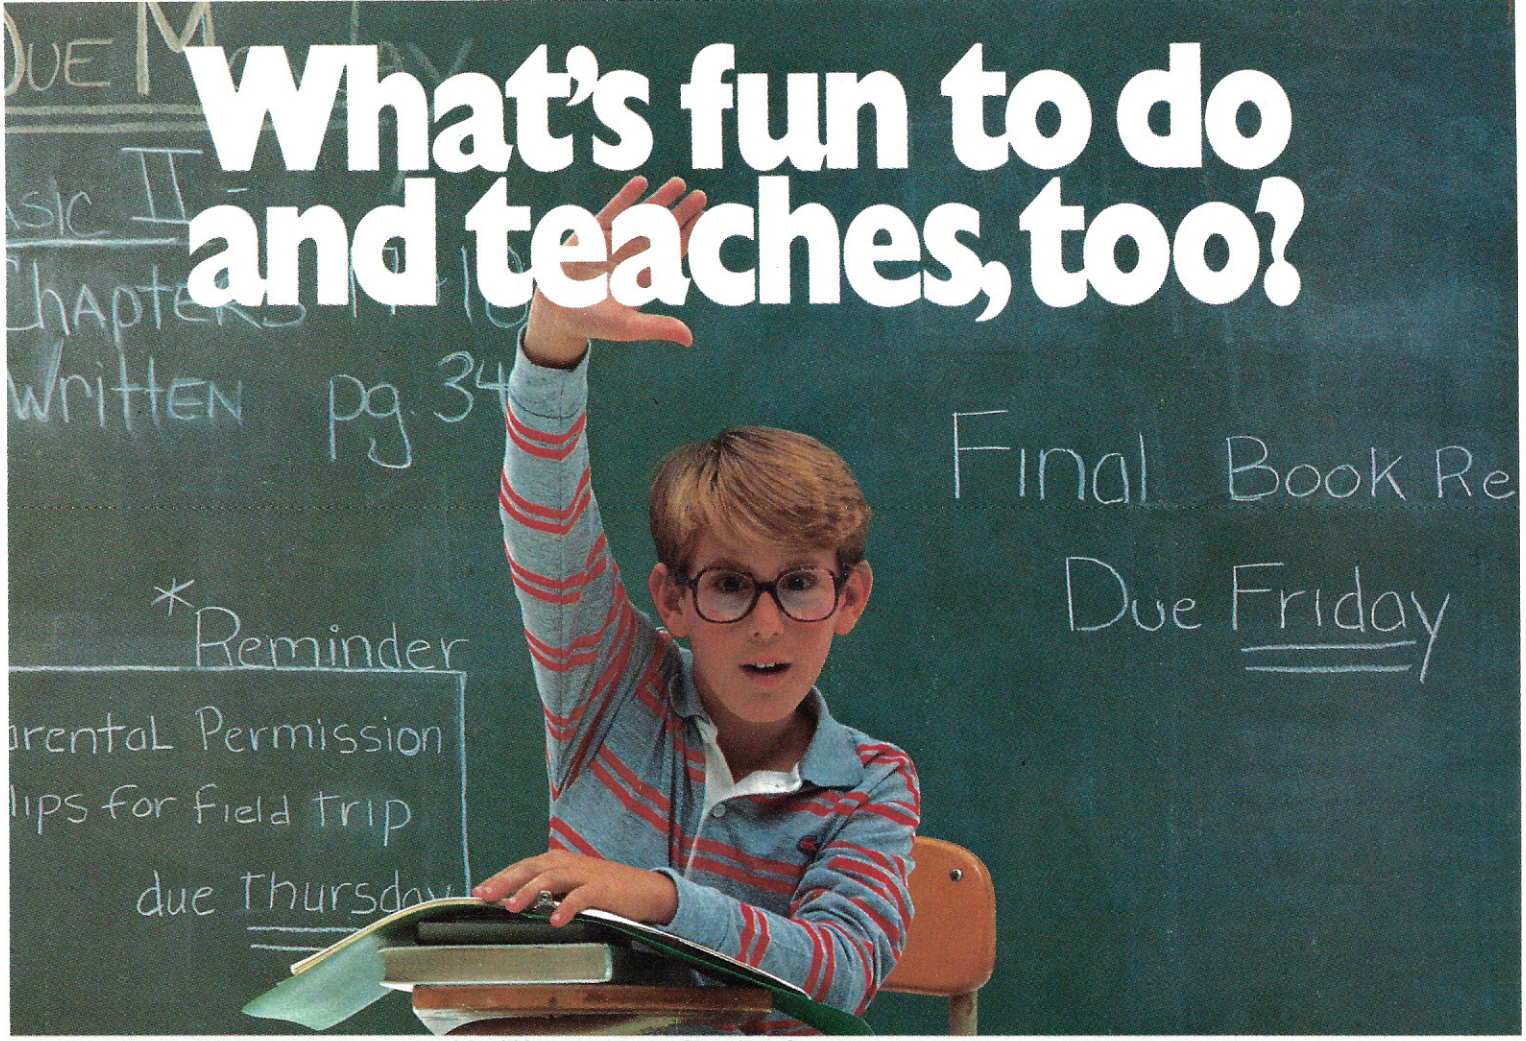

That's an easy one: HesWare™ educational software.


The children with the most answers in school are usually the children who enjoy learning. HesWare helps develop your child's interest in learning by making it fun. And along the way, develop familiarity and proficiency with computers—a skill that is becoming more and more essential to success.

HesWare educational software combines enjoyment with a creative learning experience. Unlike video games, HesWare educational programs involve your child—and that keeps their interest. Whether it's creating colorful and artistic pictures with Turtle Graphics, making up funny faces with Facemaker,™ or helping America's favorite canine, Benji, save kidnapped scientists (and learn about the solar system in the process,) or any of the programs in our education library, HesWare gives your children a positive attitude toward learning and technology.

It's not expensive to give your child a headstart on the future. HesWare programs are available for most popular home computers, including the Commodore VIC 20,™ Commodore 64,™ Atari,® and IBM.®

HesWare educational software. Just one of the ways HesWare is expanding the computer experience. And expanding your child's horizons. Look for them at your favorite software retailer.

Pleases the tough customer.

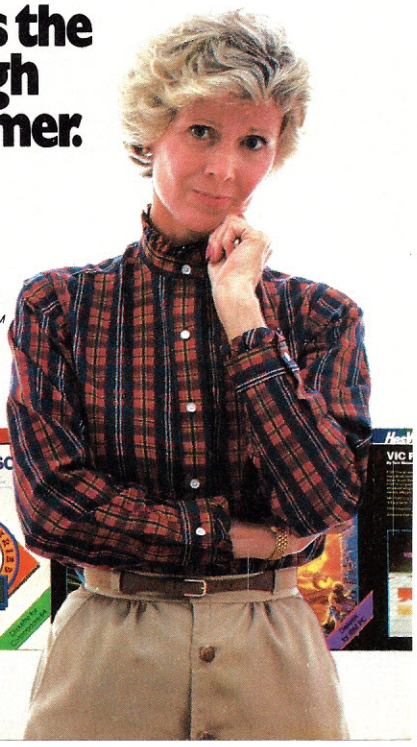

HesWare™

Human Engineered Software, 150 North Hill Drive, Brisbane, CA 94005
800-227-6703 (in California 800-632-7979) Dept. C20



HesWare is a trademark of Human Engineered Software. Facemaker is a trademark of Spinnaker Software. VIC 20 and Commodore 64 are trademarks of Commodore Electronics Ltd. Atari is a registered trademark of Atari, Inc. IBM is a registered trademark of International Business Machines.

© 1983

CIRCLE 163 ON READER SERVICE CARD

Hello, information.

Or, how the IBM Personal Computer can bring you the world.



Modem shown not supplied by IBM.

There's a world of information just waiting for you. But to use it, study it, enjoy it and profit from it, you first have to get at it.

Yet the facts can literally be right at your fingertips—with your own telephone, a modem and the IBM Personal Computer.

Plug into the network.

The modem that plugs into your phone takes the codes your IBM Personal Computer understands and turns them into signals that can be transmitted over the phone lines.

On the other end of the phone lines are independent information services* ready for you to access from your home, school, lab or office. So, in minutes, you can tap the resources of over a thousand data bases—and plug into a world of possibilities.



Something for everyone.

At home, for example, you can shop through an electronic catalog. Access mortgage amortization and tax depreciation schedules. Study the wines of France, the foods of Italy. Find property to sell, rent, swap or share. And play hundreds of games.

At school, you can bring news into the classroom—as it happens. You can teach and learn with facts about everything from phrase origins to plane geometry. You can also tap instructional courses and learn how to program the very IBM Personal Computer you're using.

In the lab, you can call up a wealth of mathematical and statistical programs or retrieve scientific and technological data.

In the office, you can plug into the commodities market. Read abstracts of leading publications. Even get census figures to see who's in your major market. And when you're planning a business trip, your IBM Personal Computer can provide airline schedules and car rental information, as well as tell you what the weather is and where the best restaurants are.

Calling all computers.

And these outside data bases aren't your only information link, either.

With assigned passwords, you can also have access to data that's stored in your company's IBM minicomputer or mainframe via your IBM Personal Computer.

You can even exchange a sales forecast with a manager two floors down or two thousand miles away—one IBM Personal Computer to another.

So the IBM Personal Computer really *can* let you call the world. But there's one call to make first. For more information on where to buy the IBM Personal Computer, call 800-447-4700. In Alaska or Hawaii, 800-447-0890. IBM®

The IBM Personal Computer
A tool for modern times

*Information services are available by subscription at additional cost, and are not supplied by IBM.

CIRCLE 165 ON READER SERVICE CARD



ACEWriter II
Sophisticated word processing that's easy to learn



ACECalc
VisiCalc®-compatible spreadsheet analysis program with 80 columns of variable width



ACE Display card
Opens video display to a full 80 columns by 24 lines



ACE 80 CPU card
Allows you to run CP/M and Apple® II programs



ACE Dual Interface card
Allows you to connect to local and remote printers, terminals, computers and other accessories



Apple II compatible

64K of RAM

Ulc Upper & lowercase



Typewriter-style keyboard



12-key numeric pad



VisiCalc keys



50-watt power supply

Built-in fan



1982



Apple II compatible

64K of RAM

Ulc Upper & lowercase



Typewriter-style keyboard



12-key numeric pad



VisiCalc keys



50-watt power supply

Built-in fan



1983

Good. Better.

And you thought Franklin was good before.

Well, look at Franklin now. You'll find our ACE product line has grown . . . and grown. To include sophisticated word processing. Sensational spreadsheet analysis. And an array of peripheral boards. So you can expand the capabilities of your ACE 1000 as your business needs increase. Our product line's not the only thing that's grown. Franklin now has more than 1,000 authorized dealers throughout the country. So, if you thought we were good before, come see us now.



FRANKLIN
COMPUTER CORPORATION
Better than ever.

Apple is a registered trademark of Apple Computer Inc.
VisiCalc is a registered trademark of Visi Corp.

2128 Route 38; Cherry Hill, NJ 08002 Telephone: 609-482-5900; Telex: 837-385

CIRCLE 164 ON READER SERVICE CARD

The CBasic Clinic

Part 3

John A. Libertine

You have probably noticed that the first two sessions in this series went along slowly and easily to get you used to the CBasic language. You should now at least be familiar with the steps involved in writing, compiling, and running your CBasic programs.

From now on, you will find that things speed up and become a little more involved. Don't let this throw you. If you can't quite get the idea the first time, don't be afraid to reread and, above all, try the program listings. You can learn quite a bit more if you see the results on your screen or printer.

Error Messages

Before we start this session, I want to call your attention to the error messages in CBasic. You recall there are two kinds: one shows up when you compile a program; the other when you actually run it. Your documentation lists both kinds and explains the error. A better listing appears in *CBasic User Guide* (Osborne/McGraw Hill), which I urge you to buy. In my opinion, the *User Guide* listing gives much better explanations and corrective actions to be taken.

The most common compiler error you are likely to see is ERROR SE. The error notice is printed right under the line where it occurs and reads something like: ERROR SE IN LINE 47 AT POSITION 13. SE means syntax error. You may have misspelled a key word (pritn instead of print, for example). The next most common error is US (undefined string). It means you left the quotation mark off the beginning or, more likely, the end of a string. You will, undoubtedly, make your share of errors and thus have to learn about them as you go along. Some of them can be quite tricky, so take the time to read the documentation and try to think logically and slowly.

John A. Libertine, The Four Corners, Hanover, MA 02339.

Okay, let's try a slightly different approach this time. Take a look at Listing 1, a simple program that allows you to enter the names, addresses, and scores of a bowling team. Note that I have used special numbers (A1, A2, and so on) at the left margin. These are for ease in reference only; you do *not* type them in your program.

First of all, read through the entire listing. You should be able to understand most of it. Of course, there are many new statements and functions that will be unclear; we will go into these in detail, but try to get the feel and the gist of the program first. This program not only lets you enter the data but saves them in a file so you can access them anytime. We will then do another short program to print the results out on your printer.

Subroutines

The first new statement is the very first word: GOSUB. As in most Basics, it means go to a subroutine. The figure next to it (in this case, 10000) refers to the *line number* where the subroutine starts. Remember that we don't need line numbers in CBasic *except* when we specifically refer to one. You will find line 10000 near the end (at A68). Most programmers put subroutines at the end.

In this case, there are three of them (at lines 10000, 20000, and 30000). It is customary in CBasic to use distinctive line numbers for subroutines. In this case, I have used large even numbers starting with 10000. You could also use a decimal line system: 1000.1, 1000.2, etc. The choice is yours as long as you are comfortable with it. Incidentally, for simplicity I will refer to program lines as line 1000 or line 20. The reference numbers at the left will be called simply A1, A34, and so on.

At A1, we tell the computer: Go to a subroutine that is located at line 10000. Line 10000 (at A68) is the beginning of our old friend from Part 2, the FOR-NEXT loop that clears the screen. This ends at A71. Now notice that A72 has the single word RETURN. This tells your computer we have reached the end of the subroutine and the program is to return to the line following the GOSUB instruction. In this case, the program now goes back to A2. Remember, *all subroutines* must be followed by a RETURN.

From A2 to A7, the program displays a title screen. The multiple print statements on A5 push everything on the screen up seven lines to center the words. The colons between each PRINT are shortcuts. They mean the next instruction is to print on the following line. In this case, each instruction merely prints a blank line.

A7 illustrates two significant CBasic statements: input and line. Input stops the program and waits for you to type something. In this case, we are asking that the RETURN key be pressed. The function here is to stop the program while the operator reads the screen. At A33 and several other places, the Input requested is a name or other data. In any case, Input serves two functions: It stops the program, and it accepts your input, which is then assigned to a variable. Usually, after you input the data, you hit the RETURN key to end the input. At A7, only the RETURN key need be hit because the function here is to halt only until you are ready to proceed.

Line Inputs

There are two basic kinds of inputs. A41 illustrates the usual one. Here you are asked to furnish a number (bowling score). The other kind is a line input. A33 is a typical example. Putting the word LINE before the variable NAME$

makes it possible to enter a line of characters and/or numbers including most punctuation marks (commas, semicolons, and so on). Ordinarily, a comma indicates the end of one item and the beginning of another. For example, if you entered:

John,Joseph,Michael

each name would be considered a *separate* input, and you would need three variables (i.e., INPUT Name1$, Name2$,Name3$). In this case, the commas are considered delimiters; they set off each item individually. If you use the line type of input, the three would be *one* item (assigned to one variable), and it would be stored and printed out exactly as entered.

This line input is useful in an address line, for example:

100 Main Street, Apartment 2.

If you did not use the line input, the street address and apartment number would have to be two separate items assigned to two variables in the file, and the comma simply would not print out. If you try to assign such a line to a single variable, you would get an ERROR message.

One punctuation mark you cannot use in a line input is a quotation mark because quotation marks are used as the delimiters in this type of input. A simple way to visualize this is to see how CBasic stores items you input. Say you input an address:

100 Main Street, Apartment 2

If you use the regular input with two variables, here is how it looks in the file:

100 Main Street,Apartment 2

If you use the line input with one variable, it looks like this:

"100 Main Street, Apartment 2" (note the quotation marks).

In the first example, commas are the delimiters. In the second, commas are still the delimiters but not when they are *within a* string set off with quotation marks. You can see it better in a file that reads:

"10 Main St., Apartment 2", "Anytown, Mass."

The commas after St. and Anytown are literals, and they print. The comma between Apartment 2 and Anytown is a delimiter and does not print. This is two separate entries, of course.

In A7, the line input serves an additional function. When you hit RETURN, you are putting a null string—a string with nothing in it into the variable Dummy$. With the regular input, hitting RETURN has no effect. The computer does nothing but wait for more input or gives you an error message. By making it a line input, hitting RETURN puts in a null string in the form of two quotation marks next to each other (""). The computer sees this as an entry, assigns it to Dummy$, and goes to the next program line. Because we never call back Dummy$, it just serves to startup the program after a halt.

You must remember that the line type of input can be used *only* with string variables. CBasic does not allow this form with integer or real number variables.

In addition, compare A6 and A7 with A20. In the first case, we have a PRINT statement followed by an INPUT line. On your screen, A6 prints the line shown and, on the next line, A7 prints a question mark. At A20, the input is followed by a prompt string (a word or words) that will print on your screen. There isn't a question mark in this case, and the cursor stays on the same line. Either works. The second is usually easier and more efficient. With this background, you should now be able to understand the program completely through A21.

File Handling

Now we come to one of the most powerful functions of CBasic: file handling. For some reason, this whole business of files seems to throw neophytes for a loop. Let's approach it slowly and simply keeping in mind that, for now, we will sometimes oversimplify and leave out some of the more advanced features to make things easier.

The whole business of files seems to throw neophytes for a loop.

It helps to remember that a file is nothing more than data stored on your disk; thus it can be recalled anytime. You give it a name that follows the CP/M format (up to eight characters followed by an optional period and three character extension as: FILENAME.EXT). The data can be stored in two major forms: sequential and random access. The latter is more advanced and versatile, but for this program let's stick with the simpler sequential form. Sequential simply means the data are stored in a stream—one item right after the other.

The first step is to create the file. Two statements are available: create and file. The first creates a file unquestioningly. This means that if the same file name already exits, it *erases* it and *overwrites* it. The File statement creates a file only if the name does not exist on your disk. If it does exist, it opens the file (i.e., makes it available for reading or additional input). In our program, we are using this form. Once a file is created or opened, we do not refer to it again by file name. We use a number from 1 to 20 because 20 is the largest number of files we can have open at the same time. In the case of the File statement, the file number is the lowest unused number. In our programs that is number 1. The create statement requires you to give the file a number as in CREATE "FILENAME.FIL" AS 1. In either case, we refer to the file as 1 as long as it is active.

At A22, we name the file and assign it to a variable Filename$. At A24, we open the file. The first time you use this program, it creates the file. After that, the file exists and the program will open the file. This makes it possible, among other things, to add names and data to an existing file.

A25 is a key line. The IF END statement means: If in reading this file, should you come to the end of the file, then go to line 10. If we did not put this in, the program would read to the end of the file and, finding no further data, would cause a runtime error that would crash the program. A27 (line 20) illustrates the READ format. As I noted, the file is referred to as 1. The format for a read is:

READ #X semicolon variable comma variable comma and so on (where X is a file number from 1 to 20). Note that an IF END is *not* executed immediately. It only executes when and if you have read all the way through a file.

If you are running this program for the first time, the IF END executes at line 20 (A27) because it tries to read a file with no data in it. The program goes to line 10. If the file already exists, the read executes and reads the first series of the data (Name$ through String3). As you can see at A29, the program then returns to line 20 and reads the next series and so forth until the end of the file is reached. What is happening here is that the data are taken out of the disk file and placed into memory. When the end of the file is reached, the IF END executes and the program goes to line 10 (at A31). Just to illustrate that line numbers in CBasic do not have to follow any order, note that line 10 comes *after* line 20 in this program.

You should be able to figure out A26 and A28 (along with similar lines later in the program). This is a simple way to count the number of entries you make. At the end, we can print out the number of names in the file.

When the program gets to line 10, the GOSUB 10000 repeats the clear screen routine and the program begins to ask for inputs at A33 through A47. Note that after the three numeric inputs (for scores) there is an error trap line, which simply catches an input that is less than

1 or more than 300 (the range for bowling scores). You should be able to trace this for yourself now.

This is not a very sophisticated error trap, but it does not have to be because the operator has a chance to proofread his entries later. This error trap simply generates the warning message. This happens after the inputs at A50 through A57. I think you should be able to follow the logic without my going over each line.

At A58 (or A62 depending on responses just preceding) the program has a GOSUB to A73. This is where the data are written onto the disk. The format is virtually identical to the READ statement except the command is PRINT #X instead of READ #X (where X is the file number).

Your assignment is to figure out the logic of the PRINTER.BAS program from your documentation or CBasic User Guide.

Closing The File

At some point, the program must come to A63. To ensure that the data are safely transferred to disk, we must close the file. The command is simple: CLOSE X (X = file number). We are now at the end of the program. From A64 to A67, the final count is taken and printed on your screen.

The STOP statement at A67 is important. It prevents the program from continuing along and executing all the subroutines that follow. Unlike some Basics, we cannot use END here. An END in CBasic stops the compiler (which we don't want, of course), so the STOP is used instead. The difference is simple: END stops the program cold at any stage of compilation. STOP stops the program only in the runtime mode.

When you have written the program, store it, compile it (CBAS2 BOWL), and then run it (CRUN2 BOWL). Put in four or five names and scores. Note that you have three lines for addresses. If you do not need all of them, you merely enter RETURN (a null string, remember?). After you do this, you can read the file. Go to the A> prompt in CP/M and enter: TYPE BOWLING.FIL. The file will show up on your screen. Note the way the data are stored. The first few items (the ones entered with Line Input) are set off in quotes. The last three (entered with plain Input) are not. A typical line in your file should look like this:

"J. Jones", "10 Main St.","Anytown, CA 90000","",195,183,179 Notice the null string between 90000 and 195.


Now you should run the program a second time and add a few more names and scores to illustrate how to add to an existing file. Type it out on your screen again to see the additions.

Now would you like to see a formatted print out on your printer? Just enter the program in Listing 2. We will go into the whys and wherefores next session, but for now you must try it as a solo flight. Type, store, compile (CBAS2 PRINTER), and run it (CRUN2 PRINTER).

Your assignment before the next session is to try to figure out the logic of the PRINTER.BAS program from your documentation or the *CBasic User Guide*. Especially look up two new statements: the LPRINTER and CONSOLE commands. Good luck. END

NAME THAT KEY

(ALL 248 OF THEM!)

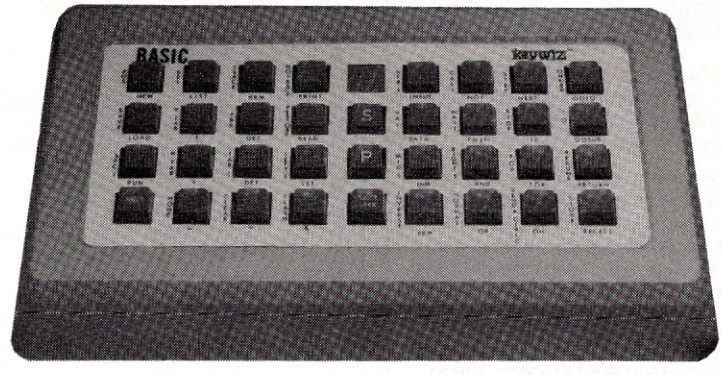

THE FIRST
USER DEFINABLE KEYBOARD

- Define each key with up to 8 characters of your choice directly from your computer keyboard
- Redefine any key - anytime - for any software program
- Each key is completely user definable without software or disk interaction
- 62 user definable keys (31 lower case/31 shifted) per keyboard
- Stores up to 4 (62 key) keyboards in its own memory
- Switch between keyboards at the touch of a button making all 248 user defined keys available
- KeyWiz is complete - no other parts to buy or PROMs to purchase and does not disable your keyboard

keywiz® VIP

(Very Intelligent Peripheral)

TURN THE POWER "OFF and when you turn it on again - it's still there!

Full 1 Year Warranty

Also available - our KeyWiz 83 & Convertible

- Preprogrammed Auxiliary Keyboards with 30 Visicalc/ AceCalc Function Keys
- Available with a Numeric Key Pad (our Model "83") or or without ("Convertible" Model) works with any program.
- Also available are the listed Word Processor Function Keys. (Optionally on the "83" model for $40.00 and provided without charge in the "Convertible" Model)
- Why waste time memorizing word processor or Calc commands or stringing key strokes together when KeyWiz utilizes single key strokes labeled in plain English. KeyWiz makes it all understandable.
- 4 Arrow Keys for full cursor positioning - a great asset to any Calc or word processor user.
- End Users - KeyWiz completes your microcomputer package.
- Dealers - KeyWiz makes it easier to sell software.
- Educators - KeyWiz sharply reduces training time and saves you $ $ $.
- OEM's - Provide a preprogrammed keyboard with that software package you're marketing. Call us about Custom Key Pads.

See us at Apple Fest SAN FRANCISCO
Moscone Center
San Francisco
Friday-Sunday
October 28-30, 1983

CURRENTLY AVAILABLE
Applewriter II
Screenwriter II
Super Text
Magic Window II
Word Star
SVS Word Handler
PIE Writer
Easy Writer

CCP Creative Computer Peripherals Inc.
Aztec Environmental Center
1044 Lacey Road, Forked River, N.J. 08731
THE **BIG** NAME IN **SMALL** COMPUTER PERIPHERALS


ORDERS ONLY **800-225-0091**
INFORMATION 609-693-0002
DEALER INQUIRIES INVITED

ORDER NOW
For the: ☐ APPLE II+ ☐ APPLE II e or ☐ FRANKLIN ACE
Standard KeyWiz '83
☐ Visicalc / Acecalc Key pad w/numeric key pad 299.00
☐ With optional Word Processor 339.00
(Choose one: _____)
KeyWiz Convertible
☐ Visicalc / Acecalc key pad w/Word Processor 299.00
(Choose one: _____)
☐ Custom Key Module (Send for specs) 40.00
KEYWIZ VIP for Apple II+ ☐ or Apple IIE ☐
☐ User Definable Keyboard with plastic Applesoft Basic Template, Pascal Template and 2 Blanks 439.00

Add $8.00 Shipping/Handling to order
6% Sales Tax in New Jersey
Send $3.00 for our Informative Users Manual

CIRCLE 143 ON READER SERVICE CARD

How to find the right software for your home or office computer.



The 1983 Software Buyer's Guide saves you time, trouble and money when you're shopping for software for your personal or business computer.

In this convenient, comprehensive guide the editors of **Creative Computing** have compiled up-to-date software reviews from our magazine. It's the one and only reference you need to select the right software for your individual computer needs.

Included in this new edition are programs for every conceivable application, including practical programs like TK! Solver, Vision, Paint and Video Easel and Slide Show–plus the latest games for Color Computer, TRS-80, Apple, Atari, and more!

You'll also find step-by-step guidance on buying a word processor, database manager, educational or recreational software.

And once you decide on the programs you want, you can find out where to get them though the convenient directory of manufacturers that's included.

Get the hard facts about software in the **1983 Software Buyer's Guide.** Send for your copy today. Only $4.95!

MAIL TODAY TO:
Software Buyer's Guide
CN1914
Morristown, N.J. 07960

Please send me_____copies of the **1983 Software Buyer's Guide** for only $4.95 each, ($3.95 plus $1.00 per copy postage & handling). $6.00 outside U.S.A.

Total Amount $_____

☐ Payment Enclosed (CA, NJ and NY State residents please add applicable sales tax.)

NAME_____
(please print)

ADDRESS_____

CITY_____

STATE_____ZIP_____

CBasic Clinic, continued...


Listing 1. Program name: BOWL.BAS

Important: This listing uses special line numbers (A1, A2, etc.) at the left margin. These are for reference only . . . you do not type them as part of the actual program!

```
A1    GOSUB 10000   REM  Clear the screen
A2    PRINT "         THIS IS A SIMPLE ENTRY PROGRAM FOR"
A3    PRINT
A4    PRINT "                 A BOWLING TEAM"
A5    PRINT:PRINT:PRINT:PRINT:PRINT:PRINT:PRINT
A6    PRINT "            HIT <RETURN> TO CONTINUE"
A7    INPUT LINE DUMMY$
A8
A9    GOSUB 10000
A10   PRINT "You will be prompted to enter a name followed by up to"
A11   PRINT
A12   PRINT "three address lines.  If you do not need all three lines,"
A13   PRINT
A14   PRINT "just hit <return> to skip.  You will then be prompted to"
A15   PRINT
A16   PRINT "enter the scores for each of three strings bowled."
A17   PRINT
A18   PRINT "You enter these numerically (i.e.  201 or 198 etc)."
A19   PRINT:PRINT:PRINT:PRINT:PRINT:PRINT:PRINT
A20   INPUT "Hit <return> to begin";LINE DUMMY$
A21
A22   FILENAME$="BOWLING.FIL"     REM Name the file
A23
A24   FILE FILENAME$              REM Open or create the file
A25   IF END #1 THEN 10
A26   COUNT% = 0
A27   20 READ #1;NAME$,ADD1$,ADD2$,ADD3$,STRING1,STRING2,STRING3
A28   COUNT% = COUNT% + 1
A29   GOTO 20      REM FIND END OF FILE
A30
A31   10 GOSUB 10000
A32   PRINT:PRINT
A33   INPUT "Full name:";LINE NAME$
A34   PRINT
A35   INPUT "Address line #1:";LINE ADD1$
A36   PRINT
A37   INPUT "Address line #2:";LINE ADD2$
A38   PRINT
A39   INPUT "Address line #3:";LINE ADD3$
A40   PRINT
A41   INPUT "Score for first string:";STRING1
A42   IF STRING1 >300 OR STRING1 <=0 THEN GOSUB 30000  REM Error Trap
A43   PRINT
A44   INPUT "Score for second string:";STRING2
A45   IF STRING2 >300 OR STRING2 <=0 THEN GOSUB 30000
A46   PRINT
A47   INPUT "Score for third string:";STRING3
A48   IF STRING3 >300 OR STRING3 <=0 THEN GOSUB 30000
A49   PRINT
A50   PRINT " ****PROOFREAD ABOVE CAREFULLY!!! ****"
A51   PRINT
A52   PRINT "1.  TO RE-DO, ENTER 'R' (for Re-do) THEN <RETURN>"
A53   PRINT "2.  If okay, and more names to do, enter <RETURN> only"
A54   PRINT "3.  IF FINISHED WITH ALL NAMES,"
A55   INPUT "    enter 'F' (for Finished) then <RETURN>";LINE ENTER$
A56   IF ENTER$="R" OR ENTER$="r" THEN GOTO 10
A57   IF ENTER$="F" OR ENTER$="f" THEN GOTO 1000
A58   GOSUB 20000    REM Write inputs to file
A59   COUNT% = COUNT% + 1
A60   GOTO 10
A61
A62   1000 GOSUB 20000   REM Write inputs to file
A63   CLOSE 1
A64   COUNT% = COUNT% + 1
A65   GOSUB 10000   REM Clear Screen
A66   PRINT "THERE ARE ";COUNT%;" NAMES IN THIS FILE NOW."
A67   STOP   REM  Main Program Ends Here
A68   10000  REM Clear Screen subroutine
A69   FOR I% = 1 TO 24
A70   PRINT
A71   NEXT I%
A72   RETURN
A73   20000 PRINT #1;NAME$,ADD1$,ADD2$,ADD3$,STRING1,STRING2,STRING3
A74   RETURN
A75   30000 PRINT "****INCORRECT SCORE ENTERED****"
A76   PRINT "RE-DO THIS ENTIRE ENTRY!!!!"
A77   RETURN
```

TAKE A BREAK!

For Apple, Atari, Commodore 64, and IBM-PC

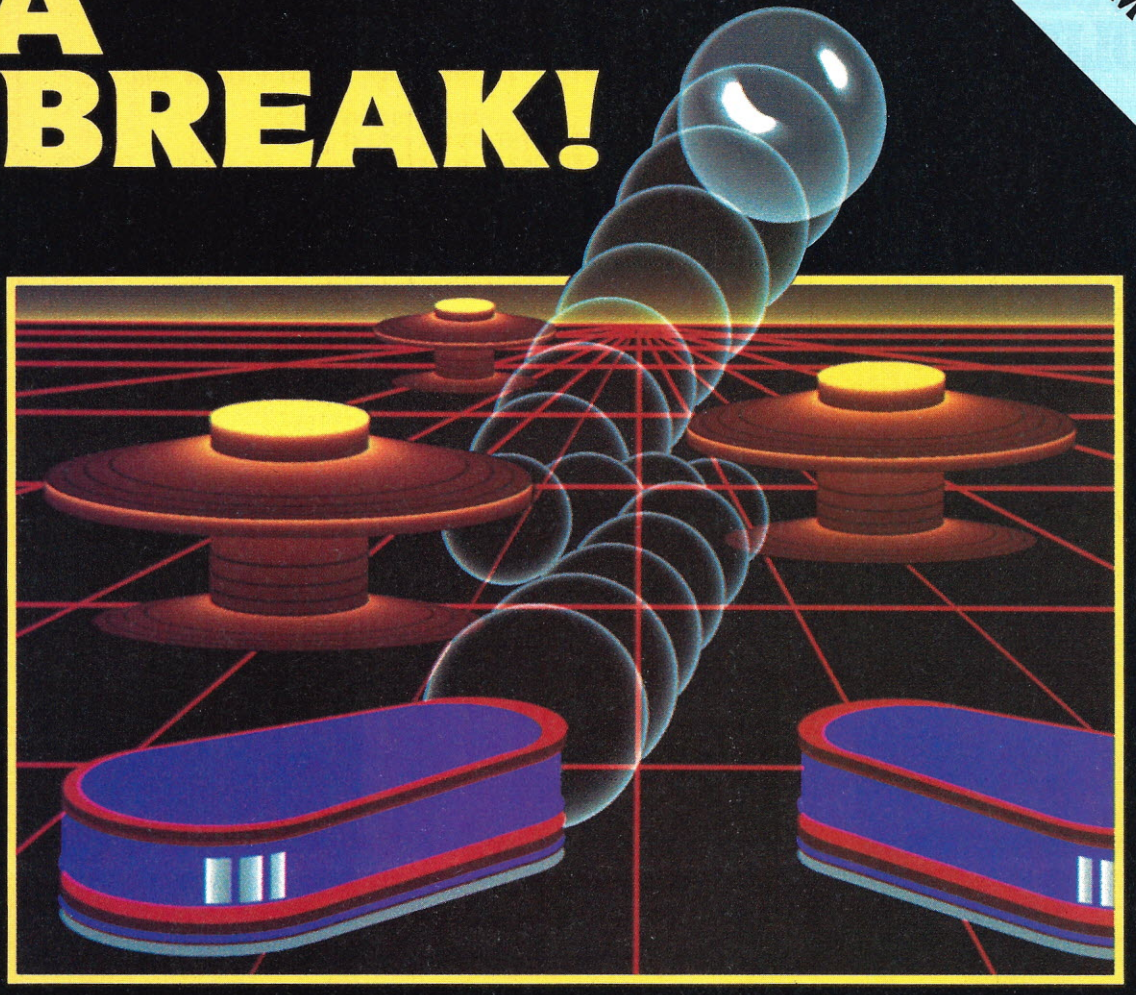

WITH NIGHT MISSION PINBALL

You deserve the best. You've earned it. Now reward yourself with a session of **Night Mission PINBALL**, the most realistic and challenging arcade simulation ever conceived! ■ Stunning graphics and dazzling sound effects put **Night Mission PINBALL** in a class by itself. Game features: multi-ball and multi-player capabilities, ten different professionally designed levels of play, and an editor that lets you create *your own* custom modes. ■ So take a break with **Night Mission PINBALL** from SubLOGIC. Winner of *Electronic Games* magazine's 1983 Arcade Award for Best Computer Audio/Visual Effects.



See your dealer . . .

or write or call for more information. For direct orders please add $1.50 for shipping and specify UPS or first class mail delivery. Illinois residents add 5% sales tax. American Express, Diner's Club, MasterCard, and Visa accepted.

Order Line: 800/637-4983

CIRCLE 257 ON READER SERVICE CARD

subLOGIC Corporation
713 Edgebrook Drive
Champaign IL 61820
(217) 359-8482 Telex: 206995

Looking for mind stretchers? TRY...

PROBLEMS FOR COMPUTER SOLUTION


Sharpen your students' minds and give them practical experience in using the computer. PROBLEMS FOR COMPUTER SOLUTION offers 90 brain teasers involving algebra, geometry, trigonometry, number theory, probability, statistics and science. Some typical examples:

- Can you find a five-digit number which when multiplied by four has its digits reversed?
- Write a program to find "Hardy's number" (the smallest integer that can be written as the sum of two cubes in two different ways).
- Program the computer to test any phrase to see if it is a palindrome (reads the same way backwards as forwards).

The student edition contains all 90 problems, seven appendices and a bibliography. The teacher's edition includes the same, plus the solutions with listings in BASIC, sample runs, and in-depth analyses explaining the algorithms and theory involved.

PROBLEMS FOR COMPUTER SOLUTION

Student Edition: 8¼" x 11", softbound.
Teacher's Edition: 8¼" x 11", softbound.



CREATIVE COMPUTING PRESS
Dept. HE2C
39 East Hanover Ave., Morris Plains, NJ 07950

Please send me:

_____Copies of PROBLEMS FOR COMPUTER SOLUTIONS, *Student Edition*, at $4.95, plus $1.00* postage & handling, each. #9Z

_____Copies of PROBLEMS FOR COMPUTER SOLUTION, *Teacher's Edition*, at $9.95, plus $2.00* postage & handling, each. #9Y

*Outside the US add $3.00 per order.

☐ **PAYMENT ENCLOSED $**_____
CA, NJ and NY STATE residents add applicable sales tax.

☐ **CHARGE MY:** (Charge and phone orders $10 min.)
☐ American Express ☐ MasterCard ☐ Visa

Card No._____Exp. Date_____

Signature_____

Name_____

Address_____Apt._____

City_____

State_____Zip_____

For faster service, call **TOLL FREE 800-631-8112.**
(In NJ call 201-540-0445.)

CBasic Clinic, continued...

Listing 2. Program name: PRINTER.BAS

```
GOSUB 10000
PRINT "       This program will print-out a bowling team"
PRINT
PRINT "              roster and scores"
PRINT
PRINT
PRINT "        ***** BE SURE YOUR PRINTER IS ON AND"
PRINT
PRINT "                  PAPER IS INSERTED"
PRINT:PRINT:PRINT:PRINT:PRINT
INPUT "    Hit <RETURN> to print now.......:";LINE DUMMY$

LPRINTER

IF END #1 THEN 25
OPEN "BOWLING.FIL" AS 1
20 READ #1;NAME$,ADD1$,ADD2$,ADD3$,STRING1,STRING2,STRING3


PRINT NAME$
PRINT ADD1$
PRINT ADD2$
PRINT ADD3$
PRINT "First string score......";string1
PRINT "Second string score.....";string2
PRINT "Third string score......";string3
PRINT
LET Total.score = string1 + string2 + string3
LET Average = Total.score/3
PRINT "Total Score for three strings.....:";Total.score
PRINT
PRINT "Three string average .............:";Average
PRINT:PRINT:PRINT:PRINT
GOTO 20

25 CLOSE 1

CONSOLE

GOSUB 10000
GOSUB 20000
STOP

10000 FOR INDEX% = 1 TO 24
PRINT
NEXT INDEX%
RETURN
20000 PRINT:PRINT:PRINT:PRINT
PRINT "END OF PRINT-OUT OF 'PRINTER.BAS' "
RETURN
```

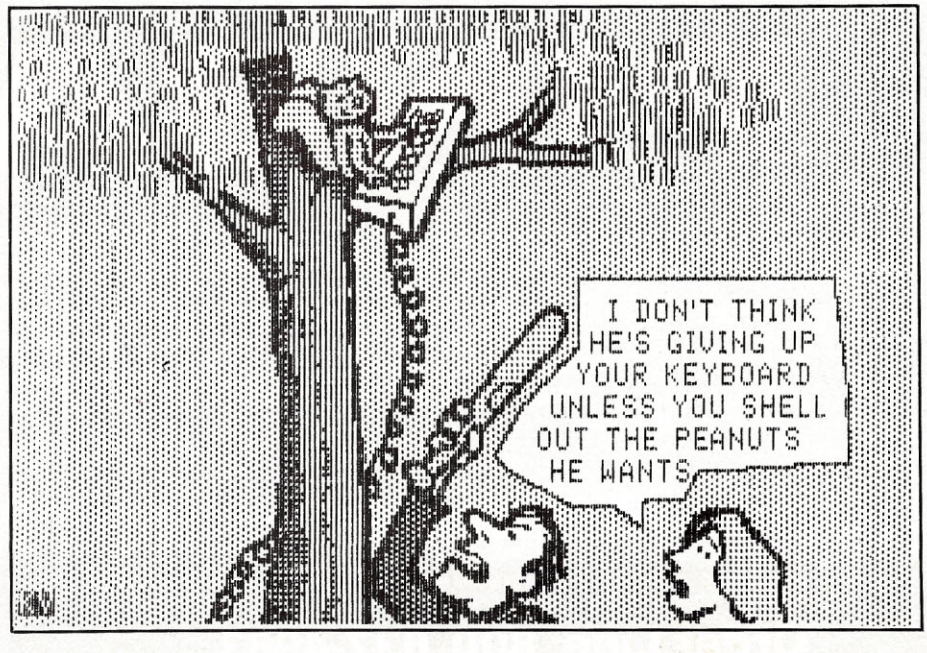


THE MOST COMPLETE COMPUTER INFORMATION RESOURCE


THE NEW ENCYCLOPEDIA OF COMPUTER SCIENCE AND ENGINEERING

IS YOURS FOR ONLY $2.95

WHEN YOU JOIN THE LIBRARY OF COMPUTER AND INFORMATION SCIENCES

You simply agree to buy 3 more books—at handsome discounts—within the next 12 months.

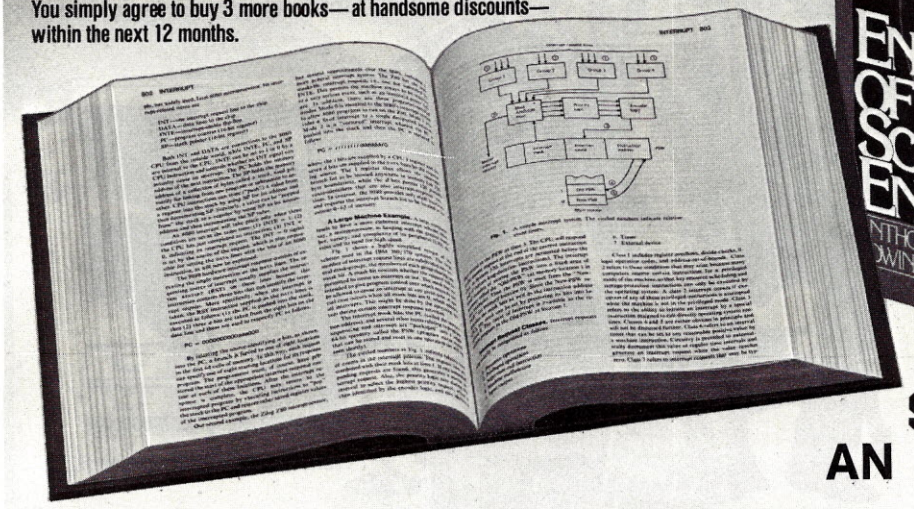

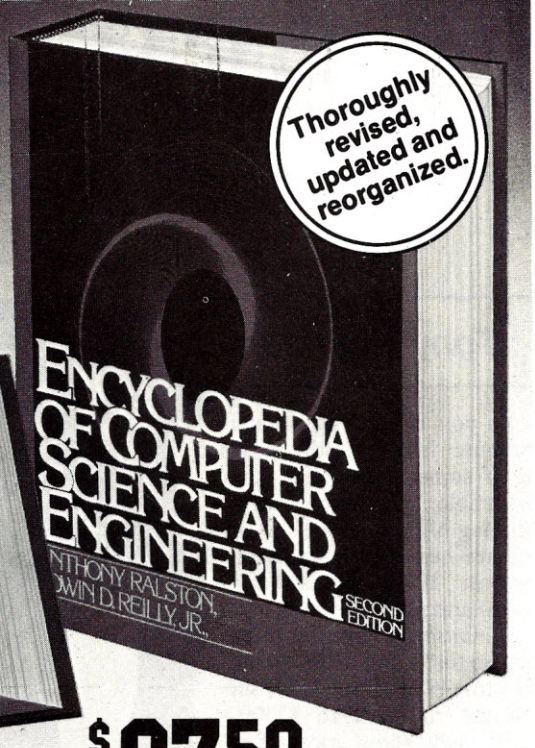

AN $87.50 VALUE

This up-to-date Second Edition contains:

- **Over 1,670 pages of revised, expanded, and updated text**
- **550 articles on virtually every aspect of the computer sciences**
- **Written by 301 distinguished authorities**
- **Profusely illustrated with over 500 photos, and over 250 diagrams, graphs and charts**

Indispensable to consultants, business people, data processing professionals, and enthusiasts, the ENCYCLOPEDIA OF COMPUTER SCIENCE AND ENGINEERING is a veritable data base of information on:

- Hardware
- Software
- Programming languages
- Artificial intelligence
- Computer applications
- Personal computing and much more!

The Encyclopedia is organized to make finding and using its wealth of information an ease. Articles are alphabetically arranged and are cross-referenced to related articles and to specific subject matter. The clear and expanded appendices include abbreviations, acronyms, special notation and terminology, as well as numerical tables, the mainstay of applied technologies. A complete 5,000-term index contains references to sub-categories, doubles as a computer science dictionary, and is an invaluable tool for locating specific information.

Praise For the First Edition:
Called "Impressive...comprehensive... well done" by *Datamation,* and "...a real treasure cache" by *Business Management,* the new Second Edition promises to eclipse *Computer Management's* statement on the original of "There isn't another book like it." Send for your *free* 10-day trial.

The Library of Computer and Information Sciences is the oldest and largest book club especially designed for the computer professional. In the incredibly fast-moving world of data processing, where up-to-date knowledge is essential, we make it easy for you to keep totally informed on all areas of the information sciences. In addition, books are offered at discounts up to 30% off publishers' prices. Begin enjoying the club's benefits today!

4 Good Reasons to Join

1. The Finest Books. Of the hundreds of books submitted to us each year, only the very finest are selected and offered. Moreover, our books are always of equal quality to publishers' editions, *never* economy editions.

2. Big Savings. In addition to getting the ENCYCLOPEDIA OF COMPUTER SCIENCE AND ENGINEERING for $2.95 when you join, you keep saving substantially—up to 30% and occasionally even more. (For example, your total savings as a trial member—including this introductory offer—can easily be over 50%. That's like getting every other book free!).

3. Bonus Books. Also, you will immediately become eligible to participate in our Bonus Book Plan, with savings up to 70% off the publishers' prices.

4. Convenient Service. At 3-4 week intervals (16 times per year) you will receive the Book Club News, describing the Main Selection and Alternate Selections, together with a dated reply card. If you want the Main Selection do nothing and it will be sent to you automatically. If you prefer another selection, or no book at all, simply indicate your choice on the card, and return it by the date specified. You will have at least 10 days to decide. If, because of late mail delivery of the News, you should receive a book you do not want, we guarantee return postage.

If the reply card has been removed, please write to:

The Library of Computer and Information Sciences
Dept. 7-CE7 Riverside, N.J. 08075 to obtain membership information and an application.

How to deduct a personal computer on your tax return

WRITING IT OFF



Tony Shershin

So you bought a personal computer in 1983 and you wonder if some of the cost is tax deductible; or maybe you are thinking of buying one this year and are hesitating because of the cost. If you are self-employed and *using the computer in your business,* then the entire cost, up to $5000, is tax deductible for 1983. (For 1984, the amount increases to $7500.)

But how about most of us who are salaried employees? Unless your employer requires you to have a personal computer as a condition of employment, it probably will not be deductible. (One major exception is the employee whose job is directly computer related. More on this in the sections below dealing with employee expense and educational expenses.)

But don't give up yet. Why not start a part-time business of your own, thus creating self-employment status, or, if you own stocks, use your computer to maintain your accounts and analyze your investments. There are several software packages tailored specifically for investors. Under these circumstances, that portion of the cost which reflects the proportion of time the computer is used in this activity may be deductible.

For example, if the computer and related equipment, such as a printer and a disk drive, cost $3000 and of its 40 hours weekly use, 20 hours are in support of your business, then one half of $3000—$1500—can be deducted in 1983.

Tony Shershin, Mathematical Sciences Dept., Florida International Univ., Miami, FL 33199.

The IRS takes a dim view of any activity in which expenses exceed revenues.

Hobby Vs. Business

The IRS takes a dim view of any activity in which expenses exceed revenue. Where possible, the IRS will assert that the activity is a hobby rather than a business, thereby disallowing the expenses as deductions. To be a business, the main purpose must be to make a profit.


The easiest way to convince the IRS that you intend to turn a profit is to be profitable during two of any five consecutive years. Of course, that isn't much help if you are just starting out. If your activity is enjoyable (and thus likely to be termed a hobby if there is a string of consecutive losses), then I would suggest delaying a computer purchase for a year until you have generated a few dollars of profit. It is possible to petition the IRS to postpone their determination of your activity to be a hobby (if there are losses) until after the fourth year and, if your first year is profitable, this would allow a further postponement until the end of the fifth year.

Losses will not automatically cause your activity to be classified as a hobby. Remember, the key issue is your intent to make a profit. You can structure your activity to conform to certain guidelines that the IRS has said it will consider: You should carry on the activity in a businesslike manner. For example, have business cards printed, advertise, and keep a careful record of your expenses and income. If you, or your advisors, have expertise in the activity, then that is a real plus.


Spending a great deal of time and effort on the activity is also helpful. Success when engaged in other business

WORDS CAN'T DESCRIBE THE EASE OF USING TRANSEND PC™ FOR ELECTRONIC MAIL.


1.

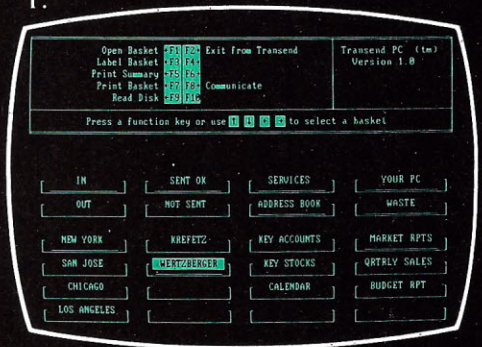

2.

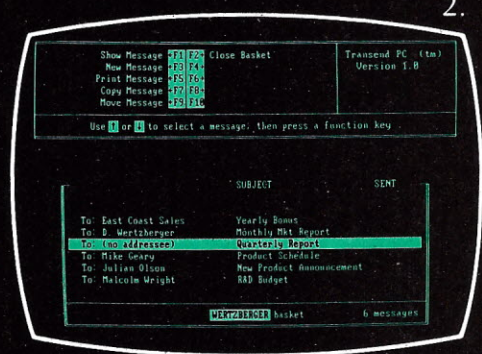

3.

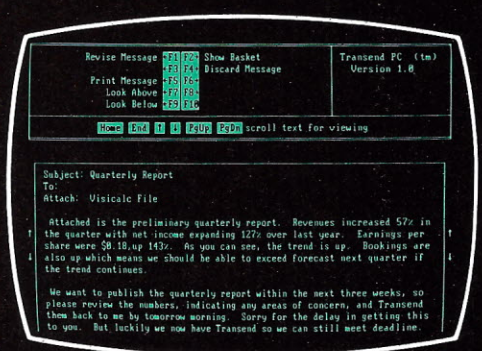

4.



SCREENS CAN.

TRANSEND

THE WORLD JUST KEEPS GETTING SMALLER.

The screens say so much, you may never need the manual. Transend PC turns your IBM PC into an electronic workstation or an intelligent terminal. Four screens show how easy it is to use:

1. Transend PC uses IN and OUT baskets just like you do. To choose one, hit a key.

2. The basket shows what's inside. To choose a document, hit a key and *voila*!

3. It's full size. You can read, edit, file, address or toss it (Note the WASTE basket on screen 1).

4. To route or address a document, pick a name from the ADDRESS basket. Transend PC does the rest.

To mail it over the phone, move it to the OUT basket and hit another key. Transend PC dials the addresses; delivers (through SOURCE-MAIL℠, OnTyme®, or direct to another PC); checks for incoming mail; and signs off. You don't have to set up anything or learn any parameters. Transend does everything automatically.

Transend PC works with *all* other software packages like 1-2-3™, WordStar®, and VisiCalc®. You can label baskets to handle all your paperwork. And Transend PC lets your IBM PC talk to any other computer.

For a closer look at the screens, ask your dealer for a demo. For a closer look at electronic communications, ask for a free copy of *The Who, What, Why, How and When of Electronic Communications* from Transend.

Transend Corporation
2190 Paragon Drive
San Jose, CA 95131
(408) 946-7400

Transend PC is a trademark of Transend Corporation. IBM PC is a trademark of International Business Machines Corporation. SOURCEMAIL is a service mark of The Source Telecomputing Corporation, a subsidiary of The Reader's Digest Association. OnTyme is a registered trademark of Tymeshare, Inc. 1-2-3 is a trademark of Lotus Development Corporation. WordStar is a registered trademark of MicroPro Inc. VisiCalc is a registered trademark of VisiCorp.

CIRCLE 250 ON READER SERVICE CARD

activities is another favorable sign. Other items considered include: the size of the occasional profit, if any; your financial status; and the presence of personal pleasure or recreation (bad in the IRS view if there are losses). It is not necessary for all of the favorable criteria above to be present in your activity to avoid classification as a hobby. But the more elements that are present, the more likely that it will be treated as a business by the IRS.

It is important to document carefully the time you spend working with investments on the computer.

Computers To Manage Investments

Although investment activity is not considered a business by the IRS, nevertheless any investment expense can be claimed as an itemized deduction. Further, to the extent that your computer is used to manage your investments, that associated cost is deductible by using the Accelerated Cost Recovery System (ACRS). For example, if you have extensive stock holdings and you purchase a computer and appropriate software, then 15% of the cost can be deducted in the first year, 22% in the second year, and 21% in each of the next three years. As mentioned earlier, if your number of stocks is small, then the IRS will attempt to limit your deductions to a fraction of the cost based upon the actual percentage of time the computer is used to support your investments.

In case you decide to write off the purchase of a computer for this purpose, we will fill you in on the actual law in this instance: The law is embodied in Internal Revenue Code sections and in this case three sections need to be mentioned.

Section 212 is the law that allows us to deduct investment related expense, but does not apply to the purchase of capital items such as a computer. (It is noted in passing that the cost of leasing a computer or using a computer timeshare service would be deductible under 212.)

Section 179 allows a deduction of up to $5000 in 1983 and $7500 in 1984 if the purchased computer is used in a business.

This leaves us with only the depreciation and ACRS sections, 167 and 168, which apply to property held for the production of income as well as to property used in a trade or business. These are the two correct sections to cite when claiming the computer purchase depreciation deduction in connection with investments.

It is important to document carefully the time you spend working with investments on the computer. For instance, you should keep a daily log of the exact time the computer was used to analyze your stocks, which stocks were considered, and what decisions, if any, were made as a result of the computer analysis.

What specific software can be used to manage investments? There are several hundred programs. Clark Software Corp. of Shamokin, PA publishes for $5.95 the book *A Guide to Investor Software* which is recommended by the American Association of Individual Investors. Many programs are now priced below $300. One of the most popular is the *Dow Jones Market Analyzer* from RTR Software which retails for $250.

There are several recent survey articles in computer magazines which describe the available investment software and, if you own an Apple, *The Book of Apple Software* rates and critiques quite a few such programs. One highly rated package is *The Personal Investor* from PBL Corp ($95).

In contrast to such programs which analyze stock performance are data services which provide up-to-date information on stock prices, earnings, news, etc. These include The Source from Readers Digest, News/Retrieval from Dow Jones & Co., and CompuServe Information Service from H&R Block. Cost consists of an initial charge plus a per unit time fee and a minimum monthly charge.

For example, the Source has a $100 subscription fee and connect time runs from $2.75 to $25.00 per hour depending on the time and the day; the minimum monthly charge is $10. News/Retrieval has a $50 basic fee plus $75 annual fee (or $50 monthly fee depending on the plan selected) and a $0.10 and up per minute user charge; and CompuServe costs $40 initially with hourly fees ranging from $5.00 to $22.50 (depending on time and day) plus $0.02 and up per item. The data services are probably worthwhile only if you plan to do extensive investing. On the other hand, such services tend to substantiate the authenticity of your computer investment activity in the eyes of the IRS.

Computers As An Employee Expense

Anyone who works directly with a computer may be eligible to deduct the computer and software programs as employee expenses. This includes computer programmers and teachers of computer-based subjects. Performance of services as an employee constitutes a business for tax purposes so that ordinary and necessary business related expenses which are not reimbursed are deductible, but only if they are required by the employer or essential to the performance of one's duties. However, mere helpfulness is not enough to justify the deduction, so that caution should be used in claiming such a deduction: A letter from your supervisor attesting to the fact that the purchase of a computer is *essential* to performing your assigned duties is very desirable.

Computer Programs As An Educational Expense

You can deduct the cost of any education which is undertaken to maintain or to improve a skill required in your employment or business. Common examples of such expenses are purchases of technical books and subscriptions to professional journals.

Nowadays, it would seem logical that the purchase of computer programs, which maintain or improve employment skills, would qualify as an educational expense.

Deductible Computer Items

Hardware. If a computer and related items such as a printer, monitor, and disk drive are used for business purposes, and if the purchase was in 1983, then the entire cost, up to $5000 of all this equipment can be deducted on your 1983 tax return. For example, if you buy a computer costing $1500, a printer costing $700, a disk drive costing $400, and a monitor costing $100, the entire amount—$2700—can be deducted. (If you buy such a computer system in 1984, the entire cost can be deducted on your 1984 tax return.)

You can deduct the cost of any education which is undertaken to maintain or to improve a skill required in your employment.

If you go all out and spend more than $5000, then the excess may be partially deducted in 1983 by using the Accelerated Cost Recovery System (ACRS). For example, if the computer system cost $7000 in 1983, an additional $300 can be deducted on your 1983 return.

MORE OF THE BEST FOR LESS

SPECIALS

IBM

Money Decisions Vol. I	150.00
Money Decisions Vol. II	170.00
BPI General Accounting	450.00
Night Mission Pin Ball	29.95
Dr. Logo	77.95

COMMODORE 64

Lode Runner	26.95
Pooyan	22.95
Juile	26.95
Gen. Ledger (Time Work)	77.95
Critical Mass	30.95
Castle Wolfenstein	22.95

ATARI

Donkey Kong	34.95
Spellicopter	30.95
Castle Wolfenstein	22.95
Band Street Writer	54.95

APPLE

Krell Logo	72.95
Pinball Construction Set	ea 29.95
Music Construction Set	ea 30.95
Gumball	20.95

APPLE GAMES

	Retail Price each	Your Price each
oderbund Software		
e Arcade Machine	59.95	41.95
oplifter	34.95	24.95
rpentine	34.95	24.95
	34.95	24.95
de Runner	34.95	24.95
are Change	34.95	24.95
tamost		
tec	39.95	27.95
tasoft		
xxon	39.95	27.95
oyan	29.95	20.95
yx/Automated Simulations		
mple of Apshai	40.00	27.95
mpman	40.00	27.95
Barons	99.00	69.00
ctronic Arts		
rdhat Mac	34.95	27.95
chon	39.95	31.95
is Assassin	39.95	31.95
yden Software		
rgon II	34.95	24.95
ocom		
rk I, II, III	39.95	27.95
adline	49.95	34.95
arcross	39.95	27.95
spended	49.95	34.95
tness	49.95	37.50
inetfall	49.95	37.50
chanter	49.95	37.50
crolab		
ner 2049er	39.95	27.95
ath in the Caribbean	35.00	24.95
ghrise	30.00	21.95
raper Caper	40.00	30.00
ise Software		
stle Wolfenstein	29.95	20.95
an Empire	34.95	24.95
lesta Corporation		
ess	69.95	49.95
lin	49.95	37.95
igin Systems		
tima III	54.95	43.95
verns of Calisto	39.95	31.95
nguin Software		
e Man	19.95	15.95
ansylvania	19.95	15.95
e Quest	19.95	15.95
nute Man	19.95	15.95
ality Software		
neath Apple Manor Hi Res	29.95	21.95
erra On-Line Inc.		
tima II	59.95	41.95
wbreaker (New Version)	29.95	20.95
rk Crystal	39.95	27.95
ius Software		
ndits	34.95	24.95
e Balde of Blackpoole	39.95	27.95
itical Mass	39.95	27.95
-Tech Software		
zardry I	49.95	34.95
zardry II	34.95	24.95
zardry III	39.95	27.95
lice Artist	34.95	24.95
ar Maze	34.95	24.95
Strategic Simulations		
Computer Ambush (2nd Edition)	59.95	41.95
Germany 1985	59.95	41.95
North Atlantic 86	59.95	41.95
Geopolitique 1990	39.95	27.95
Battle of Normandy	39.95	27.95
Knights of the Desert	39.95	27.95
Ringside Seat	39.95	27.95
Broadsides	34.95	24.95
Eagles	39.95	27.95
Sublogic Corporation		
Flight Simulator	33.50	23.95
Night Mission Pinball	34.95	24.95
Space Vikings	49.95	37.95

APPLE BUSINESS/UTILITIES

Artsci		
Magic Window II	149.95	104.95
Magicalc	149.95	104.95
Ashton-Tate		
dBase II (Z-80 Required)	700.00	490.00
Friday (Z-80 Required)	295.00	206.95
Beagle Brothers		
Tip Disk #1	19.95	15.95
Utility City	29.95	20.95
Flex Text	29.95	20.95
Frame Up	29.95	20.95
Typefaces (Needs Apple Mechanic)	19.95	15.95
Pronto Dos	29.95	20.95
GPLE	69.95	49.95
Alpha Plot	39.95	27.95
Apple Mechanic	29.95	20.95
DOS BOSS	23.95	19.95
Double Take	34.95	24.95
Business Solutions		
Incredible Jack	179.00	134.95
Central Point Software		
Copy II+	39.95	31.95
Continental Software		
The Home Accountant	74.95	52.50
FCM (Filing/Mailing)	99.95	69.95
Eagle Software		
Money Decisions (Volume I)	199.00	149.95
Money Decisions (Volume II)	229.00	171.95
Tax Decisions	229.00	183.95
Hayden Software		
Applesoft Compiler Plus	99.95	69.95
Microsoft		
Multiplan (Z-80/Apple DOS)	275.00	192.50
Multi-Tool Financial Statement	100.00	80.00
Multi-Tool Budget ANalysis	150.00	112.50
Micro Sparc		
GALE	49.95	37.50
Macrosoft	69.95	55.95
The Assembler	69.95	55.95
Pear Systems		
Stock Portfolio Evaluation System	600.00	500.00
Penguin Software		
Complete Graphics System II	69.95	48.95
The Graphics Magician	59.95	41.95
Sensible Software		
Sensible Speller	124.95	93.95
Back It Up III	74.95	59.95
Multi Disk Catalog	25.00	20.00
Super Disk Copy II	30.00	21.00
Sierra On-Line Incorporated		
Screenwriter II	129.95	90.95
Silicon Valley Systems		
Word Handler	59.95	49.95
List Handler	49.95	39.95
Software Publishing Corporation		
PFS-File	125.00	87.50
PFS-Report	125.00	87.50
PFS-Graph	125.00	87.50
PFS-Write	125.00	87.50
Southwestern Data Systems		
ASCII Express Pro.	149.95	104.95
Munch A Bug	49.95	34.95
Merlin	64.95	45.50
Printographer	49.95	34.95
Assembly Lines	19.95	15.95
Stoneware		
DB Master Utility #1	129.00	97.50
DB Master Utility #2	129.00	97.50
DB Master (Version 4.0)	350.00	262.50
Visicorp		
Visifile	250.00	174.95
Visischedule	300.00	210.00
Business Forecasting Model	100.00	80.00
Visicale IV	250.00	174.95

IBM

Serpentine	34.95	27.95
Lode Runner	34.95	27.95
Early Games	29.95	23.95
Early Games Mathmaker	29.95	23.95
Quizagon	39.95	31.95
Spellicopter	39.95	31.95
Crypto Cube	39.95	31.95
Bottom Line Strategist	400.00	320.00
Friday (MS/DOS)	295.00	235.00
CDEX Training for VisiCalc	69.95	55.95
CDEX Training for IMB PC	69.95	55.95
CDEX Training for Mulitplan	69.95	55.95
MileStone	295.00	265.00
Multiplan	275.00	220.00
MultiTool Word	395.00	315.00

COMMODORE 64

Early Games for Young Children (Disk)	29.95	23.95
Hayden		
Micro Addition (Disk)	29.95	23.95
Micro Division (Disk)	29.95	23.95
Micro Multiplication (Disk)	29.95	23.95
Great MA to CA Race (Disk)	34.95	27.95
Monkey See Monkey Spell (Disk)	29.95	23.95
Lightning Software		
Master Type (Disk)	39.95	31.95
Odesta		
Chess (Disk)	69.95	55.95
Sega		
Star Trek (Cart)	39.95	31.95
Buck Rogers (Cart)	39.95	31.95
Spinnaker		
Alphabet Zoo (Disk/Cart)	29.95	23.95
Story Machine (Cart)	39.95	31.95
Delta Drawing (Cart)	39.95	31.95
Delta Music (Cart)	39.95	31.95

ATARI SOFTWARE

Donkey Kong (Cart)	44.95	39.95
Big Five Software		
Miner 2049er (Cart)	49.95	39.95
Epyx/Automated Simulations		
Temple of Apshai (32K Disk)	40.00	32.00
Crush, Crumble, Chomp (32K Disk)	30.00	24.00
Jump Man Jr (Cart)	40.00	32.00
Gamestar		
Star Bowl Football (Disk)	31.95	25.95
Star league Baseball (Disk)	31.95	25.95

For Mail Orders: Include your selection(s), name, address, phone number along with your check, money order or credit card number and expiration date. Please include $3.00 for shipping & handling (heavy items, hardware and foreign orders extra). California residents add 6½% sales tax.

FOR ORDERS ONLY
800-942-2058

VISA MasterCard AMERICAN EXPRESS

In California, Alaska & Hawaii Call
(415) 237-4406

Bay Area visit
SOFTWARESOLUTIONS
185 San Pablo Ave, El Cerrito, CA 94530
5) 237-5257 Hrs: M-Sat 10 a.m. to 6 p.m.

NONAGONSOFTWARE
P.O. Box 1486
El Cerrito, CA 94530

CIRCLE 182 ON READER SERVICE CARD

This amount is calculated by multiplying the excess, $2000, by 15%, which is the percentage allowed the first year under the ACRS. $440, 22% of $2000, may also be deducted on your 1984 tax return as well as $420 (21% of $2000) on each of your 1985, 1986, and 1987 tax returns.

By the way, if you bought a computer before 1983 for your personal pleasure and now plan to use it in a business, then its current market value or its original cost, whichever is lower, can be deducted over a five-year period as indicated in the previous paragraph.

If you do lease a computer, be sure that it does not contain a purchase option clause.

As an alternative to deducting up to $5000 the first year (the so-called Section 179 election), if a computer is used for business purposes, it is possible to use the ACRS to spread out the deduction over a five-year period if you prefer. The advantage of this approach is that you will also be eligible for the *investment tax credit* (more useful than a deduction) which lets you claim up to 10% of the cost of the computer.

Most people prefer to deduct the full amount immediately, but there are circumstances in which this alternative may be more desirable. For example, if other business expenses largely offset income in the year that the computer system is purchased, then it would be better to postpone some of the deduction to future years when income is greater.

Software. Suppose you buy some programs to be used in your business. The programs are certainly deductible but often not entirely in the year of purchase. The arena of software deductibility is littered with confusion. So let's try and keep it simple:

If the program is bought at the same time as the computer and its cost is *not* separately stated on the bill of sale, then it is considered as part of the system and may be deducted entirely in the first year as a part of the system (when the total cost is less than $5000). That is why computer shops often give a system price rather than pricing each of the items in the system individually.

If the cost of the software program is separately stated, then in tax terms it is considered an intangible asset and must be amortized, i.e., deducted, over a five-year span. That is, 15% of its cost may be deducted in the first year and additional amounts in each of the next four years, according to the ACRS guidelines discussed previously.

There is, however, one important exception: If the program can be used only for a limited period of time, say one year, then it can be amortized over that shorter period of time. For example, if you were to operate a part-time tax practice and bought a program to help you fill out the 1983 forms, then its entire cost could be deducted in the year of purchase.

Leasing. Leasing is like paying rent. As such it is a deductible business expense. It is also deductible if the leased equipment (computer or software) is used to manage income-producing property, such as stocks and bonds. (Technically, in tax lingo, this latter case is referred to as a deductible "non-business" expense.)

As an example, suppose you lease a computer for three years at a cost of $4500. Then $1500 can be deducted on your tax return in each of the three years.

Some computer companies and computer stores lease their products to appeal to business customers since the lease cost can be immediately deducted in contrast to a sold item which must usually be depreciated. However, for the *personal* computer user there is no particular advantage in leasing because of the first year write off of up to $5000 in 1983 (and $7500 in 1984).

Even for more expensive computers the tax law enacted in 1981, which allows rapid ACRS write-off of a com-

Figure 1.

STANDARD FEDERAL TAX REPORTS Vol. 70, Part II of Report No. 38, Aug. 17, 1983

SCHEDULE C (Form 1040) — Department of the Treasury Internal Revenue Service

Profit or (Loss) From Business or Profession
(Sole Proprietorship)
Partnerships, Joint Ventures, etc., Must File Form 1065.
▶ Attach to Form 1040 or Form 1041. ▶ See Instructions for Schedule C (Form 1040).

OMB No. 1545-0074
1983
09

Name of proprietor — Social security number of proprietor

A Main business activity (see Instructions) ▶ , product ▶
B Business name and address ▶ C Employer identification number
D Method(s) used to value closing inventory: (1) ☐ Cost (2) ☐ Lower of cost or market (3) ☐ Other (if other, attach explanation)
E Accounting method: (1) ☐ Cash (2) ☐ Accrual (3) ☐ Other (specify) ▶
F Was there any major change in determining quantities, costs, or valuations between opening and closing inventory? If "Yes," attach explanation. — Yes ☐ No ☐
G Did you deduct expenses for an office in your home?

PART I.—Income

1 a	Gross receipts or sales	1a	
b	Less: Returns and allowances	1b	
c	Subtract line 1b from line 1a and enter the balance here	1c	
2	Cost of goods sold and/or operations (Part III, line 8)	2	
3	Subtract line 2 from line 1c and enter the **gross profit** here	3	
4 a	Windfall Profit Tax Credit or Refund received in 1982 (see Instructions)	4a	
b	Other income	4b	
5	Add lines 3, 4a, and 4b. This is the **total income** ▶	5	

PART II.—Deductions

6	Advertising		24	Supplies (not included in Part III)	
7	Bad debts from sales or services (Cash method taxpayers, see Instructions)		25	Taxes (Do not include Windfall Profit Tax here. See line 29.)	
8	Bank service charges		26	Travel and entertainment	
9	Car and truck expenses		27	Utilities and telephone	
10	Commissions		28 a	Wages	
11	Depletion		b	Jobs credit	
12	Depreciation and Section 179 deduction from Form 4562 (not included in Part III)	5000 00	c	Subtract line 28b from 28a	
13	Dues and publications		29	Windfall Profit Tax withheld in 1983	
14	Employee benefit programs		30	Other expenses (specify):	
15	Freight (not included in Part III)		a		
16	Insurance		b		
17	Interest on business indebtedness		c		
18	Laundry and cleaning		d		
19	Legal and professional services		e		
20	Office expense		f		
21	Pension and profit-sharing plans		g		
22	Rent on business property		h		
23	Repairs		i		
			j		
			k		

31 Add amounts in columns for lines 6 through 30k. These are the **total deductions** ▶ — 31
32 Net profit or (loss). Subtract line 31 from line 5 and enter the result. If a profit, enter on Form 1040, line 12, and on Schedule SE, Part I, line 2 (or Form 1041, line 6). If a loss, go on to line 33 — 32
33 If you have a loss, you must answer this question. "Do you have amounts for which you are not at risk in this business (see Instructions)?" ☐ Yes ☐ No
If "Yes," you must attach Form 6198. If "No," enter the loss on Form 1040, line 12, and on Schedule SE, Part I, line 2 (or Form 1041, line 6).

PART III.—Cost of Goods Sold and/or Operations (See Schedule C Instructions for Part 1, Line 2)

1	Inventory at beginning of year (if different from last year's closing inventory, attach explanation)	1	
2	Purchases less cost of items withdrawn for personal use	2	
3	Cost of labor (do not include salary paid to yourself)	3	
4	Materials and supplies	4	
5	Other costs	5	
6	Add lines 1 through 5	6	
7	Less: Inventory at end of year	7	
8	**Cost of goods sold and/or operations.** Subtract line 7 from line 6. Enter here and in Part I, line 2 above	8	

Proof as of Aug. 6, Subject to change and OMB approval

puter over a mere five year period, has made leasing somewhat antiquated from a tax standpoint. Of course, leasing can still be beneficial in a technological sense because computers are quickly outdated and leasing allows for rapid conversion to new equipment.

But if you do lease a computer, be sure that is does not contain a purchase option clause. If it does have such a clause, then the IRS will probably view it as a sale, rather than a lease. Although I doubt that the actual tax deductions would differ significantly, just refiguring the actual tax could be a headache.

Give away your old computer. Suppose you bought your computer only for personal enjoyment and, consequently, were not able to deduct any of the cost. When your computer gets old—and it will sooner than you think—keep in mind that if you give it to your church or favorite charitable organization, then you can claim its current market value as a charitable contribution.

The higher your tax bracket, the greater will be your savings. This method may be preferable to the hassle of trying to sell an outdated machine. Moreover, the goodwill generated may more than compensate for the difference between a sales price and the realized savings via a contribution.

Other deductible business-related expenses. In addition to allowing you to deduct the cost of a computer system and software, starting a part-time business will allow you to deduct other expenses also. The more common such business related expenses are: advertising, car use, home office (be careful), legal fees, postage, supplies, taxes and tax advice, telephone, travel (such as plane trip and hotel stay) and entertainment

Figure 2.

Form **4562** (Rev. September 1982)
Department of the Treasury Internal Revenue Service (0)

Depreciation and Amortization

▶ See separate instructions.
▶ Attach this form to your return.

OMB No. 1545-0172
Expires 6/30/84
67

Name(s) as shown on return | Identifying number

Business or activity to which this form relates

Part I Depreciation

Section A Election to expense recovery property (Section 179)

A. Class of property	B. Cost	C. Expense deduction
Computer system	5000.00	5000.00

1 Total (not more than $5,000). Enter here and on line 8 (Partnerships—enter this amount on Schedule K (Form 1065)) . . . . . .

Section B Depreciation of recovery property

A. Class of property	B. Date placed in service	C. Cost or other basis	D. Recovery period	E. Method of figuring depreciation	F. Percentage	G. Deduction for this year
2 Accelerated Cost Recovery System (ACRS) (See instructions):						
(a) 3-year property						
(b) 5-year property						
(c) 10-year property						
(d) 15-year public utility property						
(e) 15-year real property—low-income housing						
(f) 15-year real property other than low-income housing						
3 Property subject to section 168(e)(2) election (See instructions):						

4 Total column G. Enter here and on line 9 . . . . . .

CALL OR WRITE TODAY!

ELEPHANT DISKS
SS/SD 10@...$17.45
SS/DD 10@...$20.95
DS/DD 10@...$26.95

Inventory Selections
...just to name a few!
(We also have IBM, Atari and Commodore to keep your Hardware on the "FAS-TRACK")

ULTIMA III	$ 38.95
BEAGLE BAG	19.95
FLEX TEXT	19.95
FRAME-UP	19.95
TIP DISK #1	13.95
TYPEFACES	13.95
PLANETFALL OR ENCHANTER	32.95
MOST AMAZING THING	26.95
RENDEZVOUS	26.95
SNOOPER TROOPS 1 OR 2	29.95
QUEST OR TRANSYLVANIA	13.95
LODE RUNNER	23.95
COSMIC BALANCE I OR II	EA. 25.95
ZORK I, II OR III	EA. 24.95
DEADLINE, SUSPENDED OR WITNESS	32.95
STARCROSS	25.95
STELLAR 7	24.95
WIZARDRY	32.95
KNIGHT OF DIAMONDS	22.95
ZAXXON	25.95
PFS: FILE	81.95
PFS: REPORT	81.95
PFS: GRAPH	81.95
PFS: WRITE	81.95
RHYMES & RIDDLES	20.95
LEGACY OF LLYLGAMYN	26.95
NORTH ATLANTIC 86	38.95
RFD 1985	22.95
MINER 2049ER	25.95
GEOPOLITIQUE 1990	25.95
LEARNING WITH LEEPER	24.95
SAMMY LIGHTFOOT	26.95
GRAPHICS MAGICIAN	38.95
STICKY BEAR BOP	26.95
STICKY BEAR NUMBERS	26.95
STICKY BEAR ABC	26.95
FACE MAKER	22.95
STORY MACHINE	22.95
BANK STREET WRITER	43.95
ZOOM GRAPHIX	32.95
SENSIBLE SPELLER	78.95
SCREEN WRITER II	81.95
SCREEN WRITER PROFESSIONAL	128.95
ASC II PROFESSIONAL	85.95
PRONTO DOS	19.95
DOUBLE TAKE	22.95
ALPHA PLOT	24.95
APPLE MECHANIC	19.95
BEAGLE BASIC	23.95
DOS BOSS	15.95
HOME ACCOUNTANT	47.95
THE GENERAL MANAGER II	148.95
VISICALC 3.3	164.95
KOALA PAD	89.95
VISITREND/PLOT	198.95
KNOW YOUR APPLE IIE	16.95
UTILITY CITY	19.95
GPLE	42.95
ZARDAX	154.95
COPY II PLUS	24.95
MAGIC WINDOW II	93.95
PIE WRITER 40/80	94.95
ORCA/M	99.95
WORDSTAR	268.95

Personal checks allow 2 weeks. We accept Visa & MasterCard (add 3% for handling). Send or call with card # & exp. date. Include $2.00 for shipping. Ohio residents add 5½% state sales tax. Prices are subject to change without notice.

FAS-TRACK
COMPUTER PRODUCTS
Box 456
Columbus, Ohio 43216
(614) 863-1699
OR TOLL-FREE OUTSIDE OHIO
1-800-272-1600

CIRCLE 154 ON READER SERVICE CARD

Happy Hands

Offers Discounts on All

TRS-80™ COMPUTERS

We Have What You Are Looking For

Free Shipping Within United States

* *100% New Original Equipment*
* *Prices Comparable to Any Other*
* *No Tax On Out of State Shipments*

For Prices and Shipping Information Call Toll Free

1-800-545-9019

N.M. Residents Call 257-7865

or write

HAPPY HANDS

P.O. DRAWER I


RUIDOSO, NEW MEXICO

88345

CIRCLE 183 ON READER SERVICE CARD

MINER 2049er.™

NOW YOU CAN REALLY GET INTO IT.



This terrific Miner 2049er T-shirt looks good any way you look at it. On the front is a full color picture of our hero, Bounty Bob. On the back it says Tigervision in red.

And everywhere you look you'll be seeing friends wearing it. So don't put it off. Send for your Miner 2049er T-shirt, today. Only **$7.95** each.

Available in adult sizes: S, M, L and XL. And in children's sizes: S, M and L.

To order:
Send name and address, size and quantity with check or money order payable to **Tiger Supply**, P.O. Box 150, Dept. CC-1 Vernon Hills, IL 60061.

Add $2.50 for postage and handling outside U.S.A. Illinois residents, add 48¢ for sales tax. Please allow 6-8 weeks for delivery.

TIGERVISION®

© 1983 Tigervison

Miner 2049er is a trademark of Big Five Software, Inc.

CIRCLE 223 ON READER SERVICE CARD

Writing It Off, continued...

(be careful; keep a *detailed* log).

Where To Deduct

Business use. If you buy a computer for a business in 1983, then its cost, when less than $5000, may be entered on line 12 of Part II on Schedule C (Profit or (Loss) From Business or Profession). (See Figure 1.) A description of the computer system must be given in Section A of Part I of Form 4562 (Depreciation and Amortization).(See Figure 2.) If the cost is more than $5000, the deducted ACRS amount is entered also on Schedule C and Form 4562 (Section B). (See Figures 1 and 3.)

Other business expenses are also listed in Part II of Schedule C.

Employee business expense. Unreimbursed expenses are itemized on line 24 (miscellaneous deductions) of Schedule A (see Figure 4.) A sheet detailing these expenses should be attached to Schedule A. (Prior to 1982, Form 2106 (Employee Business Expenses) was also required, but the form was revised for the 1982 tax returns and is no longer appropriate for itemized deductions except for educational expenses.)

Managing Investments. When you use a leased computer or a computer time-sharing service to determine which stocks to buy and sell, this investment expense is an itemized deduction and is entered on line 24 (miscellaneous deductions) of Schedule A. (See Figure 4.) This is also the place to enter the cost of any investment related computer programs that you may have purchased during the year. However, expensive programs which can be used year after year should be depreciated in the same manner as the computer.

If a computer is bought, the ACRS

Figure 3.

Form **4562** (Rev. September 1982)
Department of the Treasury Internal Revenue Service (0)

Depreciation and Amortization

▶ See separate instructions.
▶ Attach this form to your return.

OMB No. 1545-0172
Expires 8/31/85
67

Name(s) as shown on return | Identifying number

Business or activity to which this form relates

Part I Depreciation

Section A Election to expense recovery property (Section 179)

A. Class of property	B. Cost	C. Expense deduction

1 Total (not more than $5,000). Enter here and on line 8 (Partnerships—enter this amount on Schedule K (Form 1065))

Section B Depreciation of recovery property

A. Class of property	B. Date placed in service	C. Cost or other basis	D. Recovery period	E. Method of figuring depreciation	F. Percentage	G. Deduction for this year
2 Accelerated Cost Recovery System (ACRS) (See instructions):						
(a) 3-year property						
Computer for investment activities	Jan '83	5000.00	5 yrs.	—	15 %	750.00
(b) 5-year property						
(c) 10-year property						
(d) 15-year public utility property						
(e) 15-year real property—low-income housing						
(f) 15-year real property other than low-income housing						
3 Property subject to section 168(e)(2) election (See instructions):						

4 Total column G. Enter here and on line 9

See Paperwork Reduction Act Notice on page 1 of the separate instructions. Form **4562** (Rev. 9-82)

amount should be entered at item 2(b) (5-year property)—in Section B on the depreciation form 4562 (See Figure 3). Write in the phrase "a computer for investment activities" above the 5-year property label; specify 5 years in column D, a dash in column E, and 15% in column F; fill in columns B,C, and G. Normally this ACRS amount is entered on Schedule C or on Schedule E (Supplemental Income), but since neither of these schedules deals with securities investments, and Schedule D (Capital Gains and Losses) has no place to list such a deduction, in my opinion it should be listed at line 24 (miscellaneous deductions) on Schedule A.

A caveat is in order at this point: Since this is not the ordinary place to list an ACRS deduction, it is possible that the IRS may wish to have you explain this item if you are audited; if so, it would be best to consult a professional tax advisor for representation at such a meeting.

As an alternative, you could list the ACRS amount deducted on line 18 of Form 1040 and attach an explanation sheet to Schedule E; this approach is especially useful if you do not itemize your deductions (and, therefore, do not use Schedule A).

Educational expenses. These are also listed under itemized miscellaneous deductions on Schedule A. However, you must also attach a brief statement on a separate sheet of paper explaining the deduction and describing the relationship of the education to your employment duties. Moreover, if you are an employee, you must fill out Part III of Form 2106. END

Figure 4.

STANDARD FEDERAL TAX REPORTS Vol. 70, Part II of Report No. 38, Aug. 17, 1983

SCHEDULES A&B (Form 1040)
Department of the Treasury
Internal Revenue Service


Schedule A—Itemized Deductions
(Schedule B is on back)
▶ Attach to Form 1040. ▶ See Instructions for Schedules A and B (Form 1040).

OMB No. 1545-0074
1983
07

Name(s) as shown on Form 1040 | Your social security number

Medical and Dental Expenses (Do not include expenses reimbursed or paid by others.) *(See page 17 of Instructions.)*	1	Medicines and drugs	1		
	2	Write 1% of Form 1040, line 33	2		
	3	Subtract line 2 from line 1. If line 2 is more than line 1, write zero		3	
	4	Other medical and dental expenses:			
		a Doctors, dentists, nurses, hospitals, insurance premiums you paid for medical and dental care, etc.		4a	
		b Transportation		4b	
		c Other (list—include hearing aids, dentures, eyeglasses, etc.) ▶		4c	
	5	Add lines 3 through 4c		5	
	6	Multiply amount on Form 1040, line 33, by 5% (.05)		6	
	7	Subtract line 6 from line 5. If line 6 is more than line 5, write zero		▶	7
Taxes *(See page 18 of Instructions.)*	8	State and local income		8	
	9	Real estate		9	
	10	a General sales (see sales tax tables)		10a	
		b General sales on motor vehicles		10b	
	11	Other (list—include personal property) ▶		11	
	12	Add lines 8 through 11. Write your answer here		▶	12
Interest Expense *(See page 19 of Instructions.)*	13	a Home mortgage interest paid to financial institutions		13a	
		b Home mortgage interest paid to individuals (show that person's name and address) ▶		13b	
	14	Credit cards and charge accounts		14	
	15	Other (list) ▶		15	
	16	Add lines 13a through 15. Write your answer here		▶	16
Contributions *(See page 19 of Instructions.)*	17	a Cash contributions. (If you gave $3,000 or more to any one organization, report those contributions on line 17b.)		17a	
		b Cash contributions totaling $3,000 or more to any one organization. (Show to whom you gave and how much you gave.) ▶		17b	
	18	Other than cash (attach required statement)		18	
	19	Carryover from prior year		19	
	20	Add lines 17a through 19. Write your answer here		▶	20
Casualty and Theft Losses	21	Total casualty or theft loss(es) (attach Form 4684)		▶	21
Miscellaneous Deductions *(See page 20 of Instructions.)*	22	Union and professional dues		22	
	23	Tax return preparation fee		23	
	24	Other (list) ▶ Employee business expense	5000 00	24	
	25	Add lines 22 through 24. Write your answer here		▶	25
Summary of Itemized Deductions *(See page 20 of Instructions.)*	26	Add lines 7, 12, 16, 20, 21, and 25			26
	27	If you checked Form 1040 { Filing Status box 2 or 5, write $3,400 / Filing Status box 1 or 4, write $2,300 / Filing Status box 3, write $1,700 }			27
	28	Subtract line 27 from line 26. Write your answer here and on Form 1040, line 34a. (If line 27 is more than line 26, see the Instructions for line 28 on page 20.)		▶	28

Subject to change and OMB approval
Proofs of Aug. 16

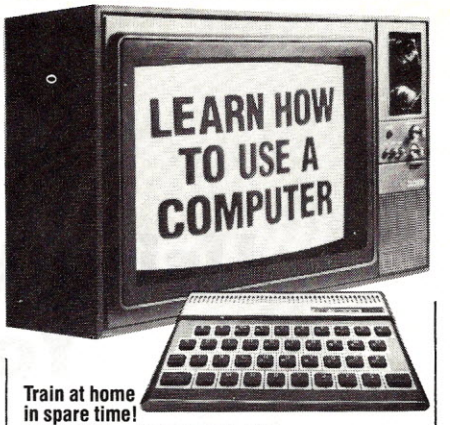

Train at home in spare time!
Learn it all...at the office, or at home...computer operations, applications and programming!

Learn how and why a computer can help you. Learn to write your own computer programs. How to program in BASIC. How to understand and use more than 80 BASIC commands and functions. How to use prepackaged software and change it to meet your special needs. How to make sense of the overwhelming maze of books, information and advice available at your local computer store. See how easy it is to use different programs already available. See how they fit into your home or business operations...budgeting, real estate, bookkeeping, inventories, expenses, pricing, profit margins, investments, interest, taxes...hundreds more including foreign languages, and graphics. Never again be at the mercy of a so-called "computer expert."



EXPERTS SHOW YOU WHAT TO DO, HOW TO DO IT...TO MAKE YOUR LIFE EASIER

Everything is explained in easy-to-understand language with plenty of examples. Step-by-step you learn how to program in BASIC. How to understand and use more than 80 BASIC commands and functions. How to use prepackaged software and change it to meet your special needs. How to make sense of the overwhelming maze of books, information and advice available at your local computer store. You learn everything you need to know to use the computer. You'll be able to understand computer experts and talk their language... storage, systems, terminals and much, much more. **NOW... ALL THIS IN ONE COURSE!**

• Computer Training • Computer Programming
• Computer Applications
Find out what you need to know about computer operations

TIMEX SINCLAIR 1500 WITH BUILT IN 16K MEMORY INCLUDED WITH YOUR TRAINING
Plugs into any TV!



SEND FOR FREE FACTS!

460

ICS SINCE 1891 **COMPUTER TRAINING, Dept. DH0C3**
Scranton, Pennsylvania 18515

Please rush me free facts and color brochure that tells how I can learn computer applications, programming and operation at home in spare time.

Name _____ Age _____

Address _____

City/State/Zip _____

Using VisiCalc to Compute Your Income Tax

David A. Williams

Income tax afflicts everyone, but if you have a computer, you can make the calculations less painful and perhaps avoid over- or underpayment by estimating your tax liability throughout the year. Many programs on the market calculate your tax and even fill out the forms for you, but if you own *VisiCalc* and your return is not too complex, you don't need to buy another program.

This article describes a *VisiCalc* "program" that helps you estimate your tax liability as the year progresses and then does the necessary calculations for your return. It won't print the data on the return, but it is a simple job to transfer the data because the format is designed to resemble the appropriate IRS forms.

The program is set up for a joint return that includes Form 1040 and Schedules A, B, D, and W. The output from the schedules is automatically entered on Form 1040 in the appropriate place. This is about all that 48K of RAM can handle, but data from other schedules can be entered manually on the 1040 in the spaces provided.

If you own VisiCalc and your return is not too complex, you don't need to buy another program.

David A. Williams, 2452 Chase Circle, Clearwater, FL 33546.

Program Description

Figures 1 through 5 show the *VisiCalc* display or printout before data have been entered. The row and column headings are not part of the program, but were added for clarity. As much as possible the format matches the corresponding IRS forms. The width, except for Schedule D, was held to six columns or 54 characters so that the entire width would be visible on my 64-column display. Line numbers are included to help transfer the data to the real forms. The forms have been arranged in vertical sequence to make it easy to add more rows. In some cases space has been provided to enter the data in more detail than is required to aid in keeping records.

Figure 1. Schedule A.

```
     A       B          C        D        E          F
                **Schedule A - Itemized Deductions**
-----------------------------------------------------------
     Medical  Medicines and Drugs          Line A1
     And                1% Income          Line A2          0
     Dental                                Line A3          0
     Expenses Total Insurance Pr           Line A4
              Doctors  Dentists           Line A5a
              Transportation               Line A5b
              Other                        Line A5c
10-                    Sub-Total           Line A6          0
                       3% Income           Line A7          0
                                           Line A8          0
                                           Line A9          0
                                           Line A10         0
-    -        -        -                   -    -           -
     Taxes    State and local Inc          Line A11
              Real Estate                  Line A12
              General Sales                Line A13a        0
              Sales (motor veh)            Line A13b
20-           Other                        Line A14
                       Total Tax           Line A15         0
-    -        -        -                   -    -           -
     Interest Home Mortgage (Banks)        Line A16a
     Expense  Home Mortgage (Indiv)        Line A16b
              Credit Cards                 Line A17
              Other


                       Sub-Total           Line A18         0
30-                    Total Int           Line A19         0
-    -        -        -                   -    -           -
     Contrib. Cash Contributions           Line A20a
              Contrib. (>$3000)            Line A20b
              Other                        Line A21
              Carryover                    Line A22
                       Total               Line A23         0
-    -        -        -                   -    -           -
     Casualty Total Casualty               Line A24
     Theft    Union, Profess dues          Line A25a
40-  Miscell. Tax Prep Fee                 Line A25b
              Other


                       Sub-Tot             Line A26         0
                       Total Misc.         Line A27         0
-    -        -        -                   -    -           -
     Summary  Total Deductions             Line A28         0
                                           Line A29      3400
              Net Deductions               Line A30         0
50-  -----------------------------------------------------------
```

Figure 2. Schedule B.

```
     A       B          C        D        E          F
     ******Schedule B - Interest and Dividend Income*******
-----------------------------------------------------------
     Part I   From Seller Fin. Mort.       Line B1
     Interest Other Interest Income                 xxxxxxxxx
     Income                                Line B2
                                                 "
                                                 "
                                                 "
                                                 "
60-                                              "
                                                 "
                       Sub-Total           Line B3          0
                 All-Savers Interest       Line B4
                                           Line B5          0
                 Previous Exclusion                         0
                 Remaining Exclusion                     2000
                 This years Exclus.        Line B6          0
                 Non-Excl. ASC Inc.        Line B7          0
                 Total Interest Inc.       Line B8          0
70-  -    -        -        -               -    -           -
     Part II  Name Of Payer                         xxxxxxxxx
     Dividend                              Line B9
     Income                                      "
                                                 "
                                                 "
                                                 "
                                                 "
                                                 "
80-                    Sub-Total           Line B10         0
                 Cap. Gain Dist.   Line B11            xxxxxxxxx
                 Non-Tax Dist.     Line B12            xxxxxxxxx
                 Pub Util Div Excl Line B13            xxxxxxxxx
                                           Line B14         0
                 Total Dividends           Line B15         0
-----------------------------------------------------------
```

Figure 6 is a listing of the formulas used to calculate the data. The letter and numbers following the arrow indicate the cell in which the formula must be entered. Logic functions are used extensively to calculate entries that are dependent on the data. For example, F18 contains the formula for calculating general sales tax based on the tables provided by the IRS. The formula shown is for a family of five with an adjusted gross income greater than $38,001 and living in Florida. The formula for the same family with an income between $26,001 and $38,000 would be: @IF (F179<26001,0,277 + (@INT((F179 + @IF (E159 > E158, E158, E159) + F67+F104-26001)/2000)*14))

The formula can be adapted to other income ranges and numbers of dependents by changing the numbers 26001, 277, and 14 to the appropriate values from the sales tax tables. Figure 7 shows an excerpt from the Optional State Sales Tax tables from which these figures are taken.

To set up the formula for your situation, first select your state, then find the row where the minimum income is less than your range of interest (26001 in the example). Next, find the sales tax in the column under the correct number of dependents (277 in the example). Finally, find the difference between that and the sales tax in the next row down (14 in the example). The formula is then accurate for as many rows as the increment is constant.

For incomes greater than $38,001, use the sales tax shown in the row for incomes between $38,001 and $40,000, and the increment given directly below. Substitute these values in the formula shown in the listing.

The income used is the adjusted gross income from Form 1040, line 33, the dividends exclusion, All-Savers interest, and the married couple deduction. You may be entitled to include additional non-taxable income. Consult the instructions for the sales tax tables. Make sure your total income doesn't exceed the upper limit for the range you have set up, and don't forget to change the formula if the number of dependents changes.

If your income turns out to be less than that for which the formula was set up, it will return $0, which should alert you that something is wrong. No warning is given if you exceed the range on the high side, but the error will be small if you don't go too far over.

The formulas in cells H182, G183, H183, and F184 are used to calculate your tax if you use either Schedule Y or the tax tables, your taxable income is greater than $11,900, and you are a married couple filing jointly. If your filing status is different, a comparison of these formulas with the numbers in Schedule Y shows how they were derived. H182 adjusts incomes under $50,000 so that the formulas give the same answer as the tax tables. The others calculate the tax and are separate only because the formulas are too long to fit in one cell. The correct tax always appears in F184; therefore, it is the only one that needs to be displayed or printed.

Figure 3. Schedule W.

```
          A       B       C       D       E       F
          ******Schedule W - Deduction For Married Couple*******
          ---------------------------------------------------------
                                                    Husband     Wife
   90-    Wages, Salaries, Tips

          Total Salaries                Line W1           0        0
          Self-Employment Inc           Line W2
                                        Line W3           0        0
          IRA Deposits
          Employee Bus Expense
          Keogh Payments
  100-          Sub-Total               Line W4           0        0
          Qual Earned Income            Line W5           0        0
                                                Line W6             0
                                                Line W7           .05
                Deduction                       Line W8             0
          ---------------------------------------------------------
```

Figure 4. Schedule D.

```
          A       B       C       D       E       F       G       H
                          **Schedule D Capital Gains And Losses**
          ---------------------------------------------------------------
          Part I   Short term gains and losses
          Kind of Property  Date Acq Date Sold Sales Pr     Cost      Loss      Gain
  110-                                                                 0         0
                                                                       0         0
                                                                       0         0
                                                                       0         0
                                                                       0         0
                                                                       0         0
                                                                       0         0
                                  Sub-Total             Line D1                0         0
                        Gain from sale of Res.          Line D2a xxxxxxxxx
                        Gain from install. sales        Line D2b xxxxxxxxx
  120-                  Gain from partnership           Line D3
                                  Sub-total             Line D4                0         0
                        Net Gain or Loss                        Line D5                 0
                        Short-term Carryover                    Line D6
                        Net Short-Term Gain Or Loss             Line D7                 0
          -  -  -  -  -  -  -  -  -  -  -  -  -  -  -  -  -  -  -  -  -  -  -  -  -  -
          Part II  Long Term Gains and losses
          Kind of Property  Date Acq Date Sold Sales Pr     Cost      Loss      Gain
                                                                       0         0
  130-                                                                 0         0
                                                                       0         0
                                                                       0         0
                                                                       0         0
                                                      Line D8          0         0
                        Gain from sale of res.          Line D9a xxxxxxxxx
                        Gain from install. sales        Line D9b xxxxxxxxx
                        Gain from partnership           Line D10
                                  Sub-total             Line D11               0         0
                        Net Gain or Loss                        Line D12                0
  140-                  Capital Gain Dist.                      Line D13
                        Sub-Total                               Line D16                0
                        Long-Term Carryover                     Line D17
                        Net Long-Term Gain or Loss              Line D18                0
          -  -  -  -  -  -  -  -  -  -  -  -  -  -  -  -  -  -  -  -  -  -  -  -  -  -
          Part III Summary of Parts I and II                    Line D19                0
                                                                Line D20                0
                                                                Line D21                0
                        Net Capital Gain                        Line D22                0
                                                                Line D23                0
  150-                  Net Capital Loss                        Line D24                0
          ---------------------------------------------------------------
```

Figure 5. Form 1040.

```
          A       B       C       D       E       F
                          ****Form 1040****
          ---------------------------------------------------------
          Exemptions
          -  -  -  -  -  -  -  -  -  -  -  -  -  -  -  -  -  -  -  -
          Income    Wages, Salaries             Line 7              0
                    Interest Income             Line 8              0
                    Dividends           Line 9a         0xxxxxxxxx
                    Exclusion           Line 9b       200xxxxxxxxx
  160-                                          Line 9c             0
                    Refunds  State Taxes        Line 10
                    Alimony Received            Line 11
                    Business Income Or Loss     Line 12             0
                    Capital Gain or Loss        Line 13             0
                                                Line
                    Total Income                Line 22             0
          -  -  -  -  -  -  -  -  -  -  -  -  -  -  -  -  -  -  -  -
          Adjust.   Employee Bus Expense        Line 24             0
          To        Payments To IRA             Line 25             0
  170-    Income    Payments to Keogh           Line 26             0
                    Savings Penalty             Line 27
                    Alimony  Paid               Line 28
                    Married Deduction           Line 29             0
                    Disability Inc Excl         Line 30
                    Total Adjustments           Line 31             0
          -  -  -  -  -  -  -  -  -  -  -  -  -  -  -  -  -  -  -  -
          Adjusted Gross Income                 Line 32             0
          -  -  -  -  -  -  -  -  -  -  -  -  -  -  -  -  -  -  -  -
          Tax                                   Line 33             0
  180-    Comput.   Itemized Deductions         Line 34a            0
                                                Line 35             0
                    Exemptions                  Line 36             0
                    Taxable Income              Line 37             0
                    Tax From Table              Line 38             0
                    Total Tax                   Line 39             0
          -  -  -  -  -  -  -  -  -  -  -  -  -  -  -  -  -  -  -  -
          Credits                               Line
                    Balance                     Line 50             0
          -  -  -  -  -  -  -  -  -  -  -  -  -  -  -  -  -  -  -  -
  190-    Other                                 Line
          Taxes     Total Tax                   Line 59             0
          -  -  -  -  -  -  -  -  -  -  -  -  -  -  -  -  -  -  -  -
          Payments          Tax Withheld                    xxxxxxxxx
                                                            xxxxxxxxx
                                                            xxxxxxxxx
                                                            xxxxxxxxx
                                                Line 60             0
                                                Line
                            Total Payment       Line 67             0
  200-    -  -  -  -  -  -  -  -  -  -  -  -  -  -  -  -  -  -  -  -
          Refund or         Amount Overpaid     Line 68             0
          Amount            To be refunded      Line 69             0
          Owed              Amount Owed         Line 71             0
          ---------------------------------------------------------
```

Loading The Program

Enter the program by typing the labels from Figures 1 through 5, the numbers in cells F48 and E159 (entered as values), and the formulas from the listing in Figure 6. Everything to the right of the colon must be entered. F103 contains a format statement and a value (.05), and F154 contains a format statement. The purpose of the format state-

ments is to override whatever global format is invoked. Be sure to enter these as formats, not formulas.

Figure 6. Formula listing.

```
FORMULA LISTING FOR VC FILE "TAXFORM/VC"

>F4:.01*F179
>F5:@IF(F4>F3,0,F3-F4)
>F10:@SUM(F5...F9)
>F11:.03*F179
>F12:@IF(F11>F10,0,F10-F11)
>F13:@IF(F6<300,.5*F6,150)
>F14:@IF(F13>F12,F13,F12)
>F18:@IF(F179<38001,0,360+(@INT((F179+@IF(E159>E158,E158,E159)+F67+F10
  4-35001)/5000)*18))
>F21:@SUM(F16...F20)
>F29:@SUM(F26...F28)
>F30:+F23+F24+F25+F29
>F36:@SUM(F32...F35)
>F44:@SUM(F41...F43)
>F45:+F38+F39+F40+F44
>F47:+F14+F21+F30+F36+F45
>F49:@IF(F47>F48,F47-F48,0)
>F62:+F53+@SUM(F55...F61)
>F64:+F63
>F66:2000-F65
>F67:@IF(F64<F66,F64,F66)
>F68:+F64-F67
>F69:+F62+F68
>F80:@SUM(F72...F79)
>F84:@SUM(E81...E83)
>F85:+F80-F84
>E94:@SUM(E90...E93)
>F94:@SUM(F90...F93)
>E96:+E94+E95
>F96:+F94+F95
>E100:@SUM(E97...E99)
>F100:@SUM(F97...F99)
>E101:+E96-E100
>F101:+F96-F100
>F102:@IF(E101<F101,@IF(E101<30000,E101,30000),@IF(F101<30000,F101,300
  00))
>F103:/FG.05
>F104:+F102*F103
>G110:@IF(E110<F110,E110-F110,0)
>H110:@IF(E110>F110,E110-F110,0)
>G111:@IF(E111<F111,E111-F111,0)
>H111:@IF(E111>F111,E111-F111,0)
>G112:@IF(E112<F112,E112-F112,0)
>H112:@IF(E112>F112,E112-F112,0)
>G113:@IF(E113<F113,E113-F113,0)
>H113:@IF(E113>F113,E113-F113,0)
>G114:@IF(E114<F114,E114-F114,0)
>H114:@IF(E114>F114,E114-F114,0)
>G115:@IF(E115<F115,E115-F115,0)
>H115:@IF(E115>F115,E115-F115,0)
>G116:@IF(E116<F116,E116-F116,0)
>H116:@IF(E116>F116,E116-F116,0)
>G117:@SUM(G110...G116)
>H117:@SUM(H110...H116)
>G121:@SUM(G117...G120)
>H121:@SUM(H117...H120)
>H122:+G121+H121
>H124:+H122+H123
>G128:@IF(E128<F128,E128-F128,0)
>H128:@IF(E128>F128,E128-F128,0)
>G129:@IF(E129<F129,E129-F129,0)
>H129:@IF(E129>F129,E129-F129,0)
>G130:@IF(E130<F130,E130-F130,0)
>H130:@IF(E130>F130,E130-F130,0)
>G131:@IF(E131<F131,E131-F131,0)
>H131:@IF(E131>F131,E131-F131,0)
>G132:@IF(E132<F132,E132-F132,0)
>H132:@IF(E132>F132,E132-F132,0)
>G133:@IF(E133<F133,E133-F133,0)
>H133:@IF(E133>F133,E133-F133,0)
>G134:@SUM(G128...G133)
>H134:@SUM(H128...H133)
>G138:@SUM(G134...G137)
>H138:@SUM(H134...H137)
>H139:+G138+H138
>H141:@SUM(H139...H140)
>H143:+H141+H142
>H145:+H124+H143
>H146:@IF(H145>0,@IF(H143<H145,@IF(H143>0,H143,0),H145),0)
>H147:.6*H146
>H148:@IF(H145>0,H145-H147,0)
>H149:@IF(H145<0,@IF(H124>=0,.5*H145,@IF(H143>=0,H145,H124+(.5*H143)))
  ,0)
>H150:@IF(-H149>3000,-3000,H149)
>F154:/F1
>F156:+E94+F94
>F157:+F69
>E158:+F85
>F160:@IF(E158>200,E158-200,0)
>F163:+E95+F95
>F164:+H148+H150
>F166:@SUM(F156...F165)
>F168:+E98+F98
>F169:+E97+F97
>F170:+E99+F99
>F173:+F104
>F175:@SUM(F168...F174)
>F177:+F166-F175
>F179:+F177
>F180:+F49
>F181:+F179-F180
>F182:+F154*1000
>G182:+F181-F182
>H182:@IF(G182>50000,G182,@INT((G182-1)/50)*50+25)
>F183:+F181-F182
>G183:@IF(H182>11900,@IF(H182>16000,@IF(H182>20200,(H182-20200)*.25+29
  37,(H182-16000)*.22+2013),(H182-11900)*.19+1234),0)
>H183:@IF(H182>24600,@IF(H182>29900,@IF(H182>35200,(H182-35200)*.39+73
  23,(H182-29900)*.33+5574),(H182-24600)*.29+4037),G183)
>F184:@IF(H182>45800,@IF(H182>60000,@IF(H182>85600,(H182-85600)*.5+302
  49,(H182-60000)*.49+17705),(H182-45800)*.44+11457),H183)
>F185:+F184
>F188:+F185-F187
>F191:+F188+F190
>F197:@SUM(E193...E196)
>F199:+F197+F198
>F201:@IF(F199>F191,F199-F191,0)
>F202:+F201
>F203:@IF(F191>F199,F191-F199,0)
```

Using The Program

The program should be easy to use for anyone familiar with *VisiCalc*. If a cell is blank, then you must enter data if it is appropriate for your particular situation. Set the recalculation mode to manual so you won't have to wait after each value is entered. If a cell contains a formula, then the value will be calculated by the program. Rows of x's are used in some places for clarity and indicate that no data are to be entered in that cell. Figure 8 shows a completed set of forms.


The data may be entered in any order, but error messages may appear or some cells may have incorrect values if data are missing. The convoluted nature of the forms and the interdependence of the calculations make it impossible to calculate all of the cells correctly in one pass. Two or three passes may be required, depending on the particular entries you use. *VisiCalc* flags the incorrect cells with the error message on the initial load, but after that no indication is given that more than one pass is required. One way to be sure is to look at the cell containing the tax owed and recalculate until the amount is the same twice in succession.

***The program should be easy to use for anyone familiar with* VisiCalc.**

Wages, IRA deductions, self-employment income, employee business expense, and Keogh payments are entered on Form W because they must be listed separately for the husband and wife. The program combines these inputs and enters the amount in the appropriate place on Form 1040. If you are single, you may still enter the data there. The program sets the married couple deduction to zero if income is not entered in both columns. Or you may delete Schedule W and the corresponding formulas in Form 1040 and enter the data there.

The data for schedules A and B are entered in much the same way as on the real forms. Make sure you change the number in cell F48 (Line A29) to match your filing status. The program automatically calculates the medical exclusions and the remaining All-Savers Exclusion. Schedule D is laid out in the same format as the real form. The program calculates all the entries except the information pertaining to the actual trans-

Figure 7. Derivation of sales tax parameters for use in formula F18.

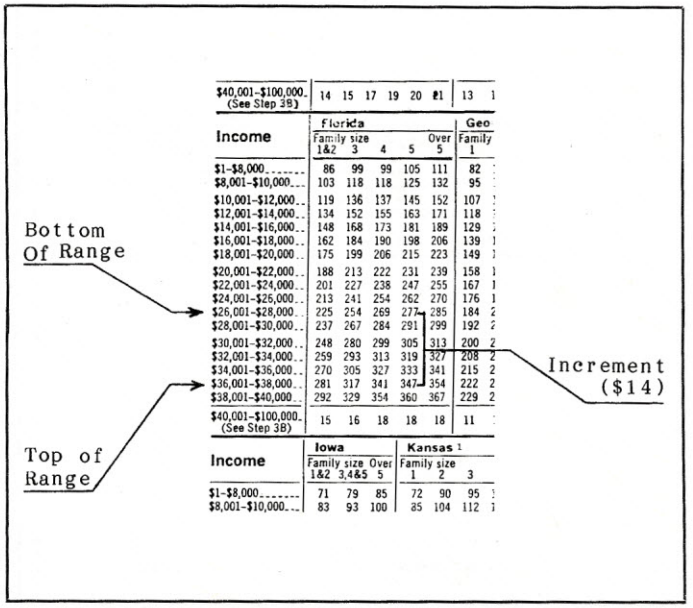


$40,001-$100,000. (See Step 3B)	14	15	17	19	20	#1	13	1

Income	Florida Family size 1&2	3	4	5	Over 5	Geo Family 1
$1-$8,000	86	99	99	105	111	82
$8,001-$10,000	103	118	118	125	132	95
$10,001-$12,000	119	136	137	145	152	107
$12,001-$14,000	134	152	155	163	171	118
$14,001-$16,000	148	168	173	181	189	129
$16,001-$18,000	162	184	190	198	206	139
$18,001-$20,000	175	199	206	215	223	149
$20,001-$22,000	188	213	222	231	239	158
$22,001-$24,000	201	227	238	247	255	167
$24,001-$26,000	213	241	254	262	270	176
$26,001-$28,000	225	254	269	277	285	184
$28,001-$30,000	237	267	284	291	299	192
$30,001-$32,000	248	280	299	305	313	200
$32,001-$34,000	259	293	313	319	327	208
$34,001-$36,000	270	305	327	333	341	215
$36,001-$38,000	281	317	341	347	354	222
$38,001-$40,000	292	329	354	360	367	229
$40,001-$100,000. (See Step 3B)	15	16	18	18	18	11

Income	Iowa Family size 1&2	Over 3,4&5	Kansas [1] Family size 1	2	3
$1-$8,000	71	79	85	72	90	95
$8,001-$10,000	83	93	100	85	104	112

SPEND 5 MINUTES WITH OUR ACCOUNTANT AND YOU'LL FIRE YOURS

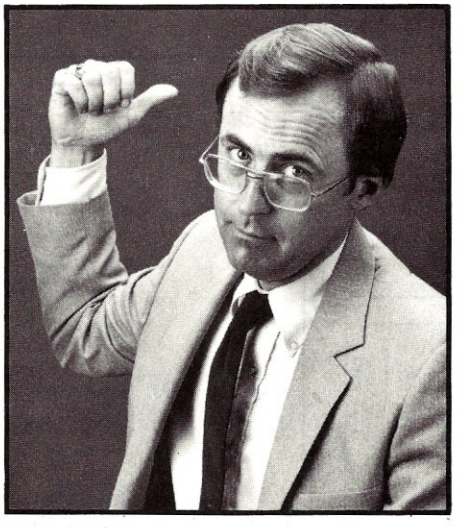

Introducing **TIME IS MONEY.™**
A simpler, faster, more flexible personal accounting software package.

While people have been overjoyed by the prospect of having their very own personal computer accountant, so far they've been underwhelmed by the products. Some are too complicated; others are little more than toys; still others are too slow and rigid in format.

Finally what you hoped for in a personal computer accounting package, TIME IS MONEY delivers.

IT'S SIMPLER.

TIME IS MONEY uses no codes and no special accounting terminology. Simple checkbook balancing with a full statement on-screen.

IT'S FASTER.

TIME IS MONEY runs with machine language speed so there's instant access to any transaction or balance. No complex or tedious setup prior to use.

IT'S MORE FLEXIBLE.

TIME IS MONEY defines, changes or deletes categories and accounts at any time. It grows as your needs grow.

IT'S MORE POWERFUL.

Tracks up to 240 separate assets and liabilities. 240 types of income from 240 different sources. 240 expense categories with tax deductions.

And all you need is an Apple II, II+, //e, or compatible computer.

Find out why TIME IS MONEY is the best personal accounting software package on the market. Call or write for a data sheet today. Even better, visit your dealer and try it out for yourself.

If you have a spare 5 minutes.

TURNINGPOINT™ SOFTWARE

11A Main Street, Watertown, MA 02172 **(617) 923-4441**

©Copyright 1983 Turning Point Software, Incorporated
Apple is the registered trademark of Apple Computer, Inc.

CIRCLE 241 ON READER SERVICE CARD

actions. Form 1040 is largely automatic. You have to enter the number of exemptions, additional adjustments or income, and the amount of tax withheld. Some lines were omitted from this form, but blank lines are provided to enter additional lines if you need them.

The global format command can be used to display the data in either dollars and cents or rounded to the nearest dollar.

Updating The Program

The example shown and all of the formulas are set up for the 1982 tax laws. For 1983 the number in cell F103 will change to .1 from .05. If the sales tax tables change, the formula in cell F18 will change. The tax cut, if there is one, will change G183, H183, and F184. There may be other changes that I am not aware of. Read the instructions just as carefully as you would if you were calculating by hand.

A final word of caution. I have checked the program carefully, and it seems to work for my particular circumstances, but I strongly advise that you check your results by hand until you are sure it is working for you. END

Figure 8. Completed tax forms.

****Form 1040*****

Exemptions					5
Income	Wages, Salaries		Line 7		50439
	Interest Income		Line 8		810
	Dividends	Line 9a		306xxxxxxxxx	
	Exclusion	Line 9b		200xxxxxxxxx	
			Line 9c		106
	Refunds State Taxes		Line 10		
	Alimony Received		Line 11		
	Business Income Or Loss		Line 12		-450
	Capital Gain or Loss		Line 13		1254
			Line		
	Total Income		Line 22		52159
Adjust. To Income	Employee Bus Expense		Line 24		2587
	Payments To IRA		Line 25		4000
	Payments to Keogh		Line 26		0
	Savings Penalty		Line 27		
	Alimony Paid		Line 28		
	Married Deduction		Line 29		564
	Disability Inc Excl		Line 30		
	Total Adjustments		Line 31		7151
Adjusted Gross Income			Line 32		45008
Tax Comput.	Itemized Deductions		Line 34a		5188
			Line 35		39820
	Exemptions		Line 36		5000
	Taxable Income		Line 37		34820
	Tax From Table		Line 38		7199
	Total Tax		Line 39		7199
Credits			Line		
	Balance		Line 50		7199
Other Taxes	Total Tax		Line 59		7199
Payments		Tax Withheld		6587xxxxxxxxx	
				1409xxxxxxxxx	
				180xxxxxxxxx	
				xxxxxxxxx	
			Line 60		8176
			Line		
		Total Payment	Line 67		8176
Refund or Amount Owed		Amount Overpaid	Line 68		977
		To be refunded	Line 69		977
		Amount Owed	Line 71		0

1982 **Schedule A - Itemized Deductions**

Medical And Dental Expenses	Medicines and Drugs		Line A1	100
		1% Income	Line A2	450
			Line A3	0
	Total Insurance Pr		Line A4	132
	Doctors Dentists		Line A5a	1567
	Transportation		Line A5b	235
	Other		Line A5c	321
		Sub-Total	Line A6	2255
		3% Income	Line A7	1350
			Line A8	905
			Line A9	66
			Line A10	905
Taxes	State and local Inc		Line A11	
	Real Estate		Line A12	1762
	General Sales		Line A13a	396
	Sales (motor veh)		Line A13b	200
	Other		Line A14	
		Total Tax	Line A15	2358
Interest Expense	Home Mortgage (Banks)		Line A16a	3795
	Home Mortgage (Indiv)		Line A16b	
	Credit Cards		Line A17	
	Other			1200
		Sub-Total	Line A18	1200
		Total Int	Line A19	4995
Contrib.	Cash Contributions		Line A20a	250
	Contrib. (>$3000)		Line A20b	
	Other		Line A21	
	Carryover		Line A22	
		Total	Line A23	250
Casualty Theft Miscell.	Total Casualty		Line A24	
	Union, Profess dues		Line A25a	45
	Tax Prep Fee		Line A25b	
	Other	Safe Dep Box		10
		Invest Club		25
		Sub-Tot	Line A26	35
		Total Misc.	Line A27	80
Summary	Total Deductions		Line A28	8588
			Line A29	3400
	Net Deductions		Line A30	5188

******Schedule B - Interest and Dividend Income*******

Part I Interest Income	From Seller Fin. Mort.	Line B1		
	Other Interest Income			xxxxxxxxx
	Electric Company Bond	Line B2		88
	Credit Union	"		50
	1st National Bank	"		41
	Money Market Fund	"		631
		"		
		"		
		"		
	Sub-Total	Line B3		810
	All-Savers Interest	Line B4		378
		Line B5		378
	Previous Exclusion			0
	Remaining Exclusion			2000
	This years Exclus.	Line B6		378
	Non-Excl. ASC Inc.	Line B7		0
	Total Interest Inc.	Line B8		810
Part II Dividend Income	Name Of Payer			xxxxxxxxx
	ABC Corp	Line B9		219
	XYZ Inc.	"		42
	Alpha Co	"		45
		"		
		"		
		"		
		"		
	Sub-Total	Line B10		306
	Cap. Gain Dist.	Line B11		xxxxxxxxx
	Non-Tax Dist.	Line B12		xxxxxxxxx
	Pub Util Div Excl	Line B13		xxxxxxxxx
		Line B14		0
	Total Dividends	Line B15		306

Schedule D - Capital Gains And Losses

Part I Short term gains and losses						
Kind of Property	Date Acq	Date Sold	Sales Pr	Cost	Loss	Gain
Elec Co. Bond	8/24/81	2/1/82	1123	1013	0	110
100 Apex Inc	10/1/81	2/9/82	5323	5999	-676	0
100 Ajax Inc	3/25/82	5/24/82	3104	3000	0	104
120 Mutual Fund	4/19/82	5/24/82	3567	3000	0	567
200 Mutual Fund	7/9/82	8/9/82	6000	5000	0	1000
					0	0
					0	0
		Sub-Total		Line D1	-676	1781
		Gain from sale of Res.		Line D2a	xxxxxxxxx	
		Gain from install. sales		Line D2b	xxxxxxxxx	
		Gain from partnership		Line D3		
		Sub-total		Line D4	-676	1781
		Net Gain or Loss			Line D5	1105
		Short-term Carryover			Line D6	
		Net Short-Term Gain Or Loss			Line D7	1105
Part II Long Term Gains and losses						
Kind of Property	Date Acq	Date Sold	Sales Pr	Cost	Loss	Gain
50 Acme Motors	10/18/76	2/1/82	3380	2105	0	1275
47 Amer Aviation	10/15/79	10/4/82	4151	4202	-51	0
54 Univ Electric	9/30/80	2/1/82	3967	4819	-852	0
					0	0
					0	0
					0	0
				Line D8	-903	1275
		Gain from sale of res.		Line D9a	xxxxxxxxx	
		Gain from install. sales		Line D9b	xxxxxxxxx	
		Gain from partnership		Line D10		
		Sub-total		Line D11	-903	1275
		Net Gain or Loss			Line D12	372
		Capital Gain Dist.			Line D13	
		Sub-Total			Line D16	372
		Long-Term Carryover			Line D17	
		Net Long-Term Gain or Loss			Line D18	372
Part III Summary of Parts I and II					Line D19	1477
					Line D20	372
					Line D21	223
		Net Capital Gain			Line D22	1254
					Line D23	0
		Net Capital Loss			Line D24	0

******Schedule W - Deduction For Married Couple*******


		Husband	Wife
Wages, Salaries, Tips		34567	14372
			1500
Total Salaries	Line W1	34567	15872
Self-Employment Inc	Line W2	-450	
	Line W3	34117	15872
IRA Deposits		2000	2000
Employee Bus Expense			2587
Keogh Payments			
Sub-Total	Line W4	2000	4587
Qual Earned Income	Line W5	32117	11285
	Line W6		11285
	Line W7		.05
Deduction	Line W8		564

NEW from Standard & Poor's—
A breakthrough for Apple II owners who invest.

ANNOUNCING STOCKPAK II— STOCK MARKET SOFTWARE FOR HARDNOSED INVESTORS

Send for our demonstration diskette and see why no one can aid investment decision-making like Standard & Poor's.

Compare our software system for speed, features, and ease of use.

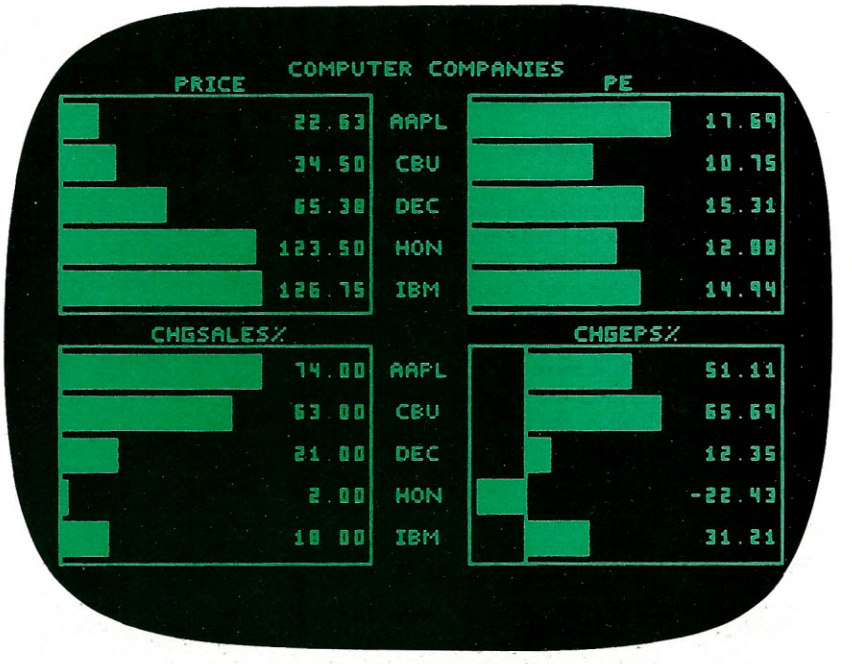

Comparisons of Apple, Commodore, Digital, Honeywell and IBM on price, PE ratio, % Changes in Sales and Earnings.Recent Data. **Plotted in 30 seconds.**

Standard & Poor's Corporation has been a major supplier of financial information for over 120 years. Our publications and services are used by brokers, institutional investors and individuals throughout the country. Now our experience and expertise has produced "state-of-the-art" software that, with any Apple II, can help you become a Wizard of Wall Street. (IBM-PC version available early '84).

The Stockpak II System consists of one Program diskette and one (or more) Database diskettes. Each month, users receive a new Database diskette. In this way, current information is available on up to 4,500 companies.

With STOCKPAK II, you can do all this—

● *Look up key financial facts.*
What do you want to know about the stocks you own and those you're considering? Over 100 information items are available for each company in the database. Get the data you want instantly—whether it's S&P's exclusive stock ranking, earnings, dividends, sales, price history, balance sheet items, or performance ratios.

● *Graphically compare and analyze information on groups of companies.*
Want to see how sales and earnings of any company stack up against its competitors? Or how five high-technology companies do in terms of growth rate, yield, earnings-per-share, and price-earnings ratio? It's so easy with Stockpak II. Our unique graphic routines provide clear, meaningful comparisons.

● *Perform simple or complex 'screens' to find certain kinds of companies.*
In less than 30 seconds, you can match criteria of your own choosing against companies in the database to find only those that "fit." Request large companies with stable earnings and low P-E ratios...or, if you're more aggressive, relatively small companies with impressive sales and earnings performance. Request only companies in certain industries...or companies with low prices and high betas. You can easily customize information items, criteria sets and report formats to suit your own preference.

You be the judge...send for our demonstration diskette

No printed description can do justice to the performance of Stockpak II. So we've prepared a demonstration diskette to show you why and how our software can help you make better investment decisions.

Send for STOCKPAK II's Demonstration Kit. It's just $10.00.
Credit card holders call
TOLL-FREE 1-800-852-5200, Ext. 7.
In NJ, 1-800-442-1300, Ext. 7.
Or send the coupon today.

STANDARD & POOR'S CORPORATION
25 Broadway, New York, NY 10004

☐ Please rush me my STOCKPAK II demo diskette for the Apple II @ $10.00.
☐ Contact me when your IBM-PC version is ready.
☐ I'm convinced. I wish to subscribe to STOCKPAK II now on a money-back-if-not satisfied basis. Enter my subscription to the following monthly database service—
- ☐ COMPOSITE (1,500 leading companies from the NYSE, ASE and OTC). $275.00
- ☐ ALL—NYSE (about 1,500 companies). $275.00
- ☐ ALL—ASE (about 800 companies). $275.00
- ☐ ALL—OTC (*two* diskettes, about 2,200 companies). $520.00

☐ Check enclosed. (Please make out to Standard & Poor's)
☐ Please charge my credit card:
☐ Amer. Express ☐ VISA ☐ MasterCard ☐ Diners Club

Card # _____ Exp _____

Signature _____

Name (Print) _____

Street _____

City _____ State _____ Zip _____

Subscriptions to STOCKPAK II are tax-deductible. We will bill you for applicable sales tax. Apple II is a registered trademark of Apple Computer, Inc. 3GA-4CCN01

Short Programs

ACRS Depreciation For Apple

Alfred Samper

The following is a translation for use on the Apple computer of Linda and Sid Broudy's ACRS Depreciation Program written for the IBM Personal Computer which appeared in the February 1983 *Creative Computing*.

For those who do not have a printer, the lines 855, 856, 857, 985 and 986 should be deleted. This will allow the printout to be displayed on the screen. END

Alfred Samper, 1316 N. Cross St., Wheaton, IL 60187.

```
10  REM --ACRS PROGRAM
20  REM --BY L. AND S. BROUDY
25  REM --SEPT.1982
30 N = 1
40  HOME : HTAB 8: INVERSE : PRINT  TAB( 7)"DEPRECIATION (ACRS) PROGRAM": NORMAL
50  VTAB (4): INPUT "WOULD YOU LIKE TO READ DATA FROM DISK (Y/N)";ANS$
60  IF AN$ = "Y" THEN 710
70  IF AN$ = "N" THEN S = 1
80  REM  --INSERTING NEW INFORMATION
90  INPUT "PLEASE TYPE IN YOUR NAME,AND YOUR SOCIAL SECURITY NUMBER(NAME,S
    S#)";NM$,SS$
100  INPUT "ITEM:";IT$(N)
110  PRINT "IS THE RECOVERY PERIOD FOR:";IT$(N)
112  PRINT  TAB( 12)"3 YRS, 5 YRS, OR 10 YRS";: INPUT C(N)
115  IF C(N) = 3 OR C(N) = 5 OR C(N) = 10 THEN  GOTO 120
117  GOTO 110
120  INPUT "UNADJUSTED BASIS:";BP(N)
130  INPUT "DATE PLACED IN SERVICE:";S$(N)
140  INPUT "% USED FOR BUSINESS:";B(N)
150  INPUT "DEPRECIATION YEAR (1,2,ETC.)";Y
160  IF C(N) = 3 THEN  GOSUB 410
```

Continued on page 188.



ALL FOR THE UNBELIEVABLY LOW PRICE OF $660.00!!!

Available at computer stores everywhere.
Or order direct and receive a 10% Introductory Factory Rebate through January 1, 1984.

130 page manual only $20 prepaid.
Dealerships currently available.

Prices and specifications subject to change without notice.

RHINO® ROBOTS

from Rhino®

The Scorpion is a versatile robot designed especially for the serious robot enthusiast. By following the detailed instructions included in the kit, you can build this highly sophisticated and entertaining device. With 32 lines of I/O and complex machine intelligence capability, it is completely software programmable. Among the many talents of the Scorpion are its ability to see and read codes, to learn obstacle locations and avoid them, and to follow a tape on the floor at 99 different speeds.

LOOK AT THESE CHALLENGING AND EXCITING FEATURES:

RS-232 C serial interface allows the Scorpion to obey instructions and answer questions from any host computer with a serial printer interface.


6502 microprocessor on board with 8K of EPROM and 2K of RAM, expandable to a full 64K system.

The special Scorpion language with 30 instructions is explained in detail in the 130 page manual (8½ × 11) accompanying the kit.

The two axis optical scanner provides data for pattern recognition and camera experiments. Over a 300 degree scan in both vertical and horizontal planes. The visual patterns can be displayed in the computer CRT.

Order today:
Rhino Robots, Inc.
P.O. Box 4010, 2505 S. Neil St.
Champaign, IL 61820
217/352-8485
Telex: 3734731 RHINO ROBOTS C

CIRCLE 199 ON READER SERVICE CARD

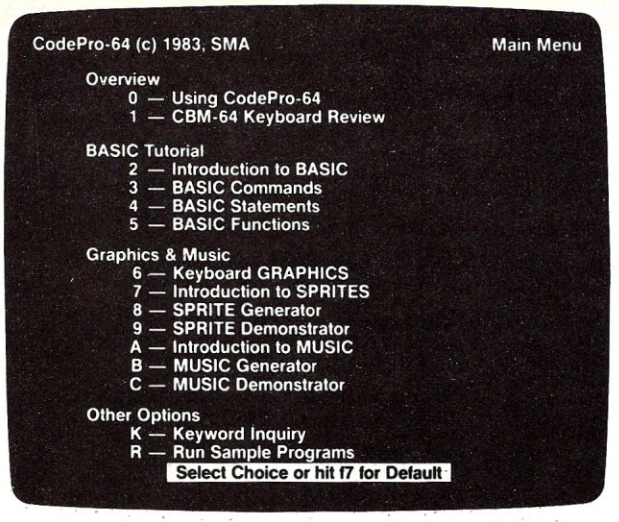

A new concept in interactive visual learning.

CodePro-64™

Now you can learn to code in BASIC and develop advanced programming skills with graphics, sprites and music—*visually*. You learn by interacting with CodePro-64, a new concept in interactive visual learning.

SEE PROGRAM EXECUTION

Imagine actually seeing BASIC statements execute. CodePro-64 guides you through structured examples of BASIC program segments. You enter the requested data or let CodePro-64 do the typing for you. (It will not let you make a mistake.)

You step through and actually see the execution of sample program statements by simply pressing the space bar. CodePro-64 does the rest. You see statements with corresponding *graphics* and variable value displays.

EXTENSIVE TUTORIAL

CodePro-64's extensive tutorial guides you through each BASIC command, program statement, and function. You get clear explanations. Where appropriate, you invoke BasicView to see examples execute and watch their flow charts and variables change.

By seeing graphic displays of program segment execution you learn by visual example. You *learn faster and grasp programming concepts easier* with CodePro-64 because you immediately see the results of your input.

You control your learning. You can go through the tutorial sequentially, or return to the main menu and select different topics, or *use keywords* to select language elements to study. You can page back and forth between screens within a topic at the touch of a function key.

Once you have practiced and mastered the BASIC language elements you move on to more advanced concepts. You learn about sprite and music programming.

SPRITE GENERATOR & DEMONSTRATOR

CodePro-64's sprite generator lets you *define your own sprites* on the screen. You learn how to define sprites and what data values correspond to your sprite definitions. (You can then save your sprite data to a diskette file for use in your own programs.) You can *easily experiment* with different definitions and make changes to immediately see the effects.

We also help you learn to program with sprites by giving you a *sprite demonstrator* so you can see the effect of changing register values. You can experiment by moving your sprite around in a screen segment, change its color and see the effects of your changes. You learn by visual examples.

MUSIC GENERATOR & DEMONSTRATOR

Our *Music Generator* and *Music Demonstrator* will provide hours of instruction and creative enjoyment. From the beginning of your instruction you can *compose simple tunes* on the screen using the generator. Once you've completed a composition you can *save the tune* and its associated SID parameters to a diskette file. Our music sample program can be used alone or incorporated into your own programs to *read the saved music file* and replay your songs.

Our music demonstrator *lets you experiment* with various combinations of music programming parameters and hear the results. All you do is enter rows of SID parameters on the screen to create a particular sound. Then you *hear each sound by playing the "keyboard organ"* in real time as you shift from row to row of SID parameters. By seeing your input and hearing the result you quickly learn how to create new musical sounds and special sound effects.

Whether you're a beginning programmer or an experienced professional, CodePro-64 will help you improve you Commodore 64 programming skills. We're sure because CodePro-64 was developed by a team of two professionals with *over 25 years* of software development experience.

CodePro-64 is a professional quality educational program for the serious student of personal computing. And it's *fully guaranteed*. Order yours today.

OUR GUARANTEE

We guarantee your satisfaction. You must be satisfied with CodePro-64 for the Commodore-64. Try it for 10 days and if for any reason you are not satisfied return it to us (undamaged) for a full refund. *No risk.*


HOW TO ORDER


Order your copy of CodePro-64 today by mail or phone. Send only $59.95 plus $3.00 shipping and handling to:


SYSTEMS MANAGEMENT ASSOCIATES
3700 Computer Drive, Dept. R-1
Raleigh, N.C. 27609


Available on diskette only. MasterCard/-VISA accepted. For faster service on credit card orders, call toll free 1-800 SMA-RUSH. (1-800-762-7874). *Dealer inquiries invited.*

Commodore 64 is a trademark of Commodore Business Machines, Inc.









SMA SYSTEMS MANAGEMENT ASSOCIATES

CIRCLE 219 ON READER SERVICE CARD

Educational software for your Apple & Atari!

BE A PATIENT TEACHER...

Trickster Coyote (Reader's Digest)
Apple only. 3rd grade-up. Scenic adventure teaches vocabulary. $ 48.95

Invader Attack (Zeitgeist) *
Apple only. 4th–6th grades. Practice in addition and subtraction of mixed numbers and fractions. 49.50

Master Type (Lightning Software) *
Apple/Atari 32K disk. Jr. high-up. Typing tutorial with unique motivation. 39.95

CONTROL THE COMPUTER...

Logo (Krell)
Apple only. 3rd grade up. Develop programming skills through graphics. 89.95

Zes Authoring System (Avant Garde) *
Apple only. Jr. high-up. Create animated computer assisted instructional packages. 250.00

SIMULATE THE REAL WORLD...

Millionaire (Blue Chip)
Apple/Atari disk. High school-up. Stock market investment participation. 59.95

Volcanoes (Earthware Computer Services)
Apple only. Jr. high-up. Earth science study through volcano exploration. 49.50

EXPRESS YOURSELF...

Music Maker (Sublogic)
Apple only. 5th grade-up. Create original music and sound effects. 39.95

The Bank Street Writer (Broderbund)
Apple/Atari disk. Jr. high-up. Simple yet powerful word processing. 69.50

EXPLORE AND DISCOVER...

In Search of the Most Amazing Thing (Spinnaker) Apple/Atari 48K disk. 5th grade-up. Define values and develop social skills. 39.95

Time Traveler (Krell)
Apple/Atari 48K disk. Jr. high-up. Text adventure in an historical setting. 24.95

Sammy the Sea Serpent (PDI) *
Atari 24K disk, 16K cass. requires joystick. Preschool-1st grade. Journey with Sammy back to the sea. 23.95 disk 18.95 cass.

* Qualifies for our unique buy back plan. See catalog for details.

These are just a few choices from our free catalog of educator reviewed software.
Order today! Don't forget to send your address and telephone number. Check, money order, VISA and MASTERCARD accepted. (Include account number and expiration date.) Add $2.00 for shipping. Missouri residents add 5.625% sales tax.

THE COMPUTER ROOM INC.
9256 Clayton Road
St. Louis, MO 63124
(314) 997-0724

CIRCLE 255 ON READER SERVICE CARD

ACRS Depreciation, continued...

```
170  IF C(N) = 5 THEN  GOSUB 470
180  IF C(N) = 10 THEN  GOSUB 530
190  INPUT "WOULD YOU LIKE A PRINTOUT (Y/N):";ANS$: IF ANS$ = "Y" THEN  GOSUB
     850
210  HOME : PRINT C(N)"-YEAR ACRS"
220  PRINT "COST RECOVERY FOR: ";IT$(N)
230  PRINT "UNADJUSTED BASIS:";: PRINT "$";BP(N)
240  PRINT : PRINT "DATE PLACED IN SERVICE: ";S$(N): PRINT "DEPRECIATION Y
     EAR:";Y
250  PRINT : PRINT "RATE OF ACRS DEPRECIATION:";100 * R;"%"
260 DEP = BP(N) * R
270 : PRINT "FULL ACRS DEPRECIATION AMT.=";: PRINT "$";DEP
280  PRINT "PERCENT OF USE FOR BUSINESS:";B(N);"%":B = .01 * B(N)
290 TD = B * DEP
300  PRINT : PRINT "ACRS DEPRECIATION DEDUCTION=";: PRINT "$";TD
310  INPUT "DO YOU WANT ANOTHER DEPRECIATION YEAR (Y/N)";A$
320  IF A$ = "Y" THEN  GOTO 150
330  IF A$ = "N" AND S = 1 THEN 370
340  INPUT "DO YOU WANT TO REVIEW ANOTHER ITEM FROM THE DISK  (Y/N)";A$
350  IF A$ = "Y" THEN 780
360  IF A$ = "N" THEN N = M
370  INPUT "DO YOU WANT TO ENTER ANOTHER ITEM  (Y/N)";AN$
380  IF AN$ = "Y" THEN N = N + 1:S = 1: GOTO 100
390  INPUT "DO YOU WANT TO SAVE YOUR DATA (Y/N)";A$
400  IF A$ = "Y" THEN 610
405  END
410  REM --3 YEAR ACRS
420  IF Y = 1 THEN R = .25
430  IF Y = 2 THEN R = .38
440  IF Y = 3 THEN R = .37
450  IF Y > 3 THEN  GOTO 150
460  RETURN
470  REM --5 YEAR ACRS
480  IF Y = 1 THEN R = .15
490  IF Y = 2 THEN R = .22
500  IF Y > 2 AND Y < 6 THEN R = .21
510  IF Y > 5 THEN  GOTO 150
520  RETURN
530  REM -- 10 YEAR ACRS
540  IF Y = 1 THEN R = .08
550  IF Y = 2 THEN R = .14
560  IF Y = 3 THEN R = .12
570  IF Y > 3 AND Y < 7 THEN R = .1
580  IF Y > 6 AND Y < 11 THEN R = .09
590  IF Y > 10 THEN  GOTO 150
600  RETURN
610  REM  --DISK ACCESS
620 M = N
630  INPUT "WHAT WOULD YOU LIKE TO NAME YOUR FILE:";F$
640  PRINT  CHR$ (4);"OPEN";F$ + ".TAX"
645  PRINT  CHR$ (4);"WRITE";F$ + ".TAX"
650  PRINT M;",";NM$;",";SS$
660  FOR I = 1 TO M
670  PRINT IT$(I);",";BP(I);",";S$(I);",";B(I);",";C(I)
680  NEXT I
690  PRINT  CHR$ (4);"CLOSE";F$ + ".TAX"
700  END
710  INPUT "WHAT FILE WOULD YOU LIKE TO READ:";F$
720  PRINT  CHR$ (4);"OPEN";F$ + ".TAX"
725  PRINT  CHR$ (4);"READ";F$ + ".TAX"
730  INPUT M,NM$,SSS
740  FOR I = 1 TO M
750  INPUT IT$(I),BP(I),S$(I),B(I),C(I)
760  NEXT I
770  PRINT  CHR$ (4);"CLOSE";F$ + ".TAX"
780  HOME : PRINT "ITEMS IN THE FILE ARE:"
790  FOR I = 1 TO M
800  PRINT I,IT$(I)
810  NEXT I
820  INPUT "WHICH ITEM WOULD YOU NOW LIKE TO REVIEW (ENTER ITEM# OR 0 FOR
     NEW ITEM)";I
830  PRINT IT$(I):N = I: IF I = 0 THEN N = M: GOTO 370
835  IF I <  = M THEN  GOTO 150
840  PRINT "THE ITEM YOU CHOOSE ISN'T IN THE FILE:": FOR K = 1 TO 1500: NEXT
     : GOTO 780
850  REM --PRINTER SUBROUTINE
855  PR# 1
856  POKE 1529,70
857  SPEED= 200
860  PRINT C(N)"-YEAR DEPRECIATION (ACRS) WORKSHEET"
870  PRINT NM$;".............SS#";SS$
880  PRINT
890  PRINT "COST RECOVERY FOR:";IT$(N)
900  PRINT
910  PRINT "UNADJUSTED BASIS:";: PRINT "$";BP(N)
920  PRINT "DATE PLACED IN SERVICE:";S$(N): PRINT "DEPRECIATION YEAR:";Y
930  PRINT "RATE OF ACRS DEPRECIATION:";100 * R;"%"
940 DEP = BP(N) * R
950  PRINT : PRINT "FULL ACRS DEPRECIATION AMT.=";: PRINT "$";DEP
960  PRINT "PERCENT OF USE FOR BUSINESS:";B(N);"%":B = .01 * B(N)
970 TD = B * DEP
980  PRINT : PRINT "ACRS DEPRECIATION DEDUCTION = ";: PRINT "$";TD: PRINT

985  PR# 0
986  SPEED= 255
990  GOTO 310
5010 AB(15): INPUT "WOULD YOU LIKE TO READ DATA FROM DISK (Y/N)";ANS$
```

B/GRAPH T.M.



A PROFESSIONAL GRAPHICS–CHARTING AND STATISTICAL ANALYSIS PROGRAM FOR ALL ATARI, COMMODORE 64, AND APPLE II+/IIe COMPUTER SYSTEMS

B/GRAPH is for professionals in Marketing, Sales, Administration, Forecasting, Accounting and General Management.
- Home and Small Business
- Educators and Students
- Hobbyists

B/GRAPH can create
- Bar Charts
- 3–D Bar Charts
- Segmented/Stacked Bar Charts
- Line Graphs
- Area Graphs
- Scatter/Point Graphs
- Stock Market Graphs (High/Low/Close)
- Pie Charts
- Graphing of 1–3 factors each with up to 100 data points

Instant conversion between all graph types without data re-entry.

B/GRAPH can perform
- Statistical Analysis Mean, Standard Deviation, Skewness, Variance, F-Test, T-Test, Chi-Square, Poisson-Bionomial & Normal Distribution and much more!
- Regression Analysis Coefficient of Determination, Durbin-Watson, F-Value, Function Plotting & more!
- Exponential Smoothing
- Moving Averages
- Geometric Moving Average
- Factor manipulation
- General Algebra

Data may be stored as Data Files or High Res Screens

B/GRAPH can read & write
- Visicalc D.I.F. Files
- User created ASCII files.

Use Visicalc to Enter your data then Graph it and Analyse it with B/GRAPH.

Use B/GRAPH to Enter, Graph and Analyse your data, then 'what if?' with Visicalc.

B/GRAPH Features
- Automatic labeling
- Relabeling
- Custom labeling in multiple text sizes and colors
- Full Screen Data Editor
- Multiple Graph Overlays
- Automatic graph scaling
- Manual graph rescaling
- Automated Slide Shows
- Grid Overlays
- Multiple Graph Overlays
- Total Screen Color Control

B/GRAPH works with most graphics printers from major manufacturers as well as with all of the popular printer cards and interfaces.

B/GRAPH comes with comprehensive professionally written documentation. It includes a complete tutorial on Graphing/Charting and Statistics.

B/GRAPH is menu driven and features a smooth and natural user interface quickly mastered by individuals without prior computer experience.

Specific features may vary between computer types

B/GRAPH is a trademark of Irata Press Ltd.
Atari is a trademark of Atari Inc.
Apple II+/IIe is a trademark of Apple Inc.
Visicalc is a trademark of VisiCorp.
Commodore 64 is a trademark of Commodore International

B/GRAPH is manufactured and distributed by Inhome Software on behalf of Irata Press Ltd.

INHOME
INHOME SOFTWARE INC.
2485 Dunwin Drive, Unit 8
Mississauga, Ontario
Canada L5L 1T1
(416) 828-0775


Available at your local dealer or order direct.

CIRCLE 166 ON READER SERVICE CARD

Introducing the first word processor made especially for the home

HOMEWORD™

The Personal Word Processor

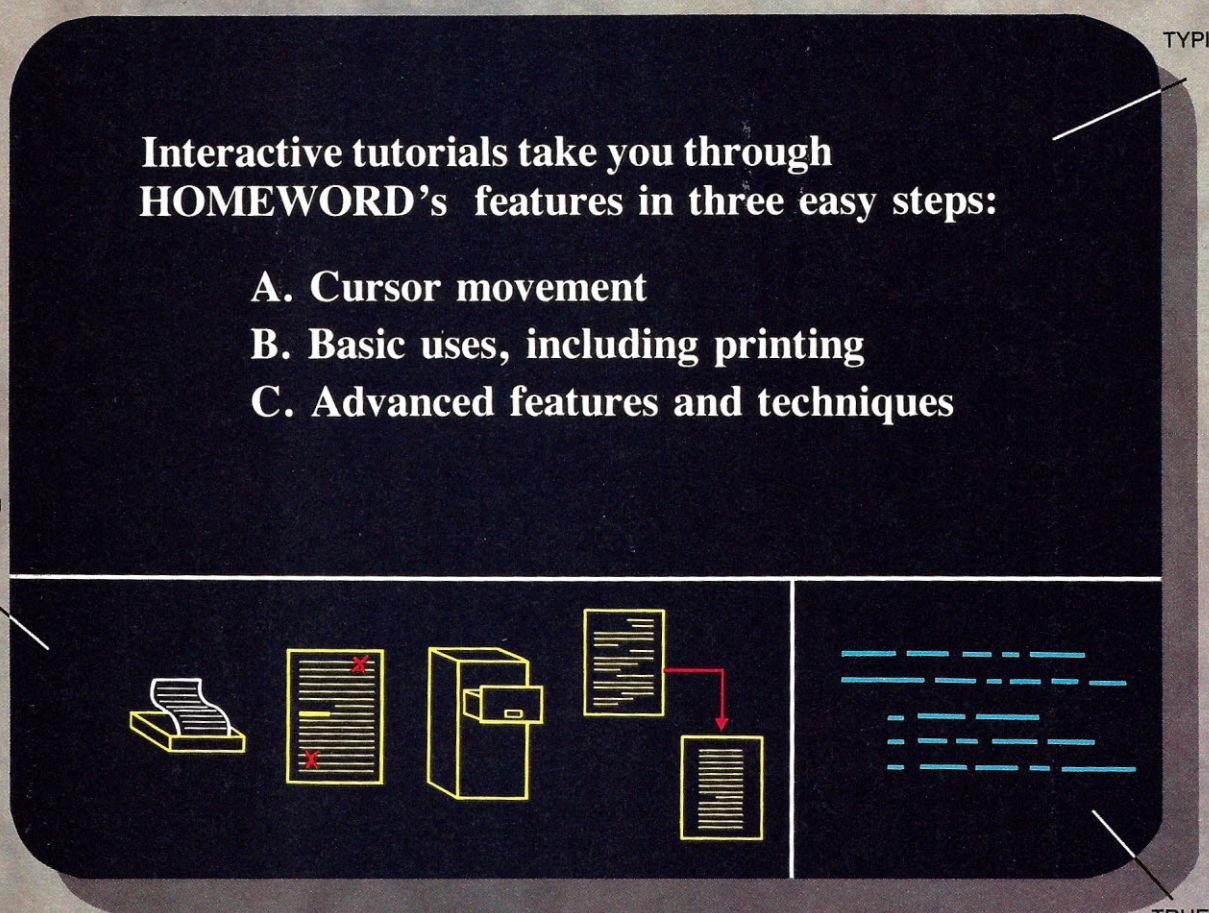

- $69.95
- Easy to Use
- Easy to Learn

Simple, versatile, effective. . . HomeWord makes putting your ideas on paper a snap. With no complicated commands to memorize, anyone can learn to use HomeWord in minutes.

An easy-to-follow audio cassette introduces you to HomeWord's operation. The slim instruction booklet is written in plain English to help you find answers fast. Familiar symbols, or "icons," lead you through the system. To edit, file, design your page layout, print, etc., you simply touch a key.

Supported all the way. . . When you buy HomeWord, you're also tied into Sierra On-Line's customer support program (one of the best in the industry). We're only a phone call away (209-683-6858) to suggest solutions to any of your software problems.

Sierra ON-LINE

TM designates a trademark of Sierra On-Line, Inc. © 1983 Sierra On-Line, Inc.

CIRCLE 207 ON READER SERVICE CARD

The First One

Print Statement Formatter For Apple

M.J. Parrott

A look at a typical Basic program will convince you that, usually, between one quarter and one third of it is concerned with outputting text to the screen. This text is of two kinds; the first takes just a few lines of program and screen and occurs scattered throughout the length of the program. The second kind of text tends to occur in large chunks and is typically printed toward the beginning where it lists instructions or gives information.

This second kind of text is frustrating to incorporate into the program. It is usually added after the main body has been written and debugged and it is a real chore to get it concise (to save memory) and to get it correctly formatted for the screen. How many times have you typed in PRINT statements only to discover on running the program that you have words wrapping around on the screen or that the last word on a line goes right to the margin and forces an extra carriage return resulting in an untidy display? I have many times said and therefore thought that a utility which allowed you to type in text without worrying about wrap around and which then formatted this into lines of Basic, correctly formatted for the screen would be a great boon.

Searching around for such a utility to use on my Apple II proved a disappointment; I couldn't find one. So I wrote my own. I find it extremely useful and time-saving and hope that you will too. I called it the First One.

Using The Program

After BRUNning it from disk, type (RETURN) from Basic or CTRL-Y from the monitor to initiate the program. The screen clears ready for you to type your text. Any character that is visible on the screen may be typed; a double quote, however, appears on the screen as a single quote or apostrophe. Control characters (including the RETURN key) are, in general, ignored by the program, but a few enable the incorporation of extra commands into the Basic program which will be generated. These control characters are

- CTRL-F: This leaves a flashing question mark on the screen but forces the FLASH command to appear in the Basic.
- CTRL-I: This leaves an inverse question mark on the screen, but forces the INVERSE command to appear in the Basic.
- CTRL-N: This leaves a flashing > symbol on the screen, but forces the NORMAL command to appear in the Basic.
- CTRL-L: This forces a carriage return both on the screen and in the text of the PRINT statement to be generated. In the PRINT statement this will either be an ASCII code 13 embedded in the string or it may appear as the normal end of a PRINT statement where the double quote "followed by neither a comma nor a semi-colon causes a carriage return to be issued when the PRINT statement is executed.
- The backspace key: This causes the last character on the screen to disappear, the cursor to back up, and the last used byte of the buffer to be zeroed. This is used for correcting typing errors. Remember that if a command such as CTRL-N is erased, you may want to type it again. Take care to count characters if you back up over a CTRL-L (a carriage return) because it has been erased from the text buffer, but the characters on the screen are no longer erased.
- CTRL-E: This causes the program to exit this inputting stage and to convert the text to lines of Basic. After the Basic program has been formed, it is RUN so the finished text may be viewed.

The First One will translate about six screenfuls of text into lines of Basic.

The First One will translate about six screenfuls of text into lines of Basic, but does not incorporate lines to halt the printing of the text at appropriate points to give you time to read it. I did this deliberately, as the exact choice of statement to do this depends to some extent on the remainder of the program.

It is no effort to go through the lines adding the necessary appropriate line as required. Once the lines of Basic have been formed, they can be treated exactly as if they had been typed in by you, the user. I usually use RENUMBER on the lines to match them to and subsequently merge them with my main program.

The whole process of typing the text, renumbering the lines and merging them with the host program is very much quicker than writing lines of PRINT statements directly. The lines of Basic as written by the First One also are more

M.J. Parrott, 23 Brackley Rd., Heaton Chapel, Stockport, Cheshire, SK4 2QT, England.

compact than those written directly due to the incorporation of ASCII character 13 into the string rather than ending the string whenever the righthand margin of the screen is reached.

How It Works

I have presented the program The First One both as a source listing and as a hexadecimal dump. It was assembled to begin at $4000 and is in essentially three parts. The first sets up the ampersand and CTRL-Y vectors to point to the second part, then returns to the caller. The second clears a buffer starting at $5000 to zero bytes, clears the screen, and accepts keystrokes. These are checked to see if they are printable characters or are commands and if so are displayed on the screen and are put into the buffer. If the buffer is filled or on receipt of the exit command (CTRL-E), the third part of the program begins operation where the lines of Basic are formed beginning at $801 as normal.

This part of the program resets the pointers to the buffer (BUF) and to the area of memory used to assemble the Basic (BAS) and looks at the next byte to see if it is text or a command or a zero value, which indicates that the end of the text has been reached. If it is text, 40 characters from the buffer are taken and scanned forward, looking for commands other than a carriage return. If none are found, the 40 characters are scanned backward looking for the first space or carriage return to find a convenient point at which to break the line of text as it will appear on the screen.

When found, the characters in front of this point are converted to the corresponding ASCII code with the high bit off and are stored in the appropriate area of memory for the Basic. The BUF pointer is reset and the process is repeated.

A count of the number of characters appearing in a line of Basic is kept, and when it is more than 240 or when a command is found, the line of text (in the Basic) is finished off with the appropriate PRINT token, with the line number, with the double quotes which delimit the string, and with the link addresses. The process then returns to the start and begins again.

Finally, when the end is reached, a jump is made to the Applesoft routine (RUN, $D566) where the Basic program is run. If the last character in the buffer is a command such as CTRL-I, CTRL-F or, perhaps more likely, a CTRL-N, the final line of Basic will be a PRINT statement with nothing following. This can easily be deleted when the Basic is listed.

Other than RUN the First One uses only a few routines in the Apple monitor, most of which can probably be duplicated on other 6502 machines. These are (addresses and affected registers are in parentheses) CLS ($FC58,A,Y) which clears the screen and sets the cursor to the upper lefthand corner, GET ($FD35,A,X,Y) which takes a keystroke ASCII value into the accumulator, PRT ($FDED) which then prints the ASCII value of the accumulator on to the next possible position of the screen, BACK ($FC10,A) which moves the cursor back one place on the screen, and BEL ($FBE4,A,Y) which rings a bell.

Therefore, if you feel brave enough to translate the First One to another machine, it should be quite easy, providing the various pointers and Basic tokens are changed to the appropriate values. END

```
SOURCE FILE: FIRST ONE
----- NEXT OBJECT FILE NAME IS FIRST ONE.OBJ0
4000:                1          ORG  $4000
FC58:                2 CLS      EQU  $FC58
FD35:                3 GET      EQU  $FD35
FDED:                4 PRT      EQU  $FDED
FBE4:                5 BEL      EQU  $FBE4
FC10:                6 BACK     EQU  $FC10
D566:                7 RUN      EQU  $D566
0000:                8 BUF      EQU  $00
0002:                9 LIN      EQU  $02
0004:               10 LINK     EQU  $04
0006:               11 BAS      EQU  $06
0008:               12 FLAG     EQU  $08
000E:               13 TEMP     EQU  FLAG+6
0032:               14 VIDEO    EQU  $32
03F5:               15 AMPSND   EQU  $3F5
                    16 **********************
4000:               17 *
4000:               18 *THE FIRST ONE
4000:               19 *
                    20 **********************
4000:A9 4C          21          LDA  #$4C       ;SET UP VECTORS FOR
4002:8D F5 03       22          STA  AMPSND     ;& AND CTRL-Y
4005:8D F8 03       23          STA  AMPSND+3
4008:A9 23          24          LDA  #>ORIG
400A:8D F6 03       25          STA  AMPSND+1
400D:8D F9 03       26          STA  AMPSND+4
4010:A9 40          27          LDA  #<ORIG
4012:8D F7 03       28          STA  AMPSND+2
4015:8D FA 03       29          STA  AMPSND+5
4018:60             30          RTS
4019:C7 CE C9       31 TEXT     ASC  "GNIDOC   WON"
401C:C4 CF C3
401F:A0 D7 CF
4022:CE
4023:D8             32 ORIG     CLD
4024:A2 80          33          LDX  #$80
4026:A9 50          34          LDA  #$50       ;BUFFER POINTERS
4028:85 01          35          STA  BUF+1      ;HELD IN ZERO PAGE
402A:A9 00          36          LDA  #$00
402C:85 00          37          STA  BUF
402E:A8             38          TAY
402F:91 00          39 LOOP     STA  (BUF),Y    ;ZERO THE BUFFER
4031:88             40          DEY             ;PLUS ONE PAGE
4032:D0 FB          41          BNE  LOOP
4034:E6 01          42          INC  BUF+1
4036:E4 01          43          CPX  BUF+1
4038:B0 F5          44          BCS  LOOP
403A:20 58 FC       45          JSR  CLS        ;HOME
403D:A9 50          46          LDA  #$50       ;RESET BUFFER POINTERS
403F:85 01          47          STA  BUF+1
4041:20 35 FD       48 BEGIN    JSR  GET        ;GET A CHAR
4044:C9 9F          49          CMP  #$9F       ;START OF PRINTABLE CHARS
4046:90 1F          50          BCC  CTR
4048:C9 A2          51          CMP  #$A2       ;A QUOTE?
404A:D0 02          52          BNE  STP
404C:A9 A7          53          LDA  #$A7
404E:A0 00          54 STP      LDY  #$00
4050:91 00          55          STA  (BUF),Y    ;PUT IT IN BUFFER
4052:20 ED FD       56          JSR  PRT
4055:E6 00          57          INC  BUF        ;UPDATE BUF
4057:D0 E8          58          BNE  BEGIN
4059:E6 01          59          INC  BUF+1
405B:E4 01          60          CPX  BUF+1      ;END OF BUFFER?
405D:F0 02          61          BEQ  BELL
```

GIVE YOUR KIDS A LESSON THEY'LL NEVER FORGET.




When kids have fun and learn at the same time, they're more likely to remember more of what they've learned. What's more, when they associate the two together — learning becomes an enjoyable activity. So they'll do more of it.

That's the basic principle behind the Learning Fun Series from EPYX.

FUN WITH MUSIC. PARENTS TAKE NOTE.

Fun with Music™ is designed to appeal to both you and your children. It comes with a songbook and has two modes of play. In the first mode, you can enter songs from the songbook — or compose your own. Then play the songs back, adding or removing notes and changing tempo or key. Your computer is like a musical instrument with memory, and you see every note of it displayed on your screen.

The second mode lets you play your song in a fun-filled action game. You control a drum major trying to touch the notes before a small but pesky poodle catches up to him and slows down the parade.





Either way, Fun with Music gives you and your whole family the perfect mix of learning and play.

FUN WITH ART. JUST PICTURE IT.

Creating art on the video screen is one of the newest forms of "high-tech" play for kids. And adults, for that matter. Plus there's nothing to clean up afterwards.

Fun with Art™ uses the computer and joystick to transform your TV screen into an artist's canvas with astonishing results. 128 colors, numerous brush strokes, all kinds of geometric shapes, and special fill-in and magnifying options are some of the 24 different modes and features available to create works of art never before possible.

Fun with Art brings out the artist in you, no matter what your age!

MORE LEARNING FUN ON THE WAY.

These two are the first of an extensive series of Learning Fun games we have planned. Look for these, as well as other EPYX titles, wherever computer software is sold.


EPYX™ COMPUTER SOFTWARE

LEARNING FUN SERIES.

CIRCLE 151 ON READER SERVICE CARD

*DOUBLES DISKETTE STORAGE SPACE!!

REDUCE YOUR DISKETTE COSTS BY 50%

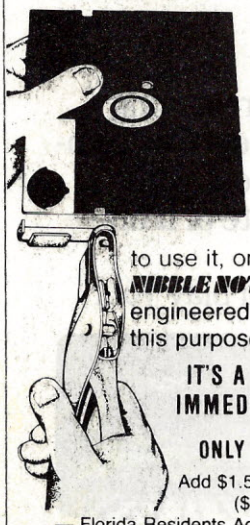

*The back of your 5¼" single sided diskette has recording medium. All you need is an ACCURATELY placed ***"write enable notch"*** to use it, on many systems. ***NIBBLE NOTCH***™ is a precision engineered tool designed for this purpose.

IT'S A MONEY SAVER!
IMMEDIATE SHIPMENT!

ONLY $14.95

Add $1.50 Postage/Handling
($4.50 Foreign)
— Florida Residents Add 5% Sales Tax —

ORDER TODAY!
SEND CHECK OR MONEY ORDER TO:

NIBBLE NOTCH™
Division of Cortran International
4211 N.W. 75th Terrace, Dept. 71
Lauderhill, Florida 33319

PAT. PEND.

CIRCLE 196 ON READER SERVICE CARD

CLASSROOM SOFTWARE

for the 16K TRS-80

Easy-to-use software for models I/III with tape, disk, or network. Complete manuals plus on-screen instructions. As simple as typing CLOAD and RUN.

Each program recorded twice on a separate side of a quality, long-lasting cassette.

CLASSROOM PACKS. Each has 4 programs in a subject area and permits self-paced study with unlimited running time. Choice of review or self-test modes plus progress reports and help feature. Missed questions are corrected and recalled until learned. **Price $44.95 each.**

- Geography I
- U.S. Government I
- U.S. History I
- Driver Education
- Electronics I
- Music Theory I

Other outstanding cassette software:

- Logic Games Package $24.95
- Anagrams $19.95
- Scramble-Grams $19.95

30-DAY GUARANTEE

At local dealers or order direct.

Educational Media Associates

Software Products
342 West Robert E. Lee
New Orleans, LA 70124

MC & VISA include card # and expiration date. Free shipping on prepaid and credit card orders. Others add $1.50 per package.

CIRCLE 171 ON READER SERVICE CARD

The First One, continued...

```
405F:B0 E0      62          BCS  BEGIN
4061:20 E4 FB   63 BELL     JSR  BEL
4064:4C CB 40   64          JMP  END1       ;EXIT EDITOR
4067:C9 88      65 CTR      CMP  #$88       ;A <- ?
4069:D0 27      66          BNE  CTR1
406B:38         67          SEC
406C:A5 00      68          LDA  BUF        ;RESET BUF
406E:E9 01      69          SBC  #$01
4070:85 00      70          STA  BUF
4072:A5 01      71          LDA  BUF+1
4074:E9 00      72          SBC  #$00
4076:85 01      73          STA  BUF+1
4078:C9 50      74          CMP  #$50       ;PAST START OF BUFFER?
407A:B0 03      75          BCS  CONT
407C:4C 23 40   76          JMP  ORIG       ;START AGAIN!
407F:A0 00      77 CONT     LDY  #$00
4081:98         78          TYA
4082:91 00      79          STA  (BUF),Y    ;ZERO BUFFER
4084:20 10 FC   80          JSR  BACK
4087:A9 A0      81          LDA  #$A0       ;A BLANK
4089:20 ED FD   82          JSR  PRT
408C:20 10 FC   83          JSR  BACK
408F:4C 41 40   84          JMP  BEGIN
4092:C9 8C      85 CTR1     CMP  #$8C       ;CTRL-L
4094:D0 05      86          BNE  CTR2
4096:A9 8D      87          LDA  #$8D       ;CAR RETURN
4098:4C 4E 40   88          JMP  STP        ;GO STORE IT
409B:C9 89      89 CTR2     CMP  #$89       ;CTRL-I
409D:D0 07      90          BNE  CTR3
409F:A9 3F      91          LDA  #$3F
40A1:85 32      92          STA  VIDEO      ;INVERSE
40A3:4C 4E 40   93          JMP  STP
40A6:C9 86      94 CTR3     CMP  #$86       ;CTRL-F
40A8:D0 07      95          BNE  CTR4
40AA:A9 7F      96          LDA  #$7F       ;FLASH
40AC:85 32      97          STA  VIDEO
40AE:4C 4E 40   98          JMP  STP
40B1:C9 8E      99 CTR4     CMP  #$8E       ;CTRL-N
40B3:D0 09     100          BNE  CTR5
40B5:A9 FF     101          LDA  #$FF
40B7:85 32     102          STA  VIDEO
40B9:A9 7E     103          LDA  #$7E
40BB:4C 4E 40  104          JMP  STP
40BE:C9 85     105 CTR5     CMP  #$85       ;CTRL-E
40C0:F0 03     106          BEQ  DOIT
40C2:4C 41 40  107          JMP  BEGIN      ;GO BACK
40C5:A9 A0     108 DOIT     LDA  #$A0       ;A BLANK
40C7:A0 00     109          LDY  #$00
40C9:91 00     110          STA  (BUF),Y    ;LAST CHAR IS BLANK
40CB:20 58 FC  111 END1     JSR  CLS        ;HOME
40CE:A2 09     112          LDX  #$9
40D0:BD 19 40  113 NOTE     LDA  TEXT,X
40D3:20 ED FD  114          JSR  PRT
40D6:CA        115          DEX
40D7:10 F7     116          BPL  NOTE
40D9:20 E4 FB  117          JSR  BEL
               118 **********************
40DC:          119 *NOW FORM THE BASIC
               120 **********************
40DC:A9 08     121          LDA  #$08       ;RESET POINTERS ETC
40DE:85 07     122          STA  BAS+1
40E0:85 05     123          STA  LINK+1
40E2:85 02     124          STA  LIN
40E4:85 68     125          STA  $68        ;START OF PROG
40E6:A9 50     126          LDA  #$50
40E8:85 01     127          STA  BUF+1
40EA:A9 00     128          LDA  #$00
40EC:85 00     129          STA  BUF
40EE:85 09     130          STA  FLAG+1     ;INIT CHAR COUNTER
40F0:85 0A     131          STA  FLAG+2     ;FLAG FOR NO END
40F2:85 0B     132          STA  FLAG+3     ;FLAG FOR COMMAND
40F4:85 0C     133          STA  FLAG+4     ;FIRST LINE COMMAND?
40F6:85 03     134          STA  LIN+1
40F8:A9 27     135          LDA  #$27       ;COUNTER FOR SPACES
40FA:85 0D     136          STA  FLAG+5     ;ON A SCREEN LINE
40FC:A9 07     137          LDA  #$07
40FE:85 06     138          STA  BAS        ;START OF TEXT
4100:A9 01     139          LDA  #$01
4102:85 04     140          STA  LINK
4104:85 67     141          STA  $67        ;START OF PROG
4106:A0 00     142 START1   LDY  #$00
```

There is no difference.



Unless you want the best price, performance and quality.

The other guys' printers have always been adequate. But why settle for adequate when you can have the best. The quiet new Riteman personal printer from Inforunner for your computer.

Made possible by over 38 years of manufacturing expertise, Inforunner has produced the best printer ever. Inch for inch, we've packed more heavy-duty quality and performance inside our compact Riteman printers at a lower cost than the competition.

Compare feature for feature. With the Riteman you get uni- or bi-directional printing running easily at 120 cps with friction, pin, and tractor feed at no extra cost. You can use your own stationery, labels, fan fold or pin feed paper. So all your printing gets done faster.

The Riteman is Epson-compatible for interfacing with most personal computers. Like Apple and IBM. And with a wide variety of print modes including italics, super and subscripts with true descenders. So your letters and other printouts look their best.

And it runs with many popular software packages including graphics.

See for yourself how easily this incredibly low-priced printer, with the best price/performance/quality combination, fits into a briefcase — at your nearest computer dealer.

ASK YOUR DEALER or call toll free (800) 824-3044. In California (800) 421-2551. Inforunner Corporation, 1621 Stanford Street, Santa Monica, CA 90404.

Inforunner's Riteman

DISTRIBUTED WORLDWIDE

Apple is a registered trademark of Apple Computer Inc. IBM is a registered trademark of IBM Corporation Epson is a registered trademark of Epson America


CIRCLE 308 ON READER SERVICE CARD



DON'T LAUGH. FIVE MINUTES OF ALLEY-OOPS AND YOU WON'T BE ABLE TO TAKE YOUR EYES OFF IT.

Oh sure—it might look silly now. But wait'll it's hurtling toward you, threatening to destroy your perfect game. You'll take it seriously then.

And bowling shoes won't be your only worry. You'll also have to watch for diabolical beer bottles, evil pin sweeps and vicious gum spots.



Sound strange?

Sure. But battling such weird objects is exactly what makes Alley-Oops so original. And so incredibly fun to play.

Alley-Oops is real arcade stuff. In fact, it's a challenge just to get to the next level of play. And there are 8 levels, the last one being the nearly impossible Challenge Round.

There are all kinds of ways to play Alley-Oops—try to mount up points, score a perfect game or reach that highest level. Whichever way you choose, you'll have endless fun playing Alley-Oops.

Just remember—don't take the bowling shoes lightly. After years of being kicked around bowling alleys, they're out to get even.



To survive Alley-Oops, you'll have to contend with diabolical beer bottles, evil pin sets, and vicious gum spots.

Alley-Oops™—A new arcade game from Artworx.® Designed by Jeffrey Godish and Brian Harkins; programmed by Leonard Bertoni and David Pompea. For the Commodore 64 and Atari (16K) computers. Cassette/diskette $29.95. Artworx Software Co., Inc., 150 North Main St., Fairport, N.Y. 14450. For a free catalog of Artworx software write or call 800-828-6573.

Artworx®

So you can play.

Atari and Commodore 64 are registered trademarks.

The First One, continued...

```
4108:B1 00     143         LDA  (BUF),Y
410A:D0 07     144         BNE  GOON      ;IF NOT ZERO
410C:A9 01     145         LDA  #$01      ;SET FLAG FOR END
410E:85 0A     146         STA  FLAG+2    ;OF PROGRAM
4110:4C BF 41  147         JMP  LINE      ;FINISH THE LINE
4113:A9 80     148 GOON    LDA  #$80      ;LOOK FOR COMMANDS
4115:D1 00     149         CMP  (BUF),Y
4117:90 40     150         BCC  LOOK
4119:B1 00     151         LDA  (BUF),Y   ;STORE THE
411B:85 0B     152         STA  FLAG+3    ;COMMAND
411D:A5 0C     153         LDA  FLAG+4    ;IS IT 1ST LINE?
411F:D0 03     154         BNE  FINOLD
4121:4C 2C 41  155         JMP  FINNEW
4124:20 CA 41  156 FINOLD  JSR  CONT7
4127:A0 02     157         LDY  #$02      ;UPDATE BAS
4129:20 77 42  158         JSR  ADDON
412C:A0 05     159 FINNEW  LDY  #$05      ;MAKE A LINE FOR
412E:A9 00     160         LDA  #$00      ;THE COMMAND
4130:91 04     161         STA  (LINK),Y
4132:88        162         DEY
4133:A5 0B     163         LDA  FLAG+3    ;GET COMMAND
4135:C9 7E     164         CMP  #$7E
4137:F0 0A     165         BEQ  NORM
4139:90 04     166         BCC  INVER
413B:A9 9F     167         LDA  #$9F      ;FLASH TOKEN
413D:B0 06     168         BCS  TOKEN
413F:A9 9E     169 INVER   LDA  #$9E      ;INVERSE TOKEN
4141:90 02     170         BCC  TOKEN
4143:A9 9D     171 NORM    LDA  #$9D      ;NORMAL TOKEN
4145:91 04     172 TOKEN   STA  (LINK),Y  ;PUT TOKEN IN LINE
4147:20 15 42  173         JSR  TOK       ;GO & FINISH LINE
414A:A9 00     174         LDA  #$00      ;RESET FLAG
414C:85 0B     175         STA  FLAG+3
414E:A0 01     176         LDY  #$01
4150:20 69 42  177         JSR  UPDATE    ;UPDATE BUF BY 1
4153:20 77 42  178         JSR  ADDON     ;& BAS BY 2 IN TOTAL
4156:4C 06 41  179         JMP  START1
4159:C8        180 LOOK    INY
415A:84 0C     181         STY  FLAG+4
415C:C4 0D     182         CPY  FLAG+5    ;IE NO. OF  CHARS LEFT
415E:F0 15     183         BEQ  NONE      ;SEARCH FOR COMMANDS
4160:D1 00     184         CMP  (BUF),Y
4162:90 F5     185         BCC  LOOK
4164:88        186         DEY            ;SET IT BACK ONE
4165:84 08     187         STY  FLAG
4167:84 0E     188         STY  TEMP      ;RESET NO OF CHARS LEFT
4169:38        189         SEC            ;PER LINE
416A:A5 0D     190         LDA  FLAG+5
416C:E5 0E     191         SBC  TEMP
416E:E9 01     192         SBC  #$01      ;(Y COUNTS FROM 0)
4170:85 0D     193         STA  FLAG+5
4172:4C A3 41  194         JMP  LOOP2
4175:A4 0D     195 NONE    LDY  FLAG+5    ;IE NO. OF CHARS LEFT
4177:B1 00     196 SEARCH  LDA  (BUF),Y
4179:C9 A0     197         CMP  #$A0      ;LOOK FOR BLANKS
417B:F0 09     198         BEQ  CONT2     ;OR CAR RETURN
417D:C9 8D     199         CMP  #$8D
417F:F0 05     200         BEQ  CONT2
4181:88        201         DEY
4182:10 F3     202         BPL  SEARCH
4184:A4 0D     203         LDY  FLAG+5    ;NOT FOUND BLANK OR CR
4186:84 08     204 CONT2   STY  FLAG      ;TEMP STORAGE
4188:18        205         CLC
4189:98        206         TYA
418A:65 09     207         ADC  FLAG+1    ;ADD UP CHAR COUNTER
418C:B0 04     208         BCS  ENDIT     ;MORE THAN 255 CHARS
418E:C9 F0     209         CMP  #$F0      ;LESS THAN 240?
4190:90 06     210         BCC  CONT3
4192:20 BF 41  211 ENDIT   JSR  LINE
4195:4C 06 41  212         JMP  START1    ;GO BACK
4198:85 09     213 CONT3   STA  FLAG+1    ;UPDATE CHAR COUNTER
419A:A9 27     214         LDA  #$27      ;RESET LINE LENGTH
419C:85 0D     215         STA  FLAG+5    ;COUNTER
419E:A9 0D     216         LDA  #$D       ;PUT CR IN BASIC
41A0:91 06     217         STA  (BAS),Y
41A2:88        218         DEY
41A3:B1 00     219 LOOP2   LDA  (BUF),Y   ;GET A CHAR
41A5:C9 8E     220         CMP  #$8E      ;LOOK FOR CR
41A7:B0 06     221         BCS  PUTIT
41A9:A2 27     222         LDX  #$27      ;RESET LINE LENGTH
41AB:86 0D     223         STX  FLAG+5    ;COUNTER
41AD:84 08     224         STY  FLAG      ;IF CR RESET BUF & BAS
```


ATTENTION ATARI® FREAKS!

Here's the book you've been looking for!



THE CREATIVE ATARI

Whether you're an Atari beginner or a seasoned expert, you really shouldn't be without this extraordinarily useful guide to practical Atari "how to" and lore. You get tutorials on Atari graphics, a discussion of Atari memory concepts, programming tips, programs and much more that will help you make better use of your Atari. It's written so that the average, non-expert user who knows a little about BASIC and simple programming can easily develop into a skilled Atari user. The contents of this absorbing book have appeared as articles, columns and tutorials in *Creative Computing*, but have been thoroughly updated and revised to insure maximum learning ease.

The Creative Atari, edited by David Small, Sandy Small and George Blank. 8½" x 11", softcover, illustrated. $15.95.

Atari is a registered trademark of Atari, Inc.

For faster service
PHONE TOLL FREE: 800-631-8112
(In NJ call 201-540-0445)

CREATIVE COMPUTING PRESS Dept. HE7C
39 East Hanover Avenue, Morris Plains, NJ 07950

Please send me _____ copies of *Creative Atari* at $15.95 each* plus $2 postage and handling. #18R.

Outside USA add $3 postage and handling charge.

*CA, NJ and NY State residents add applicable sales tax.

☐ PAYMENT ENCLOSED $_____

☐ CHARGE MY:
☐ American Express ☐ MasterCard ☐ Visa

Card No._____ Exp. Date_____

Signature_____

Mr./Mrs./Ms._____
(please print full name)

Address_____ Apt._____

City_____

State_____ Zip_____

☐ Check here for FREE *Creative Computing* Catalog.

WHERE DO YOU FIND MICRO-COMPUTER MAIL-ORDER BUYERS?

In A+
—our new publication catering to the enormous market of Apple owners, users and buyers.

In Computers & Electronics —the "grandfather" of them all and the largest circulating computer magazine in the world also provides monthly coverage of all forms of electronic equipment.

In Creative Computing —the number one magazine of computer applications and software.

In Digital Review —The foremost magazine devoted to serving the fast-growing DEC microcomputer community.

In Microsystems —an advanced journal for microcomputer professionals who need high-level information.

In PC —the "must-read" magazine for IBM Personal Computer owners, users, and buyers.

In PC Tech Journal —where more sophisticated and influential IBM users find ways to stretch their systems to new technological limits.

Our computer magazine group lets you talk to your prospects selectively in classified ads and/or directory listings that can be yours for as little as $2.00 per word! Why not run in a combination of our magazines next month—and enjoy high response?

Phone us now for rates, sizes, and ad options by title.

Classified Advertising
ZIFF-DAVIS PUBLISHING COMPANY
Consumer Computers &
Electronics Magazine
Division

CALL 725-4215

The First One, continued...

```
41AF:49 80      225 PUTIT   EOR  #$80      ;STRIP OFF MSB
41B1:91 06      226         STA  (BAS),Y   ;PUT IN BASIC
41B3:88         227         DEY
41B4:10 ED      228         BPL  LOOP2
41B6:A4 08      229         LDY  FLAG      ;GET Y VALUE
41B8:C8         230         INY
41B9:20 69 42   231         JSR  UPDATE    ;UPDATE POINTERS
41BC:4C 06 41   232         JMP  START1    ;GO BACK
                233 ********************
41BF:           234 *LINE
                235 ********************
41BF:38         236 LINE    SEC
41C0:A5 06      237         LDA  BAS
41C2:E9 01      238         SBC  #$01
41C4:85 06      239         STA  BAS
41C6:B0 02      240         BCS  CONT7
41C8:C6 07      241         DEC  BAS+1
41CA:A9 22      242 CONT7   LDA  #$22       ;A QUOTE
41CC:A0 00      243         LDY  #$00
41CE:84 09      244         STY  FLAG+1     ;RESET CHAR COUNTER
41D0:91 06      245         STA  (BAS),Y    ;PUT IN FINAL "
41D2:A5 0B      246         LDA  FLAG+3     ;WHAT'S COMMAND
41D4:F0 29      247         BEQ  CARYON     ;IF NONE GO ON
41D6:A4 0B      248         LDY  FLAG+5     ;IE FOR NO OF CHARS LEFT
41D8:B1 00      249 LOOP3   LDA  (BUF),Y    ;SEARCH FOR BLANK
41DA:C9 A0      250         CMP  #$A0       ;OR CAR RET.
41DC:F0 0F      251         BEQ  FOUND
41DE:C9 8D      252         CMP  #$8D
41E0:F0 0B      253         BEQ  FOUND
41E2:88         254         DEY
41E3:10 F3      255         BPL  LOOP3
41E5:A9 27      256 IGNORE  LDA  #$27       ;RESET COUNTER FOR NO.
41E7:85 0B      257         STA  FLAG+5     ;OF CHARS PER LINE
41E9:A0 00      258         LDY  #$00
41EB:F0 12      259         BEQ  CARYON
41ED:C0 01      260 FOUND   CPY  #$01
41EF:D0 08      261         BNE  USE        ;IF IT ISN'T  FIRST CHAR PAST COMMAND
41F1:E6 00      262         INC  BUF        ;WE WANT TO SKIP THIS
41F3:D0 F0      263         BNE  IGNORE     ;BLANK NEXT TIME ROUND
41F5:E6 01      264         INC  BUF+1
41F7:D0 EC      265         BNE  IGNORE
41F9:A0 01      266 USE     LDY  #$01
41FB:A9 3B      267         LDA  #$3B       ;A ';'
41FD:91 06      268         STA  (BAS),Y
41FF:C8         269 CARYON  INY
4200:A9 00      270         LDA  #$00
4202:91 06      271         STA  (BAS),Y    PUT IN EOL TOKEN
4204:85 08      272         STA  FLAG       ;SET FLAG FOR FINISHED LINE
4206:C8         273         INY
4207:20 77 42   274         JSR  ADDON      ;UPDATE BAS
420A:A0 05      275         LDY  #$05       ;NOW FINISH LINE
420C:A9 22      276         LDA  #$22       ;A QUOTE
420E:91 04      277         STA  (LINK),Y   ;LINK POINTS TO THIS LINE'S START
4210:88         278         DEY
4211:A9 BA      279         LDA  #$BA       ;?TOKEN
4213:91 04      280         STA  (LINK),Y
4215:88         281 TOK     DEY
4216:A5 03      282         LDA  LIN+1      ;LINE NO HI BYTE
4218:91 04      283         STA  (LINK),Y
421A:88         284         DEY
421B:A5 02      285         LDA  LIN        ;LO BYTE OF LINE NO
421D:91 04      286         STA  (LINK),Y
421F:88         287         DEY
4220:A5 07      288         LDA  BAS+1      ;HI BYTE OF NEXT LINE
4222:91 04      289         STA  (LINK),Y
4224:88         290         DEY
4225:A5 06      291         LDA  BAS        ;LO BYTE OF NEXT LINE
4227:91 04      292         STA  (LINK),Y
4229:85 04      293         STA  LINK       ;RESET LINK FOR NEXT LINE
422B:A5 07      294         LDA  BAS+1
422D:85 05      295         STA  LINK+1
422F:A5 0B      296         LDA  FLAG+3     ;TEST FLAG FOR COMMAND
4231:F0 04      297         BEQ  LEAVE
4233:A0 04      298         LDY  #$04       ;SKIP 4 BYTES
4235:D0 02      299         BNE  ADD
4237:A0 06      300 LEAVE   LDY  #$06       ;HAVE TO SKIP 6 BYTES
4239:20 77 42   301 ADD     JSR  ADDON
423C:A5 0A      302         LDA  FLAG+2     ;TEST FLAG FOR END OF PROG
423E:F0 1D      303         BEQ  CONT8
4240:A0 00      304         LDY  #$00
```



LAST NIGHT, 39 MUSICIANS HAD A COMPUSERVE CONFERENCE, SO DID 31 M.D.S, 49 SPORTS FANS AND 640 APPLE POLISHERS, AND NO ONE HAD TO LEAVE HOME.

The Electronic Forum, Cheaper than Long Distance and Much More Rewarding.

Every night on the CompuServe Information Service, professional and social groups discuss a wide range of subjects. From what's new in medical technology to what's nouvelle in continental cuisine.

And every day more computer owners who share a common interest are discovering this exciting new way to exchange ideas and even transfer hard copy data.

And besides electronic forums, they leave messages for each other on our national bulletin board, "talk" informally on our CB simulator, and communicate via CompuServe's electronic mail.

But best of all, in most cases, CompuServe subscribers get all of these state of the art communications options, plus a world of on-line information and entertainment for the cost of a local phone call plus connect time.

To become part of this flexible communications network, all you need is a computer, a modem and CompuServe. CompuServe connects with almost any personal computer, terminal, or communicating word processor.

To receive an illustrated guide to CompuServe and learn how you can subscribe, contact or call:

CompuServe

Consumer Information Service, P.O. Box 20212
5000 Arlington Centre Blvd., Columbus, OH 43220

800-848-8199

In Ohio call 614-457-0802

An H&R Block Company

CIRCLE 141 ON READER SERVICE CARD

GET TRIPLE THE FUN WITH SAMS NEW APPLE® GAMES.



Sams three new Apple® games are so fun, you won't know which one to play first.

The games themselves are relatively simple. The challenge is in winning. So whether you're an experienced player or beginner, Sams new games give you a lot of entertainment for a little money—only $29.95 each.

In REGATTA, you sail a boat around one of four lake courses displayed in full-screen, hi-res graphics. By working your sails and centerboard as indicated in the corner of your screen, you race in real-time against a clock or competitor. The game moves quickly so you must think fast. Sams complete documentation, including 17 illustrations, make it easy to learn and play. Game paddles, joysticks and color monitor are optional. No. 26147.

BERMUDA RACE is the ultimate test for sailing enthusiasts of all levels. Unlike REGATTA, you have time to think out every move. To play, you respond to the conditions indicated on the screen by changing your sail capacity, centerboard depth and compass direction. Then by pressing a key, you can check your progress on a vivid, hi-res graphics map. Sail alone or against a competitor. But watch out! A few compass degrees can make the winning difference or leave you stranded in the Bermuda Triangle. No. 26129.

If you like battle games, you're going to love SPUD. The object is to shoot at the Spud, moving it away from you and toward your competitor. If it touches his fort, he's destroyed. The Spud itself acts like a hot potato as it bounces back and forth between forts. Three kinds of ammunition let you move the Spud, destroy your competitor's shield, intercept shots, gain bonus points, and more. It's hi-res, high-action in its purest form, and fun for all ages. Includes single player game. Game paddles, joy sticks and color monitor are optional. No. 26162.

Sams new games are available for any Apple II® compatible computer with 48K RAM and one disk drive. So get triple the fun with Sams new Apple games now. Visit your local Sams dealer. Or call **800-428-SAMS** or 317-298-5566 and ask for Operator 457.

SAMS™

Howard W. Sams & Co., Inc.
4300 West 62nd Street, P.O. Box 7092
Indianapolis, IN 46206

Offer good in USA only. Prices subject to change without notice. In Canada, contact Lenbrook Electronics, Markham, Ontario L3R 1H2.

Apple and Apple II are registered trademarks of Apple Computer, Inc.

CIRCLE 212 ON READER SERVICE CARD

AD457

```
4242:98          305          TYA
4243:91 04       306          STA  (LINK),Y  ;ZERO BYTES FOR END
4245:C8          307          INY
4246:91 04       308          STA  (LINK),Y
4248:A0 03       309          LDY  #$03
424A:20 77 42    310          JSR  ADDON     ;ADJUST POINTER
424D:A5 06       311          LDA  BAS       ;POINTS TO PAST END
424F:85 AF       312          STA  $AF       ;END OF PROG POINTER
4251:A5 07       313          LDA  BAS+1
4253:85 B0       314          STA  $B0
4255:20 58 FC    315          JSR  CLS       ;HOME
4258:68          316          PLA            ;DISCARD TWO WORDS
4259:68          317          PLA            ;FROM STACK
425A:4C 66 D5    318          JMP  RUN       ;GO & RUN BASIC
425D:18          319 CONT8    CLC
425E:A9 05       320          LDA  #$05
4260:65 02       321          ADC  LIN       ;UPDATE LINE NUMBER
4262:85 02       322          STA  LIN
4264:90 02       323          BCC  CONT5
4266:E6 03       324          INC  LIN+1
4268:60          325 CONT5    RTS
                 326 **********************
4269:            327 *UPDATE
                 328 **********************
4269:98          329 UPDATE   TYA            ;UPDATE BUFFER
426A:18          330          CLC
426B:65 00       331          ADC  BUF
426D:85 00       332          STA  BUF
426F:90 02       333          BCC  CONT4
4271:E6 01       334          INC  BUF+1
4273:20 77 42    335 CONT4    JSR  ADDON
4276:60          336          RTS
                 337 **********************
4277:            338 *ADDON
                 339 **********************
4277:98          340 ADDON    TYA            ;UPDATE BAS
4278:18          341          CLC
4279:65 06       342          ADC  BAS
427B:85 06       343          STA  BAS
427D:90 02       344          BCC  CONT9
427F:E6 07       345          INC  BAS+1
4281:60          346 CONT9    RTS

*** SUCCESSFUL ASSEMBLY: NO ERRORS
```

```
4277 ADDON       4239 ADD         03F5 AMPSND      FC10 BACK
  06 BAS         4041 BEGIN       FBE4 BEL         4061 BELL
  00 BUF         41FF CARYON      FC58 CLS         4186 CONT2
4198 CONT3       4281 CONT9       407F CONT        4273 CONT4
4268 CONT5       41CA CONT7       425D CONT8       4092 CTR1
40A6 CTR3        40B1 CTR4        4067 CTR         409B CTR2
40BE CTR5        40C5 DOIT        40CB END1        4192 ENDIT
412C FINNEW      4124 FINOLD        08 FLAG        41ED FOUND
FD35 GET         4113 GOON        41E5 IGNORE      413F INVER
4237 LEAVE         02 LIN         41BF LINE          04 LINK
4159 LOOK        41A3 LOOP2       41D8 LOOP3       402F LOOP
4175 NONE        4143 NORM        40D0 NOTE        4023 ORIG
FDED PRT         41AF PUTIT       D566 RUN         4177 SEARCH
4106 START1      404E STP           0E TEMP        4019 TEXT
4145 TOKEN       4215 TOK         4269 UPDATE      41F9 USE
  32 VIDEO
```

```
  00 BUF           02 LIN           04 LINK          06 BAS
  08 FLAG          0E TEMP          32 VIDEO       03F5 AMPSND
4019 TEXT        4023 ORIG        402F LOOP        4041 BEGIN
404E STP         4061 BELL        4067 CTR         407F CONT
4092 CTR1        409B CTR2        40A6 CTR3        40B1 CTR4
40BE CTR5        40C5 DOIT        40CB END1        40D0 NOTE
4106 START1      4113 GOON        4124 FINOLD      412C FINNEW
413F INVER       4143 NORM        4145 TOKEN       4159 LOOK
4175 NONE        4177 SEARCH      4186 CONT2       4192 ENDIT
4198 CONT3       41A3 LOOP2       41AF PUTIT       41BF LINE
41CA CONT7       41D8 LOOP3       41E5 IGNORE      41ED FOUND
41F9 USE         41FF CARYON      4215 TOK         4237 LEAVE
4239 ADD         425D CONT8       4268 CONT5       4269 UPDATE
4273 CONT4       4277 ADDON       4281 CONT9       D566 RUN
FBE4 BEL         FC10 BACK        FC58 CLS         FD35 GET
FDED PRT
```


PROGRAMMER'S GUIDE TO CP/M

Edited by Sol Libes

Here's an important collection of CP/M insights that you'll never find in any CP/M manual. CP/M is the most popular microcomputer DOS in use today, and this widespread use has generated many innovative techniques and enhancements of CP/M. *Programmer's Guide to CP/M* tells you what these enhancements are and how to put them to use, how to get around apparent limitations of a CP/M system and why CP/M is far more versatile than you might have imagined. Every article in *Programmer's Guide to CP/M* originally appeared in MICROSYSTEMS between January 1980 and February 1982. Except for this collection, these articles are now unavailable! *Programmer's Guide to CP/M* gives you an in-depth look at CP/M from the viewpoint of the programmer—the individual who creates the software that interfaces directly with CP/M, or who is installing CP/M on systems for which configurations do not already exist.

Contents include "An Introduction to CP/M," "The CP/M Connection," "CP/M Software Reviews," "CP/M Utilities & Enhancement," "CP/M 86" and "CP/M Software Directories." $12.95.

For faster service, PHONE TOLL FREE:
800-631-8112
(In NJ only, 201-540-0455)

Also available at your local bookstore or computer store.



MICROSYSTEMS PRESS
Dept. HE5C, 39 East Hanover Avenue
Morris Plains, NJ 07950

Please send me _____ *Programmer's Guide to CP/M* at $12.95* plus $2.00 postage and handling each. Outside USA add $3.00 per order. # **14C**

☐ **PAYMENT ENCLOSED** $_____
*Residents of CA, NJ, and NY State add applicable sales tax.

☐ **CHARGE MY:**
(Charge and phone orders $10 minimum.)
☐ American Express
☐ MasterCard ☐ Visa

Card No._____

Exp. Date_____

Signature_____

Mr./Mrs./Ms._____
(please print full name)


Address_____ Apt.____

City_____

State_____ Zip_____

☐ Send me a FREE *Creative Computing* Catalog.

TRS-80 COLOR COMPUTER

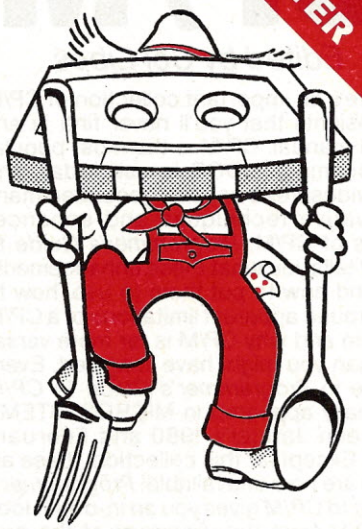

TOOLS

Programs that make it easy to exploit the power and beauty of your Color Computer without making it hard on your wallet:

Graphics #1 - Displays and text delightfully manipulated! Watch and use First Cover, Drawer (the best drawing program anywhere), Graphtext (puts text on the graphics screen), Smalltext, Rotate (create and spin 3D objects in real time), World Map, 3D World, Star Map, String Art, Kaleidoscope, and Display Demo (text screen wizardry)!

Utilities #1 - Programming is simpler when you use Lister, Listmod, Newtrace (a better TRON), Lazkey (define keys as phrases), Append (easily combine two BASIC programs), BASIC Map, Varmap, Deleter, and CK Monitor (look at and modify memory).

Disk Utilities #1 - Harness the hidden powers of your disk system with Disk Edit (change things on disk directly), Disk Aid, Offset (EXECs most tape-only programs), Track Lock, DIR Save/Get (foil I/O errors), Cataloger, Master Catalog (keep track of your program library), and File Copy (a better BACKUP).

Choose any one of the three packages for just $12.00 ($17.00 on disk)!

SILVERWARE

- a lot of software for a little silver

See your dealer or:
Write or call us direct at P.O. Box 21101, Santa Barbara CA 93121 (805) 966-1449

The First One, continued...

HEXADECIMAL DUMP OF THE 'FIRST ONE'

```
*4000.4281

4000- A9 4C 8D F5 03 8D F8 03
4008- A9 23 8D F6 03 8D F9 03
4010- A9 40 8D F7 03 8D FA 03
4018- 60 C7 CE C9 C4 CF C3 A0
4020- D7 CF CE D8 A2 80 A9 50
4028- 85 01 A9 00 85 00 A8 91
4030- 00 88 D0 FB E6 01 E4 01
4038- B0 F5 20 58 FC A9 50 85
4040- 01 20 35 FD C9 9F 90 1F
4048- C9 A2 D0 02 A9 A7 A0 00
4050- 91 00 20 ED FD E6 00 D0
4058- E8 E6 01 E4 01 F0 02 B0
4060- E0 20 E4 FB 4C CB 40 C9
4068- 88 D0 27 38 A5 00 E9 01
4070- 85 00 A5 01 E9 00 85 01
4078- C9 50 B0 03 4C 23 40 A0
4080- 00 98 91 00 20 10 FC A9
4088- A0 20 ED FD 20 10 FC 4C
4090- 41 40 C9 8C D0 05 A9 8D
4098- 4C 4E 40 C9 89 D0 07 A9
40A0- 3F 85 32 4C 4E 40 C9 86
40A8- D0 07 A9 7F 85 32 4C 4E
40B0- 40 C9 8E D0 09 A9 FF 85
40B8- 32 A9 7E 4C 4E 40 C9 85
40C0- F0 03 4C 41 40 A9 A0 A0
40C8- 00 91 00 20 58 FC A2 09
40D0- BD 19 40 20 ED FD CA 10
40D8- F7 20 E4 FB A9 08 85 07
40E0- 85 05 85 02 85 68 A9 50
40E8- 85 01 A9 00 85 00 85 09
40F0- 85 0A 85 0B 85 0C 85 03
40F8- A9 27 85 0D A9 07 85 06
4100- A9 01 85 04 85 67 A0 00
4108- B1 00 D0 07 A9 01 85 0A
4110- 4C BF 41 A9 80 D1 00 90
4118- 40 B1 00 85 0B A5 0C D0
4120- 03 4C 2C 41 20 CA 41 A0
4128- 02 20 77 42 A0 05 A9 00
4130- 91 04 88 A5 0B C9 7E F0
4138- 0A 90 04 A9 9F B0 06 A9
4140- 9E 90 02 A9 9D 91 04 20
4148- 15 42 A9 00 85 0B A0 01
4150- 20 69 42 20 77 42 4C 06
4158- 41 C8 84 0C C4 0D F0 15
4160- D1 00 90 F5 88 84 08 84
4168- 0E 38 A5 0D E5 0E E9 01
4170- 85 0D 4C A3 41 A4 0D B1
4178- 00 C9 A0 F0 09 C9 8D F0
4180- 05 88 10 F3 A4 0D 84 08
4188- 18 98 65 09 B0 04 C9 F0
4190- 90 06 20 BF 41 4C 06 41
4198- 85 09 A9 27 85 0D A9 0D
41A0- 91 06 88 B1 00 C9 8E B0
41A8- 06 A2 27 86 0D 84 08 49
41B0- 80 91 06 88 10 ED A4 08
41B8- C8 20 69 42 4C 06 41 38
41C0- A5 06 E9 01 85 06 B0 02
41C8- C6 07 A9 22 A0 00 84 09
41D0- 91 06 A5 0B F0 29 A4 0D
41D8- B1 00 C9 A0 F0 0F C9 8D
41E0- F0 0B 88 10 F3 A9 27 85
41E8- 0D A0 00 F0 12 C0 01 D0
41F0- 08 E6 00 D0 F0 E6 01 D0
41F8- EC A0 01 A9 3B 91 06 C8
4200- A9 00 91 06 85 08 C8 20
4208- 77 42 A0 05 A9 22 91 04
4210- 88 A9 BA 91 04 88 A5 03
4218- 91 04 88 A5 02 91 04 88
4220- A5 07 91 04 88 A5 06 91
4228- 04 85 04 A5 07 85 05 A5
4230- 0B F0 04 A0 04 D0 02 A0
4238- 06 20 77 42 A5 0A F0 1D
4240- A0 00 98 91 04 C8 91 04
4248- A0 03 20 77 42 A5 06 85
4250- AF A5 07 85 B0 20 58 FC
4258- 68 68 4C 66 D5 18 A9 05
4260- 65 02 85 02 90 02 E6 03
4268- 60 98 18 65 00 85 00 90
4270- 02 E6 01 20 77 42 60 98
4278- 18 65 06 85 06 90 02 E6
4280- 07 60
```

Radio Shack Color Computer TDP System 100



ROAR!

Do tricks with your computer without breaking your wallet's spirit! A subscription to **Chromasette** gets you a tape or disk full of quality programs delivered by First Class Mail every month! Write for more information or, better yet, try a Back Issue. At $6.00 for 6 to 8 programs on tape ($11.00 on disk), you'll see just how good and inexpensive **Chromasette** software is.

The Bottom Line:	Tape	Disk
1 year (12 issues)	$50.00	$95.00
6 months (6 issues)	$30.00	$55.00
Single Issues	$ 6.00	$11.00

Calif. residents add 6% to single issues. First Class postage to N. Amer. included. Overseas add $10 to subscriptions and $1 to single issues. Sent AO rate. All back issues from July 1981 available—ask for list. Programs are for the Extended BASIC model and occasionally for disks.



Chromasette

P.O. Box 1087 Santa Barbara, CA 93102
(805) 963-1066



ALL MINI DISKS COME ERROR FREE.

THE HARD PART IS MAKING SURE THEY STAY THAT WAY.

A disk is built with certain safeguards. That's why most disk makers offer guarantees that the product you receive comes to you error free.

We at Memtek Products are concerned that the minidisk remains error free. *Every* time you use it. After exposure to dust, cigarette smoke, fingerprints, even wear caused by your computer. And so, we have built safeguards around the disk, as well.

Memtek Products' latest innovation... acknowledgment of a real world beyond the laboratory.

The hub ring. Designed to prevent our minidisks from jamming in your machine. Rigid. Durable. Reinforced.

The coating. A critically-controlled coating of high-energy magnetic oxide particles that covers the disk's surface, which is then micro-polished to improve head to disk contact, preventing dropouts, lowering head abrasion.

The lubrication system. A constant lubricant protects both the disk surface and the drive head from wear.

The sleeve. Comes with a soft liner that protects the disk while gently cleaning the surface.

The guarantee. We'll replace, free, any minidisk if it fails to accurately store and retrieve data due to a defect in materials or workmanship for up to 5 years from date of purchase. Simply mail the disk back.

The Memtek lineup. Premium, double and quad density minidisks as well as 10- and 15-minute computer cassettes and a 5¼" disk drive head cleaner.



WE PLAY FOR KEEPS™

COST ISN'T OUR ONLY ADVANTAGE

Our complete line of 100% Apple® compatable disk drives are not only superior in performance and reliability; they offer you a choice.

Whether you select our full height AP-100, our slim line AP-105 or our new ergonomically designed twin pack AP-110, you can rely on Quentin to deliver quiet, fast and efficient performance.

When you are ready to step up to Winchester mass storage, Quentin will be there to meet your growing needs, from 5 to 31 megabytes of formatted capacity with the Q-500 and Q-600 series.

Every Quentin drive has been engineered to provide you with years of reliable service and we stand behind that promise with a one year limited warranty on parts and labor. Your Authorized Quentin dealer will be happy to demonstrate all of the outstanding features of our range of disk storage products, including the cost; but remember "cost isn't our only advantage."

QUENTIN™

100% Apple® Compatable

Quentin Research, Inc.
9207 Eton Avenue,
Chatsworth, Ca. 91311
(213) 709-6500

CIRCLE 276 ON READER SERVICE CARD



Quentin is a registered trademark of Quentin Research, Inc.
Apple is a registered trademark of Apple Computer, Inc.

High Precision Functions in Basic

Part 2

Albert Nijenhuis

In Part 1 (*Creative Computing*, December 1983) we provided Basic routines that would enable us to calculate EXP, SIN, and COS with high precision. In Part 2 we deal with SQR, LOG, ASN, and ATN. These functions are the inverses of the squaring function, of EXP, SIN, and TAN=SIN/COS, respectively.

Calculating SQR(Y) means finding a solution x of the equation $x^2 = y$. Assuming y is positive, there are two solutions, of opposite signs; we want the positive one. (If y is negative, there is no solution at all.)

To find LOG(Y) we solve the unknown x from the equation $e^x = y$; if y is positive, there is one solution, otherwise none.

Similarly, calculating ATN(Y) means finding a solution x of the equation tan x = y. Again, there is an infinite number of solutions, and we want the one between $-\pi/2$ and $\pi/2$, in radian measure.

Finally, calculating ASN(Y) means finding a solution x of the equation sin x = y. If y lies between -1 and 1, then there is an infinite number of solutions; we want the one that lies between $-\pi/2$ and $\pi/2$. (For other values of y there are no solutions.) We will reduce the calculation of ASN to that of ATN via the formula ASN(Y) = ATN(Y/SQR(1-Y*Y)).

Successive Approximations

The method by which we shall calculate inverse functions is a level more sophisticated than the infinite series we used in Part 1. This time the values are calculated by a method of successive approximations of a less transparent type. To appreciate these methods it is useful to be familiar with what is known as *Newton-Raphson*.

In fact, our method for SQR is just that, but the methods for LOG and ATN are more delicate and converge even faster; that is, they require fewer steps to achieve the desired accuracy. It may be useful to have a text on calculus or "pre-cal" handy to check some of the formulas.

High Accuracy

We shall use the infinite series expansions as follows:

$\ln(t) = (t-1) - (t-1)^2/2 + (t-1)^3/3 - \ldots.$

$\arctan(t) = t - t^3/3 + t^5/5 - t^7/7 + \ldots.$

Unfortunately, these series aren't nearly as nice as those in Part 1. First of all, they are not valid for all values of t: for ln (t), t must lie between 0 and 2, for arctan (t), t must lie between -1 and 1. Worse, however, unless t is quite close to the middle value (1 for ln (t), 0 for arctan (t)) many terms are required to obtain sufficient accuracy. All this is due to the absence of the rapidly increasing factorials in the denominators that we had before.

The required high accuracy will therefore be obtained by referring back to the high accuracy versions of the functions of which these are the inverses, together with the rather crude approximations obtained from the series above by using only two terms:

Function	Two-Term Approximation
ln (t)	$(t-1) - (t-1)^2/2 = (t-1)(3-t)/2$
arctan (t)	$t - t^3/3 = t(1 - t^2/3)$

The basic idea is to start with an approximation to the value of x in the equation to be solved, to use the high accuracy function to see how close you are to the given y-value, and to use the result to obtain a better approximation. This process is repeated as needed, each time adding a small amount to the previous approximation to get a better one.

Calculating the Logarithm: Scaling

Before we start the succesive approximations, we scale the problem to a workable range.

As an illustration, we calculate ln (12) to 3 places, using a 10-place calculator equipped with e^x. There is no question of using the series for ln (t), of course. What we can do, however, is note that ln (12) is one unit bigger than the ln of $12/e = 4.416$, and similarly, two units bigger than the ln of $12/e^2 = 4.146/e = 1.624$, three units bigger than the ln of $12/e^3 = 1.146/e = .597$, and so on. The scaling we choose in this case consists of finding a number between $e^{-.5} = .607$ and $e^{.5} = 1.649$. That corresponds to the range -.5 to .5 for which the first 16 terms of the series for e^x in Part 1 gave high accuracy.

First Approximation

Thus, we see that $\ln(12) = 2 + \ln(1.624)$, and now we must find ln (1.624). At this point we use the two-term formula and find .429 as an approximation to ln (1.624). To see how close this is, we calculate (with high precision) $e^{.429} = 1.536$. The closeness is measured by $1.624/1.536 = 1.057$. Therefore, $\ln(1.624) = \ln(1.536) + \ln(1.624/1.536) = .429 + \ln(1.057)$. Repeat with 1.057; its ln is approximately .056, and the exponential of this (with high precision) is 1.057. These calculations thus give with three-digit accuracy that $\ln(1.057) = .056$. Totaling all terms we find the answer: $\ln(12) = 2 + .429 + .056 = 2.485$

Albert Nijenhuis, Department of Mathematics, University of Pennsylvania, Philadelphia, PA 19104.

Program for Log

The program in Listing 1 is a close representation of the method. The input variable is X (not y), and the constants E2, and so on are set by the EXP program in Part 1. To avoid double precision divisions where possible, the program calculates, as an example, $1.624 \cdot e^{-.429}$ instead of $1.624/e^{.429}$; thus, X1 in line 1560 is the opposite sign of what was expected. The approximations are performed four times. This figure was obtained by experimentation on the least favorable input values, $e^{-.5}$ and $e^{.5}$.

Calculating The Arctan

Again, we illustrate the calculation of arctan with a hand calculator example: find arctan (2). Scaling leads to

$x = \pi/2$ - arctan (.5).

First Approximation

The two-term approximation yields .458 for arctan (.5). We denote this value a. Calculated with high precision, tan (.458) = .493. Let us denote this value by b, then tan (a) = b, and a is an approximation to arctan (.5).

Second Approximation

We now want a formula of the form arctan (.5) = a + arctan(something), so we can repeat the approximation process on the second term. (This in analogy to the formula for ln (1.624) above.) To find what "something" is, subtract a from both sides, take the tan and obtain tan(arctan .5 - a) = "something." On the left side we now use the trig formula:

tan(u-v) = (tan (u) - tan (v)/(1 + tan (u) tan (v))

in which we set u = arctan (.5) and tan (v) = b = .493, and we obtain:

"something" = (.5 - .493)/(1 + (.5)·(.493)) = .005

That is, arctan (.5) = .458 + arctan (.005). The same procedure (left to you) applied to arctan (.005) gives the value .005 which is accurate to three places. Hence, arctan (2) = 1.571 - .458 - .005 = 1.107 (calculation in 10 digits, with three showing).

Programs for Arctan

The program in Listing 2 should not be hard to follow. The input is X, and lines 2800 to 2850 do the scaling. Lines 2900 to 2960 contain the approximation loop, with 2910 containing the two-term formula and 2950 the trig formula.

Calculating the Arcsin

The calculation of arcsin (y) follows a similar pattern. Let x be the desired angle, so sin (x) = y and x lies between $-\pi/2$ and $\pi/2$, whence cos (x) > 0. By virtue of the popular formula $\sin^2 + \cos^2 = 1$ it follows that cos x is the square root of $1 - y^2$. The square root must be calculated with high precision by a routine which we discuss below. Let z be the value of the square root. We then distinguish three cases for scaling: y > z, y < -z, and y between -z and z. In the first two cases, we calculate arctan(z/y) and use the same complementations as for ATN; in the last case we calculate arctan(y/z).

The program is given in Listing 3 and should require no further explanation.

Alternative Suggestions

The methods for LOG and ATN may be modified in several ways; for example, the two-term approximations may be replaced by some other approximation, such as a one-term approximation, or an approximation of degree 3 or higher. The choice of approximation method will determine the number of times the approximation must be performed for high accuracy. Sometimes an initial approximate value of surprisingly high accuracy can be obtained, such as the value of a single precision LOG or ATN function. We use this approach in the program in Listing 5, which is to be merged with the program in Listing 3 of Part 1. Then just one two-term approximation step will suffice.

Calculating Square Roots

A high precision version of SQR is obtained by the famous formula: if y is a given positive number, if x is the square root of y and if t is any positive number, then 1) if t<x then (t +y/t)/2 is greater than x; 2) if t>x then (t+y/t)/2 is also greater than x but is much closer to x. Hence, for given y, set t = 1, calculate (t +y/t)/2, reset t to this value, and repeat until satisfied.

The number of repetitions required depends on the value of y. If y is large, or close to zero, more repetitions are needed than if y lies, for example between .5 and 2, when five times is enough. We have, therefore, chosen to change y to a number between .5 and 2 by dividing (or multiplying) by factors 4; the square root thereby gains (loses) an equal number of factors 2. The program is given in Listing 4.

A better initial choice for t is the single precision value of SQR(Y) if that is available. Then no scaling is needed; this method is used in Listing 5. END

Listing 1.

```
1400 ' SUBROUTINE FOR LOG
1410 ' REQ: EXP (INITIALIZED)
1420 ' TO CALCULATE: GOSUB 1500
1430 ' INPUT VARIABLE: X
1440 ' OUTPUT VARIABLE: LN
1450 ' DBLE PREC: X, LN,
1460 ' X1, X2, C1, E2, E3, E4
1470 ' INTEGER: N
1480 '
1500 LN=0: X2=X: N=4
1510 IF X2<=E2 THEN 1530
1520 LN=LN+1: X2=X2*E4: GOTO 1510
1530 IF X2>=E3 THEN 1550
1540 LN=LN-1: X2=X2*E: GOTO 1530
1550 X1=(X2-1)*(X2-3)/2
1560 LN=LN-X1
1570 N=N-1: IF N=0 RETURN
1580 GOSUB 1300: X2=X2*C1
1590 GOTO 1550
1600 'END OF  LOG  ROUTINE
'
```

Listing 2.

```
2700 ' SUBROUTINE FOR ATN
2710 ' REQ: SIN COS (INITIALIZED)
2720 ' TO CALCULATE: GOSUB 2800
2730 ' INPUT VARIABLE: X
2740 ' OUTPUT VARIABLE: AT
2750 ' DBLE PREC: X, AT, X1, X3, X4
2770 '
2800 IF X<-1 THEN AT=-P2: GOTO 2820
2810 IF X>1 THEN AT=P2 ELSE 2840
2820 X3=1/X: GOSUB 2900
2830 AT=AT-X4: RETURN
2840 X3=X: GOSUB 2900
2850 AT=X4: RETURN
2860 '
2900 X4=0: N=3
2910 X1=X3*(1-X3*X3/3)
2920 X4=X4+X1
2930 N=N-1: IF N=0 RETURN
2940 GOSUB 2300: X1=S1/C1
2950 X3=(X3-X1)/(1+X1*X3)
2960 GOTO 2910
2970 'END OF  ATN  ROUTINE
'
```






THE UNDERRATED VIRTUES OF PLAIN VANILLA

Our Lemon has hogged the limelight, our Lime has made it to the White House, and our Orange and Peach have shared in the glory too. But there's a band of unsung heroes in the shadows with all of the surge protecting, noise filtering capabilities of their colorful cousins, with the same insured lifetime guarantee, and the same expert technology of EPD.


The only difference is color. (Or lack of it).

The Electro-Clamp™ line from EPD is made to do the same job, but blend into more sedate surroundings with its quiet, neutral exterior. The four Electro-Clamps share the same specifications as The Lemon™, The Lime,™ The Peach™ and The Orange™, so if your needs for surge protection lean toward the conservative, choose Electro-Clamp™ I, II, IV, or V.

Remember, technology is more than skin deep.

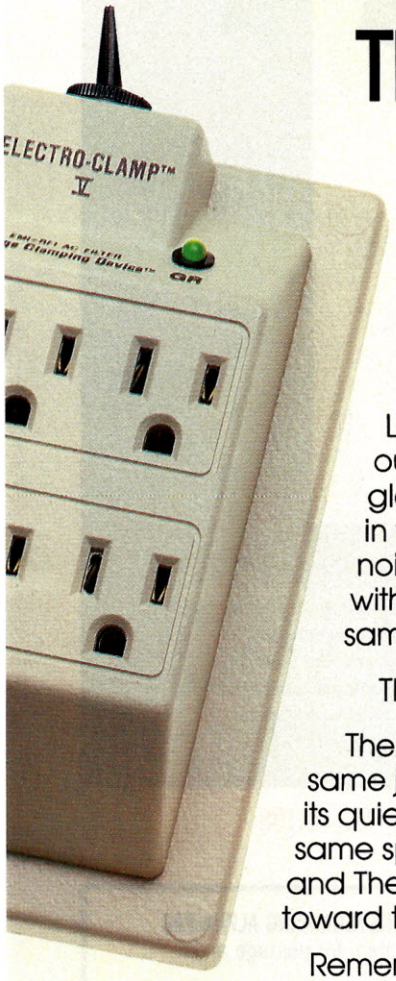



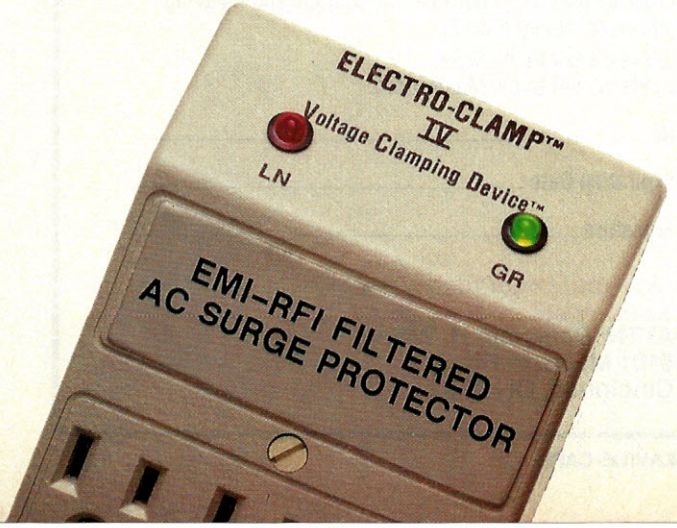

DON'T PLUG IN WITHOUT US.

EPD


Electronic Protection Devices Inc.
P.O. Box 673, Waltham, MA 02254
(617) 891-6602 • 1-800-343-1813

CIRCLE 244 ON READER SERVICE CARD

After Pac Man...What?

Pac Man, Super Pac Man, Donkey Kong, Asteroids ... you've got them all, right? Well here are two new software packages you probably don't have but should add to your collection.



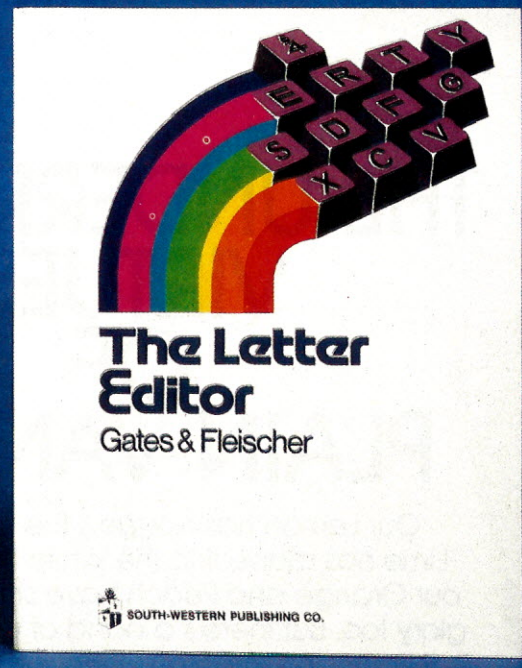

KEYBOARDING ALPHA-PAC can make you a keyboarding wizard in no time at all. Through the use of animated graphics, this exciting new touch keyboarding program will show you which fingers should strike which keys and how to position your hands over the keyboard. If you plan to use your home computer for personal budgeting, for homework, or if you have a word processing program, ALPHA-PAC is a must!

THE LETTER EDITOR, in just 4 easy lessons, demonstrates the following: *enter, browse, change, delete, edit, file, help, insert, justify, load, print, replace, set, move,* and *save.* With this information you can key-in and edit all kinds of reports, essays, term papers, and a hundred other personal letters and school assignments.

Put your home computer to work for you with **KEYBOARDING ALPHA-PAC** and **THE LETTER EDITOR.**

Return the order form ... do it today.

Order Form

Please send me ____ KEYBOARDING ALPHA-PAC diskette package(s) and ____ THE LETTER EDITOR diskette package(s) for the following hardware:

☐ TRS-80™ Model III or 4, 48K minimum

☐ Apple®IIe, 64K minimum

Name _____

Address _____

City _____ State _____ ZIP _____

Phone # ( ) _____

*Make check or money order payable to South-Western Publishing Co.

☐ I have enclosed $59.50 for each **KEYBOARDING ALPHA-PAC** package ordered, plus $1.50 per item for postage and handling (check or money order*).

☐ I have enclosed $59.50 for each **LETTER EDITOR** package ordered, plus $1.50 per item for postage and handling (check or money order*).

☐ Please bill to my VISA:

☐ Please bill to my MasterCard:

No. _____

Expiration Date _____

Signature _____

Mail your order to:

South-Western Publishing Co.
ATTN: Benjamin H. Willard
5101 Madison Rd.
Cincinnati, OH 45227

CIRCLE 210 ON READER SERVICE CARD

High Precision Functions, continued...

Listing 3.

```
2400 ' SUBROUTINE FOR ASN
2410 ' REQ: SIN COS (INITIALIZED)
2420 '       SQR
2430 ' TO CALCULATE: GOSUB 2500
2440 ' INPUT VARIABLE: X (BETW -1 & 1)
2450 ' OUTPUT VARIABLE: AS
2460 ' DBLE PREC: X, AS, X1, X2,
2470 '            X3, X4, C1, S1
2480 '
2500 X2=1-X*X: GOSUB 3200
2510 IF X<-X1 THEN AS=-P2: GOTO 2530
2520 IF X>X1 THEN AS=P2 ELSE 2550
2530 X3=X1/X: GOSUB 2900
2540 AS=AS-X4: RETURN
2550 X3=X/X1: GOSUB 2900
2560 AS=X4: RETURN
2570 'END OF  ASN  ROUTINE
'
```

Listing 4.

```
3000 ' SUBROUTINE FOR SQR
3010 ' TO CALCULATE: GOSUB 3100
3020 ' INPUT VARIABLE: X (POS OR 0)
3030 ' OUTPUT VARIABLE: SR
3040 ' DBLE PREC: X, SR, X1, X2, X3
3050 ' INTEGER: N
3060 '
3100 X2=X: GOSUB 3200: SR=X1: RETURN
3110 '
3200 IF X2=0 THEN X1=0: RETURN
3210 X1=1: X3=X2
3220 IF X3<=2 THEN 3240
3230 X3=X3*.25: X1=X1*2: GOTO 3220
3240 IF X3>=.5 THEN 3260
3250 X3=X3*4: X1=X1*.5: GOTO 3240
3260 FOR N=1 TO 5
3270 X1=.5*(X1+X2/X1)
3280 NEXT N: RETURN
3290 'END OF  SQR  ROUTINE
'
```

Listing 5.

```
5060 PRINT TAB(12);"LOG";TAB(22);"5400";TAB(35);"LN#"
5080 PRINT TAB(12);"ASN";TAB(22);"5600";TAB(35);"AS#"
5090 PRINT TAB(12);"ATN";TAB(22);"5700";TAB(35);"AT#"
5100 PRINT TAB(12);"SQR";TAB(22);"5800";TAB(35);"SR#"
5400 LN#=LOG(X#): VN%=INT(-LN#+.5): V1#=-LN#-VN%:
     GOSUB 5310: V2#=X#*VA#:
     LN#=LN#-(V2#-1)*(V2#-3)/2: RETURN
5600 V2#=1-X#*X#: GOSUB 5850: IF X#<-V1# THEN
     AS#=-VP# ELSE IF X#>V1# THEN AS#=VP# ELSE 5620
5610 V3#=V1#/X#: GOSUB 5750: AS#=AS#-V4#: RETURN
5620 V3#=X#/V1#: GOSUB 5750: AS#=V4#: RETURN
5700 IF X#<-1 THEN AT#=-VP# ELSE IF X#>1 THEN AT#=VP#
     ELSE 5720
5710 V3#=1/X#: GOSUB 5750: AT#=AT#-V4#: RETURN
5720 V3#=X#: GOSUB 5750: AT#=V4#: RETURN
5750 V1#=ATN(V3#): V4#=V1#: GOSUB 5550: V1#=VB#/VA#:
     V3#=(V3#-V1#)/(1+V1#*V3#):
     V4#=V4#+V3#*(1-V3#*V3#/3): RETURN
5800 V2#=X#: GOSUB 5850: SR#=V1#: RETURN
5850 V1#=SQR(V2#): IF V1#=0 THEN RETURN ELSE
     V1#=.5DO*(V1#+V2#/V1#): RETURN
5860 ' END OF HIGH PREC FUNCT LOG, ASN, ATN, SQR
5860
5870 ' END OG HIGH PREC FUNCT  LOG, ASN, ATN, SQR
5870 ' END OF HIGH PREC, FUNCT,  LOG, ASN, ATN, SQR
     SUPPLEMENTING  EXP, SIN, COS  OF FIG. 4, PART 1
```


MICRO BEE
SOFTWARE

Manufacturing licences for the popular Australian designed Micro Bee computer have recently been granted to many companies throughout the world.

MYTEK Computing is the largest and most respected producer of software for the Micro Bee Computer.

MYTEK Computing invites dealers to sample its large and extensive range of Micro Bee Software.

Micro Bee users are also invited to request to be included on MYTEK Computing's free mailing list. Catalogues are air-mailed regularly to all parts of the world.


MYTEK COMPUTING
1 Kent Street, Bicton, 6157, Perth, Western Australia
Telephone: (09) 330 7336

CIRCLE 179 ON READER SERVICE CARD



"Bad news, Honey! The computer just erased that recipe for liver omelette you liked so much."

Random Landscapes

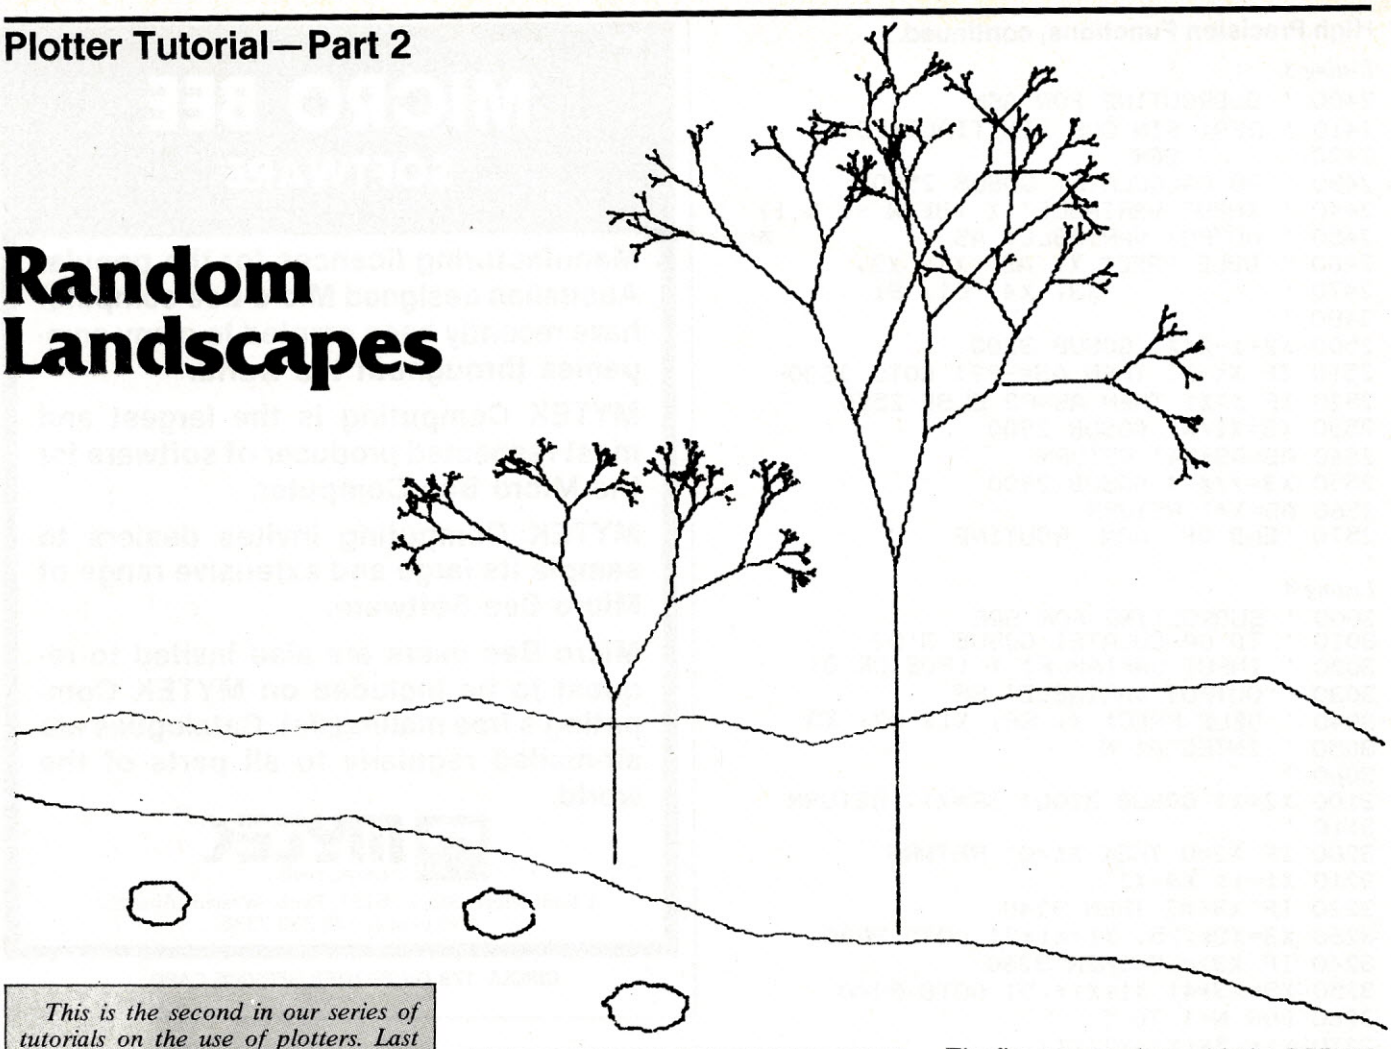

This is the second in our series of tutorials on the use of plotters. Last month we had some mathematical constructions done on a Houston Instruments plotter. These plots were done on a Radio Shack CGP-115. Note the similarities and differences in plotter commands; it is much like two versions of Basic.

This tutorial shows the use of the controlled random function in plotting a scene. Long-time readers of Creative Computing *will recall that in January 1976 we ran the output of a similar plotting program which produced snowmen with various characteristics. Several are shown below.*

Next installment: three-dimensional curves and hidden line removal. —DHA

Today I have written the most useless program ever invented. Nevertheless, I am certain you will find it interesting. What is the program you ask? Well, think of it as your introduction to the field of computer art. This program draws the random landscapes that illustrate this article. Perhaps it will spark your interest in the latest field to be invaded by computers, that age old phenomenon called art.

Michiel van de Panne, Box 13, Site 16, SSI, Calgary, Alberta, Canada T2M 4N3.


Michiel van de Panne

First of all, I should state that all the figures shown were drawn by the same program. All the variations are due to random numbers. Naturally, the ones I chose are the most appealing pictures that were generated. For every good landscape that is generated, there is frequently one that is not as attractive. This does nature justice, however, as the same holds true in nature.

To use the program, simply type it in and add the lines given for your computer. The remarks do not have to be typed in. The program will run as listed on the TRS-80 Model I/III with CGP-115 plotter. The figures were done with the CGP-115 plotter.

If there is no routine given for your computer, make one yourself. Line 20 should contain a clear screen, choose color, or whatever start up is necessary for your screen or plotter. Lines 920 and 930 should contain program lines to move to a point if A$="MOVE" and to draw to a point if A$="DRAW".

Depending on your screen size or plotting surface, you might have to scale down the drawing by multiplying the X and Y coordinates by a fraction. The origin should be located halfway across the screen and one quarter of the way up. For a screen of 200 by 140, this would mean adding 100 to X and 35 to Y when plotting. Lastly, line 940 should contain a program line for generating a random number be-

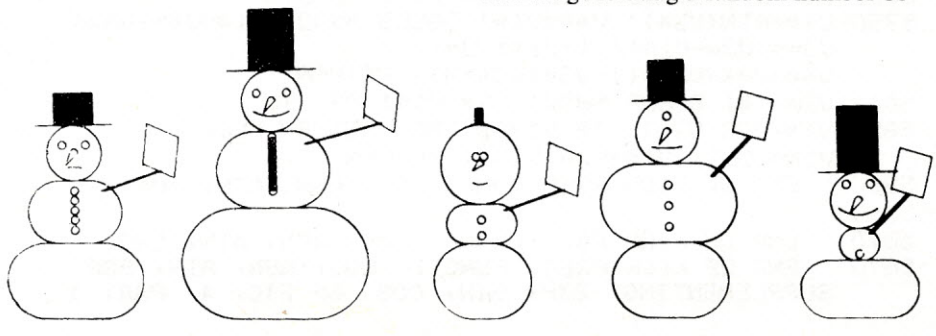

tween one and the number given by the variable R1.

Creating The Landscape

Each landscape is made up of five parts: the ground level, the mountain backdrop, the tree or trees, the rocks, and possibly a park bench with or without a back. The trick in creating a reasonable landscape lies in controlling the randomness of all these different parts without overdoing it. Too much control of the random factors results in a similar picture each time the program is run. A balance must be reached to allow for variety but to eliminate anything wholly unnatural.


The ground level is the first part to be drawn in the scene. The first thought on drawing this simple slope at the bottom is simply to have a random height chosen along a regular interval of steps. Unfortunately, this results in a jagged and unrealistic surface. Instead, the program chooses a random constant that is added to the previous level at each step. This random constant is changed four times across the scene to allow for gradual changes. On top of this, more random numbers allow for minor variations of the levels dictated by first constant.

The mountains are much simpler to depict. The jagged surface that was unacceptable for the ground surface is perfectly acceptable for the mountains. The height of the mountains is changed to a different random number at random intervals. There is also a check included to ensure that they don't pass below the level of the ground that has been drawn.

The trees prove to be the most interesting feature of the landscape. Surprisingly, they are not as difficult to draw as it might seem. The first thing to notice is that each tree starts with one trunk that splits into two branches. Each of these branches further divides into two branches. This repeats until there are eight different levels of branches, with the trunk being the first level and all the twigs being the last level.

To make the tree random is fairly involved. First, the length of the trunk is

```
1 REM *** PROGRAM FOR DRAWING LANDSCAPES ***
2 REM *** REMARKS DO NOT HAVE TO BE TYPED IN ***
9 REM *** DIMENSION ARRAYS FOR USE IN DRAWING TREES ***
10 D=128:DIMA(D),A1(D),X(D),X1(D),Y(D),Y1(D),L(50),C(10)
20 LPRINTCHR$(18):LPRINT"M240,0":LPRINT"I"
29 REM *** GOSUB RANDOM GROUND & MOUNTAINS SUBROUTINE ***
30 GOSUB150
39 REM *** DECIDE HOW MANY TREES TO DRAW ***
40 R1=2:GOSUB940:F3=R1
49 REM *** GOSUB TREE DRAWING SUBROUTINE ***
50 FORZ=1 TO F3:GOSUB540  :NEXTZ
59 REM *** DECIDE HOW MANY ROCKS TO DRAW ***
60 R1=6:GOSUB940:F=R1:FORN=1TOF
68 REM *** DECIDE ON RANDOM POSITION FOR ROCKS AND ***
69 REM *** SEE IF OTHER ROCKS ARE NEARBY ***
70 C=0:R1=40:GOSUB940:X=R1+4:FORN1=1 TO N:IF ABS(X-C(N1))<4 THEN C=1
80 NEXTN1:IFC=1 THEN 70
85 C(N)=X
89 REM *** CHOOSE RAND. HEIGHT TO PUT ROCK & GOSUB SUBROUT. **
90 R1=30:GOSUB940:YC=L(X)-(20+R1):XC=X*10-240:GOSUB830  :NEXTN
99 REM *** DECIDE WHETHER OR NOT TO DRAW BENCH ***
100 R1=2:GOSUB910:IFR1=1THEN140
109 REM *** CHOOSE RAND. PLACE FOR BENCH & SEE IF GROUND LEVEL
110 T=T+1:R1=37:GOSUB940:X=R1:IFABS(L(X+3)-L(X+7))<6 THEN130
119 REM *** IF TRIED 40 TIMES, GOTO END ELSE TRY AGAIN ***
120 IF T=40 THEN 140  ELSE 110
129 REM *** GIVE COORDINATES FOR BENCH & GOSUB BENCH SUBROUTINE
130 X1=X*10-240:Y1=L(X+3):GOSUB310
140 END
149 REM *** RANDOM GROUND ***
150 R=12:R1=70:GOSUB940:Y=R1-35:XP=-240:YP=Y
160 A$="MOVE":GOSUB920:F=0
170 FORX=-240 TO 240 STEP 10
180 IFR<12 THEN R=R+1:GOTO200
190 R1=5:GOSUB940:RI=RI+R1-3:R=0
200 R1=5:GOSUB940:Y=Y+R1-3+RI:F=F+1:L(F)=Y
210 A$="DRAW":XP=X:YP=Y:GOSUB920
220 NEXTX:X=-240:GOTO240
229 REM *** RANDOM MOUNTAIN BACKGROUND ***
230 R1=6:GOSUB940:X=X+30+R1*10:IFX>240 THEN X=240
240 R1=50:GOSUB940:Y=20+R1
249 REM *** ENSURE MOUNTAINS DO NOT GO BELOW GROUND ***
250 IFY<L(X/10+24) THEN Y=L(X/10+24):F=1
260 IFX=-240 THEN GOSUB520:GOTO270
265 GOSUB 530
270 IFX=240 THEN 300
280 IF F=1 THEN 300
290 GOTO 230
300 RETURN
309 REM *** DRAW BENCH ***
310 X=X1+25:Y=Y1:GOSUB520
```

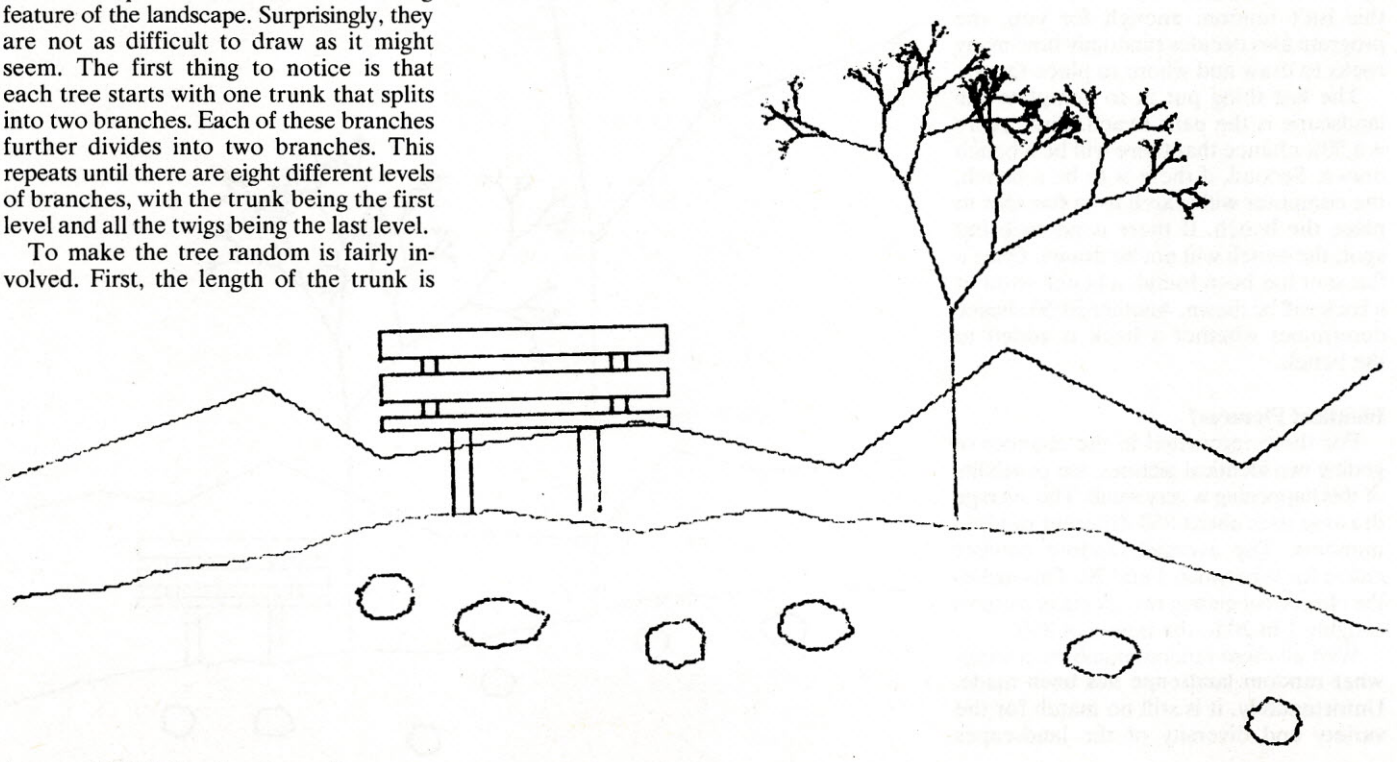

specified by a random number. From the trunk onward, the length of each branch is about six tenths of the length of the previous level plus or minus a small random factor. The angles of the branches are also determined randomly. For each branch on a previous level, one branch goes to the left at a random angle (with respect to the branch to which it is attached), and another goes to the right.

I have not fully explored the possibilities of the random tree. Leaves would be one possible addition. Another interesting possibility would be to depict the tree as if being bent by the wind. I have tried this, but have not yet been successful at it. At any rate, there is an infinite number of things that can be randomly controlled or randomly added.

Another interesting possibility would be to depict the tree as if being bent by the wind.

From the tree, the program proceeds to draw a random number of randomly shaped rocks. These rocks are basically circles that have been randomly deformed. As the angle of the circle increases in random steps, the radius is controlled by random numbers. In addition to this, the X axis of the circle is stretched randomly by a factor of between one and two. If this isn't random enough for you, the program also decides randomly how many rocks to draw and where to place them.


The last thing put in to complete the landscape is the park bench. First, there is a 50% chance that there will be a bench drawn. Second, if there is to be a bench, the computer will search for a flat spot to place the bench. If there is no such flat spot, the bench will not be drawn. Once a flat spot has been found, a bench without a back will be drawn. Another 50/50 chance determines whether a back is added to the bench.

Identical Pictures?

For those interested in the chances of getting two identical pictures, the possibility of this happening is very small. The average drawing uses about 850 different random numbers. The average random number called for is between 1 and 20. This makes the chances of getting two identical pictures roughly 1 in 20 to the power of 850.

With all these random numbers, a somewhat random landscape has been made. Unfortunately, it is still no match for the variety and diversity of the landscapes found in nature. This program was not intended to duplicate nature though. To do so is an impossible task. If anything, these drawings will impress you because they are drawn by your 100% logical, digital, electronic computer. Furthermore, they show the beginning of the expanding possibilities of computer art. The last thought that the pictures impart is an immense appreciation for the beauty in the orderly chaos of nature. END

```
320 Y=Y1+30:GOSUB530  :X=X1+32:GOSUB530
330 Y=Y1:GOSUB530  :X=X1+75:Y=Y1:GOSUB520
340 Y=Y1+30:GOSUB530  :X=X1+68:GOSUB530
350 Y=Y1:GOSUB530  :X=X1:Y=Y1+30:GOSUB520
360 X=X1+100:GOSUB530  :Y=Y1+35:GOSUB530
370 X=X1:GOSUB530  :Y=Y1+30:GOSUB530
379 REM *** DECIDE WHETHER OR NOT TO DRAW BACK ON BENCH ***
380 R1=2:GOSUB940:IFR1=1 THEN RETURN
389 REM *** DRAW BACK OF BENCH ***
390 Y=Y1+40:GOSUB520  :Y=Y1+50:GOSUB530  :X=X1+100:GOSUB530
400 Y=Y1+40:GOSUB530  :X=X1:GOSUB530  :Y=Y1+55:GOSUB520
410 Y=Y1+65:GOSUB530  :X=X1+100:GOSUB530
420 Y=Y1+55:GOSUB530  :X=X1:GOSUB530
430 X=X1+15:Y=Y1+35:GOSUB520  :Y=Y1+40:GOSUB530
440 Y=Y1+50:GOSUB520  :Y=Y1+55:GOSUB530
450 Y=Y1+35:X=X1+20:GOSUB520  :Y=Y1+40:GOSUB530
460 Y=Y1+50:GOSUB520  :Y=Y1+55:GOSUB530
470 Y=Y1+35:X=X1+80:GOSUB520  :Y=Y1+40:GOSUB530
480 Y=Y1+50:GOSUB520  :Y=Y1+55:GOSUB530
490 Y=Y1+35:X=X1+85:GOSUB520  :Y=Y1+40:GOSUB530
500 Y=Y1+50:GOSUB520  :Y=Y1+55:GOSUB530
510 RETURN
```

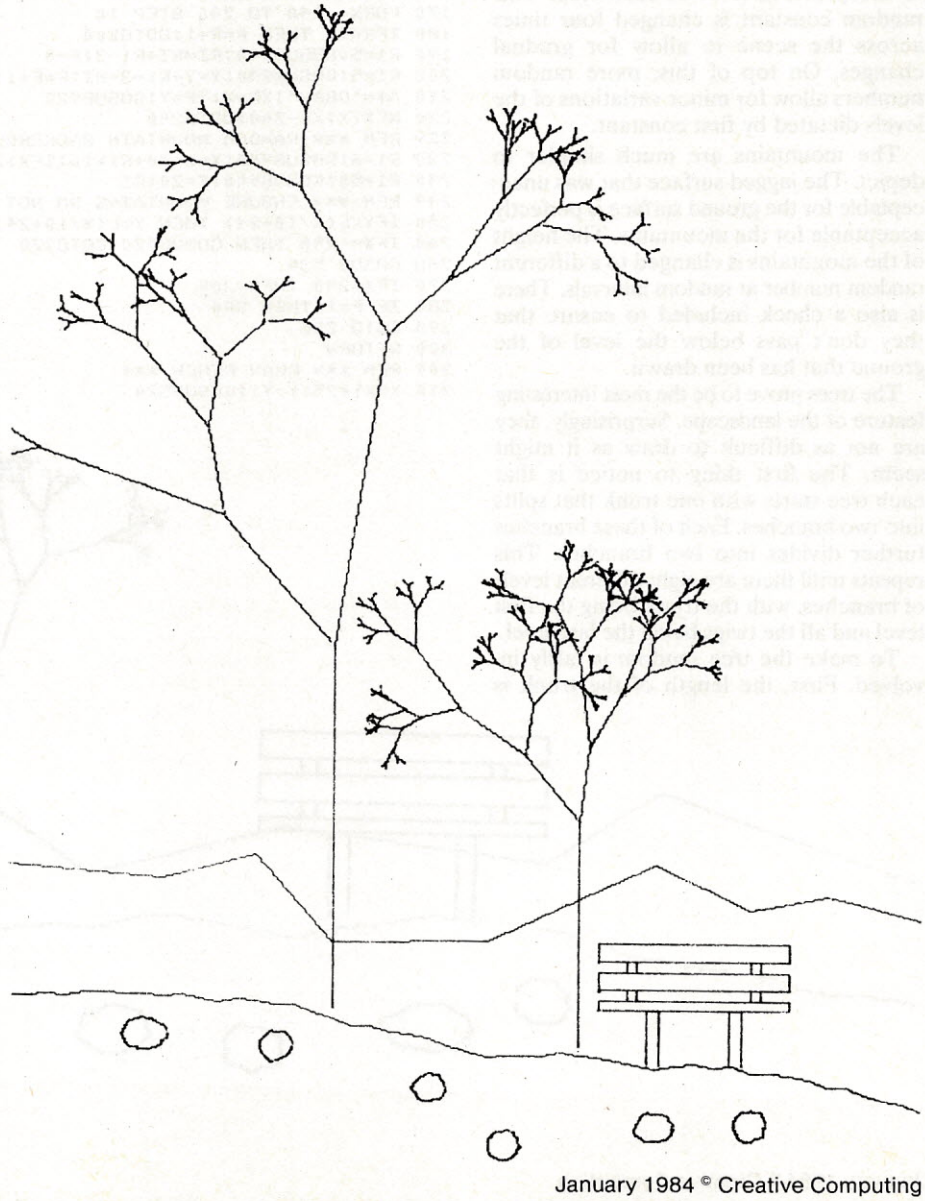

Last Year Over 20,000 Americans Were Committed To Asylum.



Once people enter *Asylum,* they don't *want* to leave. And neither will you.

Inside this thrilling adventure game from Screenplay™ challenges lie around every corner, behind every door. There are hundreds of doors, too!

You've gone crazy from playing too many adventure games. You've been placed in the asylum to act out your delusions. To cure yourself, you must make good your escape.


There's no one you can turn to for help. Almost every turn leads to a dead end. Or worse, vigilant guards stand in your way. If you can't outmuscle them, can you outthink them? Inmates line hallways offering help. But can they be trusted?

While getting out of the asylum may take months, you'll get into our game instantly.

Smooth scrolling three dimensional graphics give you a very eerie sense of reality. This feeling is also heightened by the use of full sentence commands.

No wonder thousands of people bought *Asylum* last year, and *PC World* recently named *Asylum* one of the top ten games for the IBM PC.

Play *Asylum.* All you have to be committed to is fun.



Asylum runs in 48K on the Atari, Commodore 64 and IBM PC computers. See your local software dealer. $29.95.

screenplay™

Box 3558, Chapel Hill NC 27514 800-334-5470

You could win $10,000 from Screenplay anywhere our games are sold.

CIRCLE 220 ON READER SERVICE CARD

Our Products Get Used . . . Everywhere



In Business . . .		*In Government . .*	*In Education . . .*
Toshiba	ITT	NASA	Harvard University
Sony	Boeing	Argonne Labs	Georgetown University
General Electric	Lockheed	Jet Propulsion Labs	University of Chicago
Union Carbide	Xerox	U.S. Army	California Institute of Technology
ARCO	TRW	U.S. Air Force	John Hopkins University
Hazeltine	Raytheon	U.S. Navy	University of Southern California
Westinghouse	Sorcim	Naval Postgraduate School	University of Massachusetts
Harris	Quantum	U.S. Department of Commerce	University of Wisconsin
Grumman	Intel	U.S. Department of Treasury	U.S. Naval Academy
McDonnell Douglas	Sperry Univac	Social Security Administration	Rochester Institute of Technology
Chase Manhattan	SofTech	FAA	University of Iceland
Honeywell	E.I. DuPont	Depart. of Energy, Canada	University of Leicester
Poloroid	IBM	Depart. of Transportation, Canada	University of Trondhiem
Magnavox	Hughes Aircraft	Depart. of Publications, Australia	University of Zimbabwe

THE MOST COST EFFECTIVE ADA* DEVELOPMENT TOOLS AVAILABLE ON MICROCOMPUTERS!

Our Ada product line is available on the following Operating Systems:
CP/M, CP/M-86, PC-DOS and MS-DOS.

Available from the following distributors:

Nationally

Suntex Data
10175 Harwin Suite 100
Houston, TX 77036
(713) 271-9191

CompuView Products
1955 Pauline Blvd., Suite 200
Ann Arbor, MI 48103
(313) 996-1299

Westico, Inc.
25 Van Zant St.
Norwalk, CT 06855
(203) 853-6880

Marfam Corporation
5340 Thornwood Dr. Suite 102
San Jose, CA 95123
(408) 226-0170

Internationally

Nord-Micro Informatique
155, rue du Fauburg
Denis
75010 Paris
(1)205-39-47

Micronix
11 Blackmore St.
Windsor 4030
QLD. Australia
(07)57 9152

S-100 Systems
3687-4 Shobumachi
Obayashi
Saitama, Japan 346-01
04808 (5)0416:
04808 (5)6565

CP/M, CP/M-86, CCP/M-86 are trademarks of Digital Research, Inc.
*ADA is a trademark of the U.S. Department of Defense
MS-DOS is a trademark of Microsoft

©Copyright 1983 RR Software

RR SOFTWARE, INC.

specialists in state of the art programming

P.O. Box 1512 Madison, Wisconsin 53701
(608) 244-6436

CIRCLE 237 ON READER SERVICE CARD

Plotter Tutorial, continued...

```
520 XP=X:YP=Y:A$="MOVE":GOSUB920   :RETURN
530 XP=X:YP=Y:A$="DRAW":GOSUB920   :RETURN
539 REM *** DRAW TREE(S) ***
540 NL=8:B=2^(NL-1)
550 PI=3.1415926:P=PI/2
559 REM *** GIVE RANDOM LENGTH FOR TRUNK ***
560 R1=150:GOSUB940:A(1)=P:LE=50+R1:F=1
569 REM *** CHOOSE RAND. PLACE FOR TREE & CHECK FOR OTHER TREES
570 R1=20:GOSUB940:C=0:X=R1+14:FORN=1 TO Z-1:IF ABS(X-C(N))<10 THEN C=1
580 NEXTN
589 REM *** GO BACK IF OTHER TREES TOO CLOSE ***
590 IFC=1 THEN 570
600 C(Z)=X:Y1=L(X):X1=X*10-240
609 REM *** MOVE TO START OF TRUNK ***
610 A$="MOVE":XP=X1:YP=Y1:GOSUB920
619 REM *** LOOP THRU LEVELS OF BRANCHES ***
620 FORL=1 TO NL:IFL>1 THEN 640
630 X=0:Y=LE:A$="DRAW":XP=X+X1:YP=Y+Y1:GOSUB920   :X(1)=X:Y(1)=Y:GOTO780
640 C=F
649 REM *** LOOP THRU ALREADY DRAWN BRANCHES TO ADD MORE ***
650 F=0:FORN=1 TO C
659 REM *** GET RAND. ANGLE & LENGTH FOR BRANCH ***
660 GOSUB800
669 REM *** CALCULATE X,Y WHERE BRANCH WILL END ***
670 F=F+1:A=A(N)-AN:X=COS(A)*LN+X(N):Y=SIN(A)*LN+Y(N)
679 REM *** MOVE TO START OF BRANCH ***
680 A$="MOVE":XP=X(N)+X1:YP=Y(N)+Y1:GOSUB920
689 REM *** DRAW TO END OF BRANCH ***
690 A$="DRAW":XP=X+X1:YP=Y+Y1:GOSUB920
699 REM *** RECORD ENDPOINTS FOR START PTS. OF NEXT LEVEL ***
700 A1(F)=A:X1(F)=X:Y1(F)=Y
709 REM *** REPEAT FOR 2ND BRANCH, ONLY BRANCH GOES TO RIGHT
710 GOSUB 800
720 F=F+1:A=A(N)+AN:X=COS(A)*LN+X(N):Y=SIN(A)*LN+Y(N)
730 A$="MOVE":XP=X(N)+X1:YP=Y(N)+Y1:GOSUB920
740 A$="DRAW":XP=X+X1:YP=Y+Y1:GOSUB920
750 A1(F)=A:X1(F)=X:Y1(F)=Y
760 NEXTN
769 REM *** NEW ENDPOINTS & ANGLE BECOME OLD ONES ***
770 FORN=1TOF:A(N)=A1(N):X(N)=X1(N):Y(N)=Y1(N):NEXTN
779 REM *** MAKE LENGTH OF NEXT SET OF BRANCHES SHORTER ***
780 LE=LE*.6:NEXTL
790 RETURN
799 REM *** CHOOSE RANDOM ANGLE FOR BRANCH (IN RADIANS) ***
800 R1=45:GOSUB940:AN=(R1+5)*PI/180
809 REM *** CHOOSE RANDOM LENGTH FOR BRANCH ***
810 R1=LE:GOSUB940:LN=R1+LE/2
820 RETURN
829 REM *** DRAW RANDOM ROCK(S) ***
```



PROFIT LEADER



Creative Computing not only sells itself at a nice profit, it creates awareness of the hardware and software in your store. It's like having another salesperson on your staff—one who *pays you*. One who goes home with customers and continues to influence buying decisions long after you're closed for the day. If you're interested in a low-ticket item with top-of-the-line sales power, let's talk now.

ZD


CALL COLLECT:

(212) 725-7679

Or write:
Ziff-Davis Publishing Company
Computers and Electronics Publications
Retail Sales
One Park Avenue
New York, NY 10016


Minimum order, 10 copies.
We pay all shipping costs to your store.

```
830 RA=40:R1=0:GOSUB940:XM=1+R1:M=.2:A=0
831 REM *** XM IS A FACTOR WHICH ELONGATES ROCK ***
840 X1=RA*XM*M:Y1=0:A$="MOVE":XP=X1+XC:YP=Y1+YC:GOSUB920
849 REM *** INCREASE ANGLE & CHECK FOR COMPLETE CIRCLE ***
850 R1=20:GOSUB940:A=A+5+R1:IFA>360 THEN 900
859 REM *** CHOOSE PARTIALLY RANDOM RADIUS ***
860 R1=RA*.2:GOSUB940:R=RA*.9+R1:AN=A*3.1415/180
869 REM *** CALCULATES X,Y TO BE DRAWN ***
870 X=M*XM*COS(AN)*R:Y=SIN(AN)*R*M
879 REM *** DRAW LINE TO X,Y ***
880 A$="DRAW":XP=X+XC:YP=Y+YC:GOSUB920
889 REM *** CONTINUE ***
890 GOTO850
899 REM *** COMPLETE ROCK BY DRAWING LINE TO STARTING PT. ***
900 A$="DRAW":XP=X1+XC:YP=Y1+YC:GOSUB920
910 RETURN
919 REM *** ACTUAL MOVING & DRAWING DONE HERE ***
920 IF A$="MOVE" THEN LPRINT"M";XP;",";YP:RETURN
930 IF A$="DRAW" THEN LPRINT"D";XP;",";YP:RETURN
940 R1=RND(R1):RETURN
```

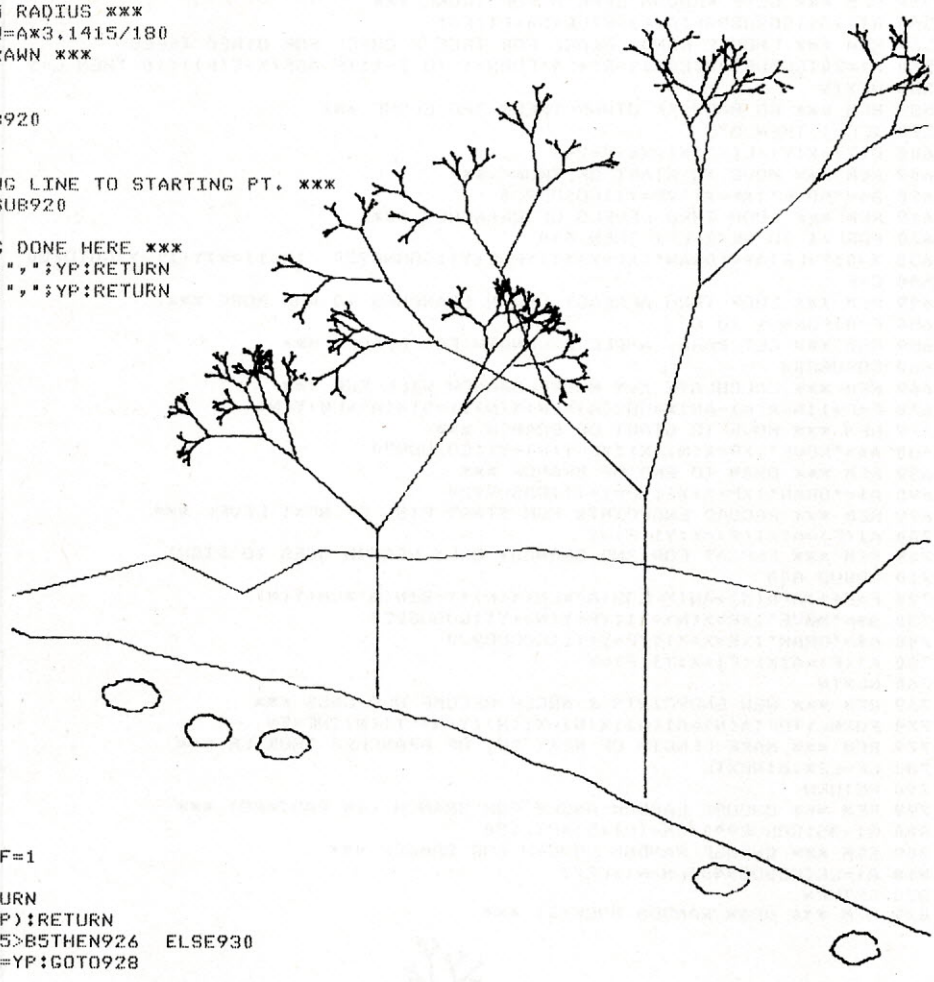

Lines to be added for Model I/III screen:

```
20 CLS:ON ERROR GOTO 21:GOTO30
21 RESUME NEXT
140 PRINT@0,"DONE";:GOTO140
560 R1=80:GOSUB940:A(1)=P:LE=50+R1:F=1
920 XP=XP*.25+64:YP=47-(YP*.11+10)
921 IFA$="MOVE"THEN XO=XP:YO=YP:RETURN
924 IFXO=XP AND YO=YP THEN SET(XP,YP):RETURN
925 A5=ABS(XP-XO):B5=ABS(YP-YO):IFA5>B5THEN926  ELSE930
926 IFXP>XOTHENC5=XO:D5=XP:E5=YO:F5=YP:GOTO928
927 C5=XP:D5=XO:E5=YP:F5=YO
928 G5=D5-C5:H5=(F5-E5)/G5:FORU5=C5TOD5
929 SET(U5,E5):E5=E5+H5:NEXT:GOTO934
930 IFYP>YOTHENC5=YO:D5=YP:E5=XO:F5=XP:GOTO932
931 C5=YP:D5=YO:E5=XP:F5=XO
932 G5=D5-C5:H5=(F5-E5)/G5
933 FORU5=C5TOD5:SET(E5,U5):E5=E5+H5:NEXT
934 XO=XP:YO=YP:RETURN
940 R1=RND(R1):RETURN
```

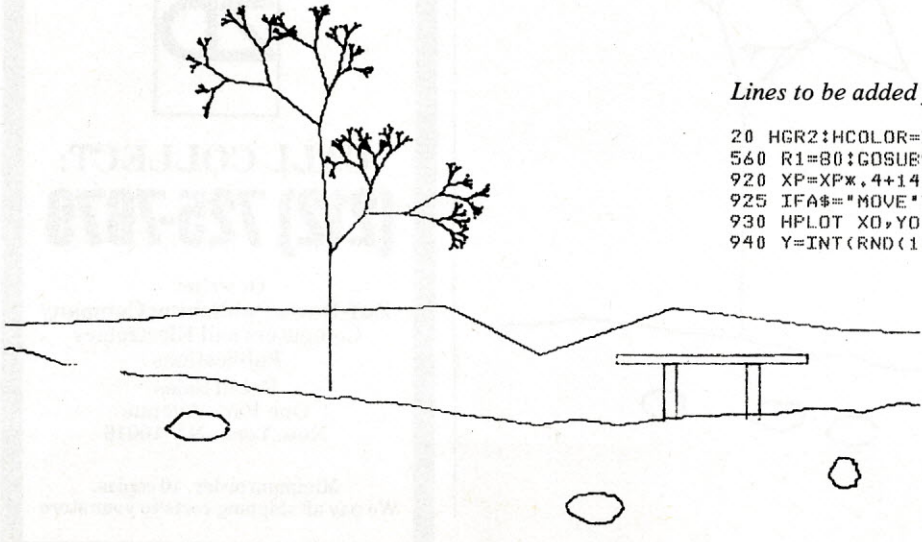

Lines to be added for Color Computer with CGP-115 plotter:

```
20 PRINT#-2,CHR$(18):PRINT#-2,"M240,0":PRINT#-2,"I"
920 IFA$="MOVE" THEN PRINT#-2,"M";XP;",";YP:RETURN
930 IFA$="DRAW" THEN PRINT#-2,"D";XP;",";YP:RETURN
```

Lines to be added for Apple II screen:

```
20 HGR2:HCOLOR=7
560 R1=80:GOSUB940:A(1)=P:LE=50+R1:F=1
920 XP=XP*.4+140:YP=179-(YP*.4+41)
925 IFA$="MOVE"THEN XO=XP:YO=YP:RETURN
930 HPLOT XO,YO TO XP,YP:XO=XP:YO=YP:RETURN
940 Y=INT(RND(1)*R1)+1:RETURN
```

Six games that'll make your ATARI® the apple of your eye.


Playing games is probably one of the main reasons you bought an ATARI® home computer. When it comes to games, there are none more sophisticated, thought-provoking, challenging — and just plain fun — than the strategy games from SSI.

We made our considerable reputation by producing some of the finest games for the Apple®. To make sure all you ATARI owners out there don't get left out, we're converting as many of our games to your favorite computer as we possibly can.

Here are just six of our ever-increasing line of ATARI games. Best of all, they're all waiting for you at your nearest computer/software or game store — today!

Our games are covered under a 14-day "satisfaction or your money back" guarantee.


1.






This historical simulation of four great World War II carrier battles is so thorough and realistic, it takes into account every last ship and plane! It is one monster of a game in scale, yet it is so easy to play. On 40K disk. $59.95


2.






Here's a real-time wargame that gives you the speed of arcade games and sophistication of strategy games. It is one of the finest and fastest tank-battle games ever made. You can choose from over 70 tanks, from the Nazi Tiger to the Abrams M-1. On 40K disk & 40K cassette. $39.95

3.






Take to the skies with your trusty Sopwith Camel or Fokker DR-1 or any number of World War I planes. You can set up duels between two planes or stage grand dogfights involving as many as 20 planes. On 40K disk. $39.95

4.






A simple and fast strategy game of power and conquest that's right up there with the classics such as chess. When you play the computer, it actually learns from you and improves with time to become the ultimate opponent. On 40K disk. $34.95


5.






Finally, a true video pinball game for all you pinball fanatics. It boasts all the features of a real pinball game – from sequential play right down to the bells and buzzers. We must forewarn you: it is totally addictive. On 48K disk. $34.95

6.





The army of the future is comprised not of men but of machines: the Cybernetic Electronic Devices. They are deadly but mindless. It is up to you as the Cytron Master to lead them to victory in this arcade-style game. On 48K disk, $39.95; and 32K cassette, $34.95.

ATARI is a registered trademark of Atari, Inc.
APPLE is a registered trademark of Apple Computer, Inc.

Screen displays are not necessarily from the Atari®. Games are for the Atari® 400/800/1200.

SSI

STRATEGIC SIMULATIONS INC

If there are no convenient stores near you, VISA & Mastercard holders can order direct by calling **800-227-1617, ext. 335 (toll free).** In California, call 800-772-3545, ext. 335.

To order by mail, send your check to: STRATEGIC SIMULATIONS INC, 883 Stierlin Road, Bldg. A-200, Mountain View, CA 94043. (California residents, add 6.5% sales tax.)

WRITE FOR A FREE COLOR CATALOG OF ALL OUR GAMES.

CIRCLE 232 ON READER SERVICE CARD

A NEW BREAKTHROUGH

SAVE UP TO 33% WITH OUR INTRODUCTORY SUBSCRIPTION OFFER!





Introducing A+, the Most Significant Advance in Apple History!


It's here! Big, bold and bursting with page after page of the latest in hardware, software, programming—and more! **A+** is the monthly magazine written exclusively for your Apple microcomputer. Each issue gets you involved with a host of fascinating features, probing updates, unique departments—and reaches to the depths of your imagination to challenge you with daring new strategies and adventures!

Here's just a sampling of what A+ is all about:



HARDWARE: From the latest advances in telecommunications and networking...to new ways to augment memory and access a wider variety of peripherals with greater ease...each issue of **A+** gets you involved.

SOFTWARE: What's new on the market and how you can make your system more powerful...plus full reviews and programming information.



UTILITIES AND DIAGNOSTICS: In addition to language utilities, **A+** helps you troubleshoot problems... makes you faster and more efficient...with utilities ranging from record processing to data transfer.

BUSINESS AND FINANCE AIDS: Software for financial forecasting and analysis...general accounting programs...financial news retrieval services...and business graphics so you can see just where your money is going.

GAMES: Take the **A+** challenge—with hoards of innovative brain teasers...from games to help you learn spelling and arithmetic...to games that provide fun and adventure!

FOR YOUR APPLE...™






PROGRAMMING TOOLS: Speed up program development with Apple text editors, testing and debugging aids and data base management systems. Since your Apple can speak many languages—from Cobal to Basic and Pascal—**A+** gives you a wide range of utilities for each language so you can create your own exciting programs.



HOME/PERSONAL PROGRAMS: covers it all...from basic processing...to helping you draw with Apple graphics...to speed reading...music theory and composition... even a course on cooking with your Apple... and then how to monitor your diet easily and accurately...along with many educational programs to learn math, science, and geography.

DATA FILES: Let **A+** probe new data base management systems so you'll be able to organize, store and retrieve information in ways you never thought possible.



YOUR TURN: Speak up with your ideas and innovations and network with other Apple users near and far.

Plug into Savings of Up to 33% with Our Introductory Offer!

YES! I want to subscribe to **A+** for:

- ☐ One year (12 issues) only $19.97—20% off!
- ☐ Two years only $36.97—26% off!
- ☐ Three years only $49.97—33% off!

Savings based on full one-year subscription price of $24.97.

Name_____

8H153

Address_____

City_____

State_____ Zip_____

Check One: ☐ Payment enclosed. ☐ Please bill me.

Please charge my:
☐ MasterCard ☐ VISA ☐ American Express

Card No._____ Exp. Date_____

Would you like to receive special offers from qualified users of our mailing list? ☐ YES ☐ NO

MAIL TO: **A+**, P.O. Box 2964, Boulder, CO 80322

APPLE

Apple II E $1149.00

Apple Monitor III w/ Stand ..... $ 199.00

Apple Disk II ..... $ 399.00

Apple 80 Col. Card . $ 99.00

Apple Extended 80 Col Card $249.00

Apple II E Starter System II E, 80 Co. Card, Monitor III, Monitor Stand, Disk II+, Controller $1699.00

ACE 1000 w/color $919.00

FRANKLIN

Starter System
ACE 1000, 12" green screen monitor, RANA Elite I Disk Drive & Controller $1469.00

Starter System w/EPSON MX80 III Printer Interface Card and Cable $1829.00

ACE 1200 (1 Disk) . $1799.00

ACE 1200 (2 Disk) . $2199.00

MICROSOFT

16K Ram for Apple ..... $ 70.00
64K Ram for IBM $269.00
256K Ram for IBM $680.00
64K Ramchip set for IBM $129.00
Systemcard 256K for IBM $479.00
Systemcard 64K for IBM $299.00
Z-80 Softcard $245.00
Softcard Premium System $469.00
Softcard Plus System for II-E $449.00
Multiplan for Z-80 ..... $189.00
Multiplan for Appledos $189.00

RanaSystems

Elite I $260.00
w/Controller $320.00

Elite II $460.00
w/Controller $530.00

Elite III $595.00
w/Controller $670.00

EPSON

EPSON AMERICA, INC.

RX 80 Printer $275.00
MX 80 FT Printer .. $430.00
MX 100 Printer ... $585.00
FX 80 Printer $535.00
FX 100 Printer $689.00
GRAFTRAX for MX Series ..... $ 55.00
(Specify printer)

Novation

Applecat II $269.00
Includes Free Time On Source, Operating Software, and your choice of a free Handset or BSR Controller

212 Applecat Upgrade $329.00
BSR Controller ..... $ 19.00
Handset ..... $ 29.00
Expansion Module ..... $ 39.00
*CAT $150.00
*D-CAT $170.00
*AUTOCAT $559.00
*J-CAT $120.00
*SMART CAT 103 ..... $189.00
*Require RS 232 Interface

Hayes®

Micro Modem II $275.00

Micro Modem II w/Terminal Program $309.00

Smart Modem 300 ..... $239.00

Smart Modem 1200B for IBM $467.00

OKIDATA

ML 80 ..... $300.00
ML 82A $379.00
ML 83A $595.00
ML 84P $919.00
ML 84S $989.00
ML 92P $449.00
ML 92S $549.00
ML 93P $825.00
ML 93S $899.00
Okigraph I ..... $ 40.00
(Specify 82 or 83)
Okigraph II ..... $ 50.00
(For Apple or Franklin)
Roll Paper Stand ..... $ 30.00
For 82A
Tractor Feed ..... $ 50.00
For 82A

Orange Micro Inc.

Grappler+ $125.00

Buffer Board .... $ 79.00

Buffered Grappler+ $199.00

star MICRONICS INC

STX-80 (Thermal) $179.00
Gemini 10X $325.00
Gemini 15 ..... $419.00

TG Products

Game Paddles . $29.00

Joy Stick $45.00

Track Ball $48.00

Add 1% for shipping and handling.

Prices subject to change without notice (up or down).

MAIL ORDER DIVISION

Carolina Microsystems

For technical support, call 1-803-254-6233. To order, call tollfree: 1-800-845-7077; phone lines open 10:00 am - 6:00 pm Eastern time. For Mastercard or Visa, add 3% service charge. Call today, or send check/money order to Carolina Microsystems, Mail Order Division, Suite 69, 1332 Main Street, Columbia, S C[illegible]

CIRCLE 120 ON READER SERVICE CARD

A $3.50 Apple Key Pad

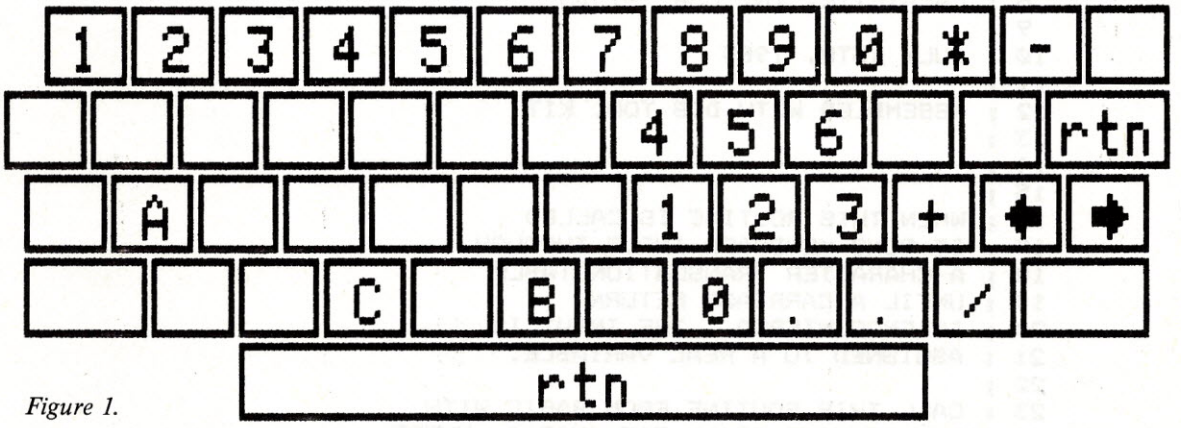


Figure 1.

Wally Hubbard

I haven't yet met an Apple owner who could be considered poor. Nor have I met one who had all the gadgets he wanted. The Apple is a "gadget-friendly" computer: there are eight slots for cards of all kinds, game paddle connections, keyboard modifications, fans, power supplies, and upper/lowercase adapter ROMs.

My Apple came barebones; I bought some RAM chips from the back pages of a magazine to fill it up cheaply and then a disk drive. Then came a music card, an interface, then another, and now seven of the eight slots are filled with no good way to reach the eighth because of all the wires. If riches were counted by the number of green circuit boards a person has, I would be in good shape.

One thing I couldn't see spending money on, however, was a numeric keypad. I don't enter that many numbers. And besides, there is always another gadget that claims my dollars first.

Made of RAM

You get what you pay for: this keypad has no extra keys to sit beside your Apple and no snazzy ribbon cable to thread into the back of your computer. It is just an assembly language program that must be typed in. But it costs only about $3.00—whatever you paid for this magazine (if you subscribe, you got a discount).

The keypad uses the existing Apple keyboard, and translates the U, I, and O keys to 4, 5, 6 and the J, K, L keys to 1, 2, 3. Those are the keys right below 7, 8, and 9 on the keyboard, so the layout is like a numeric keypad. M is zero, and the comma and period both translate to decimal points. The number keys remain the same. The spacebar acts as a return key along with the regular return key. All other keys are translated to spaces, except for the parentheses, asterisk, slash, minus, and plus. The keypad is shown in Figure 1.

The Apple is a "gadget-friendly" computer.

As a bonus, the keypad allows you to add, multiply, subtract, and divide. And it lets you include variables A, B, and C in your data entry. In addition, you can use parentheses to nest operations.

If you type:

```
2*(2+2-3)/8
```

your Apple does the figuring and it is just as if you had typed:

```
.25
```

If you type:

```
A*2
```

the input is twice the value of the variable A.

If you enter a blank line, you get a syntax error, which must be taken care of with an ONERR GOTO. If you want, the error handling can be used to set up special features. For instance, a blank line could mean the variable is to be set equal to a default value.

To use the keypad, use this command in your program:

```
CALL 768 A
```

and the input will be assigned to the variable A. The general syntax is CALL 768 (var) where (var) is any real variable.

Applesoft Helped

Actually, most of the programming needed to implement this keypad is already available in Applesoft, in the permanent memory. So we are hitching a ride. If you want to know how the keypad works, look at the assembly listing (Listing 1). If you want it to work immediately, type in data shown in the memory dump and save it to disk (Listing 2). Then check your work by trying to use it with the Basic demonstration program (Listing 3).

I do not recommend using the keypad subroutine without writing a Basic program. It probably won't work, because the CALL 768 (var) interactive command is stored in the same buffer as the keypad input, and you will erase it while it is still being read. this problem doesn't occur when you use CALL 768 (var) from within a program.

Reference


The Applesoft subroutines are listed and explained in the article "Applesoft Internal Entry Points," by John Crossley, in Volume 1 Number 1 of *Apple Orchard.* Published by the International Apple Core, 908 George St., Santa Clara, CA 95050. Cost: $2.50. END

Wally Hubbard, 3174-321 Pheasant Run Dr., Lafayette, IN 47905.

Apple Keypad, continued...

Listing 1.

```
SOURCE FILE: KEY PAD
0000:              1 ; ---------------------------------------
0000:              2 ;
0000:              3 ; KEYPAD SUBROUTINE
0000:              4 ;
0000:              5 ; ---------------------------------------
0000:              6 ;
0000:              7 ; WALLY HUBBARD
0000:              8 ; LAFAYETTE, IN, USA  47905
0000:              9 ;
0000:             10 ; JULY 15TH, 1983
0000:             11 ;
0000:             12 ; ASSEMBLED WITH DOS TOOL KIT
0000:             13 ;
0000:             14 ; ---------------------------------------
0000:             15 ;
0000:             16 ; WHEN THIS ROUTINE IS CALLED
0000:             17 ; IT RUNS KEYBOARD INPUT THROUGH
0000:             18 ; A CHARACTER TRANSLATION TABLE
0000:             19 ; UNTIL A CARRIAGE RETURN
0000:             20 ; IS ENCOUNTERED.  THE INPUT IS
0000:             21 ; ASSIGNED TO A REAL VARIABLE.
0000:             22 ;
0000:             23 ; CALL THIS ROUTINE FROM BASIC WITH
0000:             24 ; THE COMMAND "CALL 768 <VAR>", WHERE
0000:             25 ; "<VAR>" IS THE REAL VARIABLE TO
0000:             26 ; WHICH THE INPUT IS TO BE ASSIGNED.
0000:             27 ;
0000:             28 ; ---------------------------------------
0000:             29 ;
0000:             30 ;
0000:             31 ;
0088:             32 BACKSPACE EQU $88        ;CONTROL-H
0095:             33 CTRLU    EQU  $95        ;CONTROL-U
FD1B:             34 KEYIN    EQU  $FD1B      ;STANDARD KEYBOARD INPUT ROUTINE
0038:             35 KSWL     EQU  $38        ;LOW BYTE OF KSW
0039:             36 KSWH     EQU  $39        ;HIGH BYTE OF KSW
0000:             37 ; KSW POINTS TO THE CURRENT CHARACTER INPUT ROUTINE
D52C:             38 INLIN    EQU  $D52C      ;LINE INPUT ROUTINE
DD7B:             39 FRMEVL   EQU  $DD7B      ;EVALUATES THE FORMULA AT TXTPTR
EB2B:             40 MOVMF    EQU  $EB2B      ;MOVE A REAL TO VARIABLE STORAGE
00B8:             41 TXTPTR   EQU  $B8        ;TEXT POINTER
0000:             42 ; POINTS TO THE TEXT TO BE READ NEXT
DFE3:             43 PTRGET   EQU  $DFE3      ;LOCATE THE ADDRESS OF A VARIABLE
008D:             44 RETURN   EQU  $8D        ;CONTROL-M
00A0:             45 SP       EQU  $A0        ;SPACE CHARACTER
0000:             46 ;
0000:             47 ;
0000:             48 ;
----- NEXT OBJECT FILE NAME IS KP
0300:             49          ORG  $300       ; (ARBITRARY)
0300:             50 ;
0300:             51 ;
0300:             52 ;
0300:             53 ; INSERT THE CHARACTER TRANSLATION ROUTINE
0300:             54 ; BETWEEN DOS AND THE KEYBOARD
0300:             55 ;
0300:A9 03        56          LDA  #<SWITCH   ; POINT KSW AT SWITCH
0302:85 39        57          STA  KSWH
0304:A9 63        58          LDA  #>SWITCH
0306:85 38        59          STA  KSWL
0308:20 EA 03     60          JSR  $3EA       ; RECONNECT DOS
030B:             61 ;
030B:             62 ; NOW THAT THE CHARACTER TRANSLATION ROUTINE IS IN PLACE,
030B:             63 ; WE CAN TAKE A LINE OF (TRANSLATED) INPUT:
```

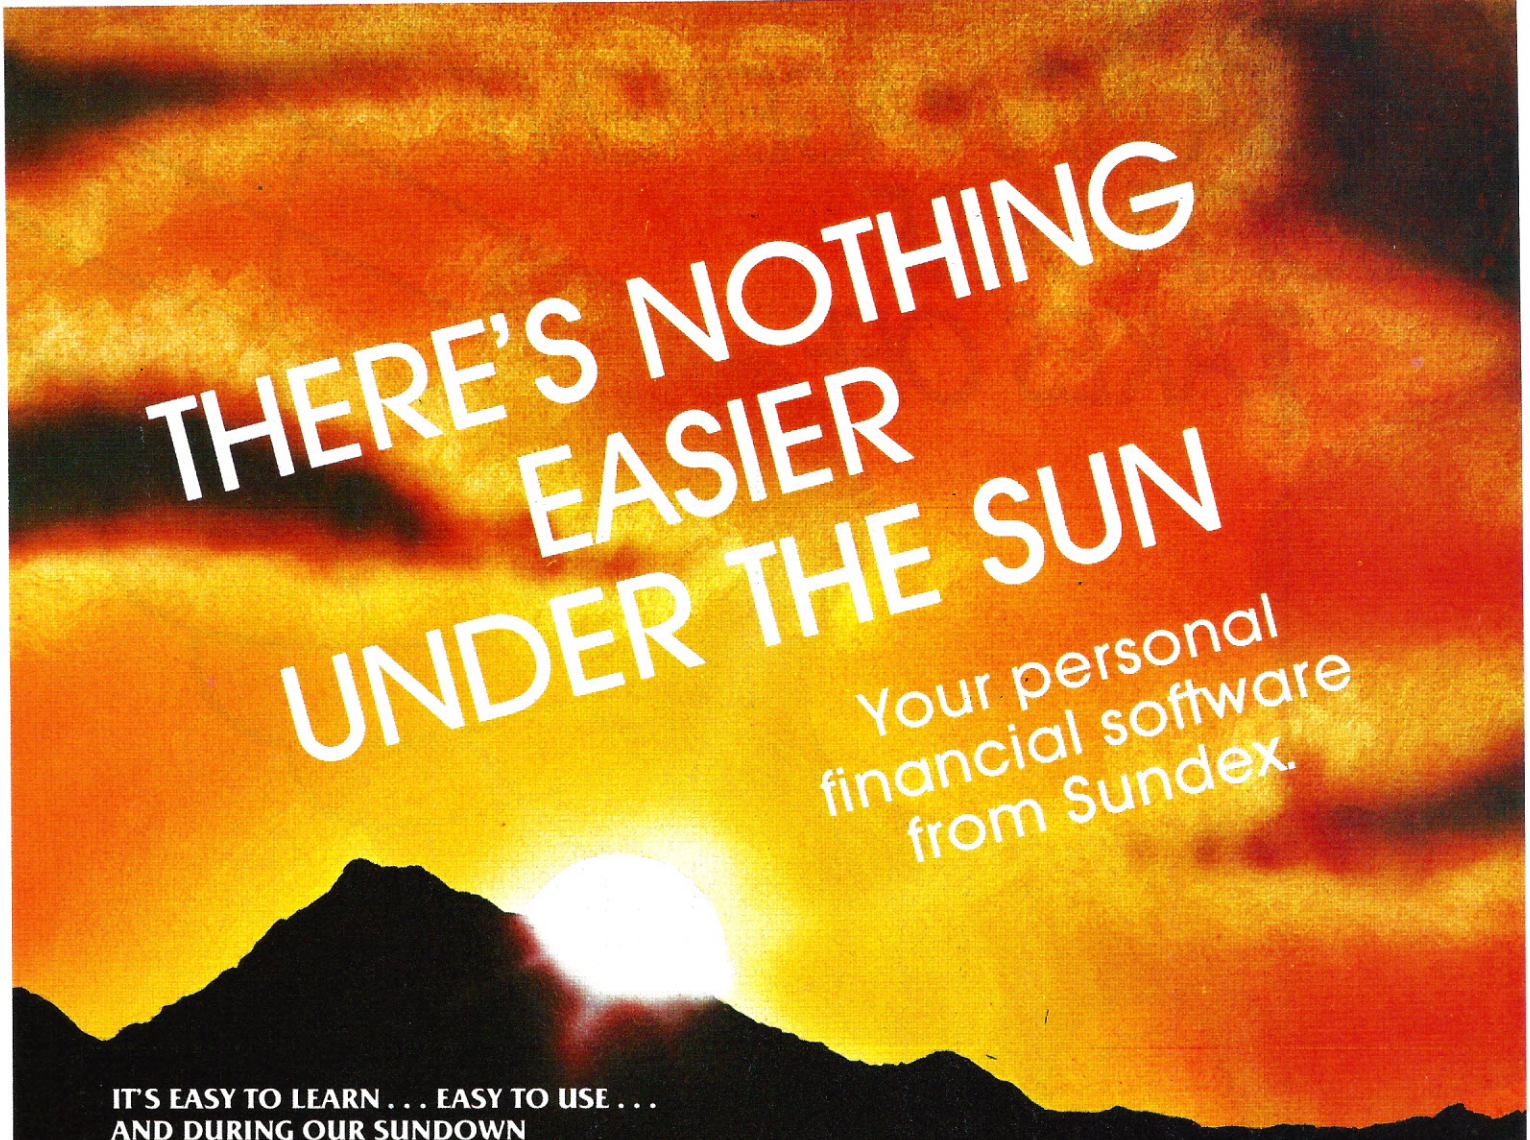

IT'S EASY TO LEARN . . . EASY TO USE . . . AND DURING OUR SUNDOWN PROMOTION . . . INCREDIBLY EASY TO BUY!!

Get the satisfaction and fun of keeping money matters under control whether your interest is in the stock market, tax management or everything in between. Not only do special promotional prices make Sundex Software an EXCEPTIONAL VALUE but "on-screen" instructions, a "HELP" key, and a manual written in "plain English," make these programs EASY-TO-USE BY ANYONE.

Sundex programs can work alone or together to help you organize and manage your money:

CERTIFIED PERSONAL ACCOUNTANT™ — You're in control of your finances with the program that puts your financial status at your fingertips. Easily organize, analyze and manage your finances effectively. It even pays bills automatically!

CERTIFIED PERSONAL INVESTOR™ — Enjoy the ease and security of managing your investment portfolio on this program. It's designed for personal portfolio management, analysis, and tax form preparation.

PERSONAL PAYABLES™ — Have fun with the Sundex program that automatically pays all your bills from up to 10 different checking accounts and prints out your checks.

These programs are available for the Apple II and IIe, IBM PC and PC jr, and the TI Professional.

The Sundex special prices last until February 5th. But, don't wait to buy. The prices go up every two weeks, so THE SOONER YOU BUY THE LESS YOU PAY. Ask your dealer to let you try this remarkable software. Then look for the colorful "Sundex Sundown" display to get this week's price on the programs you want for you and your family.

But hurry . . . you can still
SAVE UP TO 25%
if you act now.

Call 1-800-835-3243 today for the name of the Sundex dealer nearest you.
THERE'S NOTHING EASIER UNDER THE SUN.

Sundex

SUNDEX SOFTWARE CORPORATION
3000 Pearl Street
Boulder, Colorado 80301
303-440-3600

CIRCLE 217 ON READER SERVICE CARD

DATA MANAGEMENT SOFTWARE TAKES OFF



It's not just a data base. It's data management. It's a big idea, and once you see how powerful it can make your personal computer you'll know why Condor Data Management software is the right idea at the right time.

With Condor you get all the power and flexibility of a fully relational database, plus a Report Writer to generate reports. At no extra charge.

And it's simple to use. You can set up data fields quickly without the need for programming experience. Because Condor 1 and Condor 3 were written for business people with business needs.

Begin with Condor 1, the advanced file manager. Upgrade later as your business and your data grows, to Condor 3, the fully relational data management system. It's the same system that hardware manufacturers like DEC, Sony, Zenith, and Hewlett-Packard have selected to market with their personal computers.

To find out how Condor Data Management software can make your business take off, see your personal computer dealer, or call 1-800-854-7100 x165 (in California, 1-800-422-4241 x165) for the dealer nearest you.

He'll prove our point. That Condor is the data management software powerful enough to be useful to business, yet simple enough for business to use.



condor

2051 South State St., Ann Arbor, MI 48104 313/769-3988

CIRCLE 246 ON READER SERVICE CARD

Apple Keypad, continued...

```
030B:             64 ;
030B:20 2C D5     65          JSR  INLIN
030E:             66 ;
030E:             67 ; FURTHER TRANSLATION IS NECESSARY FOR THE SPECIAL CHARACTERS
;
030E:             68 ; SINCE THE FORMULA EVALUATION ROUTINE REQUIRES TOKENS
030E:             69 ; FOR +-* AND /.
030E:             70 ;
030E:             71          MSB  OFF        ; 'A' = 65 = $41
030E:A2 00        72 T0       LDX  #$00
0310:BD 00 02     73 T1       LDA  $200,X     ; LOOP UNTIL (ACCUMULATOR) = 0
0313:F0 24        74          BEQ  T3
0315:C9 2D        75          CMP  #'-'       ; CHANGE '-' TO $C9
0317:D0 04        76          BNE  TA1
0319:A9 C9        77          LDA  #$C9
031B:D0 16        78          BNE  T2
031D:C9 2A        79 TA1      CMP  #'*'       ; CHANGE '*' TO $CA
031F:D0 04        80          BNE  TA2
0321:A9 CA        81          LDA  #$CA
0323:D0 0E        82          BNE  T2
0325:C9 2F        83 TA2      CMP  #'/'       ; CHANGE '/' TO $CB
0327:D0 04        84          BNE  TA3
0329:A9 CB        85          LDA  #$CB
032B:D0 06        86          BNE  T2
032D:C9 2B        87 TA3      CMP  #'+'       ; CHANGE '+' TO $C8
032F:D0 02        88          BNE  T2
0331:A9 C8        89          LDA  #$C8
0333:9D 00 02     90 T2       STA  $200,X     ; STORE THE RESULT...
0336:E8           91          INX               ; ...AND GET THE NEXT CHARACTER...
0337:D0 D7        92          BNE  T1         ; ...UNTIL THE LINE HAS BEEN READ
0339:             93 ;
0339:             94 ;
```


A REPORTING SYSTEM FOR A SPREADSHEET DATABASE
(for any VisiCalc© or Lotus 1-2-3™ User)

Most database systems consider rows of data fields as records. The 3-D concept promoted by Abacus says to consider an entire report as a record. Therefore, visualize "pages" of reports stacked-on or scattered-around your desk; these would constitute your database.

VIZ-A-MERGE™

With Viz-A-Merge (Namely-A-Merge System) you can "cut and paste" sections of spreadsheet reports together to form new reports - - - Electronically!!! As a spreadsheet utility Viz-A-Merge allows you to combine sections, rows, columns, or single cells from any number of spreadsheet pages into one new report, or into an existing report, then recalculate selected formulas. For example, you could "cut" total year end columns from Department reports and the consolidated reports, then "paste" them together for overall company analysis. Or, you could place a total sales row into an income statement and recalculate all formulas.

VIZ-A-CON™

With Viz-A-Con (Namely-A-Consolidation System) you can add 3-Dimensional capability to your spreadsheet program. As a Report Writer to your database, Viz-A-Con allows you to select records ("pages"), get sub-totals and totals for all number fields, and have customized labels on the final report. For example you can perform hierarchical consolidations (Dept., Div., Company) or time period roll-up (Day, Week, Month, Qtr., Year). You can consolidate up to 50 files in one process and you can tie together as many as 80 processes in one group. Then play "what if" with VisiCalc and regenerate all reports in one single step.

Each Product has a simple Question & Answer procedure to assist you in organizing your report processes. You can create a complete reporting network from a spreadsheet database. They have the ability to "remember" the steps they went through to create the final reports. You can use your spreadsheet program to recalculate new data, then use our products to regenerate all new reports in one single step. Also, you can set-up special formulas to calculate additional data fields within the new reports. You can customize titles, row and column headings, footnotes, etc. for each report.

Both products include sample sessions which are easy to understand, allowing the average person to learn them in only 15 minutes. They are both compatible with dBase II™ (IBM), PFS Graph® and a host of popular products.

Abacus Associates is dedicated to producting products that allow users to create customized reporting systems tailored to the way they manually organize their data.

Please order either Viz-A-Merge or Viz-A-Con directly from Abacus Associates. Send your check or money order to Abacus Associates, 6565 W. Loop South, Suite 240, Bellaire, TX 77401, or credit card customers may CALL TOLL FREE (800) 547-5995, ext. 170. In Nebraska, (800) 642-9606, ext.170.

Apple II, II+, IIe, TRS-80 I, III, IV .....$ 99.95
Apple III, TRS-80 II/12/16, IBM-PC $139.95
Add $3.95 S & H per package.

VISA MasterCard AMERICAN EXPRESS

Look for forthcoming 3-D application templates

CIRCLE 102 ON READER SERVICE CARD

```
0339:             95 ;
0339:             96 ; EVALUATE THE INPUT LINE AS A FORMULA
0339:             97 ;
0339:             98          MSB  ON          ; 'A' = 193 = $C1
0339:A5 B8        99 T3       LDA  TXTPTR      ; SAVE TXTPTR
033B:48          100          PHA
033C:A5 B9       101          LDA  TXTPTR+1
033E:48          102          PHA
033F:A9 00       103          LDA  #$00        ; POINT TXTPTR AT THE INPUT BUFFER
0341:85 B8       104          STA  TXTPTR
0343:A9 02       105          LDA  #$02
0345:85 B9       106          STA  TXTPTR+1
0347:20 7B DD    107          JSR  FRMEVL      ; EVALUATE THE FORMULA IN THE BUFFER
034A:68          108          PLA               ; RESTORE OLD TXTPTR VALUE
034B:85 B9       109          STA  TXTPTR+1
034D:68          110          PLA
034E:85 B8       111          STA  TXTPTR
0350:20 E3 DF    112          JSR  PTRGET      ; GET VARIABLE STORAGE ADDRESS
0353:AA          113          TAX               ; SET UP FOR MOVMF
0354:20 2B EB    114          JSR  MOVMF       ; MOVE FP ACC CONTENTS TO STORAGE
0357:            115 ;
0357:            116 ;
0357:            117 ;
0357:            118 ; DISCONNECT THE TRANSLATION ROUTINE
0357:            119 ;
0357:A9 FD       120 RET      LDA  #<KEYIN     ; PR#0 EQUIVALENT
0359:85 39       121          STA  KSWH
035B:A9 1B       122          LDA  #>KEYIN
035D:85 38       123          STA  KSWL
035F:20 EA 03    124          JSR  $3EA
0362:60          125          RTS
0363:            126 ;
0363:            127 ;
0363:            128 ;
0363:            129 ; SWITCH THE ORIGINAL CHARACTER
0363:            130 ; FOR A CHARACTER IN THE TABLE
0363:            131 ;
0363:20 1B FD    132 SWITCH   JSR  KEYIN       ; GET CHAR FROM KEYBOARD
0366:C9 8D       133          CMP  #RETURN     ; $0D IS PASSED THROUGH
0368:F0 06       134          BEQ  SR
036A:C9 A0       135 S1       CMP  #SP         ; SPACE IS CHANGED TO RETURN
036C:D0 03       136          BNE  S2
036E:A9 8D       137          LDA  #RETURN
0370:60          138 SR       RTS
0371:C9 88       139 S2       CMP  #BACKSPACE  ; BACKSPACE IS PASSED THROUGH
0373:F0 FB       140          BEQ  SR
0375:C9 95       141 S3       CMP  #CTRLU      ; CONTROL-U IS PASSED THROUGH
0377:F0 F7       142          BEQ  SR
0379:C9 A8       143 S4       CMP  #'('        ; ANYTHING LESS THAN '('...
037B:90 15       144          BCC  NULL
037D:C9 D6       145          CMP  #'V'        ; ...OR GREATER THAN 'V' ...
037F:B0 11       146          BCS  NULL        ; ...IS CHANGED TO A SPACE
0381:38          147          SEC
0382:E9 A8       148          SBC  #'('        ; CALCULATE TABLE INDEX
0384:29 7F       149          AND  #$7F
0386:8E 91 03    150          STX  XTEMP
0389:AA          151          TAX
038A:BD 95 03    152          LDA  TABLE,X     ; TRANSLATE
038D:AE 91 03    153          LDX  XTEMP
0390:60          154          RTS               ; FINISHED
0391:            155 ;
0391:            156 ;
0391:            157 ;
0391:00          158 XTEMP    DFB  0           ; STORAGE FOR X REGISTER
0392:            159 ;
0392:            160 ;
0392:            161 ;
```

```
0392:A9 A0      162 NULL    LDA  #SP        ;RETURN A SPACE
0394:60         163         RTS
0395:           164 ;
0395:           165 ;
0395:           166 ;
0395:           167 ; TRANSLATION TABLE
0395:           168 ;            NEW       ;OLD
0395:           169 ;
0395:A8 A9      170 TABLE   ASC  '()'       ;()
0397:AA AB      171         ASC  '*+'       ;*+
0399:AE AD      172         ASC  '.-'       ;.-
039B:AE AF      173         ASC  './'       ;./
039D:B0 B1 B2   174         ASC  '0123456789'
03A0:B3 B4 B5
03A3:B6 B7 B8
03A6:B9
03A7:AA AB      175         ASC  '*+'       ;:;
03A9:AE AD AE   176         ASC  '.-.'      ;<=>
03AC:AF         177         DFB  '/'        ;?
03AD:A0         178         DFB  SP         ;@
03AE:C1 C2 C3   179         ASC  'ABC'      ;ABC
03B1:A0 A0 A0   180         DFB  SP,SP,SP   ;DEF
03B4:A0 A0 B5   181         DFB  SP,SP,'5'  ;GHI
03B7:B1 B2 B3   182         ASC  '123'      ;JKL
03BA:B0 A0 B6   183         DFB  '0',SP,'6' ;MNO
03BD:A0 A0 A0   184         DFB  SP,SP,SP   ;PQR
03C0:A0 A0 B4   185         DFB  SP,SP,'4'  ;STU


*** SUCCESSFUL ASSEMBLY: NO ERRORS
```

Listing 2. Key Pad memory dump. Enter the Monitor (CALL -151) and type the following:

```
300:  A9 03 85 39 A9 63 85 38
308:  20 EA 03 20 2C D5 A2 00
310:  BD 00 02 F0 24 C9 2D D0
318:  04 A9 C9 D0 16 C9 2A D0
320:  04 A9 CA D0 0E C9 2F D0
328:  04 A9 CB D0 06 C9 2B D0
330:  02 A9 C8 9D 00 02 E8 D0
338:  D7 A5 B8 48 A5 B9 48 A9
340:  00 85 B8 A9 02 85 B9 20
348:  7B DD 68 85 B9 68 85 B8
350:  20 E3 DF AA 20 2B EB A9
358:  FD 85 39 A9 1B 85 38 20
360:  EA 03 60 20 1B FD C9 8D
368:  F0 06 C9 A0 D0 03 A9 8D
370:  60 C9 88 F0 FB C9 95 F0
378:  F7 C9 A8 90 15 C9 D6 B0
380:  11 38 E9 A8 29 7F 8E 91
388:  03 AA BD 95 03 AE 91 03
390:  60 00 A9 A0 60 A8 A9 AA
398:  AB AE AD AE AF B0 B1 B2
3A0:  B3 B4 B5 B6 B7 B8 B9 AA
3A8:  AB AE AD AE AF A0 C1 C2
3B0:  C3 A0 A0 A0 A0 A0 B5 B1
3B8:  B2 B3 B0 A0 B6 A0 A0 A0
3C0:  A0 A0 B4
BSAVE KP,A$300,L$C3
```


ATTENTION APPLE® FREAKS!

Here's the book you've been looking for!

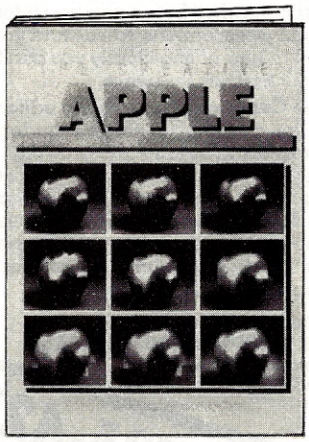

THE CREATIVE APPLE

The Creative Apple brings you the best articles and features on the Apple to appear in the past four years of *Creative Computing*. Revised and updated, this wealth of material gives you dozens of ways to tap the tremendous potential of your Apple, improve your programming skills, and expand your computing knowledge. Graphic utilities, animation, digitized images, music editing, educational software and applications, telecomputing, home control systems, VisiCalc and many other timely topics are thoroughly examined and discussed. Ready-to-run programs give you immediate use of this informative and stimulating collection, while a chapter on tips and tricks for easier programming lets you unlock the versatility of the Apple computer—and your own resourcefulness.

Whether for business, personal budgeting, the thrill of computer games or the development of educational applications, you'll find plenty here to help you get the most out of your Apple.

The Creative Apple, edited by Mark Pelczarski and Joe Tate. 8½ x 11", softcover, illustrated. $16.95

Apple is a registered trademark of Apple Computer, Inc.

CREATIVE COMPUTING PRESS Dept. HE6C
39 East Hanover Avenue, Morris Plains, NJ 07950

Please send me _____ copies of *Creative Apple* at $16.95 each* plus $2 postage and handling #18R.

Outside USA add $3 postage and handling charge.

*CA, NJ and NY State residents add applicable sales tax.

☐ PAYMENT ENCLOSED $_____

☐ CHARGE MY:
☐ American Express ☐ MasterCard ☐ Visa

Card No._____ Exp. Date_____

Signature_____

Mr./Mrs./Ms._____
(please print full name)

Address_____ Apt_____

City_____

State_____ Zip_____

For faster service, **PHONE TOLL FREE: 800-631-8112**
(In NJ call 201-540-0445)

A VISIBLE SALES STRATEGY

A classified ad in **Creative Computing** means a mini-investment with a high sales return in the microcomputer mail-order market! Let us give you information on ad sizes, options, rates—and you'll be amazed at how economically you can focus in on your specific audience.

Creative Computing penetrating editorial brings you a careful, interested readership that is rapidly growing—and growing increasingly receptive to the product or service you have to offer. And it's easier than ever to deliver your message—because you can phone your ad in at the number below, so your insertion can run in the next issue. *Make sure it does*—phone now!

Classified Advertising
ZIFF-DAVIS PUBLISHING COMPANY
Consumer Computers & Electronics Magazine Division

CALL 725-4215

Apple Keypad, continued...

Listing 3. Key Pad Demonstration Program. Pressing just the return key at the prompt enters a default value of 123456.789.

```
 10  REM   KEY PAD DEMO
 20  PRINT  CHR$ (4);"BLOAD KP"
 30  GOSUB 150
 40 DE = 123456.789
 50  PRINT "ENTER 0 TO QUIT."
 60  PRINT "ENTER A NUMBER USING THE KEY PAD: ";
 70  CALL 768A
 80  PRINT A: PRINT
 90  IF A <  > 0 GOTO 60
100  POKE 216,0: END : REM  TURN OFF ONERR
110  CALL 965: REM  ERR HANDLER
120  IF  PEEK (512) = 0 THEN A = DE: GOTO 80
130  PRINT  CHR$ (7);"ERROR --- TRY AGAIN"
140  GOTO 50
150  ONERR  GOTO 110
160  REM  STANDARD ONERR PATCH
170  FOR I = 965 TO 974
180  READ J: POKE I,J
190  NEXT : RETURN
200  DATA  104,168,104,166,223
210  DATA  154,72,152,72,96
```


VERY LOW PRICES GET YOUR ATTENTION
VERY GOOD SERVICE KEEPS IT

AT RCE WE NOT ONLY PROVIDE OUR PATRONS WITH LOW PRICES . . . WE BACK THEM WITH SUPPORT! ! ! FACTORY AUTHORIZED SERVICE CENTER SUPPORT FOR OVER TWENTY DIFFERENT BRANDS OF HOME ELECTRONICS INCLUDING . . . ATARI, FOURTH DIMENSION, MICRO-SCI, SANYO, FRANKLIN, PANASONIC AND U.S. PIONEER.

FACTORY AUTHORIZED SERVICE COMBINED WITH PRICES LIKE THESE:

SPECIALS FOR THIS MONTH

ATARI		APPLE/FRANKLIN		IBM COMPATIBLE		COMMODORE	
600XL 16k	$169	FOURTH Dimension Drives	$249	HAYES Smartmodem 1200B	$489	DATA 20 Video Pak 80	$159
800XL 64k	$279	FOURTH Graphics Printer Card	$ 89	KOALA Graphics Tablet	$ 89	DATA 20 Z-80 Video Pak w/CPM	$249
1010 Recorder	$ 74	HAYES Micromodem w/TP	$279	MICROSOFT Mouse	$155	KOALA Graphics Tablet	$ 79
1027 Ltr/Qual Printer	$299	HAYES Mach II Joystick	$ 39	QUADRAM Quadcolor I	$249		
1050 Disk Drive	$369	KENSINGTON System Saver	$ 66	QUADRAM Quadlink	$549	**MISCELLANEOUS**	
KOALA Graphics Tablet	$ 74	KOALA Graphics Tablet	$ 89	TG Joysticks	$ 49	HAYES Smartmodem 300 baud	$205
MICROBITS MPP-1000	$169	LAZER MICRO Slimline Drive	$249			MAXELL Diskettes (10)	$ 28
MICROBITS MPP-1100	$ 89	STAR MICRONICS Gemini 10X	$CALL			ZENITH 12" Green ZVM121	$ 89
		TG Joysticks	$ 39			ZENITH 12" Amber ZVM122	$139

WE CARRY A FULL LINE OF APPLE/FRANKLIN, ATARI, COMMODORE, & IBM HARDWARE & SOFTWARE. SEND FOR RCE'S FREE CATALOG

RCE

ORDER TOLL-FREE
800-547-2492
IN OREGON: (503)479-4711

RALSTON CLEARWATERS ELECTRONICS
532 N.E. 'E' STREET GRANTS PASS, OR 97526
ALL BRANDS ARE REGISTERED TRADE MARKS
FOR CUSTOMER SERVICE CALL: (503)479-4711 or (503)479-4150

• CALL FOR LATEST REDUCED PRICE • • OUR PRICES ARE ALWAYS GOING DOWN •

TERMS:
SHIPPING: Add 6% of total transaction for UPS brown (ground) or 9% for UPS blue (air), Parcel Post, or any special arrangements. Minimum shipping charge - $6.00
PAYMENT: Cashier's checks, certified checks, money orders, and bank wires honored immediately. Visa & Master Charge accepted. Allow 20 days for personal checks to clear.
REFUNDS: 10% restocking charge on all returns or exchanges. No refunds on opened software. Call first.
GUARANTEE: All products with full manufacturer's warranty. Sanyo and Apple warranty available.
We have full repair and service facilities for all electronic repairs with HP, Dynascan, Pioneer, Sanyo and Apple trained and certified technicians. For any technical service call them for instant advice or questions right on their benches at (503) 479-4150.
REPAIRS: Call for details on quality guaranteed discount repair and reconditioning service.
We have been repairing electronic equipment for 12 years and love it!

CIRCLE 192 ON READER SERVICE CARD

THE FORTH SOURCE™

MVP-FORTH

Stable – Transportable – Public Domain – Tools

You need two primary features in a software development package . . . a stable operating system and the ability to move programs easily and quickly to a variety of computers. MVP-FORTH gives you both these features and many extras. This public domain product includes an editor, FORTH assembler, tools, utilities and the vocabulary for the best selling book "Starting FORTH". The Programmer's Kit provides a complete FORTH for a number of computers. Other MVP-FORTH products will simplify the development of your applications.

MVP Books – A Series

☐ **Volume 1,** *All about FORTH* by Haydon. MVP-FORTH glossary with cross references to fig-FORTH, *Starting FORTH* and FORTH-79 Standard. 2nd Ed. $25

☐ **Volume 2,** *MVP-FORTH Assembly Source Code.* Includes CP/M®, IBM-PC®, and APPLE® listing for kernel $20

NEW ☐ **Volume 3,** *Floating Point Glossary* by Springer $10

NEW ☐ **Volume 4,** *Expert System* with source code by Park $25

NEW ☐ **Volume 5,** *File Management System* with interrupt security by Moreton $25

MVP-FORTH Software – A Transportable FORTH

☐ **MVP-FORTH Programmer's Kit** including disk, documentation, Volumes 1 & 2 of MVP-FORTH Series (*All About FORTH*, 2nd Ed. & Assembly Source Code), and *Starting FORTH*. Specify ☐ CP/M, ☐ CP/M 86, ☐ CP/M+, ☐ APPLE, ☐ IBM PC, ☐ MS-DOS, ☐ Osborne, ☐ Kaypro, ☐ H89/Z89, ☐ Z100, ☐ TI-PC, ☐ MicroDecisions, ☐ Northstar, ☐ Compupro, ☐ Cromenco $150

☐ **MVP-FORTH Cross Compiler** for CP/M Programmer's Kit. Can also generate headerless code for ROM or target CPU $300

☐ **MVP-FORTH Meta Compiler** for CP/M Programmer's kit. Use for applicatons on CP/M based computer. Includes public domain source $150

☐ **MVP-FORTH Fast Floating Point** Includes 9511 math chip on board with disks, documentation and enhanced virtual MVP-FORTH for Apple II and IIe. $450

☐ **MVP-FORTH Programming Aids** for CP/M, IBM or APPLE Programmer's Kit. Extremely useful tool for decompiling, callfinding, and translating. $150

☐ **MVP-FORTH** by ECS for IBM-PC or ATARI®. Standalone with screen editor. License required. $100

☐ **MVP-FORTH** by ECS for IBM-PC or ATARI. With color animation, multitasking sound, utilities, and license. $175

☐ **MVP-FORTH** Professional Application Development System (**PADS**) for IBM-PC, or APPLE. A three level integrated system with complete documentation. Complete system $400

NEW ☐ **MVP-FORTH** Expert System for development of knowledge-based programs for Apple, IBM, or CP/M. $80

NEW ☐ **MVP-FORTH** File Management System (FMS) with interrupt security for IBM, Victor 9000, or CP/M $200

FORTH DISKS

FORTH with editor, assembler, and manual.

☐ **APPLE** by MM $100
☐ **APPLE** by Kuntze $90
☐ **ATARI®** valFORTH $60
☐ **CP/M®** by MM $100
☐ **HP-85** by Lange $90
NEW ☐ **HP-75** by Cassady $150
☐ **IBM-PC®** by LM $100
☐ **NOVA** by CCI 8" DS/DD $150
☐ **Z80** by LM $50
☐ **8086/88** by LM $100
☐ **VIC FORTH** by HES, VIC20 cartridge $50
NEW ☐ **C64** by HES Commodore 64 cartridge $60

Enhanced FORTH with: F-Floating Point, G-Graphics, T-Tutorial, S-Stand Alone, M-Math Chip Support, MT-Multi-Tasking, X-Other Extras, 79-FORTH-79.

☐ **APPLE** by MM, F, G, & 79 $140
☐ **ATARI** by PNS, F,G, & X. $90
☐ **CP/M** by MM, F & 79 $140
☐ **Apple, GraFORTH** by I $75
☐ **Multi-Tasking FORTH** by SL, CP/M, X & 79 $395
☐ **TRS-80/I or III** by MMS F, X, & 79 $130
NEW ☐ **Timex** by FD, tape G,X, & 79 $45
NEW ☐ **Victor 9000** by DE,G,X $150

☐ **Extensions** for LM Specify IBM, Z80, or 8086
☐ Software Floating Point $100
☐ 8087 Support (IBM-PC or 8086) $100
☐ 9511 Support (Z80 or 8086) $100
☐ Color Graphics (IBM-PC) $100
☐ Data Base Management $200
Requires LM FORTH disk.

☐ **fig-FORTH Programming Aids** for decompiling, callfinding, and translating. CP/M, IBM-PC, Z80, or Apple $150

CROSS COMPILERS Allow extending, modifying and compiling for speed and memory savings, can also produce ROMable code. •Requires FORTH disk.

☐ CP/M $300
☐ 8086• $300
☐ Northstar® $300
☐ IBM• $300
☐ Z80• $300
☐ Apple II/II+ $300

FORTH COMPUTER

☐ **Jupiter Ace** $150
☐ 16K RAM Pack $50
☐ 48K RAM Pack $125

Key to vendors:

CCI Capstone Computing Inc.
DE Dai-E Systems
FD Forth Dimension
I Insoft
LM Laboratory Microsystems
MM MicroMotion
MMS Miller Microcomputer Services
NS Nautilus Systems
PNS Pink Noise Studio
SL Shaw Labs

Ordering Information: Check, Money Order (payable to MOUNTAIN VIEW PRESS, INC.), VISA, MasterCard, American Express. COD's $5 extra. Minimum order $15. No billing or unpaid PO's. California residents add sales tax. Shipping costs in US included in price. Foreign orders, pay in US funds on US bank, include for handling and shipping by Air: $5 for each item under $25, $10 for each item between $25 and $99 and $20 for each item over $100. All prices and products subject to change or withdrawal without notice. Single system and/or single user license agreement required on some products. **DEALER & AUTHOR INQUIRIES INVITED**

FORTH MANUALS, GUIDES & DOCUMENTS

☐ **ALL ABOUT FORTH** by Haydon. See above. $25
☐ **FORTH Encyclopedia** by Derick & Baker. Programmer's manual to fig-FORTH with FORTH-79 references. Flow charted, 2nd Ed. $25
NEW ☐ **Understanding FORTH** by Reymann $3
NEW ☐ **FORTH Fundamentals,** Vol. I by McCabe $16
NEW ☐ **FORTH Fundamentals,** Vol. II by McCabe $13
NEW ☐ **Beginning FORTH** by Chirlian $17
☐ **FORTH Encyclopedia Pocket Guide** $7
☐ **And So FORTH** by Huang. A college level text. $25
☐ **FORTH Programming** by Scanlon $17
☐ **FORTH on the ATARI** by E. Floegel $8
☐ **Starting FORTH** by Brodie. Best instructional manual available. (soft cover) $18
☐ **Starting FORTH** (hard cover) $23
NEW ☐ **68000** fig-Forth with assembler $25

☐ **1980 FORML Proc.** $25
☐ **1981 FORML Proc** 2 Vol $40
☐ **1982 FORML Proc.** $25
☐ **1981 Rochester FORTH Proc.** $25
☐ **1982 Rochester FORTH Proc.** $25
NEW ☐ **1983 Rochester FORTH Proc.** $25
☐ **A FORTH Primer** $25
☐ **Threaded Interpretive Languages** $23
☐ **METAFORTH** by Cassady $30
☐ **Systems Guide to fig-FORTH** $25
☐ **Invitation to FORTH** $20
☐ **PDP-11 User Man.** $20
NEW ☐ **FORTH-83 Standard** $15
☐ **FORTH-79 Standard** $15
☐ **FORTH-79 Standard Conversion** $10
☐ **Tiny Pascal fig-FORTH** $10
☐ **NOVA fig-FORTH** by CCI Source Listing $15
☐ **NOVA** by CCI User's Manual includes editor, assembler, and utilities $25
NEW ☐ **Jupiter** ACE Manual by Vickers $15

☐ **Installation Manual for fig-FORTH,** $15

Source Listings of fig-FORTH, for specific CPU's and computers. The Installation Manual is required for implementation. Each $15

☐ 1802 ☐ 6502 ☐ 6800 ☐ AlphaMicro
☐ 8080 ☐ 8086/88 ☐ 9900 ☐ APPLE II
☐ PACE ☐ 6809 ☐ NOVA ☐ PDP-11/LSI-11
☐ 68000 ☐ Eclipse ☐ VAX ☐ Z80

MOUNTAIN VIEW PRESS, INC.

PO BOX 4656 **MOUNTAIN VIEW, CA 94040** **(415) 961-4103**

CIRCLE 176 ON READER SERVICE CARD

"I turned my TV into a video drawing board with my computer and a Tech-Sketch Light Pen."



"It was so easy. My Daddy bought me a Tech-Sketch Light Pen with its free Paint-N-Sketch ™ program and instruction book . . . all for only $39.95. In just a few minutes I was drawing all kinds of pictures and in colors too!"

It's true. Now you can make your Atari, Commodore 64 or Apple home computer come alive **without the keyboard** using applicable software. Plug a Tech-Sketch Light Pen into the joystick port, touch the pen to the screen and draw pictures the natural way.

You and your family will master the art in no time at all and develop your artistic computer skills rapidly.

Tech-Sketch Light Pen LP-10S plus
FREE Paint-N-Sketch Level I
Program and Instruction Book only $39.95.

All programs are available in cassette, disk and cartridge.

Paint-N-Sketch Level II
For advanced artists.

Take a step forward to LEVEL II . . . a real artist's palette! Program contains all of LEVEL I plus 12 different colors and 3 brush sizes for different width strokes. Provides greater speed and accuracy, and many more options. For Vic 64 and Atari only $49.95 (Pen extra. Interface card required for Apple $99.95)

13 NEW TECH-SKETCH EDUCATIONAL PROGRAMS FOR MORE COMPUTER ENJOYMENT

These programs enable children (up to grade 2) to develop: Alphabet power • Basic number counting skills • Simple addition and counting on three levels • Color figure and word association • Increased concentration, memory and eye-hand coordination • Piano note and keyboard recognition • Color and sequence memory • Expansion of thinking, spelling and reading skills, and others.


30-day money back guarantee.
See your local dealer or call **800-526-2514.**
In New Jersey (201) 227-7724.

TECH-SKETCH INC.
Tech-Sketch is a subsidiary of Ampower Instrument Company
26 Just Road, Fairfield, NJ 07006

Dealers & Distributor inquiries invited. Commodore, Atari, Apple Reg. TM's.

CIRCLE 221 ON READER SERVICE CARD

Give Personal BASIC™ a try. And win Hawaii!

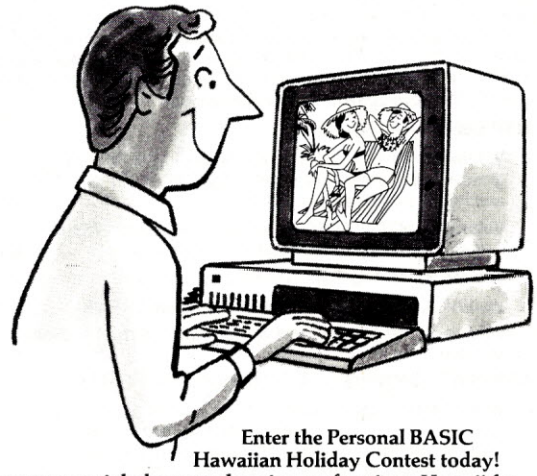

Enter the Personal BASIC Hawaiian Holiday Contest today!

Because you might become the winner of a trip to Hawaii for two—featuring airfare, hotel accommodations, a rental car and $500 spending money.

Other prizes include a $500 shopping spree and five $100 shopping sprees—to be spent in those stores where the winners purchased Personal BASIC, the world's easiest-to-learn BASIC language.

Call toll free for the participating dealer nearest you: (800) 227-1617, ext. 420. In California call: (800) 772-3545, ext. 420. But hurry, contest ends January 31, 1984.

DIGITAL RESEARCH™

The Digital Research logo and products are either trademarks or registered trademarks of Digital Research Inc. ©1983 Digital Research Inc.

CIRCLE 137 ON READER SERVICE CARD

APPLE II Outperforms IBM PC with MegaTASK PLUS™

MegaTASK PLUS™ is a combined, multi-product hardware-and-software package that provides **MEGABYTES** of **VIRTUAL MEMORY, MULTI-TASKING,** and much more to your Apple or Apple compatible computer. MegaTASK PLUS utilizes the SMARTCHIP™ (which uses an Intel 8748 Single-Chip Microcomputer), MegaTASK™ & MegaDOS™ software, and more. Your system will be enormously enhanced, specifically:

- **MULTITASKING** (as many as 16 TASK can execute at one time). Ex. Several printers can be printing while you do data-entry.
- **MEGABYTES** of **VIRTUAL MEMORY.** Largest program size 8 Megabytes. Largest ISAM file 451 Megabytes.
- **Mainframe Basic commands** bring machine-language speeds to interpretive Basic.
- **Increased Speeds.** Program execution and file access up to 10 times faster, and data transfer up to 20 times faster.

On the application side, the 'PLUS' portion includes:

- Business Graphics, Calc, Database Management and Word Processing Applications Packages.
- Report Generators and Strategic Business Analysis programs.
- Communications programs.
- Text Manipulators and Program Editors.
- And much much more!

MegaTASK PLUS includes: the SMARTCHIP, Two Manuals of over 400 pages, Three Double-Sided diskettes packed with software, a 60-Day-Trial period, a one-year Warranty, and more . .

MegaTASK PLUS and one-free-year of our Applications Software Package Series are available at a cost of $495.00. Contact your Local Dealer or order DIRECT. Add $4.00 for shipping. Virginia residents add 4% sales tax. We accept VISA and MASTERCARD, Money Order, or Check.

DATA LINK, INC.
1225 Jefferson Davis Hwy., Suite 600
Crystal Gateway II
Arlington, Virginia 22202 **(703) 486-5701**

*Apple and Apple II are Trademarks of Apple Computer, Inc.
IBM PC is a Trademark of IBM, Inc.

CIRCLE 273 ON READER SERVICE CARD

Mercury Mine Corrected

You may have noticed that there is no regular boo-boo department within the pages of *Creative Computing*. This is because such a feature is usually unnecessary.

Such was not the case with "Mercury Mine" for the Atari, which appeared in our October issue. As printed, the listing will not run.

The correct program appears below. We apologize to our Atari readers for the error. END

```
1 GRAPHICS 0
5 DIM A$(512),B$(20)
7 X=X+1:READ A:IF A<>-1 THEN B$(X,X)=CHR$(A):GOTO 7
9 DATA 0,250,250,250,250,250,250,250,250,250,250,250,0,-1
12 POKE 559,62:POKE 704,0:POKE 705,84
15 I=PEEK(106)-16:POKE 54279,I
18 POKE 53277,3
20 VTAB=PEEK(134)+256*PEEK(135)
22 ATAB=PEEK(140)+256*PEEK(141)
24 OFFS=I*256+1024-ATAB
26 HI=INT(OFFS/256):LO=OFFS-HI*256
28 POKE VTAB+2,LO:POKE VTAB+3,HI
30 Y=68:Z=180:V=1:H=1
33 A$(Y,Y+11)=B$:POKE 53248,Z
38 IF Y>213 OR Y<33 THEN V=-V
40 HOR=53248:PRIOR=623
42 POKE HOR,220:A$(213,224)=B$:POKE HOR+1,220
70 DIM B1$(40),C$(5),C(4,2),CR$(11),D$(10),SC(4),E$(40),A1$(40),FAC$(20)
72 SIZEP0=53256
73 CHAR=1000:MINE=2000:START=3000:INSTR=4000:SCORE=2520:CLINK=5000:AI=9000
75 CR$="1234EWNS":FAC$="N NEE SE5 SWW NW":DIM FC1$(19),FIN$(4),POT(8):FIN$="1234"
77 FC1$="NWW SWN   S NEE SE"
78 B1$(1)=" ":B1$(40)=" ":B1$(2)=B1$
80 FOR I=1 TO 4:SC(I)=0:NEXT I
82 GOSUB 600
85 GOSUB START
88 GOSUB MINE
92 SC=PEEK(88)+256*PEEK(89)
95 POKE 703,4
100 FOR I=1 TO P5:IF B1$((I-1)*10+1,(I-1)*10+8)="COMPUTER" THEN GOTO AI
110 ? "%WHAT IS THE MOVE FOR ";B1$((I-1)*10+1,(I-1)*10+9)
115 IF FG1=1 THEN GOTO 6000
120 ? "WHAT IS THE ROBOT NUMBER";:INPUT D$
130 FLG=0:FOR K=1 TO 4:IF D$(1,1)=CR$(K,K) THEN R=K:FLG=1
140 NEXT K
150 IF FLG=0 THEN ? "THE ROBOT NAME MUST BE FIRST":GOTO 110
160 ? "WHAT IS THE ROBOT DIRECTION";:INPUT C$:C$(LEN(C$)+1)="   "
170 XDIR=0:YDIR=XDIR
190 IF C$(1,1)="S" OR C$(2,2)="S" THEN YDIR=+2
200 IF C$(1,1)="N" OR C$(2,2)="N" THEN YDIR=-2
210 IF C$(1,1)="E" OR C$(2,2)="E" THEN XDIR=+2
220 IF C$(1,1)="W" OR C$(2,2)="W" THEN XDIR=-2
230 IF XDIR=0 AND YDIR=0 THEN 160
240 NUG=0:Y=C(R,1):X=C(R,2)
245 X=X+XDIR:Y=Y+YDIR
250 Z=PEEK(SC+(Y)*40+X+1):IF Z<>96 THEN 300
260 NUG=NUG+1:GOSUB CLINK:POKE SC+(Y-YDIR)*40+(X+1-XDIR),0
265 POKE SC+Y*40+X+1,R+16
270 C(R,1)=Y:C(R,2)=X:GOTO 245
300 SC(I)=SC(I)+NUG
310 GOSUB 2700
320 IF SC(1)+SC(2)+SC(3)+SC(4)>60 THEN GOSUB 4000
500 NEXT I
510 GOTO 100
600 RESTORE 620
610 FOR I=1 TO 8:READ ER:POT(I)=ER:NEXT I:RETURN
620 DATA -82,-80,-78,-2,2,78,80,82
900 TOP=SC(1):WIN=1
910 FOR I=2 TO 4:IF TOP<SC(I) THEN TOP=SC(I):WIN=I
920 NEXT I
930 ? "%THE WINNER IS ";B1$((WIN-1)*10+1,(WIN)*10)
980 FOR I=1 TO 1000:NEXT I
985 ? "%DO YOU WANT TO PLAY AGAIN":INPUT B1$:IF B1$(1,1)<>"Y" THEN END
990 GOTO 85
2000 REM
2001 ? "%":POKE 752,1
2010 A$="┌─┬─┬─┬─┬─┬─┬─┬─┬─┬─┬─┬─┬─┬─┬─┬─┬─┬─┬─┬─┐"
2020 ? A$
2030 A$="|♦|♦|♦|♦|♦|♦|♦|♦|♦|♦|♦|♦|♦|♦|♦|♦|♦|♦|♦|♦|"
2035 E$="├─┼─┼─┼─┼─┼─┼─┼─┼─┼─┼─┼─┼─┼─┼─┼─┼─┼─┼─┼─┤"
2040 FOR I=1 TO 9:? A$:? E$:NEXT I
2050 A$="└─┴─┴─┴─┴─┴─┴─┴─┴─┴─┴─┴─┴─┴─┴─┴─┴─┴─┴─┴─┘"
2060 ? A$
2070 POSITION 31,2:? "NW N NE"
2080 POSITION 31,3:? "  \|/"
2090 POSITION 31,4:? "W -*- E"
2100 POSITION 31,5:? "  /|\ "
2110 POSITION 31,6:? "SW S SE"
2115 POSITION 31,9:? "1 2 3 4"
2118 POSITION 33,11:? "SCORE"
2120 FOR I=1 TO P5
2130 POSITION 30,10+2*I:? B1$((I-1)*10+1,(I-1)*10+9)
2140 POSITION 30,11+2*I:? INT(SC(I)):NEXT I
2190 FOR I=1 TO 4
2200 POSITION C(I,2)+1,C(I,1):? CR$(I,I)
2210 NEXT I
2250 RETURN
2700 FOR N1=1 TO P5
2710 SPOT=SC+(11+2*N1)*40+38
2715 SN1=INT(SC(N1)/10)
2718 IF SN1=0 THEN POKE SPOT,0:GOTO 2730
2720 POKE SPOT,SN1+16
2730 POKE SPOT+1,INT(SC(N1)-SN1*10)+16
2740 NEXT N1:RETURN
2818 IF SN1=0 THEN 2730
3000 ? "%DO YOU WANT INSTRUCTIONS":INPUT C$
3010 IF C$(1,1)="Y" THEN GOSUB 3500
3020 ? "%":? "HOW MANY PLAYERS WILL THERE BE        UP TO 4";:INPUT P5
3025 IF P5>1 THEN 3060
3028 P5=2
3030 ? :? "DO YOU WANT TO GO GO FIRST AGAINST    THE COMPUTER";:INPUT C$
3040 IF C$(1,1)="Y" THEN ? :? "WHAT IS YOUR NAME";:INPUT D$:B1$(1,9)=D$:B1$(11,19)=
     "COMPUTER":GOTO 3090
3050 IF C$(1,1)="N" THEN B1$(1,9)="COMPUTER":? :? "WHAT IS YOUR NAME";:INPUT D$:B1$
     (11,19)=D$:GOTO 3090
3060 FOR I=1 TO P5:? :? "WHAT IS THE NAME OF PLAYER ";I;" :";:INPUT D$
3070 B1$((I-1)*10+1,(I-1)*10+9)=D$:NEXT I
3090 FG1=0:? :? "DO YOU WANT TO USE THE JOYSTICK":INPUT D$:IF D$(1,1)="Y" THEN FG1=1
3100 FOR I=1 TO 4
3110 X=INT(RND(0)*9+1):Y=INT(RND(0)*13+1):X=X*2:Y=Y*2
3120 IF I=1 THEN 3160
3130 FOR J=1 TO I-1:IF X=C(J,1) AND Y=C(J,2) THEN 3100
3140 NEXT J:C(J,1)=X:C(J,2)=Y
3160 C(I,1)=X:C(I,2)=Y
3180 NEXT I
3220 RETURN
3500 ? "THERE ARE FOUR ROBOTS WORKING IN A    MINE IN THE PLANET MERCURY.  THEY ARE
     CALLED 1, 2, 3, AND 4."
3510 ? "AS THEY MOVE, THEY PICK UP DIAMONDS.  YOU CAN TELL ONE ROBOT TO MOVE AND"
3520 ? "PICK UP THE DIAMONDS IN HIS PATH UNTILTHERE ARE NO MORE DIAMONDS IN HIS WAY."
3530 ? "YOU MUST TELL THE ROBOT WHICH DIREC-  TION TO MOVE.  THE PERSON WITH THE
       MOST DIAMONDS WINS."
3540 ? :? "DO YOU WISH TO SEE THE BOARD":INPUT D$
3560 IF D$(1,1)="Y" THEN GOSUB 3100:GOSUB 2000:POSITION 1,23:? "PRESS RETURN TO CON
     TINUE":INPUT D$
3580 ? "TO MOVE A ROBOT, TYPE ITS NUMBER AND  THEN TYPE THE DIRECTION THE ROBOT IS
      TO GO TO."
3590 ? "USING THE JOYSTICK, MOVE THE JOYSTICK UNTIL THE SQUARE IS ON THE ROBOT OR
       DIRECTION WANTED.  THEN PRESS"
3595 ? "THE TRIGGER.  THE CHOICE WILL STAY ON THE SCREEN"
3600 ? :? "PRESS RETURN TO CONTINUE":INPUT D$
3700 RETURN
4000 FOR REL=1 TO 4
4005 IF VAL(FIN$(REL,REL))=0 THEN 4500
4010 X=C(REL,2):Y=C(REL,1)
```

ANNOUNCING

creative computing's

1984 BUYER'S GUIDE

TO PERSONAL COMPUTERS & PERIPHERALS

Here's advice you can trust on selecting personal computers, peripherals and electronic games—in a comprehensive collection of product reviews and consumer-oriented shopping advice from *Creative Computing* magazine. You'll get a rundown of what's new on the market. Analysis of new product performance, reliability, operation, applications, cost—even what kind of repair service you can expect. Easy-to-understand comparisons between different models. And much more.

Send to: HA1S
Creative Computing Buyer's Guide
CN1914, Morristown, NJ 07960

YES! Please rush me Creative Computing's *1984 Buyer's Guide to Personal Computers & Peripherals.* Enclosed is my check or money order for $3.95 plus $1 for postage and handling.

Mr./Mrs./Ms._____
(please print)

Address_____

City_____

State_____ Zip_____

Please make check payable to Creative Computing Buyer's Guide. CA, NJ and NY State residents please add applicable sales tax. Price outside U.S.A. is $6.

Mercury Mine, continued...

```
4320 OT=SC+Y*40+X+1:MOV=0
4340 FOR KK=1 TO 8:IF PEEK(OT+POT(KK))=96 THEN MOV=1:GOTO 4355
4350 NEXT KK
4353 IF MOV=0 THEN FIN$(REL,REL)="0"
4355 IF VAL(FIN$)=0 THEN GOTO 900
4500 NEXT REL:RETURN
5000 FOR LM=1 TO 6:FOR KM=65 TO 35 STEP -3:SOUND 0,KM,10,10:NEXT KM:NEXT LM:SOUND 0,0,0,0:RETURN
6000 A$(1)="":A$(512)="":A$(2)=A$
6003 ? "THE ROBOT NUMBER IS ";
6005 POS=8:Y=101:POKE HOR,171:A$(Y,Y+11)=B$:HR=171
6010 IF STICK(0)<>15 THEN HR=HR+8:POKE HOR,HR:IF HR>195 THEN HR=171:POKE HOR,HR
6013 FOR J=1 TO 50:NEXT J
6020 IF STRIG(0)=1 THEN 6010
6030 R=INT((HR-171)/8)+1:? R
6035 ? "THE DIRECTION IS ";
6038 FOR M=1 TO 100:NEXT M
6050 Y=304:POKE HOR+1,172:HR=172:A$(Y,Y+11)=B$
6060 IF STICK(0)<>15 THEN POS=POS+1:IF POS<9 THEN GOSUB 6500
6062 IF POS>8 THEN POS=1:GOSUB 6500
6068 FOR M=1 TO 25:NEXT M
6070 IF STRIG(0)=1 THEN 6060
6080 C$(1,2)=FAC$(POS%2-1,POS%2):? C$(1,2):GOTO 170
6500 POKE SIZEP0+1,0:IF INT(POS/2)=POS/2 THEN POKE SIZEP0+1,1
6520 ON INT((POS+1)/2) GOTO 6600,6700,6800,6900
6600 HR=HR+11:POKE HOR+1,HR:FOR M=1 TO 25:NEXT M:RETURN
6700 FOR M=Y TO Y+16:A$(M,M+11)=B$:NEXT M:Y=Y+16:RETURN
6800 HR=HR-11:POKE HOR+1,HR:FOR M=1 TO 25:NEXT M:RETURN
6900 FOR M=Y TO Y-16 STEP -1:A$(M,M+11)=B$:NEXT M:Y=Y-16:RETURN
9000 MAX=0
9005 ? "%THE MOVE FOR COMPUTER "
9010 FOR II=1 TO 4:POS=0
9030 FOR XDIF=-2 TO 2 STEP 2
9040 FOR YDIF=-2 TO 2 STEP 2:CNT=0:POS=POS+1
9043 X=C(II,2):Y=C(II,1)
9050 X=X+XDIF:Y=YDIF+Y
9060 OS=SC+Y*40+X+1
9065 IF PEEK(OS)<>96 THEN 9100
9070 CNT=CNT+1:GOTO 9050
9100 IF MAX<CNT THEN MAX=CNT:IB=II:XB=XDIF:YB=YDIF:PS=POS
9110 NEXT YDIF:NEXT XDIF:NEXT II
9120 XDIR=XB:YDIR=YB:R=IB
9122 ? "THE ROBOT NUMBER IS ";R
9124 ? "THE ROBOT DIRECTION IS ";FC1$(PS%2-1,PS%2)
9130 GOTO 240
```


We're not all fun and games, but...


Software City has the best ever selection of recreational programs for your personal computer. We've also got a great selection of programs for education, business, and home finance. And every one is *discounted.* Software City is **The Program Discount Center.**



Programs, peripherals, disks and accessories, plus a complete selection of books and magazines.



VISIT A **SOFTWARE CITY** PROGRAM DISCOUNT CENTER NEAR YOU: **ALABAMA:** Birmingham (205) 591-8314 • Huntsville (205) 536-9456 **ARIZONA:** Phoenix (602) 264-1422 • Tucson (602) 721-1008 **COLORADO:** Westminster (303) 287-2606 **CONNECTICUT:** Orange (203) 799-2119 Stamford (203) 359-1414 **DELAWARE:** Wilmington (302) 478-4880 **FLORIDA:** Orange City (coming soon) • Sarasota (813) 923-4040 • Tampa (813) 961-8081 **GEORGIA:** Atlanta (404) 257-1833 **ILLINOIS:** Arlington Hts. (312) 259-4260 **INDIANA:** Indianapolis (coming soon) **IOWA:** Davenport (319) 386-2345 **KENTUCKY:** Louisville (502) 893-3838 **MARYLAND:** Bethesda (301) 468-1001 **MASSACHUSETTS:** W. Springfield (413) 739-5101 **MICHIGAN:** Ann Arbor (313) 996-4500 • Southfield (313) 559-6966 **NEW JERSEY:** Bergenfield (201) 387-8388 • Cherry Hill (609) 424-8155 • Englishtown (201) 972-1150 Fair Lawn (201) 791-8793 • Green Brook (201) 968-7780 • Hamilton (609) 890-1066 • Linwood (609) 927-3393 • Midland Park (201) 447-9794 • Montvale (201) 391-0931 Morristown (coming soon) • Pine Brook (201) 575-4574 • Pompton Plains (coming soon) • Princeton (609) 683-1644 • Red Bank (201) 747-6490 • Ridgefield (201) 943-9444 Summit (201) 273-7904 • Teaneck (201) 692-8298 **NEW YORK:** Fairport (716) 223-3723 • Forest Hills (212) 261-1141 Great Neck (516) 482-4929 • Manhattan (212) 832-0760 • Mt. Kisco (914) 666-6036 • N. White Plains (914) 946-1800 Pomona (914) 354-3706 • Staten Island (212) 351-9217 • Syracuse (315) 445-2577 **NORTH CAROLINA:** Charlotte (704) 366-5218 **OHIO:** Columbus (614) 888-6660 Dayton (coming soon) • Mayfield Hts. (216) 473-8124 **OKLAHOMA:** Tulsa (918) 744-0558 **PENNSYLVANIA:** Bethel Park (412) 854-1777 • Exton (215) 524-1483 King of Prussia (coming soon) • Pittsburgh (412) 367-0441 • Whitehall (215) 434-3060 **PUERTO RICO:** San Juan (809) 781-9357 • **TEXAS:** Austin (coming soon) **VERMONT:** Burlington (802) 864-6981 **VIRGINIA:** Fairfax (coming soon) Richmond (804) 740-8400 • S. Richmond (coming soon) • Virginia Beach (804) 463-8220 **WASHINGTON:** Bellevue (206) 451-1141 **ENGLAND:** London (coming soon).

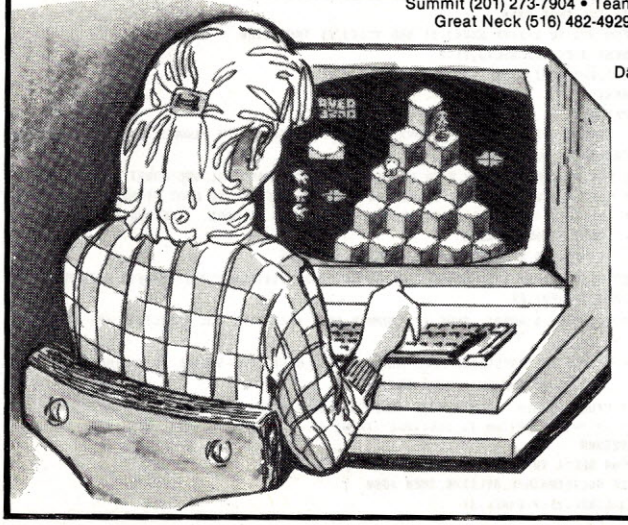

BUSINESS SOFTWARE: Catalog at all stores.

RETAIL STORE FRANCHISES: $40,000 est. total invest. Offering by prospectus only. Direct inquiries to Software City: Franchise Dept. SOFTWARE CITY • 1415 Queen Road • Teaneck, NJ 07666

Software City®

CIRCLE 213 ON READER SERVICE CARD

GenTech

NEW YEAR SPECIALS

LOTUS 123	$Call
Transtar 315 Color Printer	$489
64K RAM for IBM	$55
Smartmodem 300	$205
CABLES	
4FT PARALLEL	$35
4FT SERIAL	$40
Microsoft Premium pack	$489
NEC Spinwriters ALL Models	$Call
OTRONA ATTACHE	$2595
BASIS 108 128K CP/M 3.0	$1999
PROWRITER I	$389
PROWRITER II	$659
EPSON FX-100	$725
RANA ELITE I	$245
RANA ELITE II	$380
RANA 1000 (FOR ATARI)	$309
BUFFERED GRAPPLER	
16K	$179
32K	$199
64K	$239
MULTIPLAN IBM, Apple II/IIe	$169
IBM PC DSDD Drive	
TANDON DRIVE	$239
RANA	$299
QUENTIN	$275
FOURTH DIMENSION	$275

CUSTOMER SERVICE & TECH. SUPPORT

401-273-2420

ORDERS ONLY

800-843-4302

150 Broadway, Suite 2212, N.Y. NY 10038

Money Order, Cashier Ck. Add 3% MC/VISA Charge
Add 2% on COD Orders. Minimum Shipping Charge $5
APO Orders Add 10%. Add 5% for Net Terms.
All Returned Non Defective Merchandise are Subject to 20% Restocking Charge.

AMERICAN EXPRESS · MasterCard · VISA

COMPUTERS

FRANKLIN
ACE 1000 w/color $799

ACE PRO PLUS Systems, ACE 1000 w/color, ACE 10 Drive, 80-Column Card, ACE Writer II, ACE Calc, Monitor, Data Perfect, Personal Financier . . . . . $Call

ACE 1200 (128K, Dual Processor, 1 Drive, 80-Col. CBASIC, CP/M & DOS. . . . . $Call
ACE Office Management System
ACE 1200 w/2 Drives, I/O Card, WordStar, MailMerge, ACE Calc. . . . . $Call



COLUMBIA
128K Ram, Dual DSDD (640K) Drives, Fully IBM Compatible w/Superpack . . . . . $Call
128K RAM, 10 MB Hard disk w/Superpack $3950
Portable VP w/Superpack . . . . . $Call

COMPUPRO . . . . . $Call

ALTOS 586 SERIES/8000 SERIES . . . . $Call

CORONA PC (Hard or Floppy)
Portable PC . . . . . $Call

EAGLE
PC-2 128K RAM w/2 Drives (640K) . . . . . $Call
PC-XL 128K RAM 1 Floppy, 10 MB Hard . . . . . $Call

KAYPRO CO-POWER BOARD
IBM Compatible 128K OR 256K w/MS-DOS & CP/M 86 . . . . . $Call

MORROW DESIGNS
MD2 64K, 2 SSDD Drives, WordStar, LogiCalc, Correct-It, Personal Pearl . . . $Call
MD3 64K, 2 DSDD Drives, Above Software PLUS QUEST Accounting Package . . . . . $Call
MD11 128K, 400K DR, 2 Serial, 1 Parallel. . . . . $Call
DECISION Series D200, D210, D220 . . $Call
Multi User Decision Series . . . . . $Call

PIED PIPER $995

SANYO MBC 550 . . . . . $Call

PLOTTERS

AMDEK Amplot . . . . . $Call
COMREX Comscriber . . . . . $Call
SWEET-P Plotter. . . . . $Call
MANNESMANN Pixy-3 . . . . . $Call

BAUSCH & LOMB
DMP 40 . . . . . $879
DMP 29 (8 COLOR 11 x 17 PAPER) . . $1995
DMP 41 (SINGLE PEN 22 x 17 INCH) . $2599

FOR APPLE II/IIe, Franklin Ace

Fourth Dimension Super Drive.	$219
80-Col. w/64K (IIe Only)	$189
16K RAM.	$49
ALS CP/M Card	$299
ALS Dispatcher	$89
MicroSoft SoftCard	$239
Grappler +.	$119
Graphitti	$95
Pkaso card.	$129
IS Pipeline	$Call
Microtek Dumpling GX	$99
Microtek Dumpling 16(16K).	$169
EPD Surge Protectors	$Call

FOR IBM PC

AST RESEARCH INC.

MEGA PLUS
64K w/Serial & Clock/Cal $279
128K $379, 192K $449, 256K $489
64K w/Ser. Par & Clock $399
128K $459, 192K $579, 256K $599
MEGA PAK 256K Module $289

SIX PACK PLUS . . . . . $Call

COMBO PLUS
64K w/Serial & Parallel $279
128K $369, 192K $419, 256K $499

I/O PLUS $129
Serial $39, Parallel $39, Game port $39

QUADRAM


QUARDBOARD
64K $279
256K $419

512+ EXPANSION BOARD
Quad 512+(64K) $239
Quad 512+(256K). $399
Quad 512+(512K). $639

QUADLINK. $489

MICROFAZER
P/P (Parallel/Parallel)
8K $125, 64K $199, 128K $309
256K $589, 512K $899
S/P, P/S, S/S
8K $145, 16K $165, 32K $195, 64K $229
9V Power Supply $16.99


HARD DISK



COMREX
COMFILER 10 MB FOR QX-10. . . . . $1995

CORVUS		DAVONG (Internal)	
6 MB. . . .	$1695	5 MB. . . .	$Call
10 MB . . .	$2350	10 MB . . .	$1650
20 MB . . .	$3150	21 MB . . .	$2495
XCOMP		**QCS**	
10 MB . . .	$1795	10 MB . . .	$Call
16 MB . . .	$1995	**Tall Grass** . .	$Call

DOT MATRIX PRINTERS



EPSON
RX-80 . . . . . $299
RX-80 F/T . . . . . $Call
MX-100 . . . . . $599
FX-80 . . . . . $569

STAR MICRONICS
GEMINI 10X $299
GEMINI 15/15X . . . . . $Call


OKIDATA
MICROLINE 92. . . . . $449
MICROLINE 93. . . . . $729
MICROLINE 84 P. $979

MANNESMANN TALLY
MT160L (160 CPS) $615
MT180L (15" Carriage) $875

INFO RUNNER RITEMAN . . . . . $Call

TOSHIBA P1350 . . . . . $Call

LETTER-QUALITY PRINTERS



C-ITOH
F-10 STARWRITER. $1169
F-10 PRINTMASTER $1589

COMREX
COMRITER I (P or S) $699
COMRITER II Parallel $479
COMRITER II Ser (5K) $509

DAISYWRITER
2000 EXP (48K BUFFER) $1019

JUKI (18 CPS 15") $525


NEC SPINWRITER. . . . . $Call

QUME SPRINT 11/40 . . . . . $1345

SILVER REED
EXP 550P . . $639 EXP 550S . . $679
EXP 500P . . $439 EXP 500S . . $469

TRANSTAR T315, T120, T130 & T140. . $Call

MONITORS



AMDEK
300G. . . . . $Call 300A. . . . . $Call
COLOR I . . . $Call COLOR III . . $359

COMREX color, green, amber. . . . . $Call

PRINCETON GRAPHICS HX-12 . . . . . $499

QUADSCREEN . . . . . $Call

TAXAN
RGB VISION I $275
WITH APPLE II+ CABLE & INTERFACE. $345
RGB INTERFACE for Apple IIe . . . . . $Call
RGB VISION III. $519
KG 12N-UY (12" amber). $135

USI PI-1 (9" green) $79

TERMINALS



Freedom 100 (11 FTN Key green). . . . $499
Visual 50 Detachable KYBD $589
Televideo 910+ $565
Televideo 925 . . . . . $725
Televideo 950 . . . . . $945

MODEMS

ANCHOR
MARK I (300 baud), MARK XII (IBM) . . $Call

HAYES
MICROMODEM II $275
SMARTMODEM (1200 BAUD) $509
SMARTMODEM 1200B for IBM $439
SMARTCOM II (TERMINAL PROG). $89

NOVATION
ACCESS 1-2-3 . . . . . $Call
CAT 300 BAUD Acoustic $144
D-CAT 300 BAUD Direct $155
J-CAT 300 . . . . . $109
APPLE CAT II. $269
212 APPLE CAT II $575
103 SMART CAT $179
103/212 SMART CAT $419

SSM
300 BAUD MODEM CARD $239
1200 BAUD MODEM CARD $529
TRANSEND 1/2/3 $69/$109/$209


US ROBOTICS
PASSWORD . . . . . $Call

VEN-TEL. . . . . $Call

DISKETTES

3M SSDD Diskette.	$24
3M DSDD Diskette.	$Call
DYSAN SSDD	$37
DYSAN DSDD	$Call
Verbatim SSDD	$25
Verbatim DSDD	$34

CIRCLE 157 ON READER SERVICE CARD

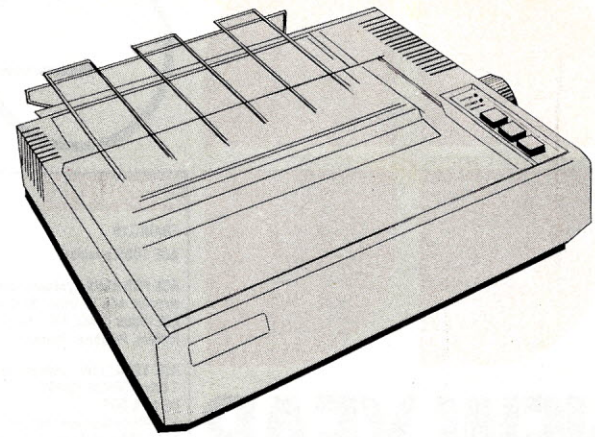

Print About Printers

John J. Anderson

Among other things this month, we shall review three different printers, including a new low-cost color machine. Two of the machines are follow-up entries on existing models, while the third is a newcomer. We shall go on to examine the technology of color ribbons, and take a look at yet another smart buffer device. So let's get going.

Ink-Jet Update

In the May 1983 *Creative,* we offered a preview of the Canon A-1210. At first glance, it looked like just another compact dot matrix printer. Such was not the case. It printed in *seven colors* with under 50dB quietude characteristic only of ink-jet technology. We were somewhat excited.

Now the Canon A-1210 has managed to reincarnate itself as the Radio Shack CGP-220. Those savvy buyers in Fort Worth have done it again. At $700, the printer represents a dramatic breakthrough in ink-jet as well as color printing technology.

The graphics specifications of the machine are 40 cps speed in the text mode and 2600 dots per second in color scan mode. Resolution is 560 monochrome dot columns per line in the standard bit image mode and 640 dots per line in the multi-color mode. The unit uses what the manufacturer calls a "drop-on-demand" process color ink cartridge. It is available in parallel or serial versions.

An in-depth review of the printer will appear in an upcoming column.

SCM TP Take II

In our March 1983 issue, we reviewed the Smith Corona TP-I daisy wheel printer—not very favorably, I might add.

SCM recently introduced the new TP-II, which set out to redress some of the problems of the original model, and succeeds on many points. The TP-I could work optimally only on friction-fed single sheets. An optional tractor-feed mechanism on the TP-II allows use of continuous-form paper without incurring skew jams. The new unit also offers an RS-232 serial as well as Centronics parallel interface.



SCM TP-II


The quality of the hardcopy output by the TP-II is impeccable (see Figure 1). Interchangeable daisy printwheels offer a full range of typefaces. The internal fan, which was very noisy on the original unit, has been quieted down quite a bit. The printer has software programmable underscore modes, margins, and tab settings. The DIP switches on the unit are easier to reach. The documentation is now much more complete, offering technical information on cabling, handshaking protocols, and DIP selection.

The multistrike cartridge ribbon supplied with the machine is a snap to change and provides superlative print quality. Fabric (better wear, worse print impression) and mylar film (dispose after one pass, excellent print impression) ribbons are also available for the unit.

Then there is the downside. The TP-II veritably crawls along at a generous estimate of 12 cps. The printhead is still unidirectional, meaning it returns to the left margin on every linefeed, without lgoic-seeking. The result of all this is that a page of printed text takes about as much time to create on the TP-II as it would take a good typist to bang it out. That is rather slow by micro standards.

But then again, all daisywheel printers are slow. What is really torturous about the TP-II is that it is nearly as noisy as its predecessor. Though the new model cabinet has been sound-insulated with strips of foam, the clatter of the machine is still unnerving. Waiting over three minutes a page at 70dB in typical conditions might pose a problem to the sound-sensitive. As was true with the TP-I, the plexiglas cover must be open when the machine is in use. Its closed function is as a dustcover or to keep your lunch from falling into the mechanism when not in use.

The unit we tested shook its printer stand rather violently. The documentation states that the cabinet feet have a tacky surface to "prevent the machine from walking." It's a good thing—this baby really wants to walk. If you mounted it on casters, you might be able to get it to take the dog out for you.

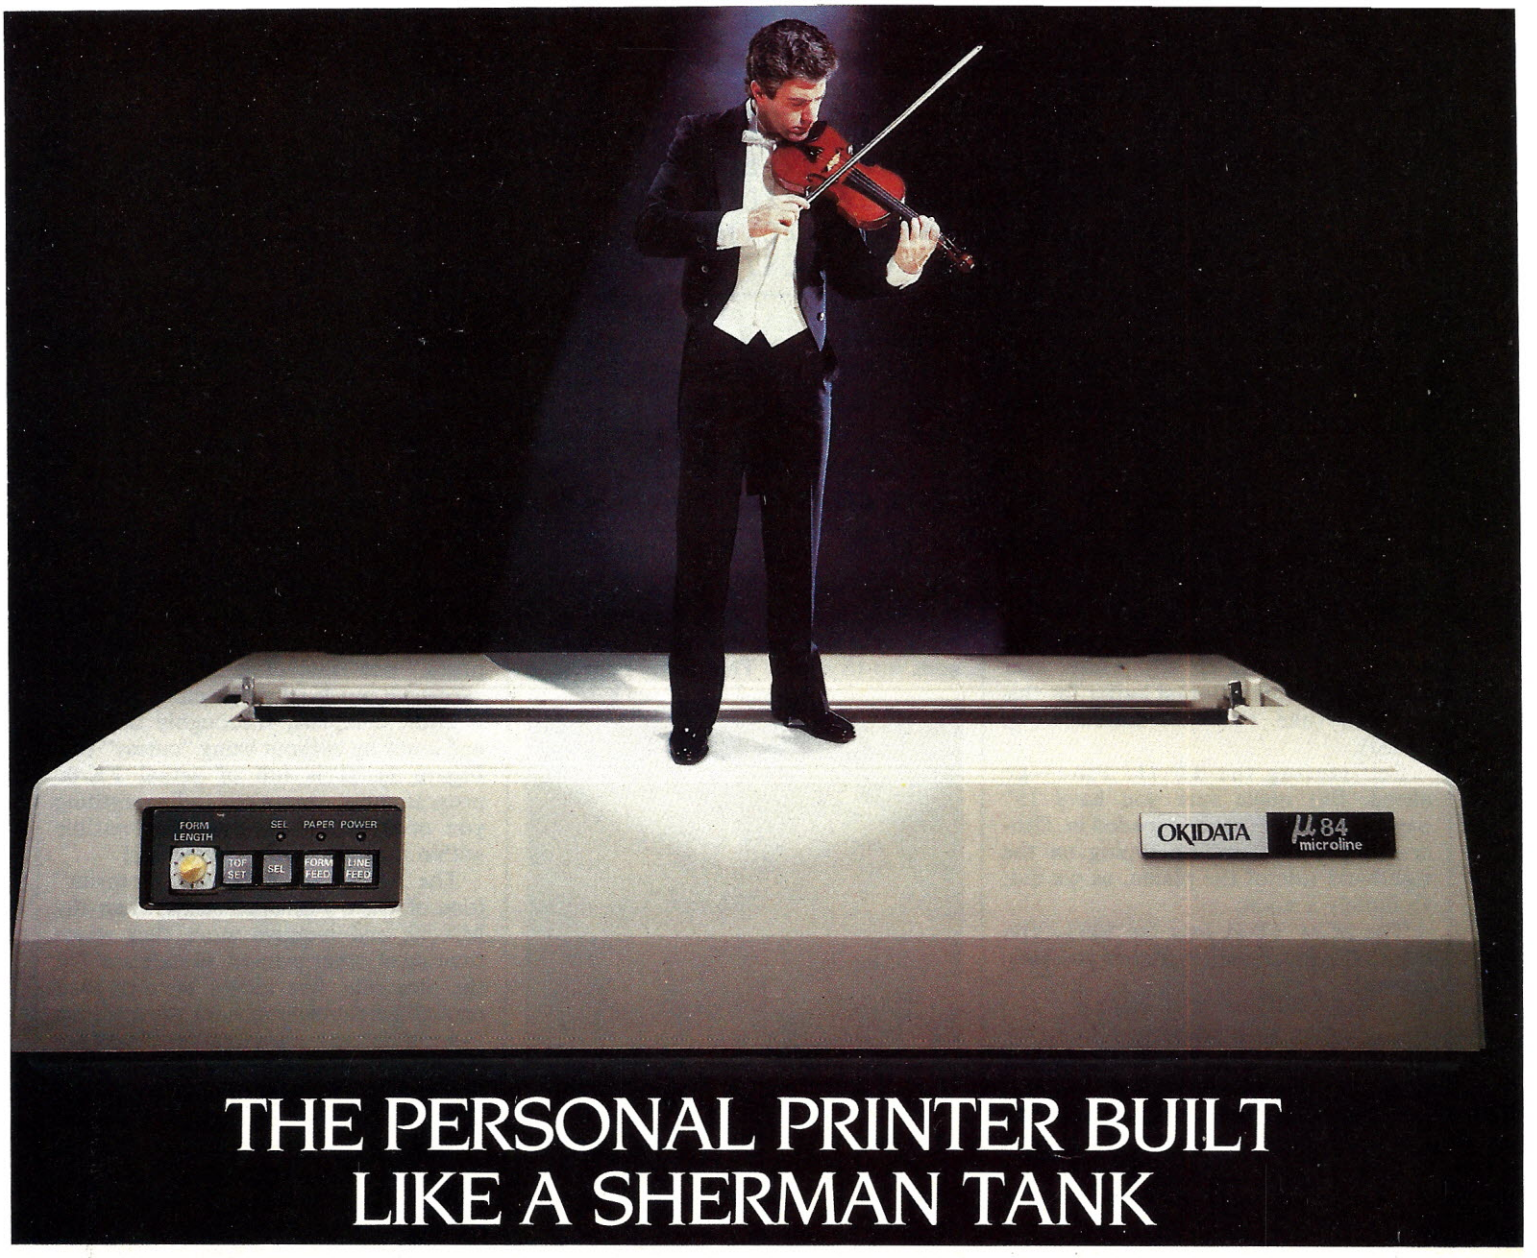

THE PERSONAL PRINTER BUILT LIKE A SHERMAN TANK


PERFORMS LIKE A STRADIVARIUS.

A Tough Act To Follow. Frankly, an Okidata printer is the best printer on the market today. Why? We pack more performance features per dollar into our dot matrix printers than anybody. Bar none. Data processing at speeds from 80 to an incredible 350 characters per second. Exceptional letter quality printing at three times the speed of most daisywheels. Draft and color printing. High resolution all points addressable graphics for charts, graphs, illustrations and photos. Even alternate character sets for self-designed typefaces and symbols. (Print a G-clef, if you like.)

Long-Term Engagement. Our high performers are the most reliable printers available, with rugged steel frames, laser-welded parts, and a print head (the most vital part of all) so strong we guarantee it for up to one full year. No wonder our warranty claim rate leads the industry at less than ½%.

Perfect Harmony With Your Computer. Every Okidata printer works in concert with the major names in personal computers. Better and faster, in fact, than the major computer name printers. (Which, by the way, aren't even made by the major computer companies.)

Best Selection. Right Price. Nobody offers you a better choice. There are eight Okidata printers in all, ranging in price from $449 to $2995, suggested retail. Suggest you call 1-800-OKIDATA (in NJ, 609-235-2600) to find the dealer nearest you. You'll get more for your money from your personal printer. Not to mention your personal computer.

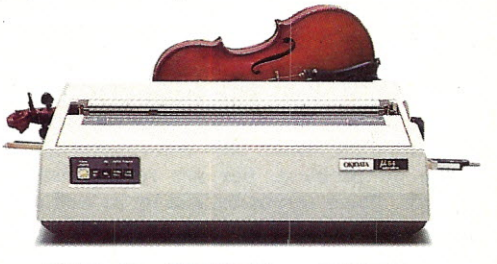

OKIDATA

Mt. Laurel, NJ 08054

A subsidiary of Oki Electric Industry Company Ltd.

CIRCLE 198 ON READER SERVICE CARD

```
<=>?@ABCDEFGHIJKLMNOPQRSTUVWXYZ[\]^_ abcdefghijklmnopqrstuvw
=>?@ABCDEFGHIJKLMNOPQRSTUVWXYZ[\]^_ abcdefghijklmnopqrstuvwx
>?@ABCDEFGHIJKLMNOPQRSTUVWXYZ[\]^_ abcdefghijklmnopqrstuvwxy
?@ABCDEFGHIJKLMNOPQRSTUVWXYZ[\]^_ abcdefghijklmnopqrstuvwxyz
@ABCDEFGHIJKLMNOPQRSTUVWXYZ[\]^_ abcdefghijklmnopqrstuvwxyz{
```

Figure 1. Type sample from Smith Corona TP-II.

```
<=>?@ABCDEFGHIJKLMNOPQRSTUVWXYZ[\]^_`abcdefghijklmno
=>?@ABCDEFGHIJKLMNOPQRSTUVWXYZ[\]^_`abcdefghijklmnop
>?@ABCDEFGHIJKLMNOPQRSTUVWXYZ[\]^_`abcdefghijklmnopq
?@ABCDEFGHIJKLMNOPQRSTUVWXYZ[\]^_`abcdefghijklmnopqr
@ABCDEFGHIJKLMNOPQRSTUVWXYZ[\]^_`abcdefghijklmnopqrs
```

Figure 2. Type sample from Epson FX-80.

The print buffer size of the TP-II remains exactly the same as the TP-I: 256 characters. This is about the smallest buffer to be found on any printer over $500. Plan on an external buffer for this machine (like the one described up ahead).

Self-testing the TP-II? Fine—go ahead. But make sure you have 13″ paper—not 8½″ paper—loaded in. Otherwise you will end up typing on the righthand side of the platen, as we did. Definitely a no-no.

The SCM TP-II lists for $895. You can find a much better price if you shop around.

Epson FX-80 Tops Itself

We've been wanting to review the Epson FX-80 for months and months, but snags with Epson delayed a unit. Finally one surfaced with a QX-10 micro at the lab, and it met nearly all our expectations, except the ones it surpassed.

The Epson MX-80, one of the most ubiquitous micro printers around, was a tough act to follow. Epson has managed to do it by packing the FX-80 chock full of special features. It features six different print pitches, Roman and italic fonts, two types of boldface, proportional spacing, programmable horizontal and vertical tabs, skip-over-perforation, user-definable character sets, hi-res monochrome graphics capability, friction as well as pinfeed paper handling, and a typewriter simulation mode.

The FX-80 is upwardly compatible with all Graftrax Plus features. Its DIP switches are conveniently located, and it sports a 2K buffer. Sub- and superscripts are no problem, nor are reverse linefeeds. Paper can be backed up as well as advanced using the platen knob, without risking a paper jam. It is relatively quiet for its kind, though it seems no quieter than its predecessor (give it a break—it is appreciably faster than its predecessor).

How fast is it? Glad you asked. The FX-80 is rated at 160 cps in its fastest font (see Figure 2). That, combined with bidirectional, logic-seeking linefeeds, adds up to speed. That same page that



Epson FX-80

took the TP-II three minutes takes the FX-80 under 30 seconds. And at the same noise level as many 40 cps machines.

Want to talk about documentation? Okay. The redrawn documentation accompanying the Epson FX-80 is quite simply the finest printer documentation I have ever seen. It weights in at 323 pages, not including the laminated cardstock quick-reference card. The text is clear, complete, thoroughly indexed, and amusing without being "cutesy" (see Figure 3). It is full of actual FX-80 programming examples, and everything you need to know is easily accessible within its covers. How refreshing!

WELCOME TO FX-80 ADVENTURE!

YOU ARE STANDING IN THE FAMILY ROOM NEXT TO YOUR COMPUTER DESK. THE KIDS ARE ACROSS THE ROOM PLAYING A VIDEO GAME ON THE TV. ON YOUR DESK IS A LARGE BOX WITH LETTERING.

YOUR COMMAND? *read lettering*

THE BOX IS LABELED "EPSON"

YOUR COMMAND? *open box*

INSIDE THE BOX YOU FIND A BRAND NEW FX-80 PRINTER.

A USER'S MANUAL FALLS TO THE FLOOR.

AN EERIE VOICE (YOUR CONSCIENCE MAYBE?) WHISPERS: "READ THE MANUAL FIRST."

YOUR COMMAND? *ignore manual; connect printer to computer*

KABOOOOM! THE PRINTER EXPLODES, VAPORIZING EVERYTHING WITHIN 5 FEET OF THE DESK. THE KIDS CONTINUE BLASTING ALIENS ON THE TV, UNAWARE OF YOUR FATE.

YOU ARE DEAD. PLAY AGAIN?

The result is admittedly exaggerated, but the underlying message is very clear: when all else fails, READ THE MANUAL!!

This advice is too late for our unfortunate adventurer, but who can blame him? It is always tempting (though not always wise) to start playing with a new printer the instant it is out of the box. The FX-80 is an advanced printer, complete with state-of-the-art features that can be adjusted to fit your particular needs. So it is more important than ever that you fully understand what the printer will do and how to make it do it before you flip the KABOOM switch.

Figure 3.

The other paper peculiarity is the fact that the pin feed rollers can be moved only about an inch in either direction. To run narrow address labels, you will require the tractor feed option—about $40. And don't try backing up on labels—you'll be asking for trouble.

The Epson FX-80 lists for $700, but is also heavily discounted.

FX Meets PC

Set-FX, from Softstyle, will be of special interest to IBM PC owners who acquire Epson FX-80s. *Set-FX* enables the FX-80 to print the full IBM character set as it appears on the screen, including line graphics, foreign languages, and math and science symbols. It also allows

Be confident because your PowerType Daisywheel correspondence becomes you.

When you can't personally be there, only the clearest typed correspondence should be your substitute. With a PowerType Daisywheel printer your documents look highly professional. And so do you!

PowerType. It's "typewriter friendly." Using a simple drop-in ribbon cassette, it bi-directionally types executive quality correspondence at 18 cps with a print wheel that holds 96 flawless characters.

Designed for personal or business applications, PowerType's carriage accepts paper that ranges from letter to legal size, from fanfold to roll to cut sheet. You can set right and left margins, vertical and horizontal tabs.

Plus, of course, PowerType has both serial and parallel interfaces to enable it to connect to just about any personal or business computer.

So the next time you're going face to face through the mail, rely on PowerType. It will help you make a professional impression. And that's always very becoming.

star™ micronics·inc

THE POWER BEHIND THE PRINTED WORD.

Computer Peripherals Division
P.O. Box 612186, Dallas/Ft. Worth Airport, TX 75261 (214) 456-0052

CIRCLE 214 ON READER SERVICE CARD



menu-based selection of special print modes.

In addition, the program includes a custom font generator and FX-80 Ideas, a demo showing some of the special capabilities of the FX-80 and *Set-FX*.

The *Set-FX* disk lists for $60.

Transtar Quality

With the possible exception of the new Radio Shack CGP-220, the Transtar T-315 has got to be the most exciting low-priced dot matrix color printer around. It uses a color ribbon to achieve its seven colors. The ink ribbon cassette has individual cartridges that can be replaced as a specific color is used up. Colors can be specified in any of three ways:

- Character units or eight-dot vertical graphics columns.
- Single-dot units scanning horizontally corresponding to RGB. This allows for color screen dumps.
- Single dot units scanning horizontally corresponding to the four hammers in the printhead.

This flexibility gives the T-315 very impressive capabilities. If you own an Apple computer, the T-315 is even more attractive bundled with the PICS interface card. The card allows for lo- and hi-res screen images to be printed at the press of a button (see Figures 4, 5, and 6).

On the top panel of the T-315 is a button labeled "copy." After initializing the Transtar on your Apple system, you can boot any graphics program, protected or not, then print screens out in full color by pressing the button and hitting the Apple spacebar. By toggling other keys on the Apple, you can expand across horizontal or vertical axes, or both. You can center the output or keep it on the left margin. You can invert from white to black and back again. You can choose a dual-pass mode.


The Transtar 315 uses a novel approach to indicate "on-line" status. On-line is the default mode upon power up. To go off line, press the "stop" button. Now an indicator light comes on, and pushbutton line and form feeding is possible, as is manual paper advance (paper *cannot* be moved backward once advanced). Press the "stop" key once again to return to on-line status.

For an impact dot-matrix printer, the T-315 is quiet. For a color impact printer, it is very quiet. When the cover on this machine is closed during operation, you can conduct a conversation in ordinary tones of voice.

As is a problem with most other low-priced color printers, the T-315 is perhaps not as good a black-and-white-printer as are similarly priced black-and-white-only models. The text print quality seems a bit anemic next to the output of an Epson or Mannesmann Tally machine (see Figure 7). Still, it is serviceable—and see how text can look in seven colors (Figure 8).

Another thing to bear in mind if you are using a color printer for heavy black-and-white output is that the ribbon will exhaust itself more quickly, as black represents only a quarter of the ribbon. The replaceable ink cartridges attempt a solution to this problem. It is likely that black is the color to be replaced most often. (A further discussion of color ribbons occurs just ahead.)

The Transtar 315 lists for $600, and

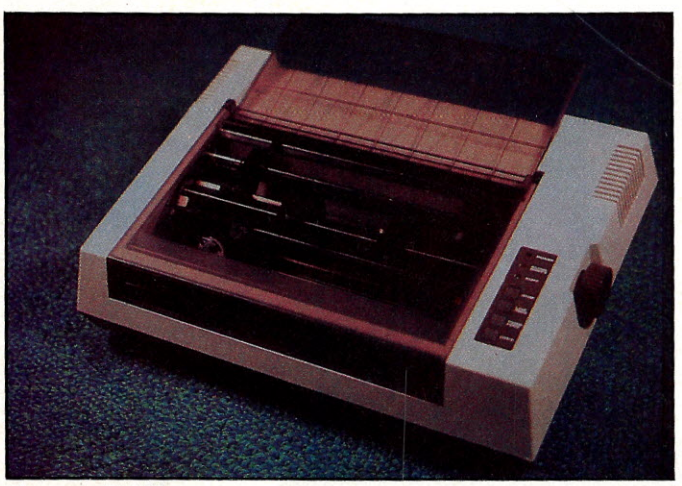

Transtar T-315.

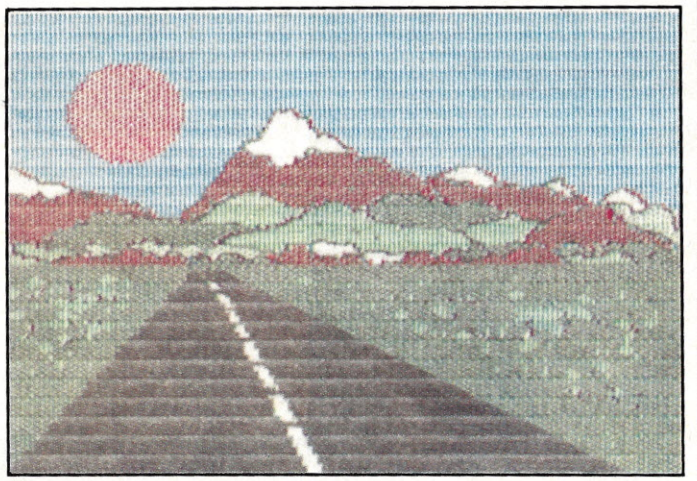


Figure 4.

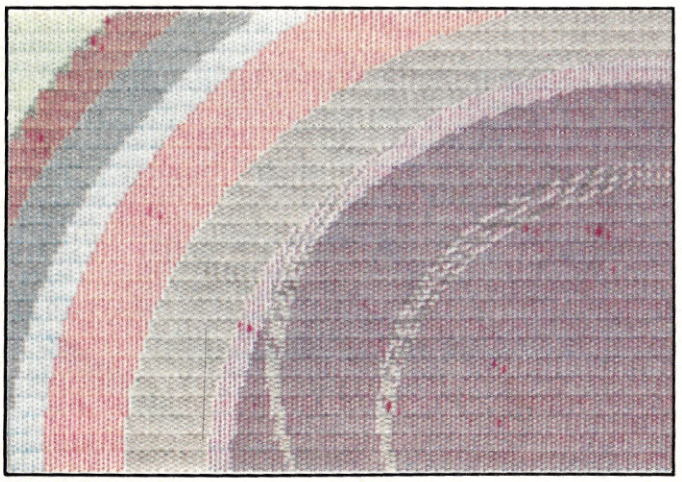


Figure 5.

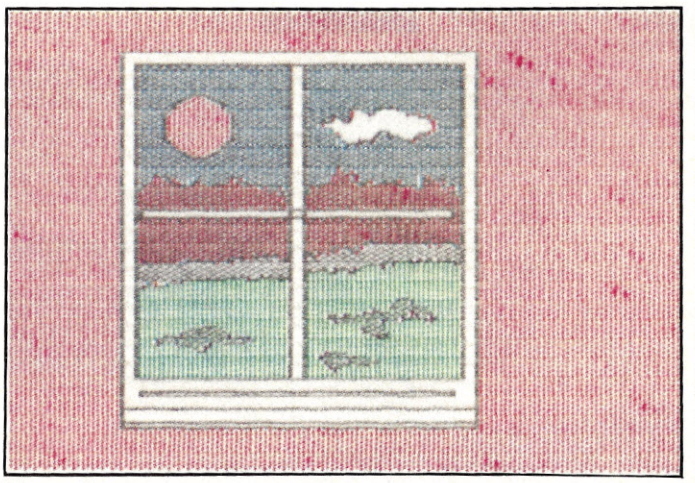



Figure 6.

apple discount software

CALSOFT

Personal—Entertainment—Business

SOFTWARE



We have all the latest software—ASK US!

ATARI, IBM PC, CP/M, COM 64: send for FREE catalog!

Low Discount Prices/Check Our Super Sale Prices
Fast Convenient Service/Same day shipping on most orders
Large Selection of Software/Call or Write for our FREE Catalog!

Call Toll Free: *(800) 423-5290* ***In California:*** *(213) 991-9641*

BEAGLE

	List Price	Our Price
DOS Boss	24.00	**20.40**
Utility City	29.50	**25.05**
Apple Mechanic	29.50	**25.05**
Pronto DOS	29.95	**25.45**
Double Take	34.95	**29.70**
★ **Beagle BASIC**	**34.95**	**26.20**

BPI SYSTEMS

General Ledger	395.00	**316.00**
Accounts Receivable	395.00	**316.00**
Accounts Payable	395.00	**316.00**
Businesss Analyst	195.00	**165.75**

BANK STREET WRITER
~~69.95~~ 52.45

BRODERBUND

★ **The Arcade Machine**	**59.95**	**44.95**
Choplifter	34.95	**29.70**
★ **AE**	**34.95**	**26.20**
Sea Fox	29.95	**25.45**
Gumball	29.95	**25.45**
Lode Runner	34.95	**29.70**
Spare Change	34.95	**29.70**

CONTINENTAL

★ **Home Accountant**	**74.95**	**56.20**
★ **CPA Modules #1-4 (each)**	**250.00**	**187.50**
FCM	99.95	**84.95**
Tax Advantage	69.95	**59.45**

DECISION SUPPORT

The Accountant	129.00	**109.65**
★ **The Business Accountant**	**255.00**	**191.25**

EDU-WARE

Prisoner 2	32.95	**28.00**
★ **Algebra 1-4 (each)**	**39.95**	**29.95**
Algebra 5 & 6	49.95	**42.45**
★ **Fractions/Decimals (each)**	**49.00**	**36.75**
PSAT/SAT Word Skills (each)	49.00	**41.65**

HAYDEN

★ **Orca/M**	**149.95**	**112.45**
Pie Writer 2.2	149.95	**127.45**
Sargon II	29.95	**25.45**

INFOCOM

★ **Zork I, II, III (each)**	**39.95**	**29.95**
Deadline	49.95	**42.45**
Starcross	39.95	**33.95**
Suspended	49.95	**42.45**
Witness	49.95	**42.45**
Planetfall	49.95	**42.45**
★ **Enchanter**	**49.95**	**37.45**
Infidel	49.95	**42.45**

MICROSOFT

	List Price	Our Price
★ **Multiplan**	**275.00**	**206.25**
Typing Tutor II	24.95	**21.20**
★ **Applesoft Compiler**	**175.00**	**131.25**
Multi-Tool Financial Statement	100.00	**85.00**

PENGUIN

★ **Complete Graphics System**	**79.95**	**59.95**
★ **Graphics Magician**	**59.95**	**44.95**
Transylvania	19.95	**16.95**
The Quest	19.95	**16.95**
Coveted Mirror	19.95	**16.95**

SIERRA ON-LINE

Ulysses	34.95	**29.70**
★ **Dark Crystal**	**39.95**	**29.95**
Cross Fire	29.95	**25.45**
★ **Screen Writer**	**129.95**	**97.45**
★ **Screen Writer Professional**	**199.95**	**149.95**
★ **Ultima II**	**59.95**	**44.95**
Frogger	34.95	**29.70**
The Artist	79.95	**67.95**
★ **General Manager**	**229.00**	**171.75**
Homeword	49.95	**42.45**
Jawbreaker	29.95	**25.45**
Troll's Tale	29.95	**25.45**
Sammy Lightfoot	29.95	**25.45**
Mr. Cool	29.95	**25.45**
Quest for Tires	34.95	**29.70**
Oil's Well	29.95	**25.45**
Aquatron	29.95	**25.45**

SPINNAKER

★ **Snooper Troops #1, #2 (each)**	**44.95**	**33.70**
The Most Amazing Thing	39.95	**33.95**
Face Maker	34.95	**29.70**
Kindercomp	29.95	**25.45**

ASCII EXPRESS PRO
~~129.95~~ 97.45

STRATEGIC SIMULATIONS

Computer Quarterback	39.95	**33.95**
Napoleon's Campaigns	59.95	**50.95**
Guadalcanal Campaign	59.95	**50.95**
Cosmic Balance II	39.95	**33.95**
Germany: 1985	59.95	**50.95**
Bomb Alley	59.95	**50.95**
★ **Fighter Command**	**59.95**	**44.95**
RDF: 1985	34.95	**29.70**
★ **North Atlantic '86**	**59.95**	**44.95**
Knights of the Desert	39.95	**33.95**
Geopolitique 1990	39.95	**33.95**
★ **Ringside Seat**	**39.95**	**29.95**
Broadsides	39.95	**33.95**
Professional Golf Tour	39.95	**33.95**
Fortress	34.95	**29.70**
Queen of Hearts	34.95	**29.70**

SIR TECH

	List Price	Our Price
Wizardry	49.95	**42.45**
Knight of Diamonds	34.95	**29.70**
Legacy of Llylgamyn	39.95	**33.95**

PFS:WRITE
~~140.00~~ 105.00

SOFTWARE PUBLISHING

★ **PFS:File**	**125.00**	**93.75**
★ **PFS:Report**	**125.00**	**93.75**
★ **PFS:Graph**	**125.00**	**93.75**

MISCELLANEOUS

Accounting Plus G/L	395.00	**316.00**
Chess 7.0	69.95	**59.45**
★ **DB Master 3.0**	**229.00**	**171.75**
★ **DB Master 4.0**	**350.00**	**262.50**
Dollars & Sense	100.00	**85.00**
★ **Incredible Jack**	**179.00**	**134.25**
Ken Uston's Blackjack	69.95	**59.45**
Lisa 2.6	79.95	**67.95**
Master Diagnostics	55.00	**47.75**
Mastertype	39.95	**33.95**
★ **Merlin**	**64.95**	**48.70**
Micro Cookbook	40.00	**34.00**
Microterminal	84.95	**72.20**
Miner 2049er	39.95	**33.95**
★ **Sensible Speller IV**	**125.00**	**93.75**
Spellicopter	39.95	**33.95**
Sticky Bear ABC	39.95	**33.95**
Tax Preparer 1984	CALL	**CALL**
Terrapin Logo	149.95	**127.45**
Transend II	149.00	**126.65**
Ultima III	54.95	**46.70**
★ **Visicalc**	**250.00**	**193.75**
Visicalc 80 Col. Preboot	49.00	**41.65**
Zaxxon	39.95	**33.95**

IBM PC SOFTWARE

BPI Personal Accounting	195.00	**156.00**
Crosstalk	195.00	**165.75**
★ **dBase II**	**700.00**	**439.00**
Flight Simulator	49.95	**42.45**
Friday	295.00	**236.00**
★ **Microsoft Word**	**395.00**	**296.25**
Multimate	495.00	**396.00**
Norton Utilities	80.00	**68.00**
PC Tutor	59.95	**50.95**
Peachpak (GL/AR/AP)	395.00	**316.00**
Peachtext 5000	395.00	**316.00**
Personal Investor	145.00	**123.25**
Smartcom II	119.00	**101.15**
★ **Wordstar**	**495.00**	**371.25**
Ultima II	59.95	**50.95**
Ultrafile	195.00	**156.00**
Visiword	375.00	**299.00**

CALSOFT

346 N. Kanan Rd. #103
Agoura, CA 91301

Call Toll Free: *(800) 423-5290* ***In California:*** *(213) 991-9641*

We accept Mastercard & Visa (include # and Expiration Date), check, COD $2.00 extra), or Money Order. California residents add 6% sales tax. Include $2.00 for shipping (UPS Blue Label $3.50, Canada $6.00, other foreign countries 10% of order - minimum $10.00).

★ **Sale prices are through February only!** **Prices subject to change without notice.**

CIRCLE 122 ON READER SERVICE CARD

As is a problem with most other low-priced color printers, the T-315 is perhaps not as good a black-and white-printer as similarly priced black-and-white-only models. The text print quality seems a bit anemic next to

Figure 7. Type sample from Transtar T-315.

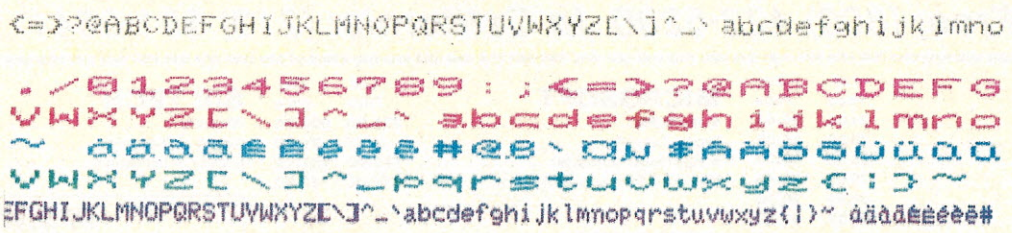


Figure 8. Color type from Transtar T-315.

the PICS Interface for $120, thus making the system the least expensive around for obtaining color Apple hardcopy. If you are looking for this capability, the package should be at the top of your shopping list.

Slicing Into Ribbons

How significant will the coming of low-end color printers be? Some in the industry have drawn a parallel to the introduction of color TV and predict that someday soon color printers will be the standard of micro systems everywhere.

This may or may not be true. Certainly the *quality* of these machines will have a lot to do with their acceptance in the marketplace. I have yet to see a printer with all the black and white capabilities of, say, the Mannesmann MT-160, and color, too. That day will have to come before many folks make the jump to a color printer.


Certainly the technology of printer ribbons has had much to do with the advent of color printers. The Canon/Radio Shack ink-jet machine represents a new direction in ribbonless printing, and, frankly, brings with it a new set of problems. Will color ink-jet technology sound the knell for color ribbons? Probably not—at least for the foreseeable future.

The Transtar 315 ribbon represents advances in existing ribbon technology, but is nonetheless heir to all the problems ribbons can pose. Its advantage is that these problems are not new, and some people have been giving them a lot of thought.


Multi-color ribbons have come a long way. The first color printers used a "primary" ribbon, of red, yellow, blue, and black, and were limited to these colors. A "process" ribbon, such as that employed in the Transtar, uses four colors: magenta, yellow, cyan, and black. Using a strikeover technique, these can be mixed and patterned to form other colors. Easy examples: magenta and yellow make red; yellow and cyan make green; and magenta and cyan make purple. With a process ribbon, a printer can approximate all the colors a color monitor can output.

The problem is creating a color ribbon that lasts. A major obstacle to producing multicolor ribbons is maintaining the integrity of each color band. It is essential that the colors not blend or run together not only during manufacturing, but for the life of the ribbon. Color ribbons sometimes seem underinked even as they come out of the box because the manufacturer is attempting to minimize the possibility of allowing inks to come together.

Until now the technique of repelling inks has been used, with varying degrees of success. Now Dataproducts, of Chatsworth, CA, has taken a new approach.

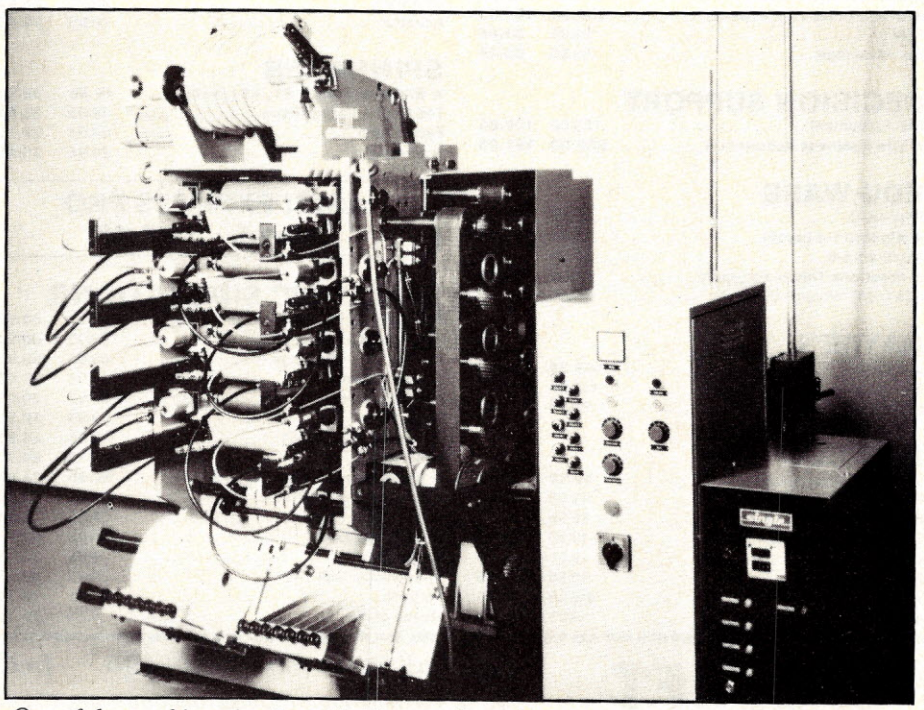

One of the machines developed by Dataproducts Supplies Division to make new color ribbon.

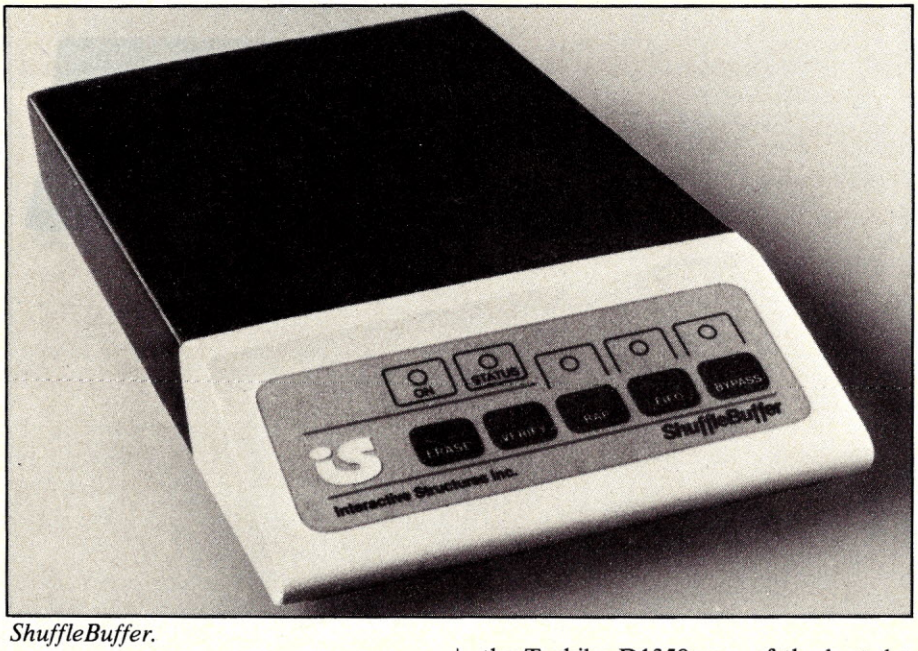

ShuffleBuffer.

They have developed flexible plastic barriers to keep the inks separate from one another. With the flexible barrier system, color ribbons can be maximally saturated with no chance of bleeding.

According to Dataproducts, the flexible barrier system can withstand repeated contact with a printhead without breaking down. Nor will it cause ribbon slippage in the drive mechanism. They will market ribbons for all models of color printers. We look forward to testing these ribbons soon. We will let you know what we think.

ShuffleBuffer Zone

The latest entry to the smart buffer zone is ShuffleBuffer from Interactive Structures. It is compatible with all micros having a standard serial or parallel output port.

The unit has the capability to "shuffle" text, graphics, spreadsheet information, and any other computer-generated material into any desired combination for printing, plotting, or telephone transmission. The result is software integration for even the most humble systems.

The buffer has a standard "dumb buffer" mode, wherein documents that don't need rearranging or reprinting go out FIFO (first in, first out). This frees the CPU for further use during long printouts. An additional mode is "Bypass," allowing the interruption of a long printout to produce a separate document on an immediate basis, then return to printing the original document.

Pricing and memory capacity of the ShuffleBuffer had not been announced at press time.

Next month we will look at the proud track record of Oki printers and review the Toshiba D1350, one of the best dot matrix printers on the market today. Until then, keep your ribbons inked! END

Firms Mentioned In This Column:

Radio Shack
300 One Tandy Center
Ft. Worth, TX 76102
(817) 390-2842

Smith Corona
65 Locust Ave.
New Canaan, CT 06840
(203) 972-1471

Epson America
3415 Kashiwa St.
Torrance, CA 90505
(213) 534-0360

Softstyle
Suite 200
7192 Kalanianaole Hwy.
Honolulu, HI 96825
(808) 396-6368

Transtar
2100 116th Ave. N.E.
Bellevue, WA 98009
(206) 454-9250

Dataproducts
9657 Mason Avenue
Chatsworth, CA 91311
(213) 882-0530

Interactive Structures
146 Montgomery Ave.
Bala Cynwyd, PA 19004
(215) 667-1713

New!
BYTEWRITER®
DAISY WHEEL
PRINTER/TYPEWRITERS




• Full Olivetti typewriter warranty when purchased complete

Complete BYTEWRITER using:
Olivetti Praxis 30 portable $495
Olivetti Praxis 35 portable $545
Olivetti Praxis 40 office machine $645
Interface only-wired and tested $165
The parallel interface mounts entirely internally. Interconnecting cables available for most computers.

BYTEWRITER
125 NORTHVIEW RD., ITHACA, N.Y. 14850
(607) 272-1132

CIRCLE 121 ON READER SERVICE CARD

Our awards for the best and worst of 1983.

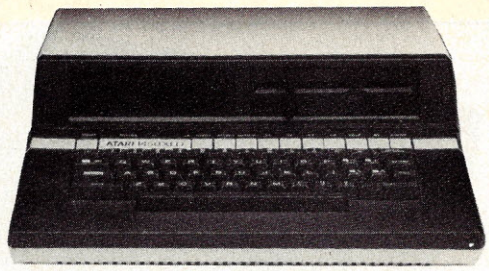

Outpost: Atari

Arthur Leyenberger

It is that special time of the year. Time for New Year's resolutions, wild orgies, and other behavior that most sane people would not be caught doing during the rest of the year. It is also a time for journalists, critics, and other soothsayers to come up with a list of the year's best. Whether the topic is movies, football games, or software, there is a surfeit of lists from every imaginable source.

At the risk of being labeled a curmudgeon I will add my own list to the bevy. The topic will be light so that you can concentrate on the important things like partying and carrying on. We Atari owners know we have the best game playing computer on the market. Its sound and graphics capabilities are rivaled by none. Although our machines are capable of more serious endeavors, we of the faith take gaming seriously. In the next few pages will be the 1983 Outpost: Atari Game Awards, or as I call them, the "Outies." But before we get to that, allow me to take care of a little business.

Look Out Adam, It's Eve

The Coleco Adam has been getting a great deal of press for the past several months. First they could meet their original deadline, then they couldn't, then they changed the deadline. I got tired of trying to keep up with the Adam saga. Apparently I was not alone. An enterprising retailer in Cedar Knolls, NJ has been selling since mid-October a packaged Atari system he has dubbed Eve. For under $600, Gemini Enterprises is offering an Atari 600XL computer, Atari 1027 letter quality printer, Atari 1010 cassette recorder, and the *Atariwriter* word processor. Atari has an official version of a similar system package called the Writer, but it does not include the 1010 cassette recorder.

Eve is a nifty package. Not only is the price right, *Atariwriter* is, in my opinion, the best word processor for the Atari. (For a thorough description of *Atariwriter* see my review in the November 1983 *Creative*). When using *Atariwriter* with the 16K Atari 600XL, you still have about 10K of memory in the machine available for text. This translates to about 20 double-spaced typed pages—more than enough for most term papers and reports.

Normally, using a cassette recorder is not the preferred method of data storage because the speed of loading and saving files is terribly slow. But here it is no problem. There is no reason to access the recorder while you are performing your word processing. Only when you want to save a file or load a previously created file will you suffer the speed penalty.

Another plus for this particular selection of components is that the Atari 1027 printer does not require the Atari 850 Interface Module. It attaches directly to the serial interface daisy chain. And it has a good quality output for an inexpensive printer.

While the speed of the printer is almost an order of magnitude slower than the fastest dot-matrix printer, it will probably fit the needs of many users. It may be best suitable for someone who is not sure he wants to do a great deal of word processing and therefore does not require high speed output. At the same time, the results are truly letter quality. The Atari 1027 printer offers bidirectional printing, underlining capability, a speed of 20 characters per second, and 12 fully formed characters to the inch.

I have only two criticisms of the Atari 1027 printer. First, it lacks pinfeed paper capability. It handles only single sheets of paper. This is fine for typing a letter to Aunt Emma, but is somewhat inconvenient for program listings. My other complaint is the price. It generally sells for about $300. This is about $100 too much considering a generic dot-matrix printer can be had for about the same sum. A lower price would be more competitive and perhaps win back some of Atari's sagging sales.

All things considered, I believe this Eve package to be very tough competition for the Coleco Adam. When you throw in the thousands of existing Atari programs that are available, I don't think Coleco has a chance.

Atari XL Compatibility

There has been much talk about the new Atari XL computers. Rumors have been more prevalent than facts. One of the major points of concern (even in past Outpost columns) has been the question of compatibility. The type of operating system for the new machines was unknown. Would they have the 400/800 Operating System, or would they have the less than popular 1200XL Operating

FIRST, THE GOOD NEWS.




First Star Has 4 New Games.


Fernando Herrera, the designer of *ASTRO CHASE* (1984 Science Fiction / Fantasy Computer Game of the Year*) and our design team again define "State of the Art."

Superior graphics, real-time animations™, multiple screens, intermissions, arcade-quality sound, innovative gaming, challenge and excitement—we deliver it all!

THE BAD NEWS? You can't play them all at once.




BOING!™
Designed by Alex Leavens & Shirley A. Russell
Atari VCS 2600



BRISTLES™
Starring Peter the Painter
Designed by Fernando Herrera
Atari Home Computers
Commodore by Adam Bellin



FLIP and FLOP™
Designed by Jim Nangano
Atari Home Computers
Commodore by Paul Kanevsky



PANIC BUTTON™
TRS-80 Color Computer by Paul Kanevsky
Commodore Computers

*Electronic Games Magazine 1984 Game Of The Year Award

FIRST STAR SOFTWARE INC

"When being first counts...we're number one!"
22 East 41st Street, New York, NY 10017
Distributor and Dealer Inquiries Invited/212 532-4666

CIRCLE 156 ON READER SERVICE CARD

Atari, Vic-20 and TRS-80 Color are the registered trademarks of Atari, Inc., Commodore Business Machines, Inc., and Tandy Corporation respectively. Astro Chase, Bristles starring Peter the Painter, Flip and Flop, Panic Button, Boing!, are trademarks of First Star Software, Inc. Printed in USA. all rights reserved. © 1983 First Star Software, Inc.

System? All existing software can run on the former, but much of it cannot run on the latter.

The facts are in, and there is some good news and bad news from Atari. The bad news is that the XL computers have the 1200XL Operating System and therefore a great deal of software will not run on them. The good news is that there will be a "Translator disk" (and cassette version) available from Atari that will modify the Operating System in the XL machines to look like the 400/800 OS. If this comes to be, one of my Christmas wishes from last month's Outpost has been granted.

Atari Rebuttal

John Anderson, my predecessor as author of this column, was quite vocal in past Outpost columns about Atari products and practices. His critical comments were intended not to slander Atari but rather to stimulate them to change. I share many of his views, but Atari has taken exception to certain points. In an effort to be fair and to present their opinion, column space this month is being made available for Atari to tell their side of the story (see the sidebar). I will wait until next month to comment on their remarks.

With that behind us, let's move on and have some fun.

The 1983 Outpost: Atari Computer Game Awards

Some video game magazines present dozens of award categories. I—and most people I know—have difficulty dealing with that kind of video game overload. Instead, I have simply chosen eight categories that best represent the various types of games for the Atari computer. In each category I have chosen a winner and a runner-up. To qualify as an entry, a game had to be available for the Atari computer in 1983.

The following list is based upon my own set of criteria. These include the overall quality and playability of the game, its use of sound and graphics in appropriate ways and the extent to which the game utilizes the capability of the Atari computer. I have spent many hours behind a joystick playing these games and that is reflected in my choices.

Game of the Year

The 1983 Outie for best game goes to *Archon* by Electronic Arts. *Archon* has broken new ground in the video games world by combining the elements of a

Atari Responds

I would like to take this opportunity to respond to some of your comments in the Outpost: Atari column in the October issue of *Creative Computing.*

First, I would like to point out that our goal in Atari Customer Relations is to have consumers of our products be happy with their buying decision. As an expression of respect to consumers who contact Atari and to protect the credibility of our commitment to support them, we respond in as consistent, accurate, and timely a manner as possible.

Mr. Rose's letter to me asked if the information he had read in the July issue of *Creative Computing* was accurate. Specifically, the 1200 redesign with a return to the compatible operating system of the 400 and 800 and an expansion chassis. Mr. Rose wanted to know if owners of the original 1200 could have the enhancements added as a retrofit. My truthful and accurate response to Mr. Rose was that the 1200XL computer will not be redesigned and is continuing to be sold in its original configuration. There is nothing to retrofit.

Second, I would characterize your reference to the new XL computers as redesigns of the 1200 as strictly your own personal opinion which does not reflect Atari's view of these machines at all. From the point of view that they use the XL operating system, have the distinctive XL color scheme, and offer features found on the 1200, I would agree that they are in the same family. However, from the point of view that the design of the new computers was specified by a different management group in advance of any consumer reaction to the 1200, I would say the new machines are merely a natural evolution.

Furthermore, because of Atari's commitment to upward compatibility, all our home computers utilize the same chip set (6502, ANTIC, GTIA, POKEY, PIA, and generally the same OS) and should be considered to be in the same family. The point is that Atari is continuing to develop computers that offer features that the public wants at a price they can afford, and to characterize natural product evolutions as redesigns of previous models gives the impression that the previous models are flawed in some way. The 1200XL is a perfectly acceptable home computer for a great many people.

Third, I would like to clarify Atari's view of the compatibility issue. It is our responsibility to provide programming guidelines to outside software developers that should be followed to ensure compatibility with future revisions of the operating system. We have done that. Unfortunately, many popular titles did not work on the 1200XL. Realistically, it is impossible to expect 100% upward compatibility with any revision to an operating system. Atari feels the vendors should make revisions to their software to follow our established guidelines.

The vendors feel revision is justified only if a large number of new machines are sold or there are new hardware features that will enhance the utility of the software. The result is that the consumers of XL computers are caught in the middle with software that works on 800's but not on their computers. In response to this situation, Atari has developed the Translator diskette/cassette that will allow owners of XL computers to "pre-boot" the 400/800 OS into their XL computer and override the built-in OS providing compatibility.

The Translator is available now from Atari Customer Relations. Atari has established a company policy of maintaining upward compatibility for the XL line of computer CPUs and peripherals. The purpose of this policy is to keep people in the Atari family happy by having new hardware products compatible with their existing software libraries. Atari must rely on the cooperation of third party vendors to ensure the credibility of this policy.

In closing, I would like to assure you and your readers that Atari takes their comments very seriously regardless of the number of contacts. We recognize that a consumer company that is more responsive will be more successful. Atari's commitment to the consumer is demonstrated by the very existence, not to mention the size, of the Consumer Product Service division. We feel that we provide a level of service and personal assistance that is not equalled in our industry.

It is not necessary to instigate a letter-writing "campaign" to get our attention. Believe me, we prefer to communicate with consumers in a positive manner ("How may we help you?") rather than an adversary manner ("What are you going to do about it?").

William "Stonewall" Bartlett
Product Support Manager
Atari Customer Relations
1312 Crossman Ave.
Sunnyvale, CA 94088
(800) 538-8543 (outside CA)
(800) 672-1404 (inside CA)



TM designates a trademark of Sierra On-Line, Inc. © 1983 Sierra On-Line, Inc. or Sydney Development Corp. B.C. characters © Field Enterprises, Inc. 1983. Manufactured under license from Coleco Industries, Inc.

CIRCLE 204 ON READER SERVICE CARD

strategy game and an arcade shoot-'em-up.

Archon is an excellent example of what a computer game can and *should* be. There are already rumors that *Archon* is attracting a dedicated following and fast becoming a national craze. Tournaments are springing up here and there, and since the game is available for most micros, all can compete.

Runner-up: *Choplifter* by Broderbund for its challenge, playability and unique non-violent approach to shoot-'em-up scoring: points are awarded only for saving the hostages. The goal of the game is to rescue hostages in your joystick-controlled helicopter and return them to safety. Your purpose is to defend rather than destroy. Memories of the Iranian crisis are brought to mind.

Best Arcade Adaptation

This Outie must go to Atari's *Donkey Kong.* The scenario is simple: Mario must rescue his girlfriend who is being held captive by Donkey Kong. Mario is at the bottom of a pile of girders and ramps. His goal is to climb a series of ladders to reach the girl at the top. Donkey Kong attempts to thwart him by rolling barrels down the ramps. Mario can either jump over or smash the barrels.

Like the arcade version, there are four screens, each of increasing difficulty. Moving elevators, falling girders, and conveyor belts comprise the advanced screens. The graphics and sound effects are great. Animation is excellent, and the game is exhilarating. To call this game fun would be an understatement. *Donkey Kong* for the Atari computer is equal to the original in all important respects. It has a catchy tune, too!

Runner-up: *Q-Bert* by Parker Brothers. Faithful graphics and sound make this game a close second. The movement and playability are almost identical to the arcade version. And besides, *Q-Bert* is a cute little guy.

Best Shoot-'Em-Up

Although I am not proficient at this game, the ultimate shoot-'em-up to date is Atari's *Defender.* This is a high-quality rendition of the popular arcade game. Your mission is to defend the last humanoids from the alien kidnappers. You maneuver the laser-equipped ship up, down, left, and right. Smart bombs are used to destroy everything on the screen when the pace gets too hectic. Horizontal scrolling is the name of the game, with the radar display at the top of the screen always showing the whereabouts of the enemy.

You really have to experience the excitement, intensity, and playability of this excellent arcade adaptation for yourself. *Defender* can easily be played for hours at a time.

Runner-up: *Super Cobra* by Parker Brothers. Another arcade adaptation, this challenging game has attractive graphics and life-like sound effects, especially when heard through an amplifier and speakers. If you like *Caverns of Mars* but require more challenge, then check out *Super Cobra.*

Most Original

Necromancer by Synapse is an atypical game. The three game screens are more like acts of a play. Each has its own theme, yet are all part of a larger story. The animation throughout the game is unmatched by anything I have seen for the Atari, and the hauntingly beautiful music adds to the overall effect of the game. *Necromancer* gets high marks for playability, too.

Runner-up: *Worms?* by Electronic Arts for its good-looking graphics that are both fascinating and relaxing. We are talking mind-expanding games here. The game is also educational in that principles of geometry are readily demonstrated.

Most Innovative

This Outie must go to the game that essentially duplicates the user interface of an Apple Lisa: *Pinball Construction Set* by Electronic Arts. This unique interface is comprised of a split screen, containing a blank pinball field on one side and a variety of little pictures (icons) representing flippers, targets, bumpers, etc, on the other. A hand-shaped cursor is moved around the screen with a joystick to point to a particular icon, say a flipper. The object is then picked up and dragged over to the play field where it can be placed anywhere you want. All of the objects are assembled on the play field to create your very own pinball games.

All aspects of a pinball game can be created, edited, and saved for future use, including ball characteristics such as speed, elasticity, and gravity, title screens, scoring logic, and sound effects. You even get five complete sample games that you may play, modify, or simply use as examples of what can be done with this wonderful package.

The *Pinball Construction Set* is a pinball wizard's dream come true. An example of state-of-the-art software on the Atari computer. A virtual graphics *tour de force* and a video game classic.


Runner-up: *M.U.L.E.* by Electronic Arts for its animation, challenge, and ingenuity. This imaginative game is really an economic simulation. Up to four players compete in an effort to monopolize the natural resources of an alien planet. The players buy, sell, and trade property in an attempt to amass the greatest wealth, and win. Animation is excellent, and there are many interesting complexities to the plot.

The design is well conceived and executed. The theme song has a good beat; you can dance to it; I'll give it a 98.


Most Challenging

To earn this coveted Outie, a game must not only be challenging but also repeatedly playable. In fact, the game should be so good that the Game Over display of one round automatically prompts another round much like the reaction of one of Pavlov's dogs.


Miner 2049er by Big Five Software is such a game. In this climbing and jumping game, you move your player, Bounty Bob, throughout 10 different levels of a mine. Each screen increases in difficulty

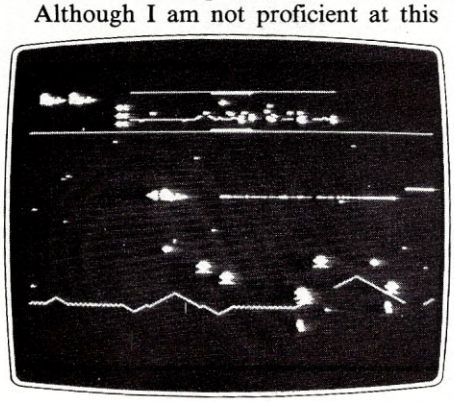

Defender

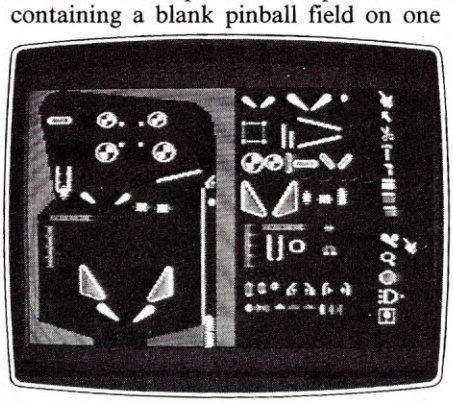

Pinball Construction Set

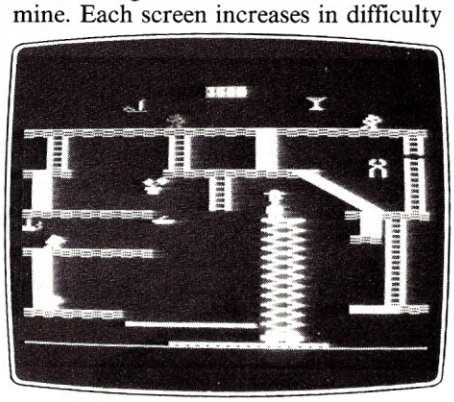

Miner 2049er

as you race against time to complete all of the levels. Even in you finish all ten levels, you begin again at a faster pace. There are various hazards throughout the mine, and your goal is to traverse all of the platforms in each screen.

The graphics are very colorful and the joystick control is responsive. *Miner 2049er* is one of the few games that I have played all night long. And I still go back for more!

Runner-up: *Jumpman* by Epyx. A very close second, this similar jumping and climbing game has 30 screens worth of play. Although the graphics are less polished than *Miner's*, *Jumpman* is very playable and offers continuous challenge.

Best Graphics

This Outie is simply for the game with the best graphics. Playability and other variables are not being considered. There is a tie for the award between *A.E.* by Broderbund and *Astro Chase* by Parker Brothers. Both are shoot-'em-ups, but *A.E.* offers a little more variety. However, both offer dazzling graphics and animation. The best animation in *Astro Chase* occurs during the intermissions every four screens. The best animation in *A.E.* is the swirling and diving alien ships.

To be fair, each of these games should also get another award. The Outie for the most difficult game should go to *A.E.* It is really a tough game, and only the serious Atari gamer will put in the time to master it. The Outie for most hype should go to *Astro Chase* (with *Zaxxon* by Datasoft a close second). This game was originally marketed by First Star Software and was written by Fernando Herrera, winner of the first Atari Star Award. The latter fact was over-used and the game was advertised continuously for six months prior to its actual release in most of the computer magazines. Their slogan was "There is No Escape." What they did not mention was, from what? I now know—there is no escape from their hype.

The Atacky Award

The Atacky goes to the grossest Atari computer game we saw in 1983—the one that more than any other merits an airline sick sack. I am happy to report that it is no contest this year. And the winner is *Orc Attack* from Thorne EMI.

Not to say that *Orc Attack* is a bad game, because it is not. It is really quite playable. You control a medieval army, protecting the parapets of your castle from seige. Below, enemy hordes raise ladders and fire arrows at your defenders. The animation is gripping and the pace of the game is exciting.

It's just that a carefully aimed swing of your sword decapitates attackers, and you have the pleasure of watching their heads sail slowly back to earth in the breeze. Especially fun for the little ones.

Orc Attack is fun to play while eating, and sure to appeal to critics of the violence in video games. "Hats off" to Thorne for this heads-up approach. END

Firms Mentioned In This Column

Atari
Box 50047
San Jose, CA 95150

Big Five Software
Box 9078-185
Van Nuys, CA 91405

Broderbund
1938 Fourth St.
San Rafael, CA 94901

Datasoft
9421 Winnetka Ave.
Chatsworth, CA 91311


Electronic Arts
2775 Campus Dr.
San Mateo, CA 94403

Epyx (Automated Simulations)
1043 Kiel Ct.
Sunnyvale, CA 94086

Parker Brothers
50 Dunham Rd.
Beverly, MA 01915

Synapse
5327 Jacuzzi St., Suite 1
Richmond, CA 94804

Thorn EMI
1370 Avenue of the Americas
New York, NY 10019

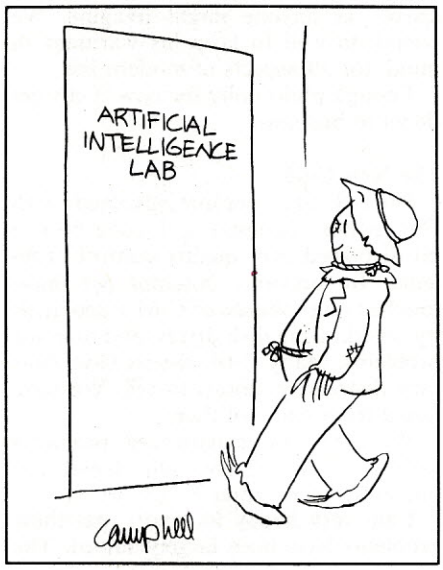

COMPUTERS FOR KIDS!

Computers for Kids

—by Sally Greenwood Larsen

Children love computers. And kids 4 to 12 love to learn programming with *Computers for Kids!* It's clearly written, with large type, and offers games and sample programs to make it fun. Readers learn how to do a flowchart, how to get the computer to do what *they* want, how to write their own games—even how to draw pictures that move!

Even if you've had no previous experience teaching microcomputer programming—or doing it yourself—*Computers for Kids* makes it simple. Included is a section of notes for teachers and parents, suggested lesson outlines, teaching suggestions for each section, and a glossary.

Sally Greenwood Larsen's extensive experience teaching microcomputer programming to kids makes this one of the best elementary level books on the subject. 11" x 8½", softcover, $5.95 ($1.00) each. Apple edition **#12G,** TRS/80 **#12H,** Atari **#12J,** IBM PC **#12K,** Sinclair **#12S,** VIC-20 **#12V.**



Be A Computer Literate

—by M. Ball & S. Charp

An introduction to the world of larger computer systems for children aged 10 to 16. Excellent for use as a supplemental textbook, *Be A Computer Literate* discusses how computers are used and their impact on our lives. Simple programming concepts are explained. Illustrated in color, with drawings, diagrams and photos. 4 3/16" x 6⅞", softcover, $6.95 ($1.50), **#6H.**

CREATIVE COMPUTING PRESS Dept. HE3C
39 East Hanover Avenue/Morris Plains, New Jersey 07950
Please send books listed below:

Item No.	Qty.	Price each	P&H	Total Price


CA, NJ, and NY State residents add applicable sales tax $

Outside USA add $3.00 per order. Total Amount $

☐ **PAYMENT ENCLOSED $**_____
☐ **CHARGE MY:** (Minimum charge or phone order $10.)
☐ American Express ☐ Mastercard ☐ Visa

Card Number_____ Exp. Date_____
Signature_____
Name_____ (please print full name)
Address_____
City/State/Zip_____

For faster service,
PHONE TOLL FREE: 800-631-8112
(in NJ only: 201-540-0445)
☐ Please send me a FREE *Creative Computing* Catalog

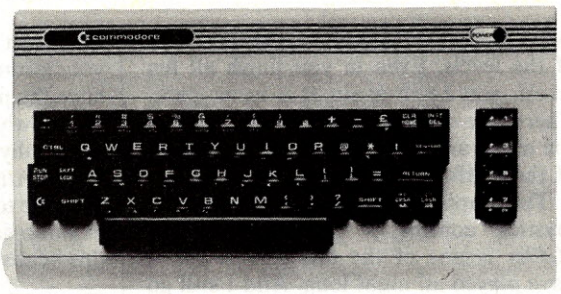

Commodore's Port

John J. Anderson

By this time you may or may not have come to terms with the fact that the coming year is numbered 1984. I know it has taken me a while to get used to the concept. And when you think about it, you must admit that we are much better off in 1984 than we might have been. Sure, there is plenty to worry about. But the nightmarish visions imagined for us by George Orwell have not really come to pass (except on Madison Avenue and selected locations in Washington D.C.). I know you might argue well to the contrary.

A Cause For Optimism

Still, I like to think that we are headed in more or less the right direction and that microcomputers have helped. In 1949, Orwell judged the coming age of computers from the intimidating point of view of the super-mainframe: he correctly saw the potential for the abuse of human rights through computerized loss of privacy. Indeed huge computers are used to aid surveillance of and maintenance of information about private citizens. In his quite penetrating prophecy about the dangers of our future, Orwell *did not* predict the ascendance of the micro.

Where the mainframe may sometimes be seen as a catalyst to the elimination of individualism, the micro pays tribute to the individual. It is a computer designed for use by an individual—hence the term "personal computer." It is yours, to do with what you please. Others may access only what you wish them to access.

Machines like the C-64 microcomputer give us reason to be a bit more optimistic about our futures and our children's futures. They stand as proof of the pleasures of computing, as opposed to the abuses (though even the telecommunications power of a C-64 can be used unethically). They stand as proof that computing belongs to *all* of us, as opposed to the Orwellian military-corporate complex (though many of them are buying C-64s too). Most of all, they show us that sometimes the most intimidating aspects of technology can be revealed to have an artful, wholly human potential—this tempers our fears.

Not to say we shouldn't remain wary. In deference to good old George O., I would agree strongly that the field of computing is as littered with "doublespeak" as anyone might imagine. We would do well to keep his warnings in mind, for all aspects of modern life.

Enough philosophy for now. Let's get down to business.

The New C-64

Since I first became involved with Commodore computers, I have been a bit disturbed over quality control problems. In previous columns we have touched on problems of C-64 video quality, overheating disk drives, and monitor problems. Many C-64 owners have their own distressing stories to tell. We have heard from many of them.

We have also experienced problems with our own C-64s and drives too numerous to mention.

I am very happy to report that these problems have been largely solved. The display video of three recently acquired C-64s is so good it surprised me; it looks like that of a wholly new computer. Gone are all traces of the sparkle, fuzzy RF video, and color bleeds that once ruled out many color combinations. With the new machines, the advantages of a truly multicolor character set become obvious for the first time.

Commodore has acknowledged some problems with the 1541 disk drive, but these seem to have been ironed out completely. We sent back two drives for service and received two new drives in trade. Those drives have been in constant service at the lab for some weeks now and have evidenced no overheating or other problems. Regular shipments of the unit have now resumed, and you should be able to find one without too lengthy a search. According to Commodore, the demand for drives far outstripped original estimates, and it has taken until now to catch up.


We have noticed one flaky "feature." Occasionally it takes more than one try to locate a file on disk. If you get a FILE NOT FOUND error, try again before you panic.

According to one reliable source, Commodore has had some problems with production of its model 1701 color monitor as well. These should have been eliminated by the time you read this. The 1701 is one of the best buys around, and provides a picture of incomparable quality for the C-64. You *must,* however, use a video cable with an independent luminance lead. An Atari, Spectravideo, or TI monitor cable, as well as many third-party cables available with the correct connectors on each end, will

commodore 64

INDISPENSABLE SOFTWARE


For Your Most Important Computing Needs




EasyScript 64
Displays 764 lines × 240 characters. Prints to 130 columns. Works with EasySpell 64.



EasySpell 64
20,000 word Master Dictionary and automatic spelling checker. Works with EasyScript 64.



EasyCalc 64
Multiple electronic spreadsheet with color bar graph feature. 63 columns × 254 rows.



The Manager
Sophisticated database system with 4 built-in applications, or design your own. Text, formulas, graphics.



SuperExpander 64
21 special commands. Combine text with high resolution graphics. Music and game sounds.




Easy Finance I—Loan Analysis
12 loan functions. Bar graph forecasting as well as calculation.




Easy Finance II—Basic Investment Analysis
16 stock investment functions. Investment bar graph.




Easy Finance III—Advanced Investment Analysis
16 capital investment functions. Bar graphs.




Easy Finance IV—Business Management
21 business management features. Bar graphs.




Easy Finance V—Statistics and Forecasting
Assess present/future sales trends with 9 statistics and forecasting functions.




Accounts Payable/ Checkwriting
11 functions. Automatic billing. 50 vendors/disk.




Accounts Receivable/Billing
11 billing functions. Printed statements.



General Ledger
8 general ledger options. Custom income statement, trial balances, reports.



Inventory Management
1000 inventory items. Full reports.



Payroll
24 different payroll functions. Integrated with G/L system.

commodore COMPUTERS

First In Quality Software

CIRCLE 125 ON READER SERVICE CARD



The first program you should buy.

The more you use your computer, the more you want it to work for you.

But where do you begin? There are literally thousands of programs. It's time consuming, confusing and frustrating! The answer is to begin with THE LAST ONE™.

THE LAST ONE . . . The program that writes programs!

Now, for the first time, your computer is truly 'personal'. Now, simply and easily, you can create software the way you want it.

From Accounting to the Zodiac, THE LAST ONE puts you keystrokes away from whatever you need from your computer.

THE LAST ONE . . . *See it at your dealer and buy it first!*

Available for Commodore 64™, Commodore 8032™, IBM PC™, Victor 9000™, Apple II™ and IIe™, Radio Shack Model II™ and most CP/M™ systems.

Distributed By

Computer Marketing Services, Inc.

300 W. Marlton Pike, Cherry Hill, NJ 08002 (609) 795-9480

Product of BLUE SKY SOFTWARE

***THE LAST ONE is a registered trademark of D. J. "Al" Systems, Ltd.**

The Commodore 64 & CBM 8032, IBM PC, Victor 9000, Apple II & IIe, Radio Shack Model II, and CP/M are registered trademarks of Commodore Business Machines, Inc., International Business Machines Corp., Victor Technologies, Inc., Apple Computers, Inc., The Tandy Corporation, and Digital Research Corp., respectively.

CIRCLE 129 ON READER SERVICE CARD

not provide an optimal monitor signal for the C-64. If you have made the investment in a color monitor, at least make sure you are providing it with the correct cabling configuration.

If you are experiencing RF problems on a TV set, try replacing the video cable supplied with the C-64 with a highly shielded cable. Here at the lab the RFI as well as the fur is always flying. We use rev. 1 Apples that could effectively be used by the Soviets to jam Radio Free Europe. Gold plated RCA to RCA patch cords (Radio Shack MF-200) do the trick in this noisy environment. They might also do the trick for you.

Another trick is bypassing the switchbox, if you don't mind the inconvenience of removing the box entirely and attaching the ends of the video cable directly to the TV antenna terminals when it is time for the *A-Team.* Sometimes the little box itself is to blame for substandard reception.

And so that is the last word (we hope) of Commodore's Port concerning C-64 quality control. We are heartened that things are on the upswing; now we can concentrate on the fun stuff. In its latest incarnation, the C-64 is finally a machine you can unabashedly believe in. Now if only we could get it to scroll more smoothly . . .

Driving The Wedge

If you have a disk drive and are not using a wedge program with your Vic-20 or C-64, you are missing out on a great convenience. The wedge is supplied with all new 1541 drives, and registered owners of C-64s and older drives should have received it on a free *Disk Bonus Pack* sent to them by Commodore. If you qualify but have not received a *Disk Bonus Pack*, write to Commodore at 1200 Wilson Dr., West Chester, PA 19380. Make sure you state the machine serial numbers of your C-64 and drive.

Loading the wedge as it appears on the demo disk accompanying new 1541s is as simple as typing LOAD "VIC-20 WEDGE",8, or LOAD "C-64 WEDGE",8, then RUN. For the wedge on the bonus pack, type LOAD" DOS WEDGE",8,1. When the machine comes back with a READY, type SYS 52224, and the wedge header should come up on the screen. Don't forget the leading space in the file name, or you will get a true FILE NOT FOUND error.

Once the wedge is loaded, disk I/O commands are much easier to invoke (a full list of wedge commands appears as Figure 1). No longer must you memorize cryptic command codes to load, save, scratch, or rename files, or to format disks. Using the wedge you may call up a disk directory without clearing the current program from memory. You can query the disk error channel with a single typestroke. You can even load and run files in a single step.

So remember, the trick to mastering the Commodore course is to use the right clubs. You wouldn't want to use a putter off the tee, right? C-64 Wedge is the one to use to get your files out of traps and onto the greens of Commodore computing.

C-64 Logo

After a rather lengthy wait, the Logo programming language has finally appeared for the C-64, and it is a strong implementation. Written for Commodore by the Terrapin group at MIT, it is full-fledged in every respect, including sprite graphics and music commands. As a language for the manipulation of graphics and sound, as well as a language for the beginning programmer, C-64 Logo is without peer.

Just what is Logo, you ask? Logo is a structured programming language, miles ahead of Basic in its simplicity and elegance. It is an especially attractive language for the learner. It is much more logical and English-like to use than virtually any other language available for microcomputers (dyed-in-the-wool Pascal chauvinists may disagree). Like Pascal, it is procedure-oriented—that is to say that all subroutines are named and may be invoked simply by defining them as procedures, then "calling" them by name.

Logo programs have no line numbers: they are simply nested procedures. Hence Logo qualifies as a "structured" language. Logo programs are not hodgepodge routines grafted onto incremental line numbers fraught with GOTOs and GOSUBs. They do not require the kind of detective work a Basic programmer takes for granted, hunting first here, then there, and eventually everywhere to follow the thread of a program. As a direct result, Logo programs are much easier to analyze than are programs in Basic or its big brother Fortran.

To create a Logo procedure, you use the Logo editor. This allows you to move through a procedure or subprocedure and make all the additions,



Animated dinosaurs feed in C-64 Logo, in only a few lines of code.

deletions, and changes you want. If you make changes and then decide to unmake them, that is possible too, using the command CTRL-G.

Debugging programs in C-64 Logo is even easier than in other dialects of the language. Besides requiring you to debug only specific procedures which are flaky, as opposed to whole reams of code, C-64 Logo includes a restartable interrupt procedure, which is the equivalent of adding a break key to the C-64. In addition there is a trace function, which allows you to watch the execution of a procedure line by line.

You may have heard about turtle graphics, which is a powerful part of Logo that children especially seem to like. Well C-64 has a full implementation of turtle graphics, in all its glory. Even beginning readers can create sophisticated graphics displays using turtle graphics. They afford instant programming gratification and have fired the ambitions of even six-year-old programmers.

The Logo disk itself is accompanied by a utilities disk, chock-full of demonstrations and useful procedures to help get you started. These include

COMMAND	FUNCTION
↑[FILENAME]	LOAD, THEN RUN, [FILENAME]
←[FILENAME]	SAVE [FILENAME]
/[FILENAME]	LOAD [FILENAME]
%[FILENAME]	LOAD [FILENAME] AT ADDRESS
@	QUERY DISK ERROR CHANNEL
@$	LIST DIRECTORY
@S:[FILENAME]	SCRATCH [FILENAME]
@I	INITIALIZE DRIVE
@UI	RESET DOS
@N:[DISKNAME],[ID]	FORMAT DISK [DISKNAME],[ID]
@C:[NEWFILE]=[OLDFILE]	RENAME [OLDFILE] TO NAME [NEWFILE]
@Q	QUIT DOS WEDGE

Figure 1.

```
5 POKE 53281,1:POKE 53280,1
10 PRINT"■":FOR X=1 TO 23
20 PRINT"     ■■■
```



Talking Games With No Speech Hardware

The season's biggest hits are the new Tymac Talkies—computer games for your Commodore 64,™ VIC 20,® Atari® 400, or Atari® 800 that talk without speech hardware. You get the excitement of speech without the cost of a synthesizer!

Tymac Talkies, designed by Game Gems, feature fast arcade action combined with dazzling, high-resolution graphics and software-generated speech. They'll put you in the experience of play with an impact you never before thought possible.

You'll fire power bolts at ruthless attackers with GANDALF; fight strange creatures while you search for treasures of the ancient gods with PEGASUS AND THE TRIALS OF PERSEUS; defend family honor as you engage in mortal combat with the SAMURAI; battle deadly bacteria in your body with BIO DEFENSE; try to survive nuclear destruction with FIRST STRIKE! There are nine titles in all, including a typing tutor and a utility graphics program.

Your admission charge to all this? Far lower than the cost of playing other talking computer games. Because we're the only ones that make your computer talk completely by itself.


Tymac's Game Gems Series. The premier name in talking computer games.

TYMAC

TYMAC INCORPORATED
127 Main Street, Franklin, NJ 07416 • 201-827-4050

Commodore 64 and VIC 20 are trademarks of Commodore Electronics Limited; Atari is a trademark of Atari, Inc.

CIRCLE 227 ON READER SERVICE CARD



APPLE MECHANIC

HI-RES SHAPE EDITOR / TYPE FONT DISK
by BERT KERSEY

$29.50: Includes Peeks/Pokes Chart & Tip Book #5.

SHAPE EDITOR: Keyboard-draw hi-res shapes for animation in your Applesoft programs. Access & create **proportionally-spaced hi-res Typefaces** with each character re-definable as you want. Six fonts are included on the disk. Excellent LISTable Applesoft demos show you how to animate graphics and create professional-looking Charts and Graphs.

BYTE-ZAP: Rewrite any byte on a disk for repair or alteration. Load entire sectors on the screen for inspection. **Hex/Dec/Ascii displays** and input. Educational experiments included for making trick file names, restoring deleted files, changing DOS, etc.

MORE: Useful music, text and hi-res tricks for your programs. Clear educational documentation.


APPLE MECHANIC TYPEFACES

by BERT KERSEY

$20.00: Includes Peeks & Pokes Chart.

26 NEW FONTS for use with Apple Mechanic programs. Many different sizes and typestyles, both ordinary and *Artistic*. Every character—from A to Z to "★" to "□"—of every typeface—from "Ace" to "Zooloo"—is re-definable to suit your needs. All typefaces are **proportionally spaced** for a more professional appearance. People *do* notice the difference!

BEAGLE MENU: Display only the file names you want from your disks (for example, only *Applesoft* or only *Locked* files) for fast one-key cursor selection.

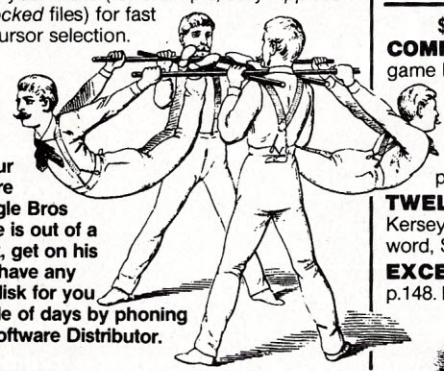

GOTO your Apple Software Store for Beagle Bros products. If he is out of a particular disk, get on his case. He can have any Beagle Bros disk for you within a couple of days by phoning ANY Apple Software Distributor.

RUSH the following disks by First Class Mail—

☐ Alpha Plot	$39.50	☐ Frame-Up	$29.50
☐ Apple Mechanic	29.50	☐ GPLE	49.95
☐ A.M.Typefaces	20.00	☐ ProntoDOS	29.50
☐ Beagle Bag	29.50	☐ Silicon Salad	24.95
☐ Beagle BASIC	34.95	☐ Tip Disk #1	20.00
☐ DiskQuik	29.50	☐ Utility City	29.50
☐ DOS Boss	24.00	☐	
☐ Double-Take	34.95	☐ ADD ME to mailing list.	
☐ Flex Type	29.50	☐ ALREADY ON mail list.	

AT YOUR APPLE DEALER NOW!
Or order directly from Beagle Bros—

VISA · master charge

Visa/MasterCard or COD, call **TOLL-FREE**
Orders only / ALL 50 STATES / 24 Hours a Day
1-800-522-1500 ext 827

OR mail U.S.Check, Money-Order or Visa/MC#
to **BEAGLE BROS**, 8th Floor
4315 SIERRA VISTA, SAN DIEGO, CA 92103

Add $1.50 First Class Shipping, Any-Size Order.
Overseas add $4.00. COD add $3.00. California add 6%.
ALL ORDERS SHIPPED IMMEDIATELY.

CLIP COUPON OR USE SEPARATE SHEET.

DOS BOSS

DISK COMMAND EDITOR
by BERT KERSEY and JACK CASSIDY

$24.00: Includes Peeks/Pokes Chart & Tip Book #2.

RENAME DOS COMMANDS & Error Messages—"Catalog" can be "Cat"; "Syntax Error" can be "Oops" or almost *anything* you want it to be.

PROTECT YOUR PROGRAMS. An unauthorized Save-attempt can produce a "Not Copyable" message, or *any* message you want. Also easy List-Prevention and other useful Apple tips and tricks. Plus one-key program-execution from catalog.

CUSTOMIZE DOS. Change the catalog Disk Volume heading to your message or title. Omit or alter catalog file codes. Fascinating documentation, tips and educational Apple experiments.

ANYONE USING YOUR DISKS (booted or not) will be using DOS the way YOU designed it.



```
10 LIST: LIST: LIST: FOR ZZ=PEEK(175)+PEEK
   (176)*256+36 TO 3072: POKE ZZ,216: NEXT
20 FOR XXX=1 TO 2: POKE-16299,0: POKE
   -16300,0: XXX=1: NEXT: REM Experiment
   with different length variable names.
```

BEAGLE BAG


12 APPLE GAMES ON ONE DISK
by BERT KERSEY

$29.50: Includes Peeks & Pokes Chart

COMPARE BEAGLE BAG with any single-game Locked-Up disk on the market today. All 12 games are a blast, the price is a bargain, the instructions are crystal clear, *and* the disk is COPYABLE. You can even *change* the programs or list them to learn programming tricks by seeing how they work.

TWELVE GAMES from the Applesoft Ace, Bert Kersey— TextTrain, Wowzo, Magic Pack, Buzzword, Slippery Digits, and many many more...

EXCELLENT REVIEWS—See Jan-83 *Softalk*, p.148. Beagle Menu too: see Typefaces description.

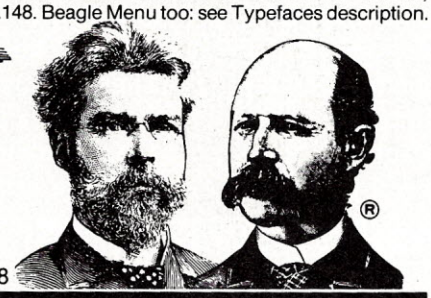

#8

Beagle Bros
Micro Software Inc.

4315 SIERRA VISTA / SAN DIEGO, CA 92103
619-296-6400

ALL BEAGLE DISKS ARE UNLOCKED, COPYABLE AND COMPATIBLE WITH APPLE II, II+ AND IIe.*
(Don't Settle for Less!)

*DISKQUIK requires Apple IIe.
"APPLE" is a Registered Trade Mark of You-Know-Who.

NEW! SILICON SALAD

INCLUDING TIP DISK #2
by BERT KERSEY and MARK SIMONSEN

$24.95: Includes Peeks & Pokes Chart

MANY MINI-UTILITIES: Disk Scanner finds bad disk sectors, **Key-Clicker** adds subtle sound as you type, **DOS-Killer** adds two tracks of space to your disks, **2-Track Cat** allows up to 210 file names per disk, **Program Splitter** makes room for hi-res pix with large Applesoft programs, **Text Imprinter** transfers text to the hi-res screen, **Onerr Tell Me** prints the appropriate error message but continues program execution, **Text Screen Formatter** converts text layouts into Print statements... plus much more Apple wizardry from the boys at Beagle Bros.

MORE TIPS ON DISK: Including fantastic programming tricks from Beagle Bros Tip Books 5, 6 and 7, plus our Tips & Tricks Chart #1.

TWO-LINERS TOO: From our customers around the world—and elsewhere. Little mind-blowers that will teach your old Apple some new tricks!


TIP DISK #1

100 TIP BOOK TIPS ON DISK
by BERT KERSEY

$20.00: Includes Peeks & Pokes Chart.

100 LISTABLE PROGRAMS from Beagle Bros Tip Books 1-4. Make your Apple do things it's never done! All 100 programs are LISTable and changeable for Apple experimentation.

COMMAND CHART INCLUDED: Free with each Tip Disk; an 11 x 17 poster of all Applesoft, Integer Basic & DOS Commands with Descriptions!

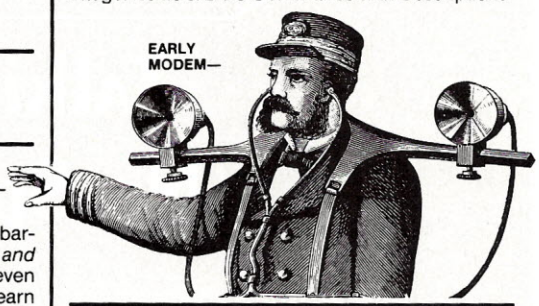

FLEX TYPE

(FORMERLY "FLEX TEXT")
VARIABLE-WIDTH HI-RES TEXT UTILITY
by MARK SIMONSEN

$29.50: Includes Peeks & Pokes Chart

PRINT VARIABLE-WIDTH TEXT on both hi-res screens with normal Applesoft commands (including HTAB 1-70). Normal, expanded & compressed text with no extra hardware. (70-column text requires a monochrome monitor, not a tv).

ADD GRAPHICS TO TEXT or add Text to hi-res graphics. Run your existing Applesoft programs under Flex Type control. Fast, easy to use, and Compatible with GPLE and Double-Take.

DOS TOOL KIT® font compatibility, or use the supplied Flex Type typefaces. Select up to 9 fonts with control-key commands. A text character editor lets you redesign any Apple text character.

FRAME-UP

FAST APPLE DISPLAY UTILITY
by TOM WEISHAAR

$29.50: Includes Peeks & Pokes Chart

PROFESSIONAL PRESENTATIONS: Turn your existing Hi-Res, Lo-Res and Text frames into attractive Apple "slide shows". *FAST* hi-res loads in 2½-seconds! Paddle or Keyboard-advance frames.

UNATTENDED SHOWS are optional, with each picture arranged and pre-programmed to display on the screen from 1 to 99 seconds. Custom **Text Screen Editor** lets you create black-and-white text "slides" and add type "live" from the keyboard during shows. Mail copies of presentations on disk to your friends and associates (or home to Mom!).

CIRCLE 238 ON READER SERVICE CARD

NEW!

GPLE

GLOBAL PROGRAM LINE EDITOR
by NEIL KONZEN

$49.95: Includes Peeks/Pokes Chart & Tip Book #7.

NOW A BEAGLE BROS DISK! GPLE lets you edit Applesoft program lines *FAST* without awkward cursor-tracing and "escape editing".

INSERT & DELETE: GPLE works like a word processor for Applesoft program lines. You make changes instantly by jumping the cursor to the change point and inserting or deleting text. No need to trace to the end of a line before hitting Return.


GLOBAL SEARCH & REPLACE: Find any word or variable in your programs, *FAST*. For example, find all lines containing a GOSUB, or edit or delete all lines with REM statements, or all occurences of any variable. **Replace any variable**, word or character with any other. For example, change all X's to ABC's, or all "Horse" strings to "Cow".

80-COLUMN COMPATIBILITY: All edit & global features support **APPLE IIe** 80-column cards and most 80-column cards on *any* Apple IIe, II+ or II.

DEFINABLE ESC FUNCTIONS: Define ESC plus any key to perform any task. For example, **ESC-1** can catalog drive 1, **ESC-L** can do a "HOME: LIST", **ESC-N** could type an entire subroutine... *Anything* you want, *whenever* you want.

GPLE DOS MOVER: Move DOS and GPLE to Language Card (or IIe upper 16K) for an EXTRA **10,000 BYTES** (10K) of programmable memory.

Plus APPLE TIP BOOK #7: Learn more about your Apple! Includes all new GPLE tips and tricks.



UTILITY CITY

21 PROGRAMMING UTILITIES
by BERT KERSEY

$29.50: Includes Peeks/Pokes Chart & Tip Book #3

LIST FORMATTER prints each program statement on a new line. Loops indented with printer Page Breaks. A great Applesoft program de-bugger.

MULTI-COLUMN CATALOGS, with or without sector and file codes. Organize your disk library.

INVISIBLE and trick catalog file names. Invisible functioning commands in Applesoft programs too.

MUCH MORE: 21 utilities, including auto-post Run-number & Date in programs, alphabetize/store info on disk, convert dec to hex or Int to FP, protect and append programs, dump text to printer...

LEARN PROGRAMMING: List-able programs and informative documentation. Includes Tip Book #3. Hours of good reading & Applesoft experiments.

ALPHA PLOT

HI-RES GRAPHICS/TEXT UTILITY
by BERT KERSEY and JACK CASSIDY


$39.50: Includes Peeks/Pokes Chart & Tip Book #4.

DRAW IN HI-RES on both Apple "pages" using easy keyboard commands OR paddles/joystick. Pre-view lines before plotting. Solid or mixed colors & Reverse (background-opposite) drawing. FAST one-keystroke circles, boxes & ellipses, filled or outlined. Add text for graphs & charts. All pix Save-able to disk, to be called from your Applesoft programs.

COMPRESS HI-RES DATA to 1/3 disk space (average) allowing more hi-res pictures per disk.

MANIPULATE IMAGES: Superimpose any two images, or RE-LOCATE any rectangular section of any drawing anywhere on either hi-res page.

HI-RES TYPE: Add text to your pictures with adjustable character-size and large-character color. Type *anywhere* with no Htab/Vtab limits. Type sideways too, for graphs. Includes Tip Book #4.



Beagle Bros Micro Software Inc.

4315 SIERRA VISTA / SAN DIEGO, CA 92103
619-296-6400

ALL BEAGLE DISKS ARE UNLOCKED, COPYABLE AND COMPATIBLE WITH APPLE II, II+ AND IIe.*

(Don't Settle for Less!)

* DISKQUIK requires Apple IIe.
"APPLE" is a Registered Trade Mark of You-Know-Who.

BEAGLE BASIC

APPLESOFT ENHANCER
by MARK SIMONSEN


$34.95: Includes Peeks/Pokes Chart & Tip Book #6. Requires Apple IIe (OR II/II+ with RAM Card).

RENAME ANY APPLESOFT COMMAND or Error Message to anything you want. For program clarification, encryption/protection or even foreign translation. Plus add optional powerful NEW COMMANDS:

ELSE follows If-Then statements, like this:
IF X=2 THEN PRINT "YES": *ELSE* PRINT "NO"

HSCRN reads color of any hi-res dot for collision testing. **SWAP X,Y** exchanges 2 variables' values. New **TONE** command writes music with no messy pokes & calls. **SCRL** scrolls text in *either* direction. **TXT2** lets Text Page 2 act exactly like Page 1.

PLUS: GOTO & GOSUB may precede variables, as in "GOSUB FIX" or "GOTO 4+X". Escape-mode indicated by special ESC CURSOR. Replace awkward Graphics screen-switch pokes with 1-word commands. Change ctrl-G Beep to any tone. **INVERSE REMS** too! All GPLE compatible.



```
1 FOR S=768 TO 773: READ A:
  POKE S,A: NEXT: POKE 232,0:
  POKE 233,3: DATA 1,0,4,0,5,0
2 HGR2: FOR R=0 TO 192: ROT=R:
  SCALE=96: XDRAW 1 AT 140,95:
  SCALE=30: XDRAW 1 AT 140,95:
  S=PEEK(49200): NEXT: RUN
```

PRONTO-DOS

HIGH-SPEED DOS / DOS-MOVE UTILITY
by TOM WEISHAAR

$29.50: Includes Peeks & Pokes Chart

TRIPLES THE SPEED of disk access and frees 10,000 bytes of extra memory by moving DOS.

Function	Normal	Pronto
BLOAD HI-RES IMAGE	10 sec.	3 sec.
LOAD 60-SECTOR PROGRAM	16 sec.	4 sec.
SAVE 60-SECTOR PROGRAM	24 sec.	9 sec.
BLOAD LANGUAGE CARD	13 sec.	4 sec.
(Text Files: No Change)		

Boot the Pronto disk or your updated disks, created with the normal INIT command. Compatible with all DOS Commands, GPLE, Double-Take, DOS Boss, Diskquik and almost all unprotected programs.

MOVE DOS to your Language Card, RAM Card, or standard Apple IIe upper 16K, freeing up **10,000 EXTRA BYTES** of memory for your programs.

15 EXTRA SECTORS per disk. Catalog Free-Space displayed every time you catalog a disk.

TYPE-COMMAND ("TYPE filename") prints contents of any Text File on screen or printer.

NEW!

DISKQUIK

DISK DRIVE EMULATOR
by HARRY BRUCE and GENE HITE


$29.50: Includes Peeks & Pokes Chart
Requires Apple IIe with Extended 80-column Card.

ACTS LIKE A DISK DRIVE in Slot 3, but much faster, quieter, more reliable and $350 cheaper. Enjoy the benefits of a 2nd (or 3rd or 4th...) drive at less than 1/10th the price. Catalogs normally with "CATALOG, S3" command. Load & Save any kind of files into RAM with normal DOS commands.

SILENT AND FAST: Since no moving parts are involved, Diskquik operates silently and at super-high speeds. See it to believe it. Your Apple IIe's Extended 80-column Card (required) can hold about half the amount of data as a 5¼" floppy disk!

MANY USES: For example, load often-used files, like FID and other utilities, into RAM when you boot up, so they are always available when you need them. Copy files from RAM onto disk and vice versa, just as if a disk drive were connected to slot #3.

FRIENDLY & COMPATIBLE with 80-column display, GPLE, ProntoDOS, and all normal Applesoft and DOS commands and procedures. Will not interfere with Apple IIe "Super Hi-Res" graphics.

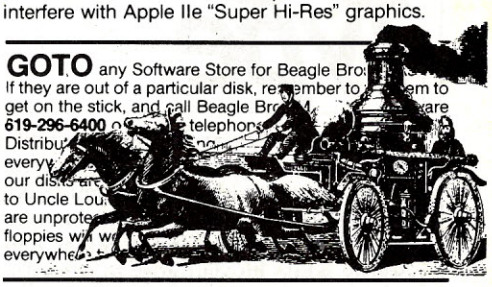

GOTO any Software Store for Beagle Bros. If they are out of a particular disk, remember to em to get on the stick, and call Beagle Bros **619-296-6400** telephone are Distribu no every our disks are to Uncle Lou are unprote floppies w everywhe

DOUBLE-TAKE

2-WAY-SCROLL/MULTIPLE UTILITY
by MARK SIMONSEN

$34.95: Includes Peeks/Pokes AND Tips/Tricks Charts.

2-WAY SCROLLING: Listings & Catalogs scroll Up AND Down, making file names and program lines much easier to access. Change the Catalog or List scroll-direction at will, with Apple's Arrow keys.

BETTER LIST FORMAT: Each program statement lists on a new line for *FAST* program tracing & de-bugging. Printer-compatible; any column-width.

VARIABLE-DISPLAY: Displays all of a program's strings and variables with current values.

CROSS-REFERENCE: Sorts and displays line numbers where each variable & string appears.

BETTER RENUMBER/APPEND: Merges programs (doesn't just connect end-to-end).

AUTO-LINE-NUMBER, instant Hex/Dec Converter, Program Stats, Eliminate/Redefine Cursor, Free Space-On-Disk... All GPLE/Pronto compatible.

CLIP COUPON OR USE SEPARATE SHEET.

☐ Alpha Plot	$39.50	☐ Frame-Up	$29.50
☐ Apple Mechanic	29.50	☐ GPLE	49.95
☐ A.M.Typefaces	20.00	☐ ProntoDOS	29.50
☐ Beagle Bag	29.50	☐ Silicon Salad	24.95
☐ Beagle BASIC	34.95	☐ Tip Disk #1	20.00
☐ DiskQuik	29.50	☐ Utility City	29.50
☐ DOS Boss	24.00	☐	
☐ Double-Take	34.95	☐ ADD ME to mailing list.	
☐ Flex Type	29.50	☐ ALREADY ON mail list.	

AT YOUR APPLE DEALER NOW!
Or order directly from Beagle Bros—



Visa/MasterCard or COD, **call TOLL-FREE**
Orders only / ALL 50 STATES / 24 Hours a Day

1-800-522-1500 ext 827

OR mail U.S.Check, Money-Order or Visa/MC#
to **BEAGLE BROS**, 7th Floor
4315 SIERRA VISTA, SAN DIEGO, CA 92103

Add $1.50 First Class Shipping, Any-Size Order.
Overseas add $4.00. COD add $3.00. California add 6%.
ALL ORDERS SHIPPED IMMEDIATELY.

CIRCLE 116 ON READER SERVICE CARD

Soccer, Anyone?



Logo Type

Donna Bearden


It seems as if everyone has been bitten by the soccer bug, even the Logo turtle!

It all started with a fourth grade boy from Venezuela who lives and breathes soccer. He is in the United States temporarily while his dad goes to school at the University of Dallas. Carlos belongs to the computer club at Forrest Park elementary school in Irving, TX.

Looking for a way to combine his love for soccer with his involvement with a computer, we began looking at soccer balls instead of just kicking them. What we discovered was an intriguing pattern of pentagons and hexagons. Would the students, who had already learned to teach the turtle to draw hexagons and pentagons, be able to put them together in the soccer ball pattern?

The Challenge

The computer club was divided into teams. Each team was challenged to teach the turtle to draw the pattern of a pentagon surrounded by five hexagons—not as easy a task as it first seems.

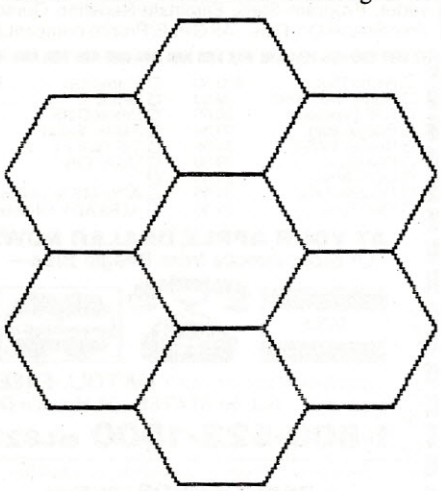

One team defined a procedure for a pentagon and another for a hexagon and then started trying to figure out how to put them together. The other team figured they could define a hexagon, then make a ring of hexagons, and end up with a pentagon in the center. After all, that is the way it looks on the ball.


Their looks of triumph quickly changed to puzzled ones when they realized the ring of hexagons had, of all things, a hexagon in the center.

How could that possibly be when they could look at the soccer ball and see a ring of hexagons with a pentagon in the center? Something very strange was going on. The difference, of course, was that the soccer ball was a three-dimensional object that they were attempting to draw in two dimensions.

The first week ended in a tie—0 to 0, with everyone puzzled but not discouraged. They knew there must be a way to do it and were eager to try again.

The second week we brought an old soccer ball with us. It had long since seen its last game, but we gave it a chance to score one more goal. By cutting it apart, the kids could see how the pattern had to be split to enable it to lie flat. (If you don't have an old soccer ball, try using the peel of an orange or grapefruit.)

Once they saw the splits that allowed the curve of the ball to flatten out on the table, they returned to the computers more determined than ever. Most of them had to leave at the end of the hour, but Carrie Simms, a fourth grader, stayed long after everyone else had left and figured out one way to draw the pattern. Here is her solution:

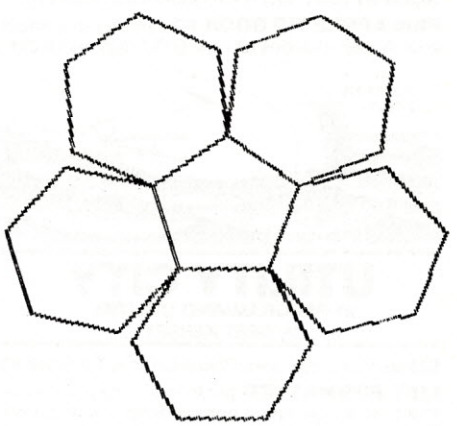

```
TO PENT
REPEAT 5 [FD 20 RT 72]
END

TO HEX
REPEAT 6[FD 20 RT 60]
END

TO SOCCER
PENT
LT 120
HEX
REPEAT 4[LT 132 FD 20 RT 60
HEX]
END
```


The Teachers Try

At the Microcomputers in Education Conference at Arizona State University in March, we presented the soccer ball

Donna Bearden, Young Peoples' Logo Association, 1208 Hillsdale Dr., Richardson, TX 75081.

SCRG — For Apple][, Apple][+, & Apple //e

SWITCH-A-SLOT

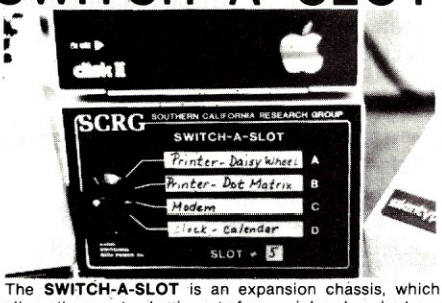

The **SWITCH-A-SLOT** is an expansion chassis, which allows the user to plug in up to four peripheral cards at one time. One of these cards is selected for use, and only that card draws power.


This product is especially useful where the software requires the printer to be in a particular slot, and the user wishes to choose between two or more printers.

- Allows up to four peripheral cards to be plugged into one peripheral slot.
- User selects desired card by front panel rotary switch.
- Only selected card draws power.
- Plugs into any peripheral slot.
- Saves wear and tear on delicate connectors.
- 18" cable connects Switch-a-slot to computer.
- Accommodates cards up to 10¼" long.
- All connectors gold plated.

$179.50

SWITCH-A-SLOT and EXTEND-A-SLOT work well with all slow to medium speed cards, such as Modems, Printers, Clock, 80 Column, Music, etc. They are not recommended for high speed data transfer devices such as disk drive controllers, alternate processor, and memory cards.

EXTEND-A-SLOT



The **EXTEND-A-SLOT** brings a slot outside your APPLE™, allowing an easy change of cards. The 18" flex cable is long enough to allow placement of the card in a convenient location. The high quality connectors are gold plated for reliability.

The perfect accessory for:

Owners of large numbers of I/O expansion cards—keep your frequently used cards installed. Use the EXTEND-A-SLOT for the others.

Technicians—easy access to test points on accessory cards under actual operating conditions.

Experimenters—make easy changes to cards while card is installed.

EASY TO USE—just plug it in as you would any expansion card, then plug your card in. When you want to change cards, do it easily outside the computer, without the wear and tear on the computer expansion slot.

$34.95

NEW PRODUCTS

QUIK LOADER

With this peripheral card, you can forget about problems caused by lost or damaged disks. Any machine language or BASIC program can be loaded instantly from solid-state memory. We will even back-up your copy of APPLE DOS and INTEGER at no extra cost. Now, when you turn on your computer, DOS and INTEGER are immediatly available. With the large memory capacity of the QUIK LOADER, users can have a large library of frequently used programs without use of a disk drive. Complete documentation shows the user how to program their own PROMs (Programmable Read Only Memory), or we will perform this service.

FEATURES:

- Up to 128K of memory
- Supports 2716, 2732, 2764, & 27128. These types may be freely intermixed
- QUIK LOADER operating system allows instant loading of programs, PROM catalog routines, etc.
- Multiple cards supported.
- Slot independent

Requires APPLE //e, or][+ and 16K card with minor modifications.

$179.50

D MAnual controller

This hardware product gives the user complete control over all I/O functions in the range $C0Ø0 through $C0FF.

Examples:


- Switch between TEXT & GRAPHICS
- Switch between Page 1 & Page 2
- Switch between HI-RES & LO-RES
- Turn disk drive ON or OFF
- Select between drives 1 and 2
- Step head in either direction
- Protect or enable language card
- Turn annunciators ON or OFF

DMAnual controller allows all this while programs are running. Commands can be issued (via push-buttons) in the middle of a program, and the desired result occurs immediatly. The process used (known as CYCLE STEALING) allows immediate execution of these commands without interfering with the normal operation of the program. The card is slot independent, and is connected to a control panel by a four foot cable. DMAnual controller is fully described in the book "UNDERSTANDING THE APPLE][" by Jim Sather (copyright 1983 by Quality Software).

$89.50


Paddle-Adapple

GAME I/O ADAPTOR and EXTENDER

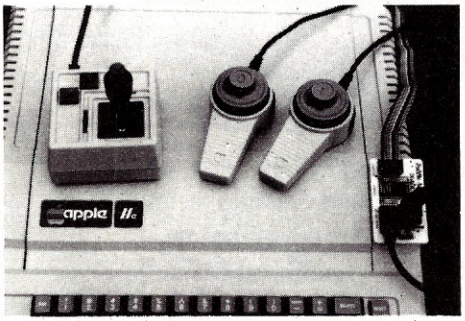

- Works with all Apple compatible joysticks, paddles and other I/O devices.
- Select one of two devices or . . .
- Use 4 paddles simultaneously.
- Unique "Jumpers" socket allows you to configure to meet your needs.
- BPI™ users can have BPI™ device and paddles plugged in simultaneously. (**Paddle-Adapple** and **Paddle-Adapple Combo** only).
- Gives you four push-button inputs.
- Supports shift key modification.
- Exchange X & Y joystick axis.
- Small and compact — adheres to computer with supplied foam tape.
- All Strobes, annunciators and power available on all 16 pin connectors.
- Supplied with 18" cable.

$29.95

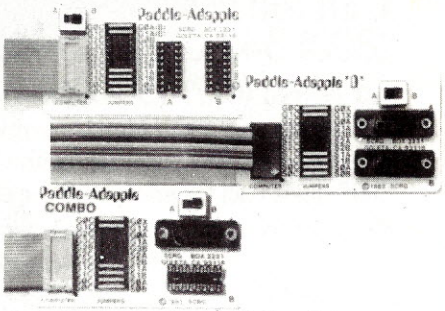

The **Paddle-Adapple** has two 16 pin sockets.

The Paddle-Adapple "D" works with the subminiature D connectors.

The **Paddle-Adapple** Combo has one 16 pin socket and one subminiature D connector.

THE MAGIC KEYBOARD

FOR APPLE][and][+ Only

- At the flip of a switch, select between standard "QWERTY" keyboard and your choice of **DVORAK, A.S.K., MONTGOMERY, LEFT & RIGHT ONE-HANDED,** and **ALPHABETICAL ORDER**
- Converts APPLE™ keyboard to one of eight 10-key or hexadecimal keypads
- Hardware conversion—compatible with **all** software
- Instantly switches between standard keyboard and keypad
- Installs easily, no soldering

$49.95

SIX MONTH WARRANTY TEN DAY RETURN PRIVILEGE

TOLL-FREE ORDER LINES

in CA (800) 821-0774

(800) 635-8310

all other states (including AK, HI, VI, & PR)

information & technical questions: (805) 685-1931

Available at your local dealer or direct from:

SOUTHERN CALIFORNIA RESEARCH GROUP

Post Office Box 2231 · C
Goleta, CA 93118
(805) 685-1931

VISA, MASTERCARD accepted

Add $2.50 for shipping, $5.00 outside U.S.A. & Canada. CA add tax.

Apple is a trademark of Apple Computers

CIRCLE 209 ON READER SERVICE CARD

New! Disks that warn of impending failures.

Also conventional disks — Both at a great price.

Get great savings, next day shipment and our no hassle money-back guarantee on Omni's two great lines.

Intelligent Disks — The only disks smart enough to warn of common failures often in time to protect your data. Certified error-free at the highest levels in the industry, you can't buy a better disk or better data protection.

Conventional Disks — The best value in the business. Certified error-free and built to exceed all industry standards.

ARCHIVE

152 Boston Turnpike
Shrewsbury, MA 01545



Now, two complete lines of 8″ and 5¼″ disks, including 96 TPI and special formats.

Call toll free (800) 343-0314
In Mass: (617) 756-2960

Get great value with Omni conventional disks.
Or important data protection with Omni Intelligent Disks. Prices below are for 5¼″ disks. Call for prices on 8″, special formats and volume discounts.

Be sure to indicate system/drive name and model # below.

5¼″ disks	Conventional Disks Cost per 10 pack	Quantity	Intelligent Disks Cost per 10 pack	Quantity	Total Cost
Single side/single density	$17.90	_____	—	_____	$_____
Single side/double density	$19.90	_____	$40.00	_____	$_____
Double side/double density	$32.50	_____	$55.00	_____	$_____
Flip/Floppy reversible	$35.00	_____	—	_____	$_____
Single side/96 TPI	$35.00	_____	$57.00	_____	$_____
Double side/96 TPI	$40.00	_____	$62.50	_____	$_____
Plastic library case (in lieu of soft storage box)	$ 1.99	_____	—	_____	$_____
Shipping and handling ($2.00 first 10 pack, 40¢ additional 10 packs. Continental U.S. only.)					$_____
5% sales tax (Mass only)					$_____
				Total	$_____

☐ Check ☐ COD ☐ Master Card ☐ VISA

Card # _____ Exp._____ Name _____

System/drive model # _____ Address _____

Tel. _____

CIRCLE 245 ON READER SERVICE CARD


Logo Type, continued...

puzzle to a group of teachers, most of whom were first time Logo users. Most of the adults were as puzzled but as determined as the students had been. John Onacki, an Arizona math teacher, came up with this solution almost by accident:

```
TO DESIGN :R :D
REPEAT 5[POLY :R :D FD :D LT 72]
END
TO POLY :R :D
REPEAT :R[FD :D RT 360/ :R]
END
```

By giving the command DESIGN with an input of 6 for :R and any number for :D, you create the soccer ball pattern.

Once the kids in the computer club were able to draw the pattern on the screen, we decided to take the two-dimensional drawing and turn it back into a three-dimensional soccer ball. Because there are 12 pentagons on a soccer ball, we printed out 12 copies of the pattern. The "players" then cut out each pattern. Rather than cut out the long, narrow triangle between each hexagon, they cut only one side of the triangle and brought the sides of the two hexagons together, securing them with tape.

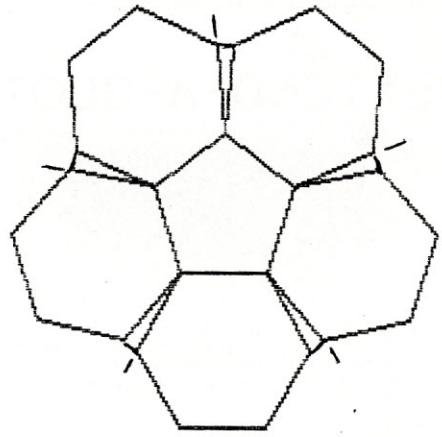

They could then experience the curve of the ball beginning to take place. By overlapping the 12 pieces of the ball, they taped together one fantastic paper soccer ball. They had completed the circle, going from three dimensions to two dimensions and back to three.

But that wasn't the end. It had started as a cultural experience and through some creative imagination, ended as quite another. Just before we taped the last piece of the ball in place, one of the kids said, "Hey, let's fill it with candy and turn it into a piñata!" And that is exactly what we did. END



Computer Outlet

We offer the largest selection of software and hardware for Apple, Atari, Commodore, IBM and Kaypro at 25 to 40% off retail.

1095 East Twain, LasVegas, NV 89109 ● Mon.-Fri. 8AM to 6PM, Sat. 9AM to 5PM

Apple Business

Artsci
Magic Window II ..... $ 95

Ashton-Tate
dBase II (req. Z-80) $419
Friday $189

Broderbund
Payroll $249
Accounts Receivable $249
The Bank Street Writer ..... $ 48

Continental Software
The Home Accountant ..... $ 48
F.C.M. ..... $ 62
G/L, A/R, A/P, Payroll ..... Ea. $159
Property Management $305

Datasoft
MicroPainter ..... $ 23
Lisp Interpreter ..... $ 79
The Basic Compiler ..... $ 65

Don't Ask Software
S.A.M. ..... $ 65

Einstein Corporation
Einstein Compiler ..... $ 85
Einstein Memory Trainer ..... $ 59

Howard Software
Creative Financing $129
Real Estate Analyzer II $119
Tax Preparer 1983 ..... $145

Hayes Microcomputer
Hayes Terminal Program ..... $ 65

IUS
Professional Easywriter $115
Original Easywriter ..... $ 65
Original Easymailer ..... $ 45
Pro-Easywriter/Mailer Combo $189
Original Easywriter/Mailer Combo ... $ 89

Link Systems
Datafax $119
Datalink ..... $ 62

Lotus
Executive Briefing System $125
Alpha Bytes Font ..... $ 17
Alpha Bytes Decorative Fonts ..... $ 17

Micro Lab
The Tax Manager ..... $ 95
Data Factory 5.0 ..... $189
Payroll Manager $189

Micro Pro (All req. Z-80 Card)
Wordstar $229
Infostar $229
Reportstar $205
4 Pak Word/Mail/Spell/Star $419

Microsoft
Applesoft Compiler $119
A.L.D.S. (Req. Z-80) ..... $ 79
Multiplan (Apple Dos or Z-80) $175

Sierra On-Line
Screenwriter II ..... $ 82
The Dictionary ..... $ 65
Screenwriter Professional $129
The General Manager II $149

PBL Corporation
Personal Investor ..... $ 95

Sensible Software
Sensible Speller ..... $ 82
Multi Disk Catalogue II ..... $ 17

Silicon Valley
Word Handler II ..... $ 45
List Handler ..... $ 39
"The Handlers" ..... $ 75

Software Publishing
PFS: File ..... $ 85
PFS: Report ..... $ 85
PFS: Graph ..... $ 85

Sorcim
Supercalc (Req. Z-80) $119
Spellguard (Req. Z-80) $125
Supercalc II $199

Southeastern Software
Data Capture 4.0 ..... $ 47
Data Capture 4.0/80 ..... $ 59

Visicorp
Visicalc 3.3 ..... $165
Visiplot $139
Visitrend/Plot $199
Visidex $165

Apple/Educational

Sticky Bear Numbers/Xerox ..... $ 30
Sticky Bear ABC/Xerox ..... $ 30
Sticky Bear Opposites/Xerox ..... $ 27
Sticky Bear Shapes/Xerox ..... $ 27
In Search of Most Amazing Thing Spinnaker ..... $ 27
Hey Diddle Diddle/Spinnaker ..... $ 20
Snooper Troops 1 & 2/Spinnaker .. Ea. $ 30
Delta Drawing/Spinnaker ..... $ 34
Story Machine/Spinnaker ..... $ 23
Face Maker/Spinnaker ..... $ 23
Rhymes & Riddles/Spinnaker ..... $ 20
Alphabet Zoo/Spinnaker ..... $ 20
Plato Whole Numbers ..... $ 39
Plato Decimals ..... $ 39
Plato Fractions ..... $ 39
PDI Preschool Builder ..... $ 24
Match Wits/CBS ..... $ 20
Mastering the S.A.T./CBS ..... $ 99
Early Games for Young Children/ Counterpoint ..... $ 20
Early Games Music/Counterpoint ... $ 20
Wizware Microzine/Scholastic ..... $ 27
Juggles Rainbow/Learning Co. ..... $ 20
Bumble Games/Learning Co. ..... $ 27
Bumble Plot/Learning Co. ..... $ 27
Gertrudes Secrets/Learning Co. ..... $ 30
Gertrudes Puzzles/Learning Co. ..... $ 30
Rocky's Boots/Learning Co. ..... $ 34
Compu-Read/Edu Ware ..... $ 23
Spelling Bee with Reading Primer ... $ 27
Algebra I/Eduware ..... $ 34
Fractions/Eduware ..... $ 34
Decimals/Eduware ..... $ 34
Decimals/Eduware ..... $ 34
Master Type/Lightning ..... $ 27
Type Attack/Sirius ..... $ 27
S.A.T. Word Attack/Hartcourt Base ..... $ 34
Word Attack/Davidson ..... $ 34
Math Blaster/Davidson ..... $ 34
Speed Reader II/Davidson ..... $ 48
Spellicopter/Designware ..... $ 27
Micro Multiplication/Hayden ..... $ 20

Apple Hit List

Normandy ..... $ 27
Germany ..... $ 34
The Cosmic Balance ..... $ 27
Witness ..... $ 34
Planetfall ..... $ 34
Starcross ..... $ 27
Zork I, II, III ..... Ea. $ 27
Enchanter ..... $ 34
Deadline ..... $ 34
Suspended ..... $ 34
AE ..... $ 20
Space Vikings ..... $ 34
Zero Gravity Pinball ..... $ 20
Sammy Lightfoot ..... $ 27
Apple Cider Spider ..... $ 24
David's Midnight Magic ..... $ 23
Sargon II ..... $ 23
Hi-Res Football ..... $ 27
Star Blazer ..... $ 22
Swashbuckler ..... $ 23
Critical Mass ..... $ 27
Knight of Diamonds ..... $ 23
Wizardry ..... $ 34
Legacy of Llylgamyn ..... $ 27
Zaxxon ..... $ 27
Lode Runner ..... $ 23
Serpentine ..... $ 23
Choplifter ..... $ 23
Frogger ..... $ 23
Temple of Apshai ..... $ 27
Castle Wolfenstein ..... $ 27
Wiz & Princess ..... $ 22
Ulysses & The Golden Fleece ..... $ 23
Tigers in the Snow ..... $ 27
Bandits ..... $ 23
Aztec ..... $ 27
Mask of the Sun ..... $ 27
Ultima II ..... $ 39
Dark Crystal ..... $ 27
Spare Change ..... $ 27

Monitors

Amdek Color I $299
Amdek Color II $449
Amdek Color III $399
Nec 1260 12" $109
Nec JB 1201M $169
USI Amber $149
Leading Edge Gorilla Green ..... $ 85
Leading Edge Gorilla Amber ..... $ 89

Apple IIe $1699

64K with 80 column card, one Apple drive, one Apple low glare monochrome (green phosphor) monitor, one monitor stand

Modems

Hayes Micromodem II $259
Hayes Micromodem II w/Terminal Pk . $299
Hayes Smartmodem 300 ..... $209
Hayes Smartmodem 1200 ..... $499
Novation Apple Cat II Modem $329

Printers

Nec 8023 ..... $ 475
Nec 3530 ..... $1599
Nec 3550 ..... $1899
Diablo 620R (25cps) ..... $ 989
Diablo 630R (40cps) $1729
Epson FX100 FT ..... $ 789
Okidata ML 82A ..... $ 399
Okidata ML 84P $1049
Okidata ML 92P ..... $ 469
ML 83A ..... $ 615
IDS Microprism 80 ..... $ 549
IDS Prism 132 ..... $1429
Citoh 8510 Prowriter ..... $ 365
Citoh F10 Starwriter $1349
Mannesmann Tally 160L ..... $ 629
Gemini 10X ..... $ 315
Qume Sprint II + ... $1429

★ Specials of the Month ★

Franklin Ace 1000 ..... $849.00
Elephant Disks s/s ..... $ 18.50
Verbatim Disks s/d ..... $ 24.00
Maxell Disks s/d ..... $ 30.00
Koala Touch Tablet (Apple, IBM) ..... $ 85.00
The Grappler + ... $129.00
Microbuffer II 32K Parallel specify internal or external $199.00
System Saver Fan ..... $ 65.00
Flip & File Diskette box w/lock (holds 50) ..... $ 24.00
Flip & File Diskette box (holds 50) ..... $ 21.00

Graphics & Utilities

Beagle Brothers
Apple Mechanic ..... $ 20
Tip Disk #1 ..... $ 15
Flex Text ..... $ 20
Frame Up ..... $ 20
Typefaces (required Apple Mechanic) . $ 15

Penguin Software
Complete Graphic System ..... $ 49
Special Effects ..... $ 27
Graphics Magician ..... $ 39
Additional Fonts & Char. Sets ..... $ 15
Complete Graphics System II ..... $ 79

To Order Call Toll Free 1-800-634-6766

Information 1-702-796-0296
Inquiries 1-702-369-5523


We accept VISA and MasterCard

ORDERING INFORMATION AND TERMS: *For Fast Delivery send cashier checks, money orders or direct bank wire transfers. Personal and company checks allow 3 weeks to clear. Charges for C.O.D. orders are $3.00 minimum or 1% for orders over $300. School purchase orders welcomed. Prices reflect a cash discount only and are subject to change without notice. Please enclose your phone number with any orders.* ***SHIPPING: — Software:*** *$3.00 minimum.* ***SHIPPING — Hardware:*** *(Please call)* ***SHIPPING — Foreign Orders:*** *APO & FPO orders: $10 minimum and 15% of all orders over $100. Nevada residents add 5 3/4% sales tax. All goods are new and include factory warranty. Due to our low prices, all sales are final. All returns must be accompanied by a return authorization number. Call 702-369-5523 to obtain one before returning goods for replacement.*

CIRCLE 133 ON READER SERVICE CARD

Diskette Users...

When you've heard from all the animals in the diskette zoo, but you need fast delivery and high quality diskettes...

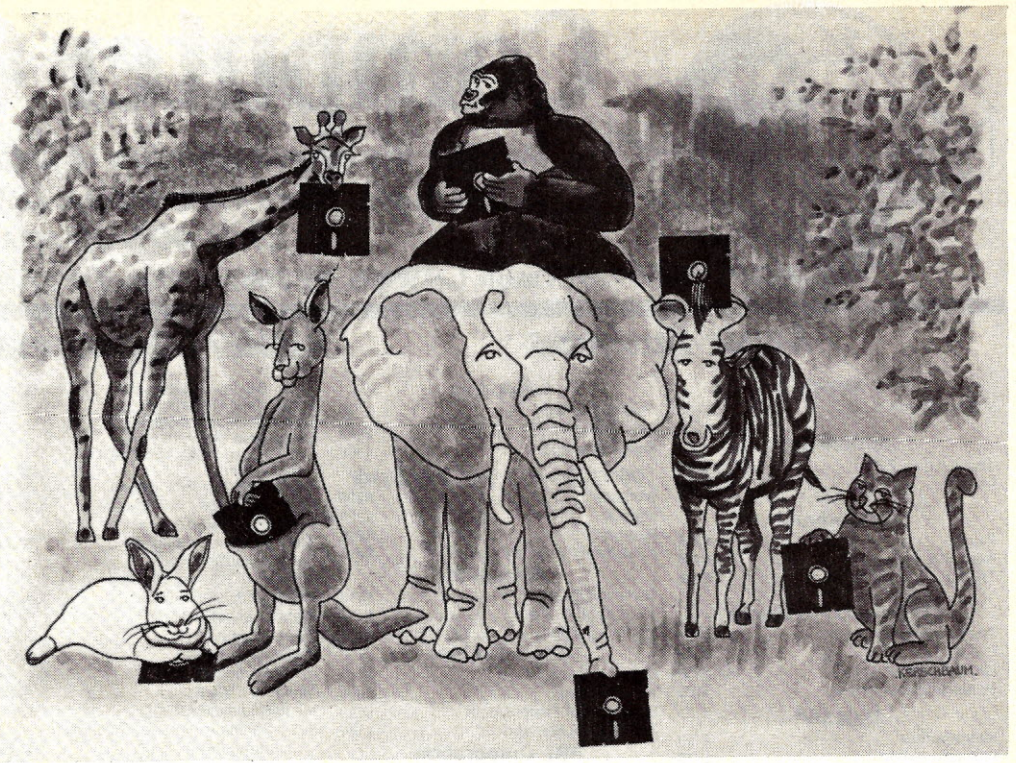

Call Communications Electronics

Diskette order desk

800-521-4414

In Canada 800-265-4828





Choose your brand
Choose your price

Product Description	Wabash Part #	CE quant. 100 price per disk ($)	Ultra Part #	CE quant. 100 price per disk ($)
8" SSSD IBM Compatible 128B/S, 26 Sector	F111	1.89	81726	1.99
8" SSSD Shugart Compatible, 32 Hard Sector	F31A	1.89	———	———
8" SSDD IBM Compatible (128 B/S, 26 Sectors)	F131	2.39	81701	2.49
8" DSDD Soft Sector (Unformated)	F14A	2.99	82701	3.19
8" DSDD Soft Sector (256 B/S, 26 Sectors)	F144	2.99	———	———
8" DSDD Soft Sector (512 B/S, 15 Sectors)	F145	2.99	———	———
8" DSDD Soft Sector (1024 B/S, 8 Sectors)	F147	2.99	82708	3.19
5¼" SSSD Soft Sector w/Hub Ring	M11A	1.49	50001	1.79
5¼" SSSD Same as above but bulk product	M11AB	1.29	00153	1.39
5¼" SSSD 10 Hard Sector w/Hub Ring	M41A	1.49	50010	1.79
5¼" SSSD 16 Hard Sector w/Hub Ring	M51A	1.49	50016	1.79
5¼" SSDD Soft Sector w/Hub Ring	M13A	1.79	51401	1.89
5¼" SSDD Same as above, but bulk product	M13AB	1.59	00096	1.59
5¼" SSDD Soft Sector Flippy (use both sides)	M18A	2.69	———	———
5¼" SSDD 10 Hard Sector w/Hub Ring	M43A	1.79	51410	1.89
5¼" SSDD 16 Hard Sector w/Hub Ring	M53A	1.79	51416	1.89
5¼" DSDD Soft Sector w/Hub Ring	M14A	2.69	52401	2.79
5¼" DSDD Same as above, but bulk product	M14AB	2.49	00140	2.49
5¼" DSDD 10 Hard Sector w/Hub Ring	M44A	2.69	52410	2.79
5¼" DSDD 16 Hard Sector w/Hub Ring	M54A	2.69	52416	2.79
5¼" SSDD Soft Sector w/Hub Ring (96 TPI)	M15A	2.59	51801	2.59
5¼" DSDD Soft Sector w/Hub Ring (96 TPI)	M16A	3.69	52801	3.69
5¼" Fileware Diskette for Apple® Lisa Computer	———	———	———	———

Wabash diskettes for as low as $1.29 each

Ultra diskettes for as low as $1.39 each

For more information about this brand call:

6 year warranty
For more info on Wabash call
800-323-9868
In Illinois 312-593-6363

Lifetime warranty except bulk
For more info on Ultra call
408-728-7777
Monday-Friday 9 am-4 pm PT

CE...your best source for diskettes

For you the diskette buyer, it's a jungle out there. There are so many different brands to choose from, you need to go on a safari to find a good brand at a reasonable cost. Fortunately, CE has already hunted for the best diskettes and offers you an excellent choice at a CE price. To save you even more, CE also offers bulk product where 100 diskettes are packed in the same box without envelopes or labels. Since we save packaging costs, these savings are passed on to you. Diskette envelopes are also available from CE.

Other Useful Computer Accessories

When the read/write heads on your computer are dirty, that can cause you a lot of grief. Now...with CE **Head Cleaning Diskettes**, you can clean the read/write heads on the diskette drives yourself in just 30 seconds. Each kit contains two head cleaning diskettes, and enough solution for 30 cleanings. Order # 5-CLE for 5¼" drives and order # 8-CLE is for 8" drives. Only $25.00 each. Also available from CE are **3M data cartridges**. The DC100A data cartridge is a small version of the DC300A data cartridge. The DC100A contains 140 feet of 0.150" tape in a package measuring 2.4 x 3.2 x 0.5 inches. Cost is $14.00 each. The DC300A is a pre-loaded tape cartridge containing 300 feet of one mil thick by ¼" computer tape. The DC300A costs $18.00 each. The DC300XL is an extra length data cartridge with 450 feet of tape. It is the same size and interchangeable with the DC300A. The DC300XL provides a total storage capacity of 34.5 million bits at 1600 BPI. The cost of the DC300XL is $22.00 each. If you need **extra mini-diskette envelopes**, CE sells super strong and tear resistant Tyvek® envelopes for $12.00 per 100 pack. Use order # TE-5 for a 100 pack of 5¼" diskette envelopes. **Smith-Corona TP-1 letter quality printers** are available in serial or parallel versions for only $529.00 each.

Quantity Discounts Available

Our diskettes are packed 10 disks to a carton and 5 or 10 cartons to a case. The economy bulk pack is packaged 100 disks to a case without envelopes or labels. Please order only in increments of 100 units for quantity 100 pricing. With the exception of bulk pack, we are also willing to accommodate your smaller orders. Quantities less than 100 units are available in increments of 10 units at a 20% surcharge above our 100 unit price. **Quantity discounts** are also available. Order 300 or more disks at the same time and deduct 1%; 500 or more saves you 2%; 1,000 or more saves 3%; 2,000 or more saves 4%; 5,000 or more saves 5%; 10,000 or more saves 6%; 50,000 or more saves 7%, 100,000 or more saves 8%, 500,000 or more saves 9% and 1,000,000 or more disks earns you a 10% discount off our super low quantity 100 price. Almost all our diskettes are immediately available from CE. Our efficient warehouse facilities are equipped to help us get you the quality product you need, when you need it. If you need further assistance to find the flexible diskette that's right for you, call the appropriate manufacturers compatibility hotline telephone number listed at the bottom of this ad. **Dealer inquiries invited.**

Buy your diskettes from CE with confidence

To get the fastest delivery from CE of your computer products, we recommend you phone your order directly to our Computer Products Division and charge it to your credit card. Be sure to calculate your price using the CE prices in this ad. Written purchase orders are accepted from approved government agencies and most well rated firms at a 30% surcharge for net 30 billing. For maximum savings, your order should be prepaid. All sales are subject to availability, acceptance and verification. All sales are final. All prices are in U.S. dollars. Prices, terms and specifications are subject to change without notice. Out of stock items will be be placed on backorder automatically unless CE is instructed differently. Minimum *prepaid* order is $50.00. Minimum *purchase order* $200.00. All shipments are F.O.B. CE warehouse. No COD's. Non-certified and foreign checks require bank clearance.

For **shipping charges** add $8.00 per 100 diskettes and/or any fraction of 100 8-inch diskettes, or $6.00 per 100 diskettes and/or any fraction of 100 5¼-inch mini-diskettes. For cleaning kits, add $3.00 per kit. For tape data cartridges, add $1.00 per cartridge. For envelopes, add $3.00 per pack of 100 envelopes. For printers add $20.00 each for U.P.S. ground shipping and handling in the continental U.S. For Canada, Puerto Rico, Hawaii, Alaska, or APO/FPO delivery, shipping charges are *three* times continental U.S. rates.

Mail orders to: Communications Electronics, Box 1002, Ann Arbor, Michigan 48106 U.S.A. If you have a Visa or Master Card, you may call and place a credit card order. Order toll-free in the U.S. Dial 800-521-4414. In Canada, order toll-free by calling 800-265-4828. If you are outside the U.S. or in Michigan dial 313-973-8888. Telex anytime 810-223-2422. Order today.

Copyright ©1983 Communications Electronics™ Ad #102783


COMMUNICATIONS ELECTRONICS™

Computer Products Division

818 Phoenix □ Box 1002 □ Ann Arbor, Michigan 48106 U.S.A.
Call TOLL-FREE 800-521-4414 or outside U.S.A. 313-973-8888

MasterCard VISA









3M diskettes for as low as $1.94 each

3M Part #	CE quant. 100 price per disk ($)
8SSSD	1.94
8SSSD-32	1.94
8SSDD	2.49
8DSDD	3.14
———	———
———	———
8DSDD-1024	3.14
———	———
———	———
———	———
———	———
5SSDD-RH	1.94
———	———
———	———
5SSDD-10RH	1.94
5SSDD-16RH	1.94
5DSDD-RH	2.69
———	———
5DSDD-10RH	2.69
5DSDD-16RH	2.69
5SSDD-96RH	2.79
5DSDD-96RH	3.74
5APPLE-FW	4.34

Lifetime warranty
For more info on 3M call
800-328-9438
In Minnesota 612-736-9524

Memorex diskettes for as low as $1.94 each

Memorex Part #	CE quant. 100 price per disk ($)
3062	1.94
3015	1.94
3090	2.49
3102	3.14
———	———
———	———
3104	3.14
———	———
———	———
———	———
———	———
3481	1.94
———	———
———	———
———	———
———	———
3491	2.69
———	———
———	———
———	———
———	———
3501	3.74
———	———

5 year warranty
For more info on Memorex call
800-538-8080
In California 800-672-3525

Burroughs diskettes for as low as $2.09 each

Burroughs Part #	CE quant. 100 price per disk ($)
FD-101	2.09
FD-105	2.09
FD-108	2.64
FD-109	3.29
FD-110	3.29
FD-111	3.29
FD-112	3.29
———	———
———	———
———	———
———	———
MFD-11	2.09
———	———
———	———
MFD-12	2.09
MFD-13	2.09
MFD-14	2.84
———	———
MFD-15	2.84
MFD-16	2.84
MFD-20	2.94
MFD-23	3.89
———	———

1 year warranty
For more info on Burroughs call
800-448-1422
Monday-Friday 9am-4pm ET

Dysan diskettes for as low as $2.99 each

Dysan Part #	CE quant. 100 price per disk ($)
800501	2.99
800618	2.99
800605	3.89
800803	4.59
———	———
———	———
800839	4.59
801184	2.99
———	———
801186	2.99
801185	2.99
801187	3.19
———	———
———	———
801014	3.19
801188	3.19
802060	3.89
———	———
802062	3.89
802061	3.89
800439	3.89
802067	4.49
———	———

1 year warranty
For more info on Dysan call
800-552-2211
In California 408-970-6096

CIRCLE 115 ON READER SERVICE CARD



The Cultured Computer

This is the first of a series of articles by Robert Mueller. Bob will write about creative and cultural aspects of computers, if your reactions are favorable. Feedback is solicited.

Bob considers himself to be primarily a visual artist. He does both abstract oils and drawings, and also socially-oriented woodcuts. Nevertheless his background spans science and all of the other arts. He has a degree in Electrical Engineering from M.I.T., and another in Philosophy from New York University.

Robert E. Mueller

What is the first step in culturing computers? To speak of culturing computers may seem extravagant. Everyone knows they are just overblown calculators. Computers may be growing increasingly complicated, but where do we get off saying they have anything to do with culture? What is *culture* anyway? Does it relate to our art? Our science and industry? Our political institutions? Our amusements? Do the games we play define our culture? Perhaps all of these—and more.

Let's concentrate on games. Video games. These new ways for humans to play are certainly unique to our society. They represent a way to transform the most formidable and complicated powers of computers, barely understood by highly trained specialists, into something everyone can enjoy: computational power transformed into human tools of skill; mathematics into method—immediately understood because it is made visual. Video games have emerged as the pop of computer software. Although there are few well known pop stars in the computer world, there are certainly millionaires.

Robert E. Mueller, Britton House, Roosevelt, NJ 08555.

When you play a video game you develop a unique symbiosis with a machine. The device is not only sensitive to your movements and commands but expands to embrace your passions and prides with its progressively complex logic. A video game does what you see, and sees what you do instantly, powerfully, in full color, and at the speed of immediate, real time.

This is what is so fascinating about a video game. Less fatiguing, it is still quicker than any other game we can play, and at the same time it is potentially more intellectually challenging.

America has a history of committing itself to solving all the problems of society.

It also leads to a hypnotic obsession, as we all know. Computers seem to have a way of obsessing people. Which of course is their danger: obsession to the point of blind dominance and obedience. Admitted negatives aside, however, let's try to analyze the positives.

Computers arose to help us solve problems in an increasingly problem-posing society. Like their mechanical relatives during the industrial revolution, computational tools began to be invented back in the eighteenth century when calculations began to exceed human abilities to do them. The data from logarithmic tables began to pile up so enormously that people like Babbage became impatient. Thus was begun the process that led to today's devices.

When this impulse reached America, a combination of Yankee ingenuity and plain laziness forced people like Herman Hollerith to build early punched-card systems. Americans are impatient, and speed in transportation and speed in communication quite naturally lead to speed in thought. America has a history of committing itself to solving all the problems of society. The computer is our latest attempt to grapple with the complexities of the modern age and reduce them to processes as simple as video games. (In fact, the elegance and clarity of video games is emulated by human factors and AI people designing human-machine interfaces for sophisticated computerized systems. It is very nice to paint your desires on a screen, or talk to a computer in English, and let the computer do the rest.)

When society ties itself into impossible knots and builds intricate mazes that confuse and paralyze human activity, inventors are impelled rat-like to find ways out of the dilemmas created. Complexity more than necessity is the parent of invention. The human being has a way of countering chaos with creativity. This creative impetus is a force that usually emphasizes humanity, but sometimes that urge does not glorify us. Splitting the atom is the most notorious example of how progress can backfire.

In the case of the computer, problems early became obvious. Automatic systems require less human help, and therefore they seem to be a threat to our employment system. But more important, automating intelligent human activities had the effect of demystifying intelligence itself. Less knowledge was required of humans to think things once considered mind-

ATARI®

600XL ..... CALL
800XL ..... CALL

1050 DRIVE	$335	MICROBITS INFC	$78
1025 PRINTER	$399	80 COLUMN BD	$249
1020 COLOR PTR	$219	TECHNICAL NOTES	$25
1027 PRINTER	$279	REAL TIME CLK	$38
1010 RECORDER	$72	48K RAM (INTEC)	$95
64K RAM (MOSAIC)	$145	64K RAM (INTEC)	$119
48K RAM (MOSAIC)	$109	AXIOM PRINTER INFC	$80
MICRO PERIF. MODEM/INFC	$129		

DRIVES

ASTRA 1620	$469	PERCOM 40-S1	$418
RANA 1000	$295	PERCOM 40-S2	$718
PERCOM 88-S1	$298	PERCOM 44-S1	$510

*ASTRA 1620
DISK DRIVE SYSTEM



MORE FOR YOUR MONEY
DOUBLE OR SINGLE DENSITY
TWO DRIVES

SPECIAL $469

ATARI SOFTWARE

Saga 1-12 each (D)	$27	Starcross (D)	$27
Diskey (D)	$33	Deadline (D)	$34
Eastern Front (C/D)	$23	Baseball (D)	$23 (R) $23
747 Land Sim (C/D)	$17	Pool 1.5 (D)	$30
Microsoft Basic II (R)	$62	Data Perfect (D)	$74
Atari Writer (R)	$68	C-65 (D)	$58
Assembler Editor (R)	$42	Max-65 (D)	$58
Pac Man (R)	$30	Action (D)	$65
Donkey Kong (R)	$34	Ali Baba (D)	$20
VC (D)	$17	Softporn (D)	$20
Legionnaire (C)	$23	Ultima II (D)	$39
Telegard (D)	$19	Frogger (C/D)	$23
Sky Blazer (D)	$22	Wavy Navy (D)	$23
Bank St. Writer (D)	$46	Type Attack (D)	$27
A.E. (D)	$23	Snooper I or II (D)	$30
Choplifter (D)	$23 (R) $29	Most Amaz. Thing (D)	$27
Serpentine (D)	$23 (R) $27	Face Maker (D)	$20
Text Wizard (D)	$65	Kinder Comp (D)	$20
Basic Compiler	$65	Fort Apocalypse (C/D)	$23
Zaxxon (C/D)	$27	Pharoah's Curse (C/D)	$23
S.A.M. (D)	$39	Protector II (D)	$23
P.M. Animator (D)	$23	Shamus (D)	$23
Spelling Bee (D)	$27	Blue Max (C/D)	$23
Fractions (C)	$21 (D) $27	Combat Leader (C/D)	$27
Decimals (C)	$21 (D) $27	Knights/Desert (C/D)	$27
Jumpman (C/D)	$27	Cosmic Balance (D)	$27
Temple of APS (C/D)	$27	Tigers In Snow (C/D)	$27
Nightmare (D)	$20	Miner 2049er (R)	$34
Sargon II (C)	$20 (D) $23	Astro Chase (D)	$22
Suspended (D)	$34	Financial Wizard (D)	$41
Zork I, II or III (D)	$27		
Q-BERT	$33		
POPEYE	$33		

SPECIALS

Gemini 15X Printer	$399
Axiom AT-100 Printer (with interface	$229
Astra Double Density Dual Drive	$469
Rana 1000 Drive	$319
Bit-3 80 Column Board	$245
Mannesmann Talley 160L Printer	$589
Atari 400 Keyboard (In Home)	$35
Programmer Kit $48	Entertainer Kit $64
Wico Joystick $23	Wico Trackball $49

COMMODORE

1541 DISK DRIVE $239

1701 Color Monitor	$255	1530 Recorder	$59
1525 Printer	$239	1600 Modem	$59
1520 Color Ptr	$169	1650 Auto Modem	$158

64 SOFTWARE 64

Neutral Zone (C/D)	$26	Fort Apocalypse (C/D)	$23
Sprite Master (D)	$27	Pharoah's Curse (C/D)	$23
Computer Football (C)	$18	Protector II (D)	$23
Telengard (C)	$16	Shamus (D)	$23
Choplifter (R)	$29	Nukewar (C)	$12
Temple of Apshai (D)	$27	Midway Campaign (C)	$12
Jumpman (C/D)	$27	Paper Clip (D)	$89
Crush Crumble (D)	$20	Delphis Oracle (D)	$114
Gridrunner (R)	$27	Word Pro 3 + /w Spell	
Zork I, II or III (D)	$27	Video Pak 80	$139
Deadline (D)	$35	Script 64 (D)	$77
Starcross (D)	$27	Calc Result Prof (D)	$119
Frogger (C/D)	$23	Home Accountant (D)	$48
Type Attack (D)	$27	M-File (D)	$89
Face Maker (D)	$23	Quick Brown Fox (R)	$50
Kindercomp (D)	$20	Writers Assistant (D)	$95
Hey Diddle (D)	$20	Spreadsheet Assist. (D)	$95
Most Amaz. Thing (D)	$27	File Assistant (D)	$95
		Hesmon 64 (R)	$27

APPLE HARDWARE

A.L.S.		**M&R**	
CPM Card	$278	Super Fan	$38
Z Card II	$119	**MICROSOFT**	
Color II	$129	Softcard	$228
Smarterm II	$129	Softcard Plus	$418
ALIEN GROUP		Softcard Premium IIe	$329
Apple Voice Box	$128	Softcard Premium II	$459
Atari Voice Box	$98	**ORANGE MICRO**	
INTERACTIVE STRUC.		Grappler +	$115
Pkaso Interface	$127	Buffered Grappler	Call
KENSINGTON		**RH ELECTRONICS**	
System Saver	$64	Super Fan II	$59
KOALA TECHNOLOGIES		**TG PRODUCTS**	
Apple Graphic Tablet	$79	Joystick IIe w/Toggle	$41
Atari Graphic Tablet	$69	Joystick	$41
C-64 Graphic Tablet	$69	Paddles	$29
KRAFT		**TYMAC**	
Joystick	$40	Printer Interface	$74
Paddles	$35		

apple® IIe

64K SYSTEM . LIST ~~$1995~~

CALL FOR LOW PRICE

APPLE DRIVES

MICRO-SCI		**RANA**	
A2 Drive	$229	Elite I Drive	$259
A40 Drive	$269	Elite II Drive	$444
A70 Drive	$349	Elite III Drive	$549
Drive Controller	$74	Drive Controller	$89

Printers/Etc.

GEMINI 10X	$279	**PROWRITER**	$345
GORILLA	$199	**SMITH TPI**	$488
CITOH		**SILVER REED P**	$669
Prowriter	$345	**QUME 11/40 +**	$1299
Prowriter II	$629	**OKI-DATA**	
Starwriter	$1149	Microline 82A	$398
Printmaster	$1448	Microline 83A	$638
NEC		Microline 84P	$958
8023 A-C	$409	Microline 92	$488
3510	$1375	Microline 93	$858
3530	$1579	**DIABLO**	
3550	$1779	620R	$939
7710/7730	$1998	630R	$1719

MONITORS

AMDEK		**NEC**	
Color I	$289	GRN (JB1260)	$115
V300	$139	GRN (JB1201)	$155
V300A	$149	Color Composite	$298
Color II	$449	RGB Color	$598

MODEMS

HAYES		**NOVATION**	
Smartmodem	$209	J-Cat	$99
Smartmodem 1200	$498	Apple Cat II	$259
Micromodem II	$259	D-Cat	$149



COSMIC COMPUTERS
UNLIMITED

727 BREA CANYON RD., SUITE 16
WALNUT, CA 91789

ORDER LINES OPEN MON-SAT 8 am - 6 pm

(800) 626-7642

PLEASE FOR ORDERS ONLY
SORRY, NO COD'S

(714) 594-5204

FOR TECHNICAL INFO, ORDER INQUIRIES, OR FOR CALIFORNIA ORDERS

Add $2.50 shipping per software order in continental U.S. Add $5.00 shipping per software order for AK, HI, FPO-APO. Add $10.00 or 15% (whichever is greater) per software order for non-U.S. Call for cost of hardware shipping. Calif. residents add 6½% sales tax. Cashiers checks or money orders filled within 24 hours for items in stock. Personal checks require 4 weeks to clear. MasterCard and Visa OK for software only within continental U.S., add 3% surcharge. Include card no., expiration date and signature. Due to our low prices, all sales are final. All defective returns must have a return authorization number. Please call to obtain one before returning goods for replacement or repair. Prices & availability subject to change.

apple®

SOFTWARE

APPLE COMPUTER INC.		**ON-LINE**	
Apple Writer IIe	$157	The Dictionary	$65
ARTSCI		Sammy Lightfoot	$20
Magic Window II	$95	General Manager II	$145
Magic Words	$45	Screenwriter II	$80
ASHTON TATE		Wiz & Princess	$22
D Base II (Req Z-80)	$299	Mystery House	$17
Finan. Plan. (Req Z-80)	$399	Time Zone	$65
Friday	$198	Maurauder	$23
AVALON HILL		Frogger	$23
Telegard	$19	Cannonball Blitz	$23
VC	$17	Screenwriter Prof.	$128
Empore of Overmind	$23	**PENGUIN**	
AVANT GARDE		Spy's Demise	$14
Zero Grav. Pinball	$20	Graphic Magician	$39
Hi-Res Golf	$20	Comp. Graphics Sys.	$39
Hi-Res Secrets	$79	Special Effects	$27
BEAGLE BROS.		**PLATO**	
Dos Boss	$17	Whole Numbers	$38
Alpha Plot	$27	Decimals	$38
Utility City	$20	Fractions	$38
Tip Disk #	$15	**QUALITY**	
Apple Mechanic	$20	Bag of Tricks	$27
Pronto Dos	$20	Ali Baba & 40 Thieves	$22
Flex Text	$20	**SENSIBLE SOFTWARE**	
Frame Up	$20	Sensible Speller	$79
Type Faces	$14	Super Disk Copy III	$23
BRODERBUND		Multi Disk Catalog	$17
Bank St. Writer	$45	**SILICON VALLEY**	
AE	$23	Word Handler	$128
Serpentine	$23	List Handler	$59
Choplifter	$23	**SIRIUS**	
Star Blazer	$22	Kabul Spy	$23
Davids Midnight	$23	Bandits	$23
Apple Panic	$20	Type Attack	$27
Alien Rain	$17	Repton	$27
Arcade Machine	$41	Critical Mass	$27
BPI		Beer Run	$20
General Acct.	$275	**SIR TECH**	
A/R	$275	Police Artist	$23
A/P	$275	Wizardry	$34
CONTINENTAL		Knight of Dia.	$23
G/L, A/R, A/P or P/R	$159	**SOFTWARE PUBLISH.**	
Property Mgt.	$296	PFS: Report	$79
Home Accountant	$48	PFS: Filing	$79
1st Class Mail	$48	PFS: Graph	$79
DATAMOST		**SORCIM**	
Aztec	$27	Supercalc (Req. Z-80)	$124
Tubeway	$23	Spellguard (Req.Z-80)	$124
Snack Attack	$21	**SOUTHEASTERN**	
Swashbuckle	$23	Data Capture 4.0	$46
DATASOFT		Data Capture 4.0/80	$59
Zaxxon	$27	**SPINNAKER**	
Micropainter	$23	Delta Drawing	$34
DON'T ASK		Hey Diddle	$20
SAM (w/DAC)	$79	Most Amazing Thing	$27
Wordrace	$17	Snooper Troops #1	$29
EDUWARE		Snooper Troops #2	$29
Alg 5 & 6	$34	Story Machine	$23
Empire II	$20	Face Maker	$23
Fractions	$34	**STONEWARE**	
Decimals	$34	Graphic Sys. (Prof.)	$116
Spelling Bee w/Read	$27	D.B. Master	$148
Alg. 1, 2, 3 or 4	$27	D.B. Master Util. #1	$84
Rendevous	$27	Graphics Proc. Sys.	$46
Prisoner II	$23	**STRATEGIC SIMULATIONS**	
EPYX		Battle of Normandie	$27
Temple of APS	$27	Germany 1985	$39
Tuesday Quarterback	$20	Epidemic	$23
Crush Crumble	$20	Pursuit Graf Spree	$39
HAYDEN SOFTWARE		Shattered Alliance	$39
Sargon II	$25	Fighter Command	$39
Piewriter 2.2	$95	S.E.U.I.S.	$27
INFOCOM		Computer Baseball	$27
Suspended	$34	Cytron Masters	$27
Zork I, II or III	$27	Guadalcanal	$39
Starcross	$27	Galactic Gladiators	$27
Deadline	$34	Battle of Shiloh	$27
INSOFT		Tigers In Snow	$27
Graforth II	$50	Cosmic Balance	$27
Electric Duet	$20	Computer Qrtrback	$27
IUS		**SUBLOGIC**	
Prof. Easywriter	$114	Whole Brain Spelling	$23
Original Easywriter	$65	Flight Simulator	$24
Original Easymailer	$45	Space Viking	$34
LEARNING COMPANY		Saturn Navigator	$23
Juggles' Rainbow	$20	**SYNAPSE**	
Bumble Games	$27	Protector II	$23
Bumble Plot	$27	Shamus	$23
Gertrudes Secrets	$30	Pharoah's Curse	$23
Gertrudes Puzzles	$30	**SYNERGISTIC**	
Rockeys Boots	$34	Atlantis	$28
LJK		Global Prog. Line Ed.	$44
Letter Perfect	$89	**TARRAPIN**	
LOTUS		Terrapin Logo (64K)	$99
Exec. Brief Sys.	$125	**VISICORP**	
MICROLAB		Visicalc IIe	$164
Miner 2049er	$27	Visicalc 3.3	$158
Data Factory 5.0	$189	Visifile	$165
Payroll Manager	$189	Visidex	$165
MICROSOFT		Visiplot	$139
Typing Tutor II	$17	Visitrend/Plot	$195
Applesoft Compiler	$118	Visi Schedule	$195
A.L.D.S. (Req Z-80)	$79	**MISCELLANEOUS**	
Basic Compiler	$239	Millionaire	$39
Multiplan	$169	Pinball Const. Set	$27
Olympic Decathalon	$20	Pool 1.5	$23
MUSE		Bandits	$23
Robot	$27	Human Fly	$21
Castle Wolfenstein	$20	Master Type	$27
ODESTA		New Step by Step	$57
Chess	$45	Ultima	$27
		Zoom Graphics	$34

Cultured Computer, continued...

boggling. Anyone with a hand-held device could perform mental feats only savants could do before. The mathematical abilities of computers began to shift our admiration from people to devices—and, at the extreme, to robots, who could become our mental giants and our envied masters. In the end, however, I think that video games should humble computer designers, became they reduced very difficult problems to simple audio-visual-manual solutions.

Problem solving in general is fun. But automated problem solving is more fun. Who cares what kind of a technical device we use to solve our problems; if we can solve them quicker or easier, we are all the more pleased. Give us bigger and more difficult problems, and we will be even more pleased when we unravel them. This is part of the joys of education—call it intellectual gaming. We get deeper and deeper into labyrinths of difficulties, and by neatly tying pathways together, we simplify their complexities. Why not use this marvelous new tool, the computer, to help us simplify life? Can it even help with our art—and enrich our culture too?

The problem is that abstractions have a way of trapping us, of fooling us into believing we have solved some difficult problem. What does a game won, or a high score achieved, represent? We displace our difficulties and build solutions that we soon discover are not solutions at all. Oh, they solve those areas we set up—say a game whose maximum score we can finally reach, regardless how complex the rules or the boundaries we formulate to define it. But they answer nothing finally—which is what we wish they would do.

Mathematical difficulties worked out elegantly are sometimes so beautiful that we think they represent an absolute truth. This is the story of our intellectual life! Everything seems so simple—on paper.

Video games are a good example of how fascinating total control over a little bit of experience can be.

How far can we take this? If we remain dominated by games, will it help us in solving the meaning of existence?


Living life is difficult. One of the reasons we play is to escape disagreeable experiences (particularly poignant ones during puberty). Video games are a good example of how fascinating total control over a little bit of experience can be. If we surrender to the demands of a challenging game, we get a great feeling of mastery when we win (or reach a high score). A challenging problem solved or a game won gives us a powerful feeling of mastery. The overwhelming problems of living are concentrated in our hands, and with deft movements and a little mental or physical exertion, we can actually solve them (for a few minutes). Life makes momentary sense.

But in the end our accomplishments begin to take over. We define ourselves with our dynamic achievements. Can we stop ourselves from surrendering to these achievements and repeating them again and again? How long can a culture survive on repetition? We run our mile as fast as we can, nevertheless we run it again and again, hoping to beat our own record. Where does it end, this race to automate tedium?

Culturing society in a democracy means making the deepest and most creative human insights and perceptions available to everyone. We want to culture computers to improve our own culture through them. This is not a question of displacing humanity onto computers, as science fiction suggests. Rather, it means making computers available as insightful tools for sensitive, non-computer people to use to elevate the collective human condition. Although video games may seem a far cry from this noble pursuit, I think they may well be the first step. END



CIRCLE 251 ON READER SERVICE CARD

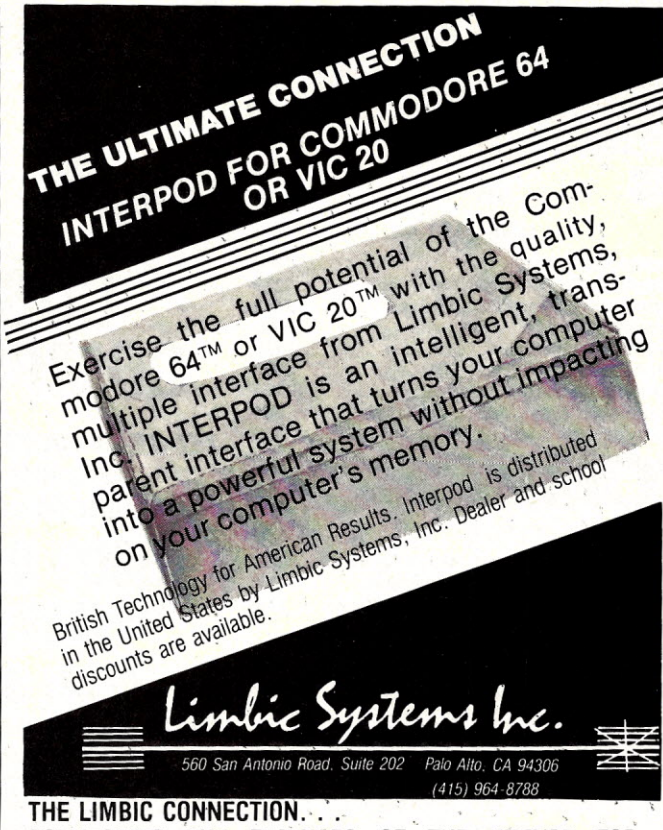


THE LIMBIC CONNECTION. . .
CONNECTING THE FEATURES OF THE FUTURE FOR TODAY'S COMMODORE USERS.

Commodore 64 & VIC 20 are trademarks of Commodore Electronics, Inc.

CIRCLE 173 ON READER SERVICE CARD

NEW UP TO 2MB ON A SINGLE CARD!

STATE OF THE ART MEMORY SYSTEMS

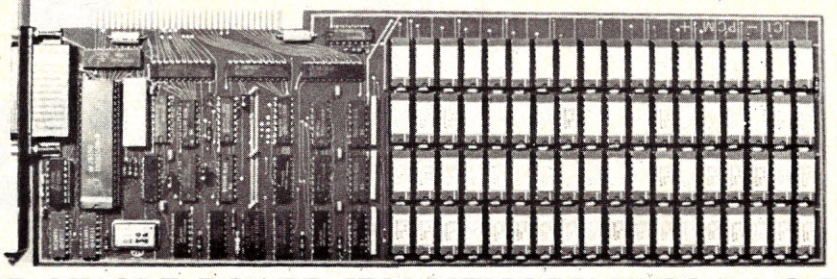


512KB SINGLE BOARD IBM MEMORY W/RS232-C PORT

- Addressable as a contiguous block in 64KB increments thru 1 megabyte.
- On board parity with interrupt on parity error.

SINGLE QTY. PRICE: $545.00

MEMDISK 1 Allows memory to emulate disks. Increases system performance!!
FREE with purchase of memory.




64KB SINGLE BOARD EXORCISER I, II, AND ROCKWELL SYSTEMS 65 MEMORY

- Parity checker on board.
- Addressable as a contiguous block in 4K increments with respect to VXA or VUA.
- Pin to Pin compatibility.

SINGLE QTY. PRICE: $250.00

NEW

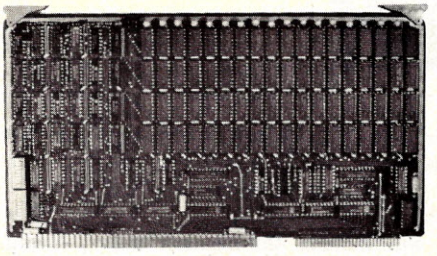


512KB TO 2MB SINGLE BOARD MULTIBUS MEMORY

- Pin to Pin MULTIBUS compatibility for both 8 bit and 16 bit systems.
- On board parity with selectable interrupt on parity ERROR.
- Addressable up to 16 megabytes.

SINGLE QTY. PRICE:

512KB	**$ 895.00**
1MB	**$3995.00**
2MB	**$5995.00**

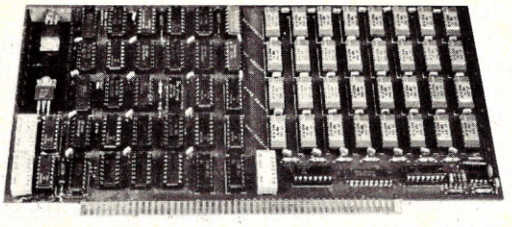


64KB SINGLE BOARD S100 MEMORY

- Addressable as a contiguous block in 4K word increments.
- Battery back-up capability.
- Functions with on-board refresh.

SINGLE QTY. PRICE: $250.00

NEW

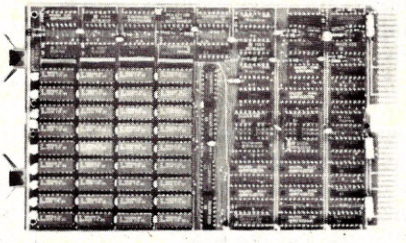

256KB TO 1 MB SINGLE BOARD LSI 11 MEMORY

- On board parity generator checker.
- Addressable as contiguous block in 256KB increments through 4 megabytes.
- Battery back-up mode.

SINGLE QTY. PRICE:


256KB	**$ 525.00**
512KB	**$2650.00**
1MB	**$3995.00**

DON'T ASK WHY WE CHARGE SO LITTLE, ASK WHY THEY CHARGE SO MUCH.

Chrislin Industries, Inc.

31352 Via Colinas • Westlake Village, CA 91362 • 213-991-2254
TWX 910-494-1253 (CHRISLIN WKVG)

CIRCLE 124 ON READER SERVICE CARD

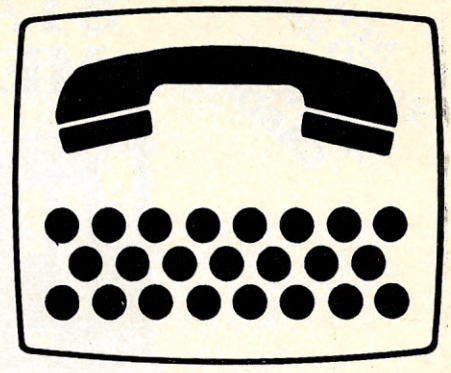

Telecommunications Talk

Brian J. Murphy

Welcome to Telecommunications Talk! This is the first in a series of columns on the subject of computers and telephones.

Topics will include information utilities, bulletin board systems, hardware, software, and the purposes to which you can apply your computer/modem system.

We invite your participation. Users, feel free to tell us about your BBS systems, communications programs, and anything else you have that is of interest. If it checks out, we will use it. Manufacturers, let us know about your software and hardware products for telecommunications. We can't promise to use everything you send, but much material we receive will find its way into the column.

The Great Computer Hack

Milwaukee: Land of "Happy Days." Richie Cunningham. Pottsy and Ralph. The Fonz. Neal Patrick and the 414s.

Neal Patrick and the 414s?

No, they are not a 50's rock group. In case you don't remember who Neal Patrick is, Sherman, let's set the Wayback Machine for August 1983. The place? Any front page of a newspaper will do: "Report 'Break In' Of Atom Lab Computer," "Cancer Clinic Computer Tampered With," "Trespass At Los Alamos Computer." How about the cover of Newsweek for September 5, 1983, with a picture of 414 "Hacker" Neal Patrick on the cover? Remember now?

The 414s were a very small group of high school age kids from Milwaukee who had met at an explorer post and found that they had a similar interest, telecomputing. Until the spring of '83, they had done nothing to merit national headlines or a Newsweek cover, but with a few log-ons all that changed.

Brian J. Murphy, 133 Post Rd., Fairfield, CT 06430

The Break-Ins

To reconstruct events briefly, on August 11 it was revealed that one of the computers at the Los Alamos National Laboratory in New Mexico had been accessed by telephone by an unauthorized user sometime in late June.

Los Alamos, being the place where much of the nation's theoretical nuclear research is conducted, is understandably reluctant to provide too many details about what the unauthorized users may have been looking into. Perhaps "reluctant" isn't the word. "Absolutely refused to discuss," may be the phrase most descriptive of their attitude. Their terse announcement to the press simply stated that an intrusion had taken place, that whatever it was the user or users had accessed was not classified nor did it deal with personnel matters.

So if the data they accessed wasn't the instructions for building an H-bomb or Dr. Edward Teller's attendance record, what was it? "Can't comment" said a Los Alamos spokeswoman when we attempted to weasel it out of her. She did make it clear, however, that whatever it was, was considered worth the time of the FBI to investigate.

At New York's Memorial Sloan-Kettering Cancer Center, a few more details were forthcoming. Again, Telenet had been used to gain unauthorized access to the computer. This time the computer data files accessed related to the monitoring of radiation treatment for cancer patients all across the country.

Spokeswoman Nancy Czaja explained that the program accessed is a utility used by radiation therapists to double check the amounts of radiation given in cancer therapy. Since radiation doses must be measured with precision to prevent them from becoming ineffective or counterproductive, this is a bad data bank with which to be playing idle games.

While he was playing with the data, the hacker managed to crash the system.

The total downtime was only five minutes, but it was enough to attract the attention of Sloan-Kettering's computer manager, who investigated certain security programs within the system. His investigation pointed to an unauthorized access of the system. It is not clear whether this access—and crash—was responsible for a block of data relating to billing being deleted from the system. After the initial incident was detected, the computer was accessed without permission "several more times."

The Cancer Center has several computers, according to Ms. Czaja, but the one the hackers accessed was specially programmed to provide easy access by physicians to give them valuable assistance in planning radiation therapy. That is what it was doing on Telenet, and that is why it was so easy to break into.

7 Good reasons why you should subscribe to *Creative Computing.*



It's the Number One magazine of computer applications and software!

There's one place you can always be sure of learning more about microcomputer software and applications: *Creative Computing.*

Every month *Creative Computing* provides you with a continuing education on everything related to microcomputers and computer equipment. Useful articles, "how to" tutorials, exciting new applications, games and "no holds barred" reviews of the latest software and equipment make up a major part of *Creative Computing*'s editorial content.

We give you probing features on programming breakthroughs and important news. Plus in-depth articles on elementary, intermediate and advanced software and applications topics—to help you develop your knowledge and skills, save hundreds (perhaps thousands) of dollars in unneeded software, discover uses for your personal computer that you might never have considered. Articles that increase your overall "computer consciousness." Here's how:

1 *Creative Computing* gives you things to actually do with a computer.

Just owning a computer isn't enough. You've got to know what to do with it. That's why applications are our primary focus. Text editing, animation, graphics, business simulations, data base and file systems, music synthesis, control of household devices, communications, games—some of the applications and software you'll learn about in *Creative Computing.*

2 *Creative Computing* discusses business applications in simple, nontechnical language.

If you're a business person who needs to know about the latest developments in word processing and office applications, turn to *Creative Computing.* We clarify such business applications as investment analysis, futures evaluations, data base management, mailing list programs, text editing, word processing and simulations. And all the software available for business people.

3 *Creative Computing* helps you decide which computer equipment is best for you.

Our tough, no-nonsense equipment profiles arm you with the facts before you walk into a computer store. You'll know the right questions to ask and how to cut through the jargon and sales hype. We give you authoritative guidance in deciding what you need, what you don't need—and what's right for you and your pocketbook.

4 *Creative Computing* covers computer education in depth.

We started out as a computer education publication, and we're still committed to the educational community. We regularly carry articles on designing educational software, evaluating educational software, teaching concepts and terminology in computer education, text editing applications for literature and computer simulations in the classroom—plus a great deal more.

5 *Creative Computing* brings you hours of mind-expanding game entertainment.

We've got a soft spot for the computer game addict—and computer game software. We know you want to understand more about the new computer games flooding the market: which ones are easiest to learn? Require the most skill? Offer the most surprises? Give you the best graphics? Provide the most challenge? Contain a new twist? *Creative Computing* brings you the answers.

6 *Creative Computing* features the state of the art.

Columns on the most popular personal computers, a "software legal forum," letters to the editor. Reviews of books, games, organizations, dealers and events. Fascinating interviews with leading innovators, equipment designers, program developers and game inventors—men and women who'll give you a real glimpse of the future!

7 Our price is right.

By subscribing to *Creative Computing* now, you can save as much as 33% off the full subscription price. To learn elsewhere what you'll learn from *Creative Computing*, you might spend hundreds of dollars in course fees and books. Then you'd have to winnow out what you could use from all that you'd learned. But *Creative Computing* does that for you, so you'll have time to enjoy your own computing interests. And that saving of time makes this offer very inexpensive indeed.

Join over 150,000 *Creative Computing* readers by subscribing today! Just use the coupon at right.

SAVE UP TO 33%!

Creative Computing · P.O. Box 5214 · Boulder, Colorado 80322

YES! Send me *Creative Computing* for:

- ☐ One year (12 issues) for $19.97—I save 20%!
- ☐ Two years (24 issues) for $36.97—I save 26%!
- ☐ Three years (36 issues) for $49.97—I save 33%!

Savings based on full one-year subscription price of $24.97

Check one: ☐ Payment enclosed. ☐ Bill me later. 4S218

Mr. / Mrs. / Ms. _____
(please print full name)

Address _____ Apt. _____

City _____

State _____ Zip _____

Offer valid in U.S. and possessions only. Please allow 30 to 60 days for delivery of first issue.

How They Did It, Who They Are

So far as we know, Los Alamos and Sloan-Kettering were not deliberately picked for trespass by these teenagers. When you call Telenet, you type in a coded set of digits which, like a telephone number, connects you to a participating computer. A few numbers are in the public or semi-public domain (The Source and Delphi information utilities are examples); most are supposed to be strictly private. The trouble is that you can make a successful link with many of those numbers once you become proficient with the Telenet system.

Getting past the security program is another matter. If you recall the movie *War Games,* all you had to do to get into the Air Force's most secret NORAD computer was come up with a single word password. It turns out that there was more truth to that scene than we had thought because at least until the Los Alamos and Cancer Center incidents this past August, it was almost as easy to log onto some of the major institutional data processing systems around the country.

Mike Hobach is the system operator (*sysop* for short) of BBS-SUE, a bulletin board system in Milwaukee. He knows all the members of the 414 group and says that they found getting the passwords for the big systems was as easy as it appeared in *War Games.*

Hobach said that the boys discovered that in many, if not most, of the big systems they invaded, the "default passwords" were still operative (these are code words used by manufacturers and programmers to access computers while they are being installed and programmed). Some of the most commonly used default passwords like *system, service,* and *test/password* seemed to work fine for the 414s when they attempted to log on to Telenet computers at random.

Sloan-Kettering and Los Alamos were the hacks that grabbed the attention of the papers—and the FBI, but the damage done by the hackers was reportedly minimal. Part of the hacking tradition, however, is mischief-making, and there had been at least one incident reportedly connected to a 414 member, according to Hobach, that illustrates the potential for serious damage.

About one year before the headline-making incidents, Hobach says, one of the 414s was responsible for causing serious damage to data files stored on a computer belonging to the Milwaukee School of Engineering. The boy responsible was reported to be too young to prosecute under Wisconsin law (which specifically prohibits unauthorized access into computers), but the school went after the boy's parents who wound up paying around $3000 to compensate for the damage.

Despite this incident, the 414s are not malicious mischief-makers, according to Hobach who says the boys have been portrayed unfairly in the press—especially the local Milwaukee papers which have taken a stern editorial stand on their capers. In reality, Hobach said, the 414s are nice young men of above average intelligence who generally do well in school and who really know what they are doing when it comes to computers. Neal Patrick, who has been the group's point man with the media, even operates his own BBS system, to which I have logged on myself. (By the way, Patrick has not answered my message, as of this writing, to tell me his side of the 414 story.)

By logging on to sensitive data banks, the 414s caused the fertilizer to hit the ventilation system. In the press, they were portrayed as the sinister side of the computer revolution, but this is probably an unfair characterization if the testimony of other computer users in their home town is reliable. Except for some unsubstantiated details I ran across in communicating with various sources in Milwaukee, the 414s seem to enjoy a reputation among other computerists as nice kids.

Computer Ethics

The defense of those boys, at least by their fellow computerists, goes beyond the disclaimer that they didn't mean to hurt anything or anyone. It goes to the point where the claim is made that there is nothing wrong with inspecting, without invitation, the programs and data files on a private computer system.

One defender of the 414s said to me, summing up the arguments in favor of hacking, "If this information is so confidential or so private, why is it accessible via Telenet? Why don't the system managers change the default passwords?"



In the atmosphere of the bulletin board systems, where there is a free interchange of ideas, programs, and data, and where most of the users are relatively young, it sometimes seems as though the world of computers was meant to have no walls, only doors waiting to be opened. Unfortunately, this isn't so. There are some thresholds which, though not illegal to cross, are unethical to pass.

One cannot pass judgment on the 414s or an anyone else who hacks so far as their responsibility before the law is concerned. In most states and nationally, hacking is apparently not a crime, except where it violates the laws relating to national security. That means that it is not OK to look at the computers at NORAD or Los Alamos even if it were as simple as dialing the right number and answering the password prompt with Joshua.

This is not a problem of legality but of ethics. Some readers of this column, who enjoy their hacking, may find the following points tiresomely familiar, but they are, I think, worth repeating.


- Computer trespass is a violation of privacy. Very simply stated, just because the information is on a computer and because the computer is accessible by telephone does not mean that anyone has a right to use that computer without permission.

Take the Sloan-Kettering case as an example. All patient data are, by ancient and honorable tradition, privileged information. Of course, there is no evidence to indicate that the 414s were deliberately trying to connect with the Cancer Center in the first place, but once they had, they had violated the rights of physicians and of cancer patients.

The range of information stored in computer data files which private individuals and institutions prefer to keep private is wide. It includes their financial status, health history, and employment records. This information may seem harmless, but most people would be embarrassed to learn that their private lives have been scrutinized by strangers. Put yourself in their shoes. Would you want all your secrets accessible to anyone with a computer and a modem?

The argument has been made that if it is easy to access a computer, then it is OK to log on. But if the door to an office building or a private house were to be left open I am sure that most people would resist their curiosity and not walk in to examine files and personal papers,

KENSINGTON MICROWARE



SYSTEM SAVER
- Surge Suppression
- Fits Apple Stand
- Dual Outlet
- U.L. Listed
- Great Gift!

$65

QUADRAM

APIC (APPLE /// PARALLEL)	129.99
IPIC (IBM PARALLEL)	89.99
ERAM 80 column 64K IIE	$CALL
MICROFAZER	$CALL
QUADBOARD I or II (64K)	279.99
QUADCOLOR I	234.99
QUADCOLOR II	209.99
QUAD 512+(64K)	249.99
QUADCHROME MONITOR	499.99

QUADLINK 479.99

MICROSOFT

A.L.D.S.	75.99
APPLESOFT COMPILER	116.99
BASIC COMPILER	259.99
COBOL COMPILER	559.99
FLIGHT SIMULATOR (IBM)	34.99
MOUSE (IBM)	129.99
MULTI-TOOL BUDGET	109.99
MULTI-TOOL FIN. STMT.	69.99
SOFTCARD II	215.99
SOFTCARD PREMIUM (IIe)	359.99
64K IBM SYSTEMCARD	295.99
WORD	$CALL

MULTIPLAN 165.99

als

CP/M 3.0
279.99

Dispatcher 99.99

SMARTTERM II, or Z-CARD II
129.99

DTC

380 Z LETTER QUALITY DAISY WHEEL PRINTER

- 48 K Buffer
- 32 CPS
- Graphics
- 10, 12, 15 Pitch
- Proportional spacing

999.99

Sheet Feeder	599.99
Tractors	129.99
Cable (Please Specify)	49.99
NEW! Stylewriter	$CALL

SPINNAKER

ALPHABET ZOO (new)	19.99
DELTA DRAWING	32.99
FACEMAKER	21.99
FRACTION FEVER (new)	21.99
HEY DIDDLE DIDDLE	19.99
KINDERCOMP	19.99
MOST AMAZING THING	26.99
RHYMES AND RIDDLES	19.99
SNOOPER TROOPS 1	27.99
SNOOPER TROOPS 2	27.99
STORY MACHINE	21.99

ALL OF ABOVE 214.99

Beagle Bros Micro Software Inc.

ALPHA PLOT	24.99
APPLE MECHANIC	19.99
BEAGLE BASIC	24.99
DOS BOSS	15.99
DOUBLE TAKE	24.99
FLEX TEXT	19.99
FRAME-UP	16.99
PRONTO DOS	19.99
TIP DISK #1	14.99
TYPEFACES	14.99
UTILITY CITY	19.99

ALL OF ABOVE 234.99

EDUWARE

ALGEBRA I, II, or III	27.99
COMPUMATH	34.99
COMPUREAD	21.99
COMPUSPELL	21.99
COUNTING BEE	21.95
DECIMALS 3.0	33.99
FRACTIONS 3.0	33.99
PERCEPTION GAMES	19.99
PRISONER II	23.99
PSAT WORD ATTACK	33.99
RENDEZVOUS	27.99
SAT WORD ATTACK	33.99
SPELLING BEE GAMES	27.99
SPELLING/READING PRIMER	27.99
STATISTICS	21.99

APPLE SOFTWARE

BPI (GL, AP, AR, PAY, INV)	299.99
BRODERBUND Arcade Machine	44.99
Bank Street Writer	49.99
Choplifter	26.99
David's Midnite Magic	26.99
Loderunner	26.99
CENTRAL POINT Copy II+	25.99
CORVUS	$CALL
DATAMOST Aztec	29.99
Swashbuckler	26.99
Kids & Apple, VIC, COMM, ea.	14.99
DATASOFT Canyon Climber	17.99
Zaxxon	29.99
DLM Alien Addition Sch-37.99, H-27.99	
Alligator Mix Sch-37.99, H-27.99	
Demolition Division Sch-37.99, H-27.99	
Dragon Mix Sch-37.99, H-27.99	
Meteor Multiplication Sch-37.99, H-27.99	
Minus Mission Sch-37.99, H-27.99	
Spelling Wiz	37.99
Verb Viper/Word Invasion	37.99
Word Man/Word Master	37.99
Word Radar	37.99
EDUFUN Frenzy Flip Flop	23.99
EPYX Crush Crumble Chomp	22.99
GRAPH 'n CALC	149.99
HAYDEN Piewriter	129.99
Sargon II	26.99
INCREDIBLE JACK	129.99
JOR-AND Secret Agent	21.99
KENSINGTON Formatt II	26.99
L&S Crossword Magic	39.99
LEARNING CO Bumble Games	29.99
Bumble Plot	29.99
Gertrudes Puzzle	32.99
Juggles Rainbow	22.99
Magic Spell	26.99
Moptown Parade	26.99
Rocky's Boots	37.99
LIGHTNING Mastertype	29.99
MICROLAB Highrise	22.99
Miner 20-49er	29.99
Death in the Caribbean	26.99
Data Factory	229.99
ODESTA CHESS	53.99
Checkers	37.99
Odin	37.99
PEACHTREE	$CALL
PENGUIN Graphics Magician	44.99
SIERRA ON LINE Frogger	24.99
Screenwriter II	89.99
Screenwriter PRO	149.99
Ultima II	44.99
Cannonball Blitz	26.99
General Manager	169.99
Dark Crystal	29.99
SOFTWARE DIMENSIONS ACCT +II	$CALL
STATE OF THE ART	$CALL
SUBLOGIC Pinball	26.99
ULTRASOFT Serpents Star	29.99
Mask of the Sun	29.99
VISICORP	$call

APPLE HARDWARE

CDP 16K RAM CARD	**39.99**
Printer Card & Cable	39.99
Fan w/surge, 2 outlets	39.99
DAN PAYMAR Lower Case 1 (rev 1-6)	25.99
Lower Case 2 (rev 7)	19.99
DARK STAR Snapshot II	89.99
EASTSIDE Wildcard	119.99
FOURTH DIMENSION Drive	219.99
HAYES Micromodem II	254.99
HAYES Micromodem IIe	$CALL
HOME Repeat Key	19.99
KOALA PAD	89.99
KRAFT Joystick	44.99
KRAFT Paddles	31.99
LEGEND 128K Ram	359.99
MICRO-SCI Drive	219.99
MOUNTAIN CPS Card	159.99
NOVATION Applecat II	269.99
Applecat Upgrade 1200 Baud	309.99
ORANGE MICRO Grappler +	119.99
Bufferboard	119.99
Bufferd Grappler +	179.99
PADDLE ADAPPLE	24.99
SATURN 128K Ram	379.99
Accelerator II	444.99
Neptune 64K	199.99
Neptune 128K	299.99

ACCESSORIES

3 Ring Disk Sheets (10)	7.99
Printer Stand Small (plxgls)	24.99
Printer Stand Large (plxgls)	29.99
64K CHIPS (9x4 164-200ns)	79.99
16K CHIPS (8x4 116-200ns)	9.99
LIBRARY CASE	1.99
Flip 'n File (ORIGINAL)	17.99
Flip 'n File 25 Locktray	17.99
Flip 'n File 50 Locktray	27.99
Power Strip w/surge	17.99
HAYES 300 Baud Smartmodem	199.99
1200 Baud Smartmodem	474.99
NOVATION J CAT	104.99
NOVATION 103/212 AUTOCAT	429.99
NOVATION 103 SMARTCAT	169.99
NOVATION INFONE MAXI	869.99
NOVATION EXPANSION MOD	29.99
MX & FX 100 RIBBONS	7.99
MX & FX 80 RIBBONS	4.49
OKI 82, 83, 92, 93, GEM RIBBONS	2.99
USI Compumod RF MOD.	34.99

Fingerprint (Epson Enhancer) 44.99

IBM

½ Height DS/DD Drive	259.99
ALPHA Data Base MGR II	169.99
Apple-IBM Connection	129.99
Executive Package	115.99
Typefaces	79.99
ARMONK Executive Suite	27.99
ASHTON TATE dBase II	$CALL
Encyclopedia	59.99
Friday	$CALL
AST Boards	$CALL
BRODERBUND Apple Panic	21.99
Serpentine	26.99
CENTRAL POINT Copy II PC	25.99
DATAMOST Space Strike	21.99
Pig Pen	21.99
Real Estate Inv Prog	69.99
Write On	69.99
EDUWARE Algebra I	29.99
Prisoner II	29.99
EPYX Crush Crumble Chomp	22.99
Curse of Ra	14.99
Jabbertalky	22.99
Oil Barons	74.99
Star Warrior	22.99
Temple of Apshai	22.99
Upper Reaches of Apshai	14.99
GRAPH 'N CALC	149.99
HAYDEN Piewriter	129.99
HAYES 1200B Modem	439.99
KENSINGTON PC Saver	$CALL
KRAFT Joystick	44.99
LIFETREE Volkswriter	119.99
LIGHTNING Mastertype	36.99
LOTUS 1-2-3	$CALL
MICROLAB Highrise	22.99
Death in the Caribbean	25.99
Miner 20-49er	29.99
MOUNTAIN Hard disk	$CALL
NORTON Utilities	59.99
PC CRAYON	49.99
PC TUTOR	47.99
PERFECT SOFTWARE	$CALL
POOL 1.5	27.99
PLANTRONICS ColorPlus	409.00
SIERRA ON-LINE Frogger	26.99
Crossfire Lunar Leep, Mouskattakin	22.99
Golf Challenger	19.99
Ulysses & Golden Fleece	29.99
SIR-TECH Wizardry	44.99
SUBLOGIC Pinball	29.99
TMAKER	169.99
TG Joystick	44.99
TITAN 64K BOARD	499.99
VISICORP, Visicalc or Visidex	164.99
Visifile, Trend/Plot, Schedule ea	199.99
Visilink	$CALL
Visi-on	$CALL
Visispell	179.99
Visiword	269.99

EAGLE PC $CALL

SORCIM

SUPERCALC SUPER SPELLGUARD
119.99ea.

SUPERWRITER SUPERCALC 2
167.99ea.

APPLE, IBM & CP/M VERSIONS

Videx

APPLE WRITER PRE-BOOT	14.99
CHARACTER ROMS	24.99
ENHANCER II	99.99
FUNCTION STRIP	34.99
HARDSWITCH	16.99
MICROMODEM CHIP	24.99
PS10	169.99
SOFTSWITCH	25.99
ULTRATERM PRE-BOOTS	$CALL
VIDEOTERM W S/S + INV	219.99
VISICALC PRE-BOOT	39.99

ULTRATERM 249.99
VIDEOTERM 199.99

INFOCOM

ENCHANTER
DEADLINE
PLANETFALL
SUSPENDED
WITNESS
32.99 ea

STARCROSS
ZORK I
ZORK II
ZORK III
24.99 ea

CP/M VERSIONS $7.00 MORE

MONITORS

AMDEK	$CALL
PRINCETON RGB HZ-12	489.99
QUADCHROME RGB HX-12	499.99
USI Pi 1 9" Green 20 mh	116.99
USI Pi 2 12" Green 20 mh	119.99
USI Pi 3 12" Amber 20 mh	146.99
USI Pi 4 9" Amber 20 mh	136.99
USI 1400C Color Composite	288.99
OSBORNE Monitor Cable	$CALL
TI Monitor Cable	$CALL
RCA 6" Male-Male	2.99
IIe to Princeton card/cable	139.99

TAXAN 12" Green 18 mh 134.99

MicroPro

CALCSTAR	89.99
DATASTAR	179.99
MAILMERGE	139.99
REPORTSTAR	199.99
SPELLSTAR	139.99
STARINDEX	109.99
SUPERSORT	139.99
WORDSTAR PRO	389.99

INFOSTAR & WORDSTAR
Call for special pricing

Continental

APPLE SOFTWARE 1983 BOOK	9.99
ATARI SOFTWARE 1983 BOOK	9.99
APPLE GRAPHICS BOOK	14.99
CPA (GL, AP, AR, PAY) ea	149.99
FCM/FL 1st CLASS MAIL (AP)	61.99
FCM/FL 1st CLASS MAIL (IBM)	71.99
HOME ACCOUNTANT+ (IBM)	84.99
HOME ACCNT.+ (KAYPRO, OSB)	59.99
HOME ACCNT.+ (TI PRO)	119.99
PROPERTY MANAGEMENT	299.99
TAX ADVANTAGE	39.99
ULTRAFILE (IBM)	$CALL

HOME ACCOUNTANT
Apple, Atari, Commodore **$44.99**

DISKETTES

DYSAN 5" SS/DD (10)	31.99
DYSAN 5" SS/DD (100)	299.99
MAXWELL 5" SS/DD (10)	27.99
MAXWELL 5" SS/DD (100)	259.99
MAXWELL 5" DS/DD (10)	37.99
MAXWELL 5" DS/DD (100)	359.99
VERBATIM 5" SS/DD (10)	24.99
VERBATIM 5" SS/DD (100)	229.99
VERBATIM 5" DS/DD (10)	36.99
VERBATIM 5" DS/DD (100)	349.99

Dysan — **BOX or CASE**
Double-sided, double density
10/box 100/case
38.99 369.99

PRINTERS

C-ITOH PROWRITER	$CALL
EPSON (ALL MODELS)	$CALL
OKIDATA 82A	384.99
OKIDATA 83A	629.99
OKIDATA 84P	969.99
OKIDATA 92	489.99
OKIDATA 93	859.99
STAR GEMINI 10X	$CALL
STAR GEMINI 15X	$CALL
STAR DELTA	$CALL
TRANSTAR	$CALL

RIBBONS IN STOCK FOR MOST MODELS

SMITH CORONA TP2 499.99

COMPUTER DISCOUNT PRODUCTS

SAN JOSE:
860 S. Winchester Bl.
San Jose, CA 95128
(408) 985-0401
MON-FRI 8AM-7PM
SAT.-SUN-HOL. 10AM-5PM

MAIL & PHONE ORDERS
860 S. Winchester Bl.
San Jose, CA 95128
(408) 985-0400

SAN FRANCISCO:
1230 Market St.
San Francisco, CA 94012
(415) 626-2244
MON-FRI 10AM7PM
SAT-SUN-HOL. 10AM-5PM

- No Charge For Credit Cards
- Prices Subject To Change
- Software Sales Are Final
- Min. $4.00 Shipping Charge
- Purchase Orders Call First

VISA · AMERICAN EXPRESS · MasterCard

APPLE IS A REGISTERED TRADEMARK OF APPLE COMPUTER INC. IBM IS A REGISTERED TRADEMARK OF INTERNATIONAL BUSINESS MACHINES CORP.

CIRCLE 128 ON READER SERVICE CARD

to go through wallets, pocketbooks, and strongboxes. This is not what nice people do. When you trespass in a computer system, that is exactly what you are doing, and it is wrong.

I have heard the assertion that all computers should be open to all people at all times. This is a wonderfully idealistic way of looking at computers, but it is not a theory that works in the real world.

Computers are made for whatever purposes their owners see fit. If a computer owner chooses to exclude all but authorized users from the system, that is fully within his rights, as it is within yours to decide who uses your system. Unrestricted access to all computers all the time is simply unrealistic.

• By accessing systems with which you are not familiar, you risk damage to other people's property. This should be clear enough after the inadvertent damage to financial records and the accidental crash of the Sloan-Kettering computer. It is certainly evident if the reports of $3000 in damage to the computer at the Milwaukee School of Engineering are valid.


No matter how much experience with computers you have, you will blunder from time to time and either lose data, hang up a program, or crash the computer. Even with easy to operate home computers, errors are easy to commit. It is much simpler on big systems, with which you have had limited experience and with software with which you are not familiar to do serious damage to the software and data files on the system you are hacking.

So what? Well, it is not nice to anonymously intrude into a private system and bomb data. In the case of computers handling files of financial data, there is a potential for serious expensive damage. The case of Sloan-Kettering demonstrates how hacking can actually harm the vital interests of some people.

You can also do harm to yourself. Although most companies and institutions with the big mainframe systems can probably afford to undo any damage that a hacker causes, they don't have to absorb the financial burden alone.

The fact is that when you violate a private system, you risk legal action to recover the cost of the damage to the system, the manhours required to restore data, and so forth. If the company can prove that the damage was willful, they can sue you and soak you for substantial damages.

• Unauthorized access amounts to stealing from the computer owner. It is one thing to call the number of a system which invites the public, for free or for a fee, to use its data processing capabilities. When you access a system without that permission, you are taking the service from the owner of the computer without paying for the time and without paying for the wear and tear to which you subject the system.

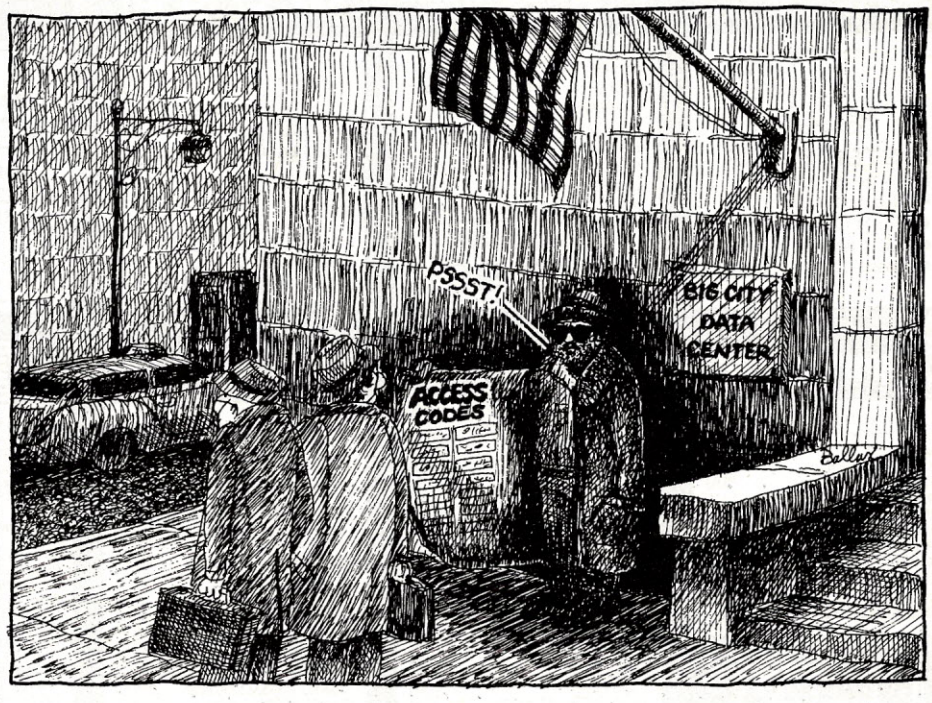

Even big systems have breakdowns; actually they have more breakdowns than home computers. A big system will often have dozens of terminals and drives which are subjected to hellacious wear and tear. This is one of the reasons mainframe time is so expensive.

The bottom line is that it costs the mainframe operator much more to run his system than it costs you or me to run ours. The mainframe operator has a right to know and control who is using his equipment and to be compensated for its use.

A Bad Public Image

Aside from these ethical considerations there are the possible consequences of unrestricted computer trespass on telecommunications in general. Let's face it, the exploits of the 414s have given a black eye to the entire world of personal computing. As if there weren't enough concern that teens and young adults are "wasting their time" playing games on personal computers, now must combat the image of the teenage computer vandal. It is an unfair characterization of the vast, overwhelming majority of people under 21 who use home computers, but it is the sort of image that might just stick if we are all not careful.

Remember that we are at the mercy of the Federal Communications Commission, which regulates the phone lines, and the Congress and the state legislatures, which pass laws on how they may be used. Let's not create the kind of political pressure that would prompt any of these bodies to restrict our access to the phone lines.

We are also at the mercy of the multiple offspring of Ma Bell. It is quite well known among members of the telecomputing community that many local phone systems are thinking about levying extra charges for the use of modems on the public phone lines. If the image of telecomputerists is not one of responsible people but of pranksters irresponsibly using their computer/phone link to invade other people's privacy and damage their property, you can count on zero public and political support for keeping rates low.

Summing Up

I have probably said many things you didn't feel like reading, but I have seen too many good people and good causes unfairly and permanently smeared by people who were too ignorant and afraid to know what they were talking about.

Let's face it; there is a great deal of computer ignorance and computer fear out there. Let's not do anything that will make our hobby less prestigious or harder to pursue.

One final disclaimer. I have found that when the term "hackers" is used among telcomputerists, it refers not only to people who hunt at random for computers to access but also to people involved in a wide range of computer related activities. This latter group has done nothing wrong, and it would be unfair to suggest that they have. END

SJB DISTRIBUTORS. ONE STOP SHOPPING FOR COMMODORE SYSTEMS.

commodore

COMMODORE BUSINESS SERIES

SuperPet (5 languages, 2 processors)	$1059
CBM 8032 Computer, 80 Column	625
CBM Memory Expansion, 64K	259
CBM 8050, 1 mg. Dual Drive	995
CBM 8250, 2 mg. Dual Drive	1295
CBM D9060, 5 mg. Hard Disk	1995
CBM D9090, 7.5 mg. Hard Disk	2250
CBM 2031, 170K Single Drive (New)	295
DC Hayes Smart Modem	300

BUSINESS SOFTWARE-8032

Word Pro 4+ or 5+	$ 309
InfoPro	219
Administrator	489
VisiCalc (expanded)	199
BPI A/R, G/L, Job Cost, Inventory, Payroll	ea.325
Commodore 64	Call

INTERFACES & ACCESSORIES

80 Column Expander	$ 159
VIC 1600 Modem	95
VIC 1650 (auto answer, auto dial)	150
VIC 1525 Graphic Printer	225
VIC 1530 Datasette Recorder	65
VIC 1541 Disk Drive	249
VIC Switch (connect 8 64's or Vics to printer, dd)	149
PET-IEEE cable	33
IEEE-IEEE cable (2m)	49
5 Slot Expander for 64	65
Parallel Interface (Epson, Okidata, IDS, NEC)	70
Programmers Reference Guide	18
Verbatim Diskettes (10 per box)	26
Hes Modem	75
ADA 1450	149
ADA 1800 (New)	129
Numeric Keypad	35

NEW COMMODORE PRODUCTS

The Executive 64	$ Call
CBM B128-80	825
CBM B256-80	1095
CBM BX700	2990
B Series Software	Call
CBM 1520 Plotter	169
CBM 1526 Printer	349

SOFTWARE FOR CBM 64

BUSINESS

WordPro 3+/64 w/Spell Right Plus	$ 79
Spell Right Plus	55
Calc Result (Advanced)	125
Calc Result (Easy)	75
Busicalc II	95
Mirage Concepts (Powerful Data Base)	95
M File (merge with WordPro)	89
Home Utilities	49
64 Mailing List (Galactic)	28
The Manager	50
Home Accountant (continental)	75
Code Writer (Writes Basic Programs)	95
Stock (investment analysis)	80
Agricultural Management	Call
General Ledger, A/R, A/P, P/R, Inv.	Call

RECREATION

Assembler Package (cassette or disk, compiled, includes editor, loader, disassembler)	$ 39
Sprite Master (access)	30
Neutral Zone (access)	35
Space Belt	19
Coco II (build your own games)	40
Vic Tree (programmers utilities)	75
Micro-Term (save to printer, disk)	39
Hesmon	35
Gothmogs Lair	30
Road Toad	15
Commodore Games	Call

MONITORS - GREAT RESOLUTION (64 OR VIC)

CBM 1701 Color Monitor	$ 249
Amdek Color Plus	299
Panasonic TR-120 (w/speaker)	155
Panasonic CT-160	279
BMC (green screen)	95
Video/Audio Cable	15

PRINTERS - LETTER QUALITY

CBM 6400, 40 cps	$1450
Diablo 620, 25 cps	949
Transtar 140 (serial)	1395
Transtar 130, 16 cps (auto load, wp features!)	769
NEC 3500 Series	1600
NEC 7700 Series	2350
Transtar 120, 14 cps	500

PRINTERS - DOT MATRIX

CBM 8023, 150 cps/graphics	$ 545
CBM 4023 Printer	395
Epson FX Printer, 160 cps	549
Epson MX-80 FT w/graftrax	Call
Epson FX-100	859
Okidata 82A, 120 cps (serial and parallel)	429
NEC 8023A (parallel)	429
Okidata 92	559
Star Gemini, 10X	329
Star Gemini, 15	499
Transtar 315 (hi-res, color)	575

POLICY

VISA/MASTERCARD
C.O.D. FOR CASH
OR BANK CHECK

Minimum $50.00 Order
Add 3% Surcharge for Credit Cards.
Exact freight calculated.
Prices subject to change without notice.
Products shipped with manufacturer's warranty.
F.O.B. Dallas, Texas

*Customer's must call for return authorization before returning any product.

PRODUCT SELECTION ADVICE
CUSTOMER SERVICE
(214) 343-1328

SJB DISTRIBUTORS INC.
10520 Plano Road, Suite 206
Dallas, Texas 75238

TO ORDER
CALL TOLL FREE
800-527-4893
800-442-1048
(Within Texas)

Business Hours
Mon. - Fri. 8:30 to 5:30
Saturday 10 to 2

Write for free catalog.

NOTE: SJB HAS A FULL LINE OF COMPUTER MEDIA IN STOCK, CALL OR WRITE FOR MORE INFORMATION.

CIRCLE 208 ON READER SERVICE CARD

COMPUTER MAIL ORDER

TeleVideo



TERMINALS

910	$559.00
912	$689.00
920	$739.00
925	$719.00
950	$929.00
970	$1069.00

COMPUTERS

800A	$1099.00
802	$2699.00
803	$1949.00
802H	$4695.00
806/20	$4999.00
816/40	$9199.00
1602	$3399.00
1603	CALL

MODEMS

HAYES

Smart	$219.00
Smart 1200 (1200 Baud)	$509.00
Chronograph	$199.00
Micromodem 100	$309.00
Micromodem II	$279.00
Micromodem II (with term)	$299.00
Smart Com II	$99.00
Smart 1200B	$469.00

NOVATION

J-Cat	$119.00
Cat	$144.00
D-Cat	$159.00
103 Smart Cat	$189.00
Apple Cat II	$279.00
103/212 Smart Cat	$439.00
212 Apple Cat II	$609.00
Apple Cat II 212 Upgrade	$309.00

ANCHOR

Mark I (RS-232)	$79.00
Mark II (Atari)	$79.00
Mark III (T..I. 99)	$109.00
Mark IV (CBM-PET)	$125.00
Mark V (Osborne)	$95.00
Mark VI (IBM-PC)	$179.00
Mark VII (Auto Ans/Auto Dial)	$119.00
Mark VIII	$269.00
TRS-80 Color Computer	$99.00
9 Volt Power Supply	$9.00

ZENITH

ZT1 Terminal	$369.00

EAGLE



IIE-1	$1369.00
IIE-2	$1649.00
IIE-3	$2399.00
IIE-4	$3199.00
PC-E	$1579.00
PC-1	$2399.00
PC-2	$2799.00
PC-XL	$3599.00
1620	$3599.00
1630	$5499.00
1640	$6499.00
Cyma Software	CALL

MONITORS

AMDEK

300G	$149.00
300A	$159.00
310A	$169.00
Color I	$279.00
Color II	$399.00
Color III	$349.00
Color IV	$999.00

USI

Pi 1. 9" G	$99.00
Pi 2. 12" G	$119.00
Pi 3. 12" A	$149.00
Pi 4. 9" A	$139.00
1400 Color	$299.00

ZENITH

ZVM 122A	$109.00
ZVM 123G	$99.00

BMC

12" Green	$85.00
9191 AU 13" Color	$249.00

TAXAN

12 N Green	$129.00
12 A Amber	$139.00
12" RGB I	$299.00

NEC

JB 1260	$119.00
JB 1201	$149.00
JB 1205	$169.00
JC 1215	$299.00
JC 1216	$429.00
JC 1203	$469.00

GORILLA

12" Amber	$95.00
12" Green	$89.00

IBM



NEC 3550 Printer....$1799

PERCOM/TANDON DRIVES

5¼" 320K Floppy	$249.00
5 Meg Hard w/Controller	$1399.00
10 Meg Hard w/Controller	$1699.00
15 Meg Hard w/Controller	$2095.00
20 Meg Hard w/Controller	$2399.00

AMDEK

310A Amber Monitor	$169.00
DXY 100 Plotter	$599.00
Color II	$399.00

AST RESEARCH, INC.

Six Pak Plus...from	$279.00
Combo Plus II...from	$279.00
Mega Plus...from	$309.00
I/O Plus II...from	$139.00

QUADRAM

Quadlink	$549.00
Quadboard...as low as	$309.00
Quad 512 Plus...as low as	$259.00
Quadcolor...as low as	$219.00
Chronograph	$89.00
Parallel Interface Board	$89.00
64K RAM Chips Kit	$69.00

MICRO PRO

Word Star/Mail Merge	$369.00
InfoStar	$299.00
Spell Star	$159.00
CallStar	$159.00

MICROSTUF

Crosstalk	$129.00

MICROSOFT

Multiplan	$179.00

ASHTON-TATE

D-Base II	$419.00

IUS

EasyWriter II	$219.00
EasySpeller	$119.00
EasyFiler	$239.00

CONTINENTAL SOFTWARE

1st Class Mail/Form Letter	$79.00
The Home Accountant Plus	$99.00

SYNAPSE

File Manager	$89.00

LOTUS

123	$329.00

PFS

	APPLE	IBM
File	$79.00	$89.00
Report	$79.00	$79.00
Graph	$79.00	$89.00
Write	n/a	$89.00

KRAFT

IBM Joystick	$55.00
IBM Paddles	$39.00

PROFESSIONAL SOFTWARE

PC Plus Word Processing	$299.00

KOALA

Koala Pad

Apple	$85.00
IBM	$95.00
Atari	$75.00
CBM 64	$75.00

PAPER SUPPLIES

1or2"Address Labels(Tract.Feed)	$9.95
15" Report Paper(Tract Feed)	$24.95
8½"Blnk Wht Paper(Tract.Feed)	$19.95

SANYO



MBC-550PC	CALL
MBC-555PC	CALL
MBC 1100	$1599.00
MBC 1150	$2099.00
MBC 1200	$1999.00
MBC 1250	$2399.00
FDD 3200-320K Drive	$399.00
FDD 6400-64K Drive	$499.00
PR 5500 Printer	$699.00

PRINTERS

EPSON

MX80 FT, MX100, RX80, FX80, FX100 ..... CALL

OKIDATA

82, 83, 84, 92, 93 ..... CALL

STAR

Delta 10	$559.00
Gemini 10X	$299.00
Gemini P15	$449.00
Serial Board	$75.00

SMITH CORONA

TP-2	$469.00
Tractor Feed	$119.00

C.ITOH

Gorilla	$209.00
Prowriter 8510P	$379.00
Prowriter 1550P	$689.00
Starwriter F10-40P	$1149.00
Printmaster F10-55P	$1549.00
Tractor Feed	$199.00

DAISYWRITER

2000 Letter Quality	$1049.00
2500...NEW	CALL
Tractor Feed	$109.00

DIABLO

620	$949.00
630	$1749.00

IDS

Call for ALL Configurations on IDS PRISM PRINTERS.

NEC

8023 AN	$399.00
8025	$729.00
3510	$1449.00
3530	$1499.00
3550	$1799.00
7710/7730	$1949.00

BMC

401 Letter Quality	$699.00
BX-80 Dot Matrix	$259.00

COMREX

Comwriter II Parallel Printer	$549.00

MANNSEMAN TALLY

Spirit 80	$319.00
MT-160L	$589.00
MT-180L	$829.00
TRANSTAR	CALL
TOSHIBA	CALL

CABLES & CONNECTIONS

Atari to Parallel	$29.00
Atari to Serial	$29.00
Apple to Parallel	$69.00
Apple to Parallel/Graphics	$99.00
Apple to Serial	$89.00
IBM to Parallel	$35.00
IBM to Serial	$29.00
Parallel to Parallel	$29.00
Serial to Serial	$29.00
Grappler Plus	$129.00
PKASO	$139.00
Atari to Modem Cable	$29.00
CBM 64 to IEEE Board	$79.00
Apple 80-Column Card	$159.00
CBM Pet to Parallel	$99.00
CBM Pet to Serial	$89.00

HEWLETT PACKARD



HP 75	$749.00
HP 41C	$149.00
HP 41CV	$209.00
HP 41CX	$259.00
HP 10C	$52.00
HP 11C	$69.00
HP 12C	$92.00
HP 15C	$92.00
HP 16C	$92.00

For HP 41/41CV

HPIL Module	$99.00
HPIL Cassette or Printer	$359.00
Card Reader	$144.00
Extended Functions Module	$64.00
Time Module	$64.00

SHARP

PC-1500A $169

PC-1250A $89

POCKET COMPUTERS

CE-125 Printer/Cass. Int.	$129.00
CE-150 Color Print./Cass. Int.	$172.00
CE-155 8K RAM	$94.00
CE-161 16K RAM	$135.00
CE-500 ROM Library	each $39.00

Texas Instruments

TI-40.....$209

CALL FOR PRICING ON TIMEX SINCLAIR 1000

16K Memory	$44.95
2040 Printer	$99.95
Vu-Calc	$17.95
Mindware Printer	$99.00

=WEST=

1-800-648-3311

In NV call (702)588-5654, Dept. 0108
P.O. Box 6689, Stateline, NV 89449
Order Status #: 588-5654

=CANADA=

1-800-268-4559

In Toronto call (416)828-0866, Dept. 0108
2505 Dunwin Ct., Unit 1B,
Mississauga, Ontario, Canada LSLITI
Order Status #: 828-0866

=EAST=

1-800-233-8950

In PA call (717)327-9575, Dept. 0108
477 E. Third St. Williamsport, PA 17701
Order Status #: 327-9576

MasterCard

No risk, no deposit on C.O.D. orders. Pre-paid orders receive free shipping within the UPS Continental United States with no waiting period for certified checks or money orders. Add 3% (minimum $5.00) shipping and handling on all C.O.D. and credit card orders. Larger shipments may require additional charges. NV and PA residents add sales tax. All items subject to availability and price change. We stock manufacturer's and third party software for most all computers on the market. Call today for our new catalog.

COMPUTER MAIL ORDER

FRANKLIN



COLOR COMPUTERS
ACE 1000, ACE 1200, ACE 1200 OMS, ACE 1100 PRO PACK: ACE 1000, ACE 10 Drive & Controller, 80 Column Card, ACECalc & ACEWriter.....CALL

APPLE IIe STARTER PACK
64K Apple IIe, Disk Drive and Controller, 80 Column Card & Monitor III...
COMPLETE.....$1599.00

MICRO-SCI
Apple & Franklin

A2	$219.00
A40	$299.00
A70	$319.00
C2 Controller	$79.00
C47 Controller	$89.00

RANA

Elite I (Apple/Franklin)	$279.00
Elite II (Apple/Franklin)	$319.00
Elite III (Apple/Franklin)	$569.00

VISICORP
FOR APPLE, IBM & FRANKLIN

Visidex	$189.00
Visifile	$189.00
Visiplot	$159.00
Visiterm	$89.00
Visitrend/Plot	$229.00
VisiSchedule	$229.00
Desktop Plan	$189.00
Visicalc 4 (IBM)	$169.00
Visicalc Advanced IIe	$309.00
Stretch Calc	$89.00

Visicorp prices for IBM may vary slightly.

LJK

Letter Perfect Apple	$109.00
Data Perfect Apple	$75.00

AXLON

Apple/Franklin 128K Ram	$299.00
Apple/Franklin Ram Disk	$729.00

MPC

Bubdisk (128K Non Volitare)	$649.00

WICO

Joystick	$21.95
Famous Red Ball	$23.95
Power Grip	$21.95
Three-Way Deluxe	$22.95
Atari/VIC Trackball	$34.95
Apple Trackball	$59.95

KRAFT

Atari Single Fire	$13.00
Atari Switch Hitter	$16.00
Apple Joystick	$44.00
Apple Paddles	$39.00

commodore



CBM 8032 $599

CBM64 ...$219

VIC 20 .....$89

CALL ON
Executive 64 Portable

1520 Color Printer/Plotter	$169.00
1525 80 Column Printer	$219.00
1530 Datasette	$69.00
1541 Single Disk Drive	$249.00
1600 VIC Modem	$59.00
1650 AD/AA Modem	$89.00
1702 14" Color Monitor	$249.00
Pet 64	$569.00
Pet 4032	$599.00
CBM 8032	$599.00
Super Pet	$999.00
B128-80	$769.00
2031	$299.00
8050	$949.00
8250	$1199.00
9060	$1999.00
9090	$2199.00
4023	$379.00
6400	$1399.00
64K Upgrade	$269.00
Spell Master	$149.00
Z-Ram	$549.00
Silicon Office	$749.00
The Manager	$209.00
Soft Rom	$129.00
Jinsam	CALL
CalcResult 64	$139.00
CodeWriter 64	$75.00
VisiCalc	$169.00

PROFESSIONAL SOFTWARE


Word Pro 2 Plus	$159.00
Word Pro 3 Plus	$189.00
Word Pro 4 Plus	$279.00
Word Pro 5 Plus	$279.00
InfoPro	$179.00
Administrator	$399.00
Power	$79.00
Word Pro 64 Plus	$65.00

CARDCO
for VIC 20/64

Light Pen	$32.00
Cassette Interface	$29.00
Parallel Printer Interface	$69.00
3 Slot Expans. Interface (20)	$32.00
6 Slot Expans. Interface (20)	$79.00

HOME COMPUTERS

ATARI



ATARI 600XL.....$149

ATARI 800XL.....$269

ATARI 1200XL .....CALL

ATARI 400 .....CALL

ATARI 800 .....CALL

1010 Program Recorder	$74.00
1020 40 Col. Printer/Plotter	$249.00
1025 80 Col. Printer	$449.00
1027 Letter Quality Printer	$299.00
1050 Disk Drive	$379.00
1030 Direct Connect Modem	CALL
CX30 Paddles	$12.00
CX40 Joystick	$8.00
CX42 Remote Joystick	CALL
CX77 Touch Tablet	$69.00
CX80 Trak Ball	$49.00
CX85 Keypad	$105.00
CX418 Home Manager	$69.00
CX488 Communicator II	$229.00
KX7098 Atari Accountant	$209.00
KX7101 Entertainer	$69.00
KX7102 Arcade Champ	$75.00

ALIEN

Atari Voice Box	$119.00
Apple Voice Box	$149.00

MEMORY BOARDS

Axlon 32K Ram	$59.00
Axlon 48K Ram	$99.00
Axlon 128K Ram	$299.00
Intec 32K Board	$59.00
Intec 48K Board	$85.00
Intec 64K Board (400 only)	$99.00
Intec Real Time Clock	$39.00

DISK & CART HOLDERS

Flip-n-File 10	$4.00
Flip-n-File 50	$19.00
Flip-n-File 400/800 Cart	$19.00

PERCOM

AT 88-S1	$329.00
AT 88-A2	$269.00
AT 88-S2	$569.00
AT 88-S1 PD	$469.00
AT 88-DDA	$145.00
RFD 40-S1	$449.00
RFD 40-A1	$279.00
RFD 40-S2	$729.00
RFD 44-S1	$539.00
RFD 44-S2	$869.00
TX 99-S1 (Texas Inst.)	$279.00

RANA

1000 Atari Disk Drive	$319.00

TRAX

AT-D2	CALL

FLOPPY DISKS
MAXELL

MD-1	$29.00
MD-2	$39.00
FD-1(8")	$40.00
FD-2(8" DS DD)	$50.00

ELEPHANT

5¼" SS SD	$18.50
5¼" SS DD	$24.95
5¼" DS DD	$29.95

VERBATUM

5¼" SS DD	$26.00
5¼" DS DD	$36.00

HEAD

Disk Head Cleaner	$14.95

C.M.O. TOP 80

APPLE/FRANKLIN

1. Choplifter	$27.00
2. Bank Street Writer	$55.00
3. PFS: File	$89.00
4. Visicalc	$179.00
5. Home Accountant	$55.00
6. Zaxxon	$29.00
7. Most Amazing Thing	$28.00
8. Visifile	$189.00
9. Fathoms 40	$19.00
10. Deadline	$35.00
11. PFS: Report	$89.00
12. Zork III	$29.00
13. Frogger	$24.00
14. Facemaker	$24.00
15. Snooper Troops #1	$32.00
16. Delta Drawing	$35.00
17. Castle Wolfenstine	$24.00
18. Wayout	$29.00
19. Canyon Climber	$19.00
20. Bandits	$26.00

CBM 64

1. Word Pro 64	$65.00
2. Jumpman	$29.00
3. Gorf (20/64)	$14.95
4. Microspec Data Base 64	$69.00
5. Logo 64	$39.00
6. Microspec Gen. Ledger 64	$79.00
7. Zork III	$29.00
8. Frogger (64)	$23.00
9. Quick Brown Fox (20/64)	$49.00
10. Shamus	$29.00
11. Deadline	$29.00
12. Assembler 64	$14.95
13. Zork II	$29.00
14. 3-D Man	$14.00
15. Protector	$32.00
16. Starcross	$29.00
17. Easy Mail 64	$14.95
18. Grave Robber	$11.00
19. Wall Street	$19.00
20. Trash Man	$32.00

ATARI

1. Donkey Kong	$39.00
2. Zaxxon	$29.00
3. E.T. Phone Home	$39.00
4. Miner 2049er	$35.00
5. Dig Dug	$33.00
6. Choplifter	$29.00
7. Donkey Kong, Jr	$39.00
8. Canyon Climber	$25.00
9. Snooper Troops #2	$34.00
10. Word Wizard	$59.00
11. Picnic Paranoia	$34.00
12. Jumpman	$29.00
13. Shamus	$34.00
14. Letter Perfect	$109.00
15. File Manager 800	$69.00
16. Preppie	$24.00
17. Astro Chase	$25.00
18. Blade/Black Hole	$27.00
19. Pac Man	$33.00
20. Baja Buggies	$25.00
21. Crush, Crumble & Chomp	$24.00
22. Wayout	$27.00
23. Zork II	$29.00
24. Visicalc	$159.00
25. Atari Writer	$49.00
26. Three Little Pigs	$25.00
27. Upper Reaches of Apshai	$16.00
28. Starbowl Football	$24.95
29. Drelbs	$26.00
30. Protector	$34.00
31. Frogger	$25.00
32. Lunar Leeper	$24.00
33. Wizard of Wor	$34.00
34. Kindercomp	$21.00
35. Moon Shuttle	$22.00
36. Home Accountant	$55.00
37. Temple of Apshai	$29.00
38. Spell Wizard	$39.00
39. Nautilus	$26.00
40. O'Riley's Mine	$22.00

=WEST=
1-800-648-3311
In NV call (702)588-5654, Dept. 0108
P.O. Box 6689, Stateline, NV 89449
Order Status #: 588-5654

=CANADA=
1-800-268-4559
In Toronto call (416)828-0866, Dept. 0108
2505 Dunwin Ct., Unit 1B,
Mississauga, Ontario, Canada LSLITI
Order Status #: 828-0866

=EAST=
1-800-233-8950
In PA call (717)327-9575, Dept. 0108
477 E. Third St. Williamsport, PA 17701
Order Status #: 327-9576

VISA

CANADIAN ORDERS: All prices are subject to shipping, tax and currency exchange fluctuations. Call for exact pricing in Canada. INTERNATIONAL ORDERS: All shipments outside the Continental United States must be pre-paid by certified check only. Include 3% (minimum $5.00) shipping and handling. EDUCATIONAL DISCOUNTS: Additional discounts are available to qualified Educational Institutions. APO & FPO: Add 3% (minimum $5.00) shipping and handling.

CIRCLE 131 ON READER SERVICE CARD

Survey results, hiding a program, and a conversation with Wozniak.



Apple Cart

Stephen Arrants

1984 marks the tenth year of *Creative Computing*, the *first* magazine devoted to personal computers. January 3 is a special date to Apple owners. On that date in 1977, Apple Computer incorporated. Joseph Wiezenbaum, the father of Eliza and a pioneer in the field of artificial-intelligence was born on the 8th.

This month: survey results, some more on telecommunications, a long promised (but not forgotten) utility, answers, and a look at new things from Apple.

The Survey

Well, I finally completed reading all the surveys. Over 200 were received and stragglers trickle in each day. So, out of 208 respondents, who are you?

132 are men, 76 are women. The youngest is 12, but she says she "hopes to do better next year." Our oldest is 63. The geographical spread was from all over the U.S., two from overseas, and 27 from Canada—nice to know the home folks read me!

The average system is an Apple II+ with a 16K language card, one drive, monochrome monitor (with an RF modulator to connect with a color TV), and a dot-matrix printer. Twenty-five of you own Franklins and six have an Apple IIe.

Favorite software? Everything from *Apple Writer* to *Zaxxon*. There was little consistency here, though *Apple Writer* and *Screen Writer II* were the most mentioned word processors.

The "refuse to boot" list is more interesting—*only two people answered this!* You do a great deal of research before buying software, relying on reviews and other users' opinions. One person had problems with a graphics package and her printer, since remedied. Another reader said he hated a very popular spreadsheet because "... after going through ten menus and answering 1000 questions, I forget what I'm doing!"

Only 56 use a bulletin board or other telecommunications service, though most plan to buy modems and join either The Source or CompuServe.

The most perplexing answers had to do with users' groups. Only *ten* readers belong to a group. The rest of you couldn't find one in your area or didn't think a users' group could help. If there isn't a group in your area, start one. A users' group can be your most important source of information and support. Chances are that someone in the group has dealt with a problem you might be having.

Not all program fixes or alterations are documented. Users' groups often have files of these, which are open to members. One national group I can recommend is A.P.P.L.E.—Apple Puget Sound Program Library Exchange. Membership includes a great Apple-only magazine, discounts on hardware and software, telephone help numbers, and access to information not available elsewhere. You don't have to live near Puget Sound to be a member. A.P.P.L.E. will help you start your own group, and they are about the friendliest people you'll meet. Pick up a copy of *Call A.P.P.L.E.* for more information.

The majority (98%) of you bought an Apple or Franklin because of what it can do. Graphics, availability of software, and experience on another Apple were the three main reasons cited. Many thought the best thing about an Apple is the flexibility and adaptability built into the system. Gary Mugsford of Bramalea, Ontario says the Apple can be built into the machine he wants. "[It is] the frame for my computer of the future."

Apple loses points on pricing, however. Other complaints were the slow Apple DOS, 40-column display, lack of numeric keypad, and terrible documentation.

Only four of you had serious problems, such as a broken key, a chip failure, or a disk drive that INITed disks at odd times. One reader complained that after having an AppleCare warranty for two years, he still doesn't know what it's used for. I wish my printer worked as well.

Most of you recognized *InvisiCalc* for what it was—a non-existent product. It is easy enough to make your own copy. First, get a blank disk. Carefully remove the disk from the sleeve. Throw the disk away, label the sleeve, and you've got *InvisiCalc.* It is the only error-free program I know of.

Some of you had questions for me, so I'll answer some of them here.

Jim DeAngelis: It is possible to have text on a lo-res or hi-res graphics screen—sort of. The most practical way of doing this is to write a character generator program to draw the letters and text symbols on the graphics screen. This can be time-consuming, however, and requires a great deal of patience. There are commercial programs that do this, and we published a program to do

What the home computer was really meant for.


Your Home Computer Is Just The Beginning.

You've got your home finances organized, learned a little French, played a lot of Zork. You have all the software you want.

Yet, something is missing.

Introducing Delphi™. The information, communications and entertainment system that takes you far beyond the limitations of disks and cartridges. The system that's so friendly the whole family can use and enjoy it.

Delphi is what the home computer was really meant for.

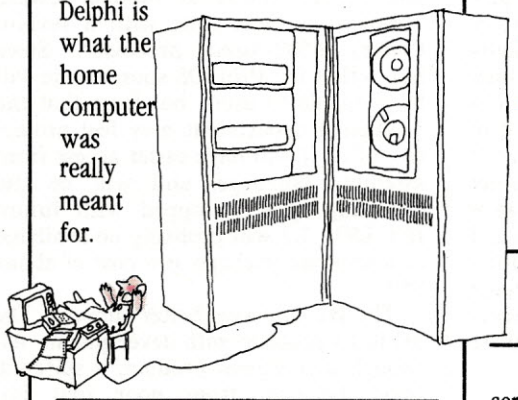

Here's What Delphi Gives You Now.

With a simple telephone call, you can look up anything in a vast research library which includes a 20,000-entry encyclopedia. You can do your banking. Get the news, weather and sports stories you want from several wire services. Check airline schedules and make reservations. Shop from an electronic catalog. Tap into the Comp-U-Store* discount shopping service. Keep track of your appointments. Play games. Get in touch with other people through the electronic bulletin board, mail and "talk" services. Seek advice from other members and volunteer your own expertise. Collaborate on the Delphi novels. Take part in or run a subscriber poll.

That's just the beginning.



You Can Be Part Of The Design Committee.


We're continually adding new services. But only services we think you and your family will use and enjoy. What's coming, for example, are tutorials on subjects from algebra to zoology.



You can be part of the design committee. Just tell us what you'd like to see on Delphi.

So Friendly, You Don't Even Need Our Handbook.

Delphi is the easy-to-use, friendly information system. We designed it for humans. You don't have to speak computerese. In fact, you don't even need our friendly handbook. We'll take you on a guided tour right on your screen.



The Price Is Friendly, Too.

It's just $49.95 to establish your Delphi membership and for the handbook to get you started. Then just as little as 85 cents for 10 minutes ($5 per hour) on-line for most services during home time . . . evenings, weekends and holidays. Office time, of course, is more.

Delphi Is Compatible With Your Equipment.

No matter what home computer you have, you can use Delphi. Unlike other systems, Delphi is compatible with all makes and is easily adaptable to any screen size. And you can use just about any acoustic coupler or direct connect modem to connect Delphi to your telephone.

We Protect Your Privacy.

We designed privacy into Delphi from the start. Our password system prevents unauthorized access. We don't even know your password, and you can change it any time. We can't monitor your transactions or communications. We can't retrieve information except at your request. The safeguards are spelled out in our policy statement and agreed to by our people. A copy is available. We are members of and subscribe to the policies of the Videotex Industry Association.



Sign Up, Log On, Be In Touch.



To sign up and log on, or for more information, just see your dealer. Or get in touch with Delphi.

We'll put your computer in touch with destiny.

*Comp-U-Store is a registered trademark of Comp-U-Card of America.

Dealer Inquiries Invited

DELPHI™

What the home computer was really meant for.

General Videotex Corp., 3 Blackstone Street, Cambridge, MA 02139 (800) 544-4005 (617) 491-3393

CIRCLE 252 ON READER SERVICE CARD

this in *The Creative Apple* on page 27.

Jill Baroff: I suspect that your telecommunications problems are in your phone lines rather than in your Apple or Hayes 1200 modem. If you use a long distance service such as MCI or Sprint, the delay time from you, to a satellite, to the host computer can cause garbage on the lines. Try running at 300 baud. I encounter fewer errors at that speed.

Jerry Van Cleef: Yes, you are right! Those soft switches in the Apple IIe can cause many problems. I will list them for other readers:

$C050-$C057 display switches. $C055 is text page 2, $C050 is graphics (lo-res unless $C057 (hi-res) is selected.)

$C080-$C08F RAM and ROM bank select soft switches.

$C0E0-$C0EF are disk drive soft switches. Unless you know what you are doing, stay away from these soft-switches. You won't cause any real harm, but you will have to reboot to recover. Thanks Jerry.

Terry Odgen: You can call your HELLO program anything you want. Just INIT with the program name, not HELLO. If you want a binary HELLO program, POKE 40514,52 before INITing. For a text HELLO program, POKE 40514,20. To have it do an automatic CATALOG, CALL 42350. This CALL works under DOS 3.3 even if the CATALOG command has been changed to another word. Try it with the drive door open. Normally you would get I/O ERROR if you CATALOG with the door open. With this CALL, the error message reads ROGRAM TOO LARGE. Why is the leading P left off? And why this error message? That's a good question. Does anyone have the answer?

Nancy Davidowicz: No, the Apple III is not dead. Apple is continuing support and development on this unjustly maligned machine.

I have been neglecting it in the column, but from time to time I will have information for Apple III users.

More Telecommunications

By the time you read this, *Creative Computing* will have a SIG (Special Interest Group) on the CompuServe Information Service. Our SIG will not charge any fees to users; all you pay for is connect time to CompuServe. We plan to feature the Street Price Index, Dateline: Tomorrow, and sections for downloading programs. We will select the best of past and current programs from *Creative Computing* and save you the time and trouble of typing in a listing.

There will be sections on program fixes, a section for readers to post their own program fixes and enhancements, a section for reader questions and answers, and previews of upcoming articles and evaluations.

From time to time we will have a live, user's meeting on the SIG so you can talk the editors and our guests. We hope you'll join us.

On another issue, local Bell System companies are filing petitions to charge modem users special access fees. Even if you use MCI or Sprint to access a host computer, these charges will affect you, since you access these carriers through local lines. The reasoning behind this is that those involved in computer telecommunication should pay a fair share of telephone rates. Now, there is nothing wrong with that. But the rates they propose are out of line for the majority of users. A business that is constantly transferring data over telephone lines should pay for more than average system use. But for you and me, these proposed rates are out of line. Bell doesn't want an extra two or three dollars per month. Most rates will add an average of *$30 per month* to your telephone bill. I urge you to let your local Public Utilities Commission or similar body know what you feel. Write your congressional representatives. Let them know what these rates will cost *you*.

News on Apple


On Sunday, October 16, 1983, Steve Wozniak, inventor of the Apple Computer (as if you needed to be reminded) was the guest speaker on CompuServe's Apple SIG. It was a great session. Steve answered questions from SIG members and the public on Apple past, present, and future. Steve gave those of us lucky enough to be present inside information about ProDOS, the Macintosh, new developments for the IIe and III, and his view of the industry.

On the Apple/Franklin case, Steve commented that when Franklin claimed "compatible," most people at Apple felt that compatible didn't mean *copy*. It was seen as another product for the market. When he saw the Ace, he felt that Franklin had copied the circuit and design, down to chip placement. "Programs belong to who wrote them, even the Op-Sys code and the like, and have value. You can't take another's work, 'Xerox' it and sell it. I found out it only takes two people to start a company, a Xerox operator and a lawyer!"

ProDOS should be out this month. It was written to support only 64K, since it was done a few years ago. But the enhanced IIe family is headed toward 16Mb in a short time with a revolutionary 6502-based processor. Steve hopes that the ProDOS source code will be available to users, but fears that the marketing department may feel protective of it. It will have easier access from assembly language, and will be the operating system shipped with future II's. DOS 3.3 will probably be available as a separate package at a cost of about $50.

The III will have better support. The III has a problem with development. Although it is a great product, it suffered, Steve believes, from poor first impressions. Apple didn't allow the hackers to do things in "their own random ways" on the III. Users should use a good product, like SOS, only if it is better for their application, not because a company forces it on them. "It's a good lesson to learn. The III is still difficult to learn how to do your own thing on. [It] will be remembered for years, even when problems (lack of software, hardware) are corrected."

What will the Macintosh be like? Steve says to look at a Lisa, then imagine it with less memory and hardware, but

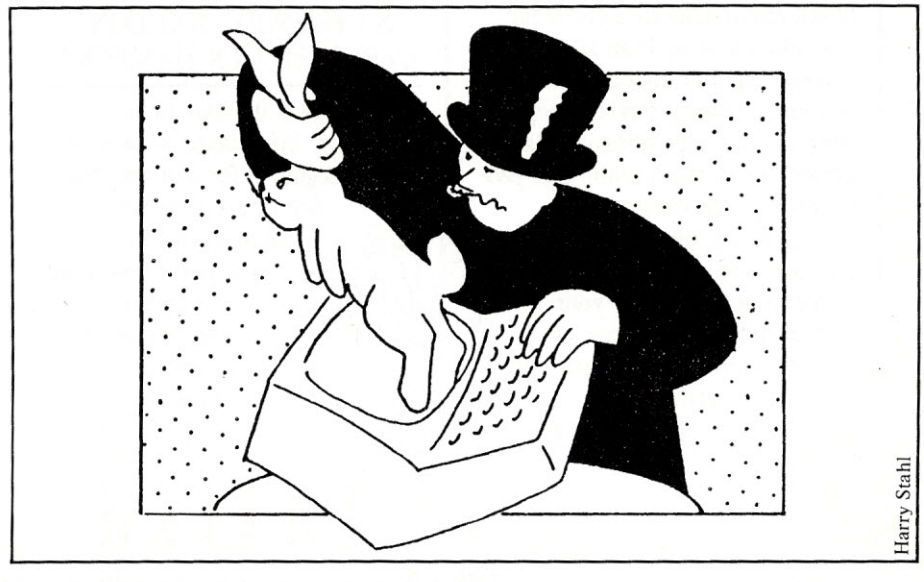

Apple Cart, continued...

able to work faster and better with fewer resources; a mouse, no color, no slots and "the finest software." It will use its own operating system which was developed to handle the user interface on Lisa more directly with better performance. Such good software had been written for Macintosh that it will be transferred to the Lisa. He doesn't see the Macintosh as initially replacing the IBM-PC as a small business machine because of memory, mass storage, and slot capability limits. It is intended to be a more finished product for the bulk of the personal market. Steve believes that the Macintosh is "the most revolutionary computer of all time—not that what it does hasn't been done before, but that it hasn't been done at a price which will wind up with millions experiencing it."

What about competition from the IBM "Peanut"? From the documentation, Steve thinks that it isn't the revolutionary price/performance product that has been promised. Until a large body of good software exists, "it's not the major home/education competition we were expecting. Remember what happened to Apple with the III—a great product got a bad start and the psychological effects of 'bad impressions' hung over us for years. The Peanut is a risky product—for example, if the disk drives have a bad reliability problem then the dealers will have a hell of a lot of non-technical computer purchasers expecting a hell of a lot from those three initials. [The Peanut] makes forthcoming Apple II products extremely good. I credit Peanut with a lot of the drop in Apple's stock price, but IIe sales worldwide are holding, and now rising."

Steve enjoyed the session, and may be back to host other meetings. If you are a CompuServe user, GO PCS-51 to join MAUG, the Micronet Apple Users Group. MAUG charges no fees, features a great download section, programming hints, and members can help you with almost any programming problem you might have. It is almost reason enough to join CompuServe.

Editing Basic Programs The Easy Way

Applesoft is a powerful language, but unfortunately it doesn't have a powerful text editor. How many times have you typed in a long listing and decided you needed to change a variable or string throughout the entire program? You could list each line, using the ESC sequence and type each correction. Slow. Dull. Discouraging.

It would be nice to use a word processor to edit a Basic program, but word processors usually use text files. Here is a way to change a Basic program into a text file, edit it, and change it back into a Basic program.

After entering your program, insert the program in Listing 1. RUN it to create a text file, and boot your word processor. Edit as you would a word processor file and SAVE the corrected text. Then go back to DOS and EXEC the file. EXECing puts the program into memory. List it to check for changes, and when you decide it is correct, SAVE it. That's it! Quick, simple, and almost bomb-proof.

How to Hide a Program

There are better ways to keep a program safe from prying eyes, but few are as simple as the following.

After the program is loaded, PEEK (2049), and make a note of the value. Now make the first line of your program POKE 2049, X. Where X is any number other than the PEEK value. RUN the program, break, and try listing it. What you see, depending on what you POKEd in, is garbage. Don't worry—your program is still safe and sound. To restore the listing, POKE in the value recorded. Ah—but what if the snoop decides to LIST before RUNning? Well, looking in Professor Luebbert's *What's Where in the Apple,* we see that decimal location 214 is the Applesoft Mystery Parameter. If you set it to $80 (decimal 128), by a POKE 214, 128; *any* command will cause the program to RUN. (The normal value for 214 is 0.) And if you POKE 1010,102: POKE 1011,213: POKE 1012,112; you make an attempt to RESET cause the program RUN. (These are the Autostart ROM reset vector and power mask. Normal values are 1010,191; 1011,157; and 1012,56.)

Those are just a few simple ways of protecting your program. If you know of any others, send them in to me at Creative Computing or by EMAIL at CompuServe account 75675, 1075.

Next month, how to read the names of deleted files when doing a CATALOG, and (I promise, Dr. Bill Ross) how to recover them intact. END

Listing 1.

```
0  POKE 33,33:D$ =  CHR$ (4): PRINT D$"OPEN FILE":
     PRINT D$"WRITE FILE": LIST
     1,63999: PRINT D$"CLOSE FILE": TEXT : END
```

statement of ownership

STATEMENT OF OWNERSHIP, MANAGEMENT AND CIRCULATION (Required by 39 U.S.C. 3685). 1A. Title of publication: Creative Computing. B. Publication No. 00978140. 2. Date of Filing: October 1, 1983. 3. Frequency of issue: Monthly. A. No of issues published annually: 12. B. Annual subscription price: $24.97. 4. Complete mailing address of known office of publication: 39 E. Hanover Avenue, Morris Plains, NJ 07950. 5. Complete mailing address of the headquarters or general business office of the publisher: 39 E. Hanover Avenue, Morris Plains, NJ 07950. 6. Full names and complete mailing addresses of publisher, editor, and managing editor: Publisher, None. Editor, Elizabeth B. Staples, 39 E. Hanover Ave., Morris Plains, NJ 07950. Managing Editor, Peter Fee, 39 E. Hanover Ave., Morris Plains, NJ 07950. 7. Owner: AHL Computing, Inc., 39 E. Hanover Ave., Morris Plains, NJ 07950; Ziff-Davis Publishing Company, One Park Ave., New York, NY 10016. 8. Known bondholders, mortgagees, and other security holders owning or holding 1 percent or more of total amount of bonds, mortgages or other securities: None.

10. Extent and nature of circulation	Average No. Copies each issue during preceding 12 months	Actual No. Copies of single issue published nearest to filing date
A. Total No. Copies (Net Press Run)	283,751	334,503
B. Paid Circulation 1. Sales through Dealers and Carriers, Street Vendors and Counter Sales	108,088	129,200
2. Mail Subscription	114,620	121,500
C. Total Paid Circulation (Sum of 10B1 and 10B2)	222,708	250,700
D. Free Distribution by Mail, Carrier or Other Means Samples, Complimentary, and Other Free Copies	6,467	5,585
E. Total Distribution (Sum of C and D)	229,175	256,285
F. Copies not Distributed 1. Office use, Left Over, Unaccounted, Spoiled After Printing	3,189	3,618
2. Returns from News Agents	51,387	74,600
G. Total (Sum of E, F1, and 2—should equal net press run shown in A)	283,751	334,503

11. I certify that the statements made by me above are correct and complete.
WILLIAM L. PHILLIPS, Assistant Treasurer

Lyco Computer Marketing & Consultants

TO ORDER CALL US

TOLL FREE 800-233-8760

In PA 1-717-327-1824

PERCOM HARD DISK DRIVES for APPLE IBM-PC TRS-80*

5MEG	$1349.00
10MEG	$1599.00
15MEG	$1999.00
20MEG	$2359.00

*Add $30.00 for TRS-80 Drives

TEXAS INSTRUMENT DRIVE $255.00

for ATARI COMPUTERS

AT88S1	$299.00
AT88S2	$535.00
AT88SIPD	$CALL$
RFD40SI	$399.00
RFD40S2	$689.00
RDF44SI	$489.00
AT88 DOUBLER BOARD	$139.00
ADD-ON DRIVES	$CALL$

apple®

Apple is a Registered Trademark of Apple Computer Inc.

SSI

Battle of Shilo	$26.75
Tigers in the Snow	$26.75
Cosmic Balance	$26.75
Knights of the Desert	$26.75
Battle for Normandy	$26.75
Germany 1985	$36.75

RANA DISK DRIVES

Elite 1	$295.00
Elite 2	$449.00
Elite 3	$559.00

MICRO-SCI

A2	call
A40	call
A70	call

MUSE

Castle Wolfenstein	$20.75
Caverns of Frietag	$20.75
Robot War	$26.75

CONTINENTAL

Home Accountant	$51.75
Book of Apple Software	$16.75

BRODERBUND

Bank Street Writer	$44.75
AE	$24.75
Apple Panic	$21.75
Choplifter	$24.75
David's Midnight	$24.75

SPINNAKER

Kindercomp	$21.75
Story Machine	$23.75
FaceMaker	$23.75
Snooper Trooper	$29.75
Delta Drawing	$34.75

EPYX

Temple of Apshai	$26.95
Star Warrior	$26.95
Crush, Crumble & Chomp	$22.75

ADVENTURE

Saga#1 Adventureland	$29.95
Saga#2 Pirate Adventure	$29.95
Saga#3 Secret Mission	$29.95
Stone of Sisyphus	$24.95

ALIEN GROUP

Atari Voice Box	$99.00
Apple Voice Box	$129.00

commodore

1212 Programmers Ad.	$44.75
1213 Vicmon	$44.75
Vic 20 dust cover	$6.99
Vic 64 dust cover	$6.99

TIMEWORKS

INVENTORY	$59.75
ACCOUNTS REC.	$59.75
ACCOUNTS PAY.	$59.75
GENERAL LEDGER	$59.75
PAYROLL	$59.75
CASH FLOW	$59.75
SALES ANALYSIS	$59.75
ELEC. CHECKBOOK	$59.75
MONEY MANAGER	$59.75
DATA MANAGER	$59.75
WALL STREET	$59.75

HES 64

64Forth R	$55.75
Hesmon R	$29.75
Turtle Graphics R	$49.75
Heswriter R	$38.75
Gridrunner R	$29.75
Attack of Mut Cam R	$34.75
Turtle Tutor R	$29.75
Turtle Trainer R	$29.75
Paint Brush R	$23.75
Benji Space Rescue D	$29.75
Home Manager C/D	$39.75
Time Money Mgr D	$55.75
OmniCalc D	$79.75
Sword Point D	$24.75

EPYX 64

Temple of Apshai	$28.00
Upper Reaches of A	$15.00
Crush Crumble & C	$23.00
Jumpman	$28.00

CARDCO

Cardprinter / LQ1	$499.00
Cardprint DM1	$109.00
5 Slot Expansion 64	$54.00
64 Write NOW	$39.00
64 Mail NOW	$29.00
20 Write NOW	$29.00
64 Keypad	$29.00
Universal Cass. Int.	$29.75
Printer Utility	$19.75
6 Slot Expansion	$79.95
3 Slot Expansion	$24.95
Vic 20/64 Printer int	$59.95

BRODERBUND 64

Serpentine R	$26.75
Choplifter R	$32.75
Seafox R	$26.75

PARKER 20

Frogger (ROM)	$33.75
QBert (ROM)	$33.75
Tutankham (rom)	$33.75

SPINNAKER 64

Kindercomp	$21.75
Story Machine	$23.75
Face Maker	$23.75
Snooper Trooper	$29.75
Delta Drawing	$34.75
Shamus II c/d	$24.95
Pinhead c/d	$22.95

QUICK BROWN FOX

QBF Word Processor	$49.95

LJK

Letter Perfect	$105.00
Data Perfect	$95.00

ADVENTURE INTERNATIONAL

S. Adams Adventure	$28.75

VIC-64

WORDPRO 3+	$69.75

VIC 20

King Arthurs Heir Cass	$24.75
Monster Maze Rom	$24.75

ATARI

Computers for people.

600XL	$$$$$149.00
800 XL	$CALL$
1200 XL	$499.00
1400 XL	$CALL$
1450 XL	$CALL$
1025 Printer	$399.00
1020 Color Printer	$245.00
1027 Printer	$299.00
1010 Recorder	$75.00
410 Recorder	$75.00
810 Disk Drive	$399.00
1050 Disk Drive	$335.00

PARKER BROTHERS

Super Cobra R	$33.75
Astro Chase R	$33.75
Frogger R	$33.75
QBert R	$33.75
Popeye R	$33.75
Risk R	$42.75
Chess R	$42.75

SPINNAKER

Story Machine R	$26.75
Face Maker R	$24.75
Kinderomp R	$20.75
Fraction Fever R	$24.75
Delta Drawing R	$26.75

SSI

Battle of Shilo C/D	$26.75
Tigers in the Snow C/D	$26.75
Battle for Normandy C/D	$26.75
Knights of the Desert C/D	$26.75
Cosmic Balance C/D	$26.75

ON-LINE

Frogger	$24.95
Wizard & Prin	$26.95

ROKLAN

Wizard of War	$29.75
Gorf	$29.75

BIG 5

Miner 2049	$32.75

BUSINESS

Visicalc	$159.75
Letter Perfect	$89.75
Letter Perfect	$89.75
Data Perfect	$89.75
Text Wizzard	$49.75
Spell Wizzard	$64.75
File Manager	$69.75
Home File Mgr	$69.75
Bookeeper	$119.75
C.R.I.S.	$199.75
Tax Advantage	$35.75
Home Accountant	$59.75
Bank Street W	$49.75

Lyco Computer Marketing & Consultants

TO ORDER CALL US

TOLL FREE 800-233-8760

In PA 1-717-327-1824

Lyco Computer Marketing & Consultants

TO ORDER CALL US

TOLL FREE 800-233-8760

In PA 1-717-327-1824

BLANK DISKETTES

ELEPHANT

Single Side SD (10).....$17.75
Single Side DD (10).....$21.75
Double Side DD (10).....$26.75

WABASH

Single Side SD (10).....$19.75
Single Side DD (10).....$23.75
Double Side DD (10) $32.75

MAXELL

MD I (10).....$28.75
MD II (10).....$38.75

CERTRON CASSETTES

CC-10 12 for.....$15.99
CC-20 12 for.....$17.99

INNOVATIVE CONCEPTS

Disk Storage (holds 10)....$4.95
Disk Storage (holds 15)....$9.95
Disk Storage (holds 50)....$26.95
ROM Storage (holds 10)...$19.75

MODEMS

ANCHOR MARK I.....$74.75
MARK II.....$74.75
HAYES 1200 .....$509.75
MICRO 2.....$274.75
SMART $214.75
NOVATION CAT.....$144.75
D-CAT.....$155.75
J-CAT.....$114.75
MICROBIT.....$159.75

CORDLESS TELEPHONES

(up to 700 ft. range)

from...$69.75

SAVE on these in-stock PRINTERS

CITOH

GORILLA GX100 .....$185.00
PROWRITER 8510 ...$339.00
PROWRITER II $659.00
8600B.....$1025.00
STARWRITER.....$1099.00
PRINTMASTER $1499.00

EPSON

RX-80 ..... $SAVE$
RX80FT .....ON
FX80.....In-Stock
FX100 .....EPSON
MX80FT..... PRINTERS
MX100 ..... $$CALL$$

LETTER QUALITY

SMITH CORONA TPI $459.00
SANYO 5500 .....$649.00
DIABLO 630 .....$1719.00

GEMINI 10X . $269.00
PROWRITER . $339.00
NEC 8023.... $369.00

OKIDATA

80.....$SAVE$
82A.....CALL for
83A .....LOWEST
84 .....PRICES
92 .....on these
93 .....IN-Stock
PACEMARK 2350.....PRINTERS
PACEMARK 2410 .....$SAVE$

STAR MICRONTICS

GEMINI 10X.....$269.00
GEMINI 15X .....$CALL$
DELTA 10 .....$479.00
GEMINI 15 .....DISC...$BLOW OUT$

13 inch COLOR TV

(with 1 yr. warranty)

$ 199.95

SANYO

PR555 ...$CALL$
MBC 1000 .....$1299

MONITORS

NEC JB1260 .....$115.00
NEC JB1201 .....$145.00
NEC TC1201 .....$315.00

Amdek Color I $275.00
Amdek 300 Green $149.00
Amdek 300 Amber $149.00
GORILLA GREEN $88.00

commodore

HES VIC-20

Torg C.....$14.75
HES Games I C $14.75
HES Games II C $14.75
VIC Fortit Rom.....$42.75
HES MON Rom $28.75
Turtle Graphics Rom $28.75
HES Writer Rom $28.75
Shamus Rom.....$28.75
Protector Rom $31.75

32K RAM $65.75
48K RAM $89.75
64K RAM.....$109.75
TECHNICAL NOTE $29.75
B KEYBOARD $79.75

SIRIUS

REPTON $26.75
WAY OUT.....$26.75
BLADE of BLACK POOLE...$26.75
TYPE OF ATTACK.....$26.75

CX415 HOME FILING MANAGER $41.75
CXL4007 MUSIC COMP...$33.75
CXL4002 ATARI BASIC ...$45.75
CX8126 MICROSOFT $65.75
CX4119 FRENCH $45.00
CX4118 GERMAN.....$45.00

EASTERN HOUSE

Monkey Wrench 2 .....$52.75

INHOME

Baseball.....$29.95

IDSI

Speedway Blast..... $29.95
Pool 1.5..... $26.95

GALAXIAN $29.75
DEFENDER $29.75
DIG DUG $29.75
SPEED READING $53.75
ATARI WRITER.....$54.75
BOOKKEEPER.....$102.75
CX4018 PILOT HOME $54.75
CX 405 PILOT EDU.....$91.75
CX404 WORD PRO.....$99.75
CXL4013 ASTEROID.....$25.75
CXL4020 CENTIPEDE ...$29.75
CXL4022 PACMAN $29.75
CXL4011 STAR RAIDER .$29.75

APX

Eastern Ft.41 ..... $25.50
DeRay Atari $19.95
Math-Tic-Tac..... $15.95
Pres of US..... $15.95
3R Math $19.95
Typo Attack $24.95
Family Budget $19.95
F. Cash Flow..... $19.95

BRODERBUND

Bank Street Writer D.....$44.75
AE D.....$24.75
Apple Panic D.....$23.75
Choplifter ROM $32.75
David's Midnight.....$24.75
Stellar Shuttle C/D.....$18.75
Ft. Apocalypse.....$24.75

HES

Gridrunner R.....$27.75
Sword Point D.....$24.75

RANA DISK DRIVE

1000 .....$CALL

ALIEN GROUP

Voice Box 2 . $99.75

DON'T ASK

Sam $41.75
Abuse $15.95
Teleatri.....$27.95
Poker Sam ..$24.95

Amulet

Nuke Sub $16.75
Magic Story Book.....$24.75
Thunder Island.....$13.95

ARTWORX

Hazard Run $24.95
Hodge Podge $16.95
S. Poker.....$26.95
Bridge 3.0.....$18.95

ATARI Computers for people.

MasterCard VISA

TO ORDER

CALL TOLL FREE

800-233-8760

In PA 1-717-327-1824

or send order to
Lyco Computer
P.O. Box 5088
Jersey Shore, PA 17740

POLICY

In-stock items shipped within 24 hours of order. Personal checks require four weeks clearance before shipping. No deposit on C.O.D. orders. Free shipping on prepaid cash orders within the continental U.S. PA residents add sales tax. All products subject to availability and price change. Advertised prices show 4% discount offered for cash, add 4% for Master Card or Visa. DEALER INQUIRIES INVITED.

CIRCLE 185 ON READER SERVICE CARD



IBM Images

Susan Glinert-Cole

As 1983 fades away into a twisty little maze of memories, all alike, it is appropriate to present a few annual awards and make a resolution or two. I have thought long and hard about resolutions, but there is only one to which I feel I could honestly adhere: I resolve not to plant scurrilous messages in my boss's AUTOEXEC.BAT file. Seeing as how he said something about tearing my heart out should I attempt such a disreputable and unbecoming action, this is one resolution that will be scrupulously observed. Some people probably think nothing of an external cardiac peripheral, but my preference has always leaned towards an internal configuration.

The awards part came a little easier. This year, for the first time, I am proud to announce the (taa taa) Surly Software of the Year Award to...

(noises of tearing envelopes and rustling paper)

*** States and Caps ***
by
Alphanetics
for
insisting that Massachussetts is spelled:
MASSACHUSSETTES
and thereby preventing me
from winning the game.

The second award, made to computer magazines everywhere is... (rip, rustle)...

Susan Glinert-Cole, Suite 211, World Trade Center, Baltimore, MD 21202. Correspondence can only be acknowledged when a stamped, self-addressed envelope has been provided.

The Pleonastic Award
for
*** Articles on Patching WordStar ***

1983 is the year I have added a fourth to the World's Three Greatest Promises (only one of which—the check is in the mail—is mentioned here).

Number four is... (rustle, rustle)

*** The new documentation will be ready in two weeks! ***

Byte Twiddling On A Shoestring

I was recently called upon to write a press release for a product of mine called *SurlyCalc*. This admirable piece of software runs entirely in the red. We at SurlySoft don't believe that anyone who owns a home computer can show anything other than a huge deficit and so we try to force people to face reality by being open and honest about the whole thing.

It's not the big outlays that do the damage; the vast expenditures for word processors and spreadsheets have usually been carefully budgeted for. This is commonly done by subjecting the cat to cheaper rations and switching to brand X antacid tablets. What really liquidates the assets are the measly little purchases like disks, magic markers, and those convenient little utilities that cushion the slide down the razor blade of computer literacy.

The question is, how can a person live without a file recovery program? Or a disk volume name changer? Or a file unhider? Or a bagel slicer? I know I did it once, but those days, like the early orange crate decorating phase of the college years, are gone forever. However, everyone running MS-DOS can do these things without buying a single extra disk from those nefarious software developers interested in separating you from your extra cash (and starving your pets in the bargain). This wonderful (and cost-effective) program is DEBUG.

Most people don't appreciate DEBUG, because it tends to be a bit cryptic in implementation, and appears to be only of interest to assembly language programmers and hexadecimal chauvinists. With a little study, and the tutorial provided below, some of the finer aspects of DEBUG can be appreciated by anyone interested in experimenting.

Among other things, DEBUG can be used to unerase a file, change the file attribute (hidden, system, or visible), and add or change a volume label. I have found that with a little practice, DEBUG is easier to use than an assortment of utilities, if only because it is small and is usually hanging around on my system disk.

The two things that are required for this exploratory exercise are the DOS manual and a disk that has been formatted with the system on it via the FORMAT/S command. This puts two hidden files, IBMBIO.COM and IBMDOS.COM, and one visible file, COMMAND.COM, on the disk.

DEBUG has the nice feature of being able to load absolute disk sectors. With a little disk anatomy lesson, then, it will be easy to follow the rationale behind the rest of the discussion. To avoid constant qualification, I will always be referring, in this article, to a double sided, double

New!

Grappler™ CD

Printer Interface

New dimensions in printer versatility for Commodore 64™ users

- Graphic and text screen dumps
- Compatible with most all Commodore software
- Works with most dot matrix printers
- Emulates Commodore 1525™ printer

new from

Orange Micro inc.

1400 North Lakeview Avenue, Anaheim, CA 92807
(714) 779-2772

Commodore 64 and Commodore 1525 are trademarks of Commodore Electronics Limited.

CIRCLE 186 ON READER SERVICE CARD

56 page FREE catalog

Business Forms and Supplies for MICRO Computers

Save money. Your firm name and address printed on standardized, continuous checks, invoices, statements, letterheads and labels.

Designed to work with programs from over 350 software sources . . . or program to our attractive forms yourself with guides provided.

Full color catalog also has stock tab paper, envelopes, diskettes, many other supplies and accessories.

- **Quality products at low prices**
- **No "handling charges" or hidden extras**
- **Available in small quantities**
- **Money-Back Guarantee**

Fast service . . . buy direct by mail or

PHONE TOLL FREE
1 + 800-225-9550
(Mass. residents 1 + 800-922-8560)
8:00 a.m. to 8:00 p.m. Eastern Time.
Monday—Friday

NAME PHONE

COMPANY

STREET

CITY, STATE and ZIP

Required to help us send you correct information:

Use my computer for
☐ Word Processing ☐ Accounting ☐ Other

Computer
☐ Apple ☐ IBM PC ☐ TRS-80 ☐

Printer?
☐ YES ☐ NO

YOUR LINE OF BUSINESS

Number of employees.

G1A 84.2

CODE 14109

Nebs Computer Forms

12 South Street, Townsend, Massachusetts 01469
A division of New England Business Service, Inc.

CIRCLE 180 ON READER SERVICE CARD

density rust-coated 5 1/4" frisbee with nine sectors per track, that is, the standard DOS 2.0 format.

The standard drawing of a disk shows a series of concentric circles, called tracks, divided into segments, called sectors. The standard IBM disk contains 40 such tracks per side, each divided into eight or nine sectors, depending on the version of DOS you are using or the instructions you give to FORMAT. If a disk is double-sided, with 40 tracks per side of nine sectors each, the total number of sectors on the disk is 720. Because each sector can contain 512 bytes of data, the total storage on this disk is 368,640 bytes.

Tracks are numbered consecutively, beginning with the outermost edge, from 0 to 39. Sectors are numbered from 0 to 719 for some applications, or by referencing the Xth sector of the Yth track. DEBUG prefers the former numbering system.

The first sector on a formatted system disk always contains the boot record. The next four sectors contain two consecutive copies of the file allocation table (two sectors per copy). The seven sectors that follow are allotted to the disk directory. Space is allocated for file data by clusters; a cluster is always one or more sectors. Double sided disks have two sectors per cluster and single sided disks have one. Clusters are allocated on a disk to minimize disk drive head movement; all of the sectors on one track are used before space on the next track is allocated. This is done by using the sectors on the first side of the disk, followed by the sectors on the second side. Figure 1 illustrates this numbering sequence.

We are going to explore the directory of the disk that you have formatted for this exercise. Make sure again that it has the system on it. Put the disk with DEBUG into drive A, the other disk in drive B and type:

```
A> DEBUG
```

The DEBUG prompt is a taciturn dash (-). When it appears on the screen, we commence with the LOAD command. Let's start off by strolling through the first few sectors by loading absolute sectors 0 to 5. For those unlucky readers who don't have the computer grafted to their left hands, Figure 2 is a printout of part of sector 5. Type:

```
- L CS:000 1 0 6
```

DEBUG will load (L) 6 sectors, beginning with sector 0, from drive 1 (the B drive) into memory at the address specified by the contents of the CS register (which contains the current code segment), starting at offset 000 hex. If an offset is not specified, DEBUG will load the data into memory beginning with offset 100. Next, we will dump (D) the sector data we just loaded into memory, beginning at offset 000.

Each time a dump command is given, DEBUG displays one-quarter of a sector (128 bytes), 16 bytes to a line. This is particularly convenient in our case, because two lines (32 bytes) specify one directory entry. So, begin dumping memory by typing:

```
- D CS:000
```

This starts the memory dump at offset 000; if the CS:000 is omitted, DEBUG will begin the dump at offset 100. Once the command has its bearings, so to speak, each additional dump command continues where the last one left off. There is no need to specify an offset after the first time. Continue typing D's until sector 5 appears—the beginning of the disk directory.

The far lefthand columns give the segment and offset address in hex. The example in Figure 3 has a segment address of 958; the offset of this sector is A00. The central section of the dump is arranged in pairs of hexadecimal numbers, each pair making up one byte of data. The ASCII equivalent of this byte is represented on the right side of the page.

As mentioned above, 32 bytes are allotted for each file entry. The first 11 bytes are the file name (eight bytes) and

```
absolute sector # 0  1  2  3  4  5  6  7  8  9  10 11 12 13 14 15 16 17 18
side              0  0  0  0  0  0  0  0  0  1  1  1  1  1  1  1  1  1  0
track             0  0  0  0  0  0  0  0  0  0  0  0  0  0  0  0  0  0  1
sector            1  2  3  4  5  6  7  8  9  1  2  3  4  5  6  7  8  9  1
```

Figure 1. Track, sector and cluster numbering schemes.

```
-D 0A00
0958:0A00  49 42 4D 42 49 4F 20 20-43 4F 4D 27 00 00 00 00   IBMBIO  COM'....
0958:0A10  00 00 00 00 00 00 00 60-68 06 02 00 00 12 00 00   .......`h.......
0958:0A20  49 42 4D 44 4F 53 20 20-43 4F 4D 27 00 00 00 00   IBMDOS  COM'....
0958:0A30  00 00 00 00 00 00 00 60-68 06 07 00 00 43 00 00   .......`h....C..
0958:0A40  43 4F 4D 4D 41 4E 44 20-43 4F 4D 20 00 00 00 00   COMMAND COM ....
0958:0A50  00 00 00 00 00 00 23 5A-29 07 18 00 00 45 00 00   ......#Z)....E..
0958:0A60  00 F6 F6 F6 F6 F6 F6 F6-F6 F6 F6 F6 F6 F6 F6 F6   .vvvvvvvvvvvvvvv
0958:0A70  F6 F6 F6 F6 F6 F6 F6 F6-F6 F6 F6 F6 F6 F6 F6 F6   vvvvvvvvvvvvvvvv
```

Figure 2. First part of sector 5.

```
-E 0A60
0958:0A60  00.46   F6.4F   F6.4F   F6.42   F6.41   F6.52   F6.20   F6.20
0958:0A68  F6.20   F6.20   F6.20   F6.08   F6.00   F6.00   F6.00   F6.00
0958:0A70  F6.00   F6.00   F6.00   F6.00   F6.00   F6.00   F6.5C   F6.42
0958:0A78  F6.36   F6.07   F6.00   F6.00   F6.00   F6.00   F6.00   F6.00
-D 0A00
0958:0A00  49 42 4D 42 49 4F 20 20-43 4F 4D 27 00 00 00 00   IBMBIO  COM'....
0958:0A10  00 00 00 00 00 00 00 60-68 06 02 00 00 12 00 00   .......`h.......
0958:0A20  49 42 4D 44 4F 53 20 20-43 4F 4D 27 00 00 00 00   IBMDOS  COM'....
0958:0A30  00 00 00 00 00 00 00 60-68 06 07 00 00 43 00 00   .......`h....C..
0958:0A40  43 4F 4D 4D 41 4E 44 20-43 4F 4D 20 00 00 00 00   COMMAND COM ....
0958:0A50  00 00 00 00 00 00 23 5A-29 07 18 00 00 45 00 00   ......#Z)....E..
0958:0A60  46 4F 4F 42 41 52 20 20-20 20 20 08 00 00 00 00   FOOBAR      ....
0958:0A70  00 00 00 00 00 00 5C 42-36 07 00 00 00 00 00 00   ......\B6.......
-W 958:000 1 0 6
-Q

[C:\] >DIR B:


 Volume in drive B is FOOBAR
 Directory of  B:\

COMMAND  COM    17664   9-09-83  11:17a
       1 File(s)     321536 bytes free
```

Figure 3. Adding a volume label.

Get all the facts about the IBM Personal Computer.

Get PC™ Magazine!

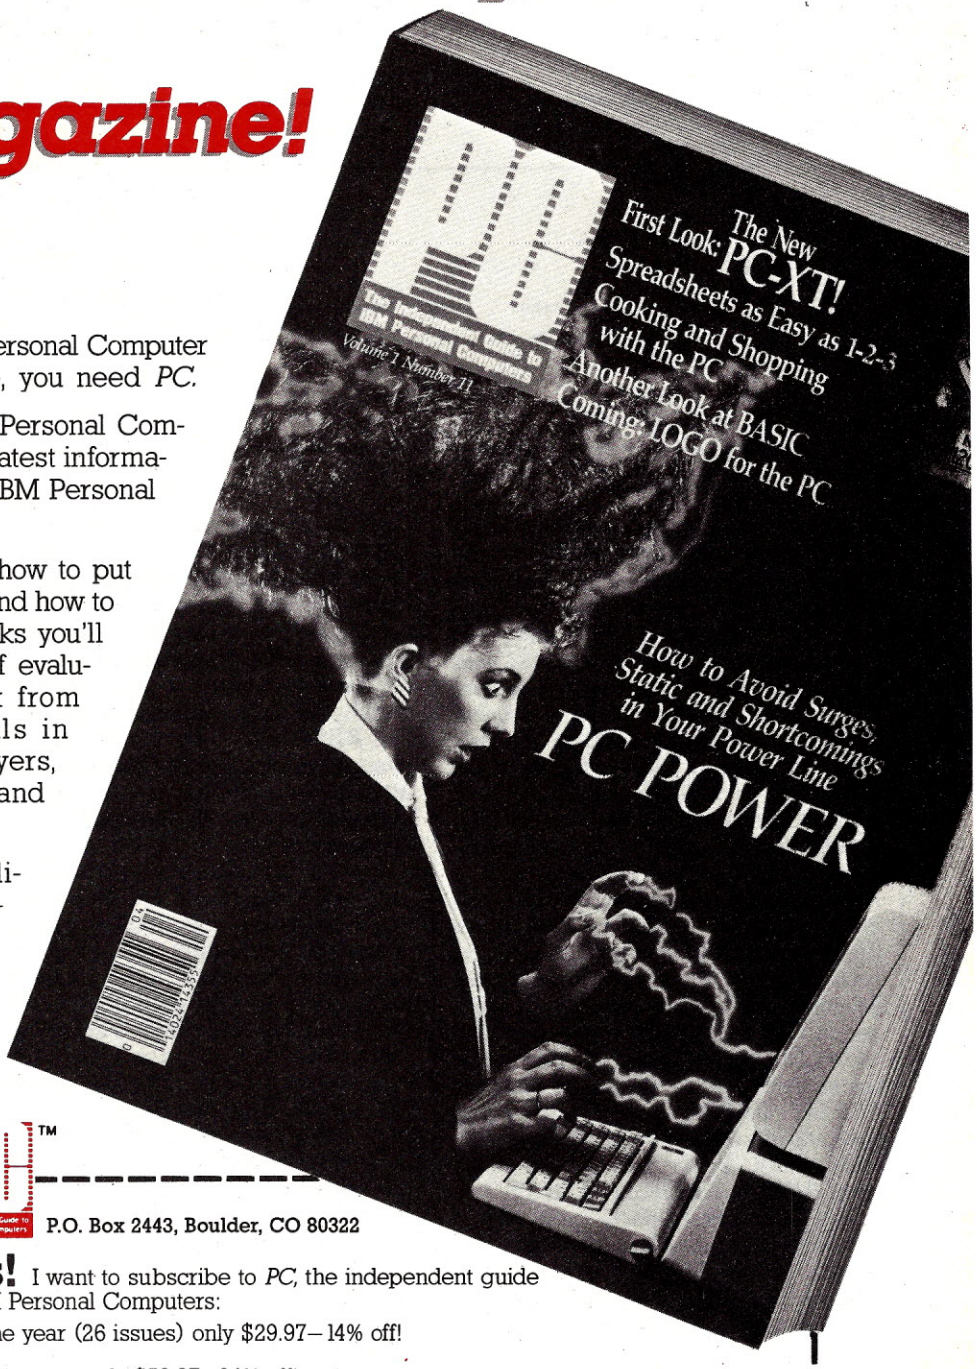

Whether you already own an IBM Personal Computer or you're thinking about buying one, you need *PC.*

PC is the independent guide to IBM Personal Computers. Each issue is packed with the latest information for everyone who's interested in IBM Personal Computers.

This is *the* magazine for finding out how to put together the best IBM "PC" system...and how to get the most out of it. Every two weeks you'll receive hundreds of colorful pages of evaluations, insights, and straight talk from respected experts—professionals in computer science as well as lawyers, businessmen, writers, educators and many others.

PC covers software, hardware, applications, and every other topic of importance to the thousands of IBM Personal Computer users who read it. To make sure that we give you the facts you need, we include a special "User-to-User" section, a "PC Wish List," and news about IBM Personal Computer clubs, events and publications.

Right now you can save up to 24% on an introductory subscription. And if you're ever dissatisfied with *PC,* just write and tell us—you'll receive a prompt refund for all the unmailed issues remaining in your subscription.

PC™

The Independent Guide to IBM Personal Computers

P.O. Box 2443, Boulder, CO 80322

Yes! I want to subscribe to *PC,* the independent guide to IBM Personal Computers:

☐ One year (26 issues) only $29.97—14% off!

☐ Two years only $52.97—24% off!

Savings based on full one-year subscription rate of **$34.97.**

CHECK ONE: ☐ Payment enclosed ☐ Bill me later.


Mr./Mrs./Ms._____
(please print full name) 8H427

Company_____

Address_____


City_____ State_____ Zip_____

Offer valid only in the U.S., its territories and possessions. Please allow 30 to 60 days for delivery of first issue.

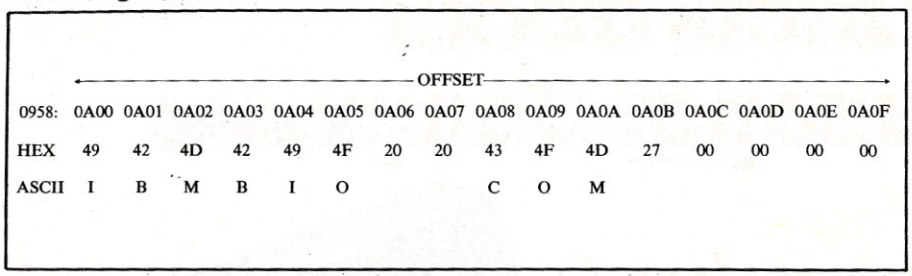

	OFFSET															
0958:	0A00	0A01	0A02	0A03	0A04	0A05	0A06	0A07	0A08	0A09	0A0A	0A0B	0A0C	0A0D	0A0E	0A0F
HEX	49	42	4D	42	49	4F	20	20	43	4F	4D	27	00	00	00	00
ASCII	I	B	M	B	I	O			C	O	M					

Figure 4.

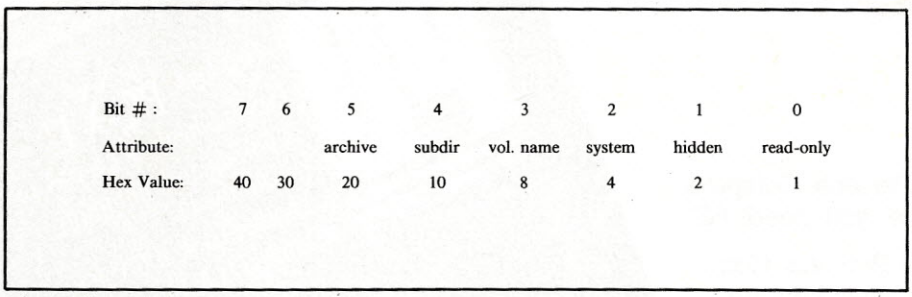

Bit # :	7	6	5	4	3	2	1	0
Attribute:			archive	subdir	vol. name	system	hidden	read-only
Hex Value:	40	30	20	10	8	4	2	1

Figure 5.

the file extension occupies the next three bytes as shown in Figure 4.

The very first byte of the entry (at A00 here) indicates the status of the filename. Hex 00 means the entry has never been used. This indicator is used to limit the length of directory searches. DOS reads directory entries sequentially; when it finds a 000 in the first byte of an entry, it knows that all of the file names in the directory have been read and stops looking for more entries.

If the file you specified wasn't located, DOS laconically informs you with a FILE NOT FOUND and throws the ball into your court. If the first byte of the file name is hex E5, it means the file has been erased. This is why file recovery programs have problems coping with erased files whose names were identical except for the first letter. If you are in the habit of naming groups of files like FREEP, GREEP, and CREEP, and then erasing them, you are endangering your sanity. Better you should name them REEPF, REEPG, and REEPC.

Byte 11 is a particularly useful one. It embodies the so-called file attributes: hidden, system, normal, volume label, subdirectory and archive bit. There is a table on page C-4 of the DOS 2.0 manual that gives the values of this byte for various attributes. Each bit in the byte is assigned an attribute, although some of the bits are not defined in DOS 2.0. At the moment, the assignments are as shown in Figure 5.

A swift calculation on both thumbs reveals that 00000010, the binary code for a hidden file, translates to 02 hex. Similarly, 00000111, 07 hex, means the file is hidden, system, and ready-only. Consulting byte 11 (offset 0A0B) in the first directory sector reveals that IBMBIO.COM has an attribute byte of 27. In addition to the hidden system and read-only bits, the archive bit has been turned on for this file (20 + 4 + 2 + 1). The archive bit is activated whenever the file has been written to and closed. It is used by the fixed disk utilities BACKUP and RESTORE to see if a file has been changed since it was last backed up. The attribute byte of a file can, of course, be changed to reflect the personal tastes of the programmer.

Bytes 12-21 in the directory entry are not used for anything yet. The chances are even-steven that DOS (upwardly-compatible-with-Unix) 3.0 might do something interesting with them. We skip merrily over them to note that bytes 22-23 map the file creation/update time and 24-25 contain the file creation/update date. The DOS manual has a moderately murky explanation of the coding scheme used to represent these numbers. Study this section if you like binary numbering schemes.

A directory would not be worth its nibbles if it did no directing; it performs this function by pointing to the place on the disk where the file begins. Bytes 26 and 27 contain the relative cluster number of the first cluster of the file. Once DOS finds the starting cluster, it turns to the file allocation table (FAT) for information on where the remaining clusters of the file are found. Disk data are mapped beginning with cluster 2 because the first two clusters are used to code the disk format. A discussion of the FAT is deferred until an adequate supply of celery can be laid in.

Changing the bytes in the directory is a matter of using the DEBUG E (for enter) command. There are two ways to use the enter command: prompted and unprompted. In the latter method, the contents of one or more bytes are replaced by values supplied in a list. With the prompted method, used here, DEBUG displays a byte at a time and waits for input. To change the byte, just type the desired (hexadecimal) characters. Pressing the spacebar advances to the next byte and typing a hyphen backs up to the preceding address. When all entries have been made, a carriage return ends the ENTER command. Let's first give IBMBIO.COM a normal attribute by changing the byte at A0B, presently a 27, to 00. Type:

```
- E A0B
```

DEBUG responds with:

```
0958:0A0B 27._
```

Type:

```
00 (carriage return)
```

Now if you look at the sector by typing:

```
-D 0A00
```

The first line looks like this:

```
0958:0A00 49 42 4D 42 49 4F 20
20-43 4F 4D 00 00 00 00 00
```

The next thing to do is write the change back to the disk and return to DOS by typing:

```
-W CS:000 1 0 6
-Q
```

A directory listing will now have shown two files, IBMBIO.COM and COMMAND.COM.

Recovering An Erased File

The next exercise requires an erased file to recover, so erase IBMBIO.COM, return to DEBUG and load the directory sector again. The first line shows:

```
0958:0A00 E5 42 4D 42 49 4F 20
20-43 4F 4D 00 00 00 00 00
```

The ASCII representation of the file name reads eBMBIO.COM. Change the E5 back to an I (49 hex) with the enter command:

```
-E 0A00
958:0A00 E5._
49
```

Write the information back to the disk, quit and list the directory. IBMBIO.COM has been recovered from the great erasure fields in the sky. This recovery technique can be successfully used only if, after an accidental erasure, nothing has been written to the disk. Once a file has been erased, all of its clusters are put back into the legally allocatable pool. In the case where the accident has been followed by some file-writing commands, there are two alternatives (three if you count suicide).

First, grab an unerase utility that can salvage a file, cluster by cluster (Norton's *Unerase*, for example). Second, load the entire disk into memory, a piece at a time if necessary, page through the sec-

INCREASE YOUR KNOWLEDGE AND CONFIDENCE WITH

THREE GREAT IDEABOOKS

FOR YOUR HOME COMPUTER SYSTEM!


Imagine harnessing the full potential of your home computer system! CREATIVE COMPUTING's IDEABOOKs give you a wealth of information to help you discover your computer's hidden strengths and overcome its weaknesses!

Beginning with chapter one, you will start getting more out of your system...for example:

- 50 ready-to-run tested programs that will help you solve practical everyday problems in math, science and business.
- Solve problems with formulas and repetitive trials, convergence, recursion, compounding, probability, geometry, science, simulations and drill and practice.
- Tap into the *true* capabilities of your home system! And identify the shortcomings and recognize the types of jobs and applications best suited for your system!

Your IDEABOOK will supplement the user manual giving you the confidence and knowledge to make the most out of your home system, at an affordable price of only $8.95!

Don't go another day without your copy of CREATIVE COMPUTING's IDEABOOK!

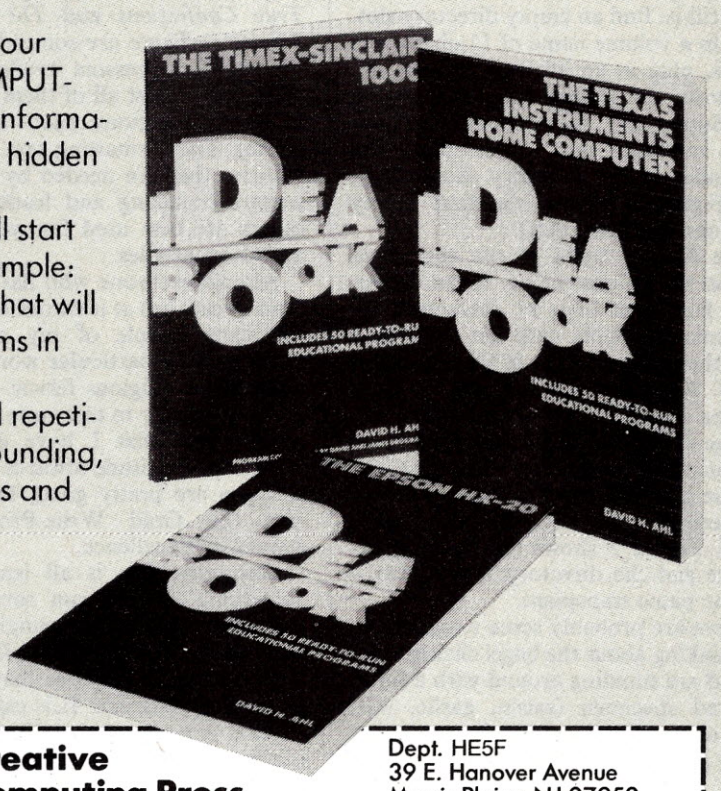

For faster service, phone Toll Free:

1-800-631-8112

(in New Jersey call 201-540-0445)

IDEABOOKS are available at your local bookstore or computer store.

Creative Computing Press

Dept. HE5F
39 E. Hanover Avenue
Morris Plains, NJ 07950

Please send the following books:

TITLE	BOOK NO.	QTY.	PRICE EACH*	$2.00 POSTAGE/ HANDLING EACH	TOTAL
Epson HX-20 Ideabook	3S		$8.95		
TI Ideabook	3R		$8.95		
TS1000 Ideabook	3P		$8.95		
				TOTAL AMOUNT DUE	

CA, NJ & NY State residents add applicable sales tax.*
Outside U.S.A. add $3.00 per order.

☐ Payment Enclosed
☐ CHARGE MY: ☐ American Express ☐ Visa ☐ MasterCard

Card No._____ Exp. Date_____

Mr./Mrs./Ms._____
please print name in full

Address_____ Apt._____

City_____ State_____ Zip_____

☐ Please send me a Free Creative Computing Press Catalog.

tors, and note where the sectors with the file data are. Use DEBUG to name a file, load the correct sectors into memory, and then write them back to disk. This technique is not recommended for the nervous. A variant on this would be to use SHIFT-PrtSc to get a hard copy of the file data and then type them in again without trying to save them to a new file name.

Adding A Volume Label

Adding a volume label to a disk after it has been formatted without one can be done fairly easily with DEBUG as well. The drill is: find an empty directory slot, write in a volume name of 11 characters or less, plug in an attribute byte of 08, and write the information back to the disk. Supposedly, the disk you have been using contains only three files; the remainder of the directory should look like Figure 3, where the first empty directory slot is at 0A60.

The first 11 bytes of the entry will contain the volume name. If the chosen name has fewer than 11 characters, fill the remaining slots with hex 20's, then drop the attribute byte of 08 into offset 0A6B. Accuracy sticklers will want to add the date and time of creation.

Page C-5 of the DOS manual explains the encoding procedure. Changing the volume label is a mere matter of altering the desired bytes with the enter command. Figure 3 shows the entering sequence and the directory sector after a volume name transplant.

There are probably some readers who are thinking about the bagel slicing facility and are standing around with a fully-flavored specimen (raisin, garlic, salt, tofu) in hand just waiting for me to get to the good part of this tedious technical discussion. It is really very simple. First, hone one side of your DEBUG disk to a keen edge. This can be conveniently done with any whetstone or razor strop. Next, slide the bagel into drive A or B, leaving the door ajar. Finally, position the sharpened edge of the disk in the drive slot and press firmly.

Word Processors

I have not talked at all about word processors in these columns, mainly because such information can be found these days by reading almost any variety of printed material (excepting, I guess, *True Confessions* and *The Journal of Virology*.) There are somewhere around 250 word processors available for the IBM PC; almost all of them are capable of basic functions such as entering, editing, and formatting text. Some have features that are needed by manuscript writers (indexing and leadering) while others are best used for writing letters and short articles.

Almost everyone who has a PC owns (and swears by) at least one of them and, for some people of my aquaintance, devotion to a particular word processor approaches religious fervor. I have had the opportunity to test quite a few, and I must admit that I have developed a rather blasé attitude towards them. Most of them are pretty good, but very few rate the Gold Write-Protect Label Award of Excellence.

Naturally, this is all leading up to something. I have run across a word processor that is amazingly versatile, beautifully engineered, and fully stocked with a range of features that is nothing short of remarkable. It is called *Xywrite II*, and is a product of Xyquest Inc. It can be used either as a program editor or as a word processor, a convenience not provided by my usual word processor. Programs can be executed from inside *Xywrite*, therefore you can edit and run code without having to exit to DOS, and your favorite spelling checker can be executed from inside *Xywrite*.

In fact, DOS can be run as a subtask of *Xywrite*. Typing DOS on the command line loads a secondary command processor, and all operating system tasks can be performed as usual. Typing EXIT after the DOS prompt puts you back into *Xywrite*. This feature alone is worth the reasonable price of $195, but there is a plethora of other niceties provided by this program that make it, in my mind, one of the best of its genre I have seen to date.


Xywrite depends heavily on the function keys to execute many commands: defining text blocks for moving, copying, deleting, toggling the cursor between the user definable windows, and changing the prompt line. Most of the formatting commands are executed from a command line. I never thought that I could get used to a command line word processor, but this program implements this concept in such a natural manner that it soon became completely comfortable to use.

Xywrite does on-screen formatting with a few caveats: text is always shown single spaced, regardless of the actual line spacing, and page breaks are not shown. It is possible, with a couple of keystrokes, to preview the text as it will appear on the printer, but editing cannot be done on this screen. The next version of *Xywrite* will incorporate page breaks and line spacing in the normal mode.

Xywrite lets you take full advantage of your printer. It comes with printer drivers for the most popular machines, and these files are not only available for inspection, but can be changed to your liking. The MODE commands available from the keyboard show bold face, underlining, and reverse (or different colors with a color graphics adapter) on the screen. Each of these modes can be assigned to a typeface, so, for example, if you wish, double wide type can appear in magenta on a yellow background (or flashing reverse on an IBM monochrome display).


All of the modes can be customized from the keyboard and the printer files. In addition, *Xywrite* has made obsolete last month's printer table program; a translating table file can be set up such that the entire character set of the IBM PC can be assigned to such special printer characters as your machine can provide.

Xywrite does tables of contents, indices, leadering, and math. It has power-

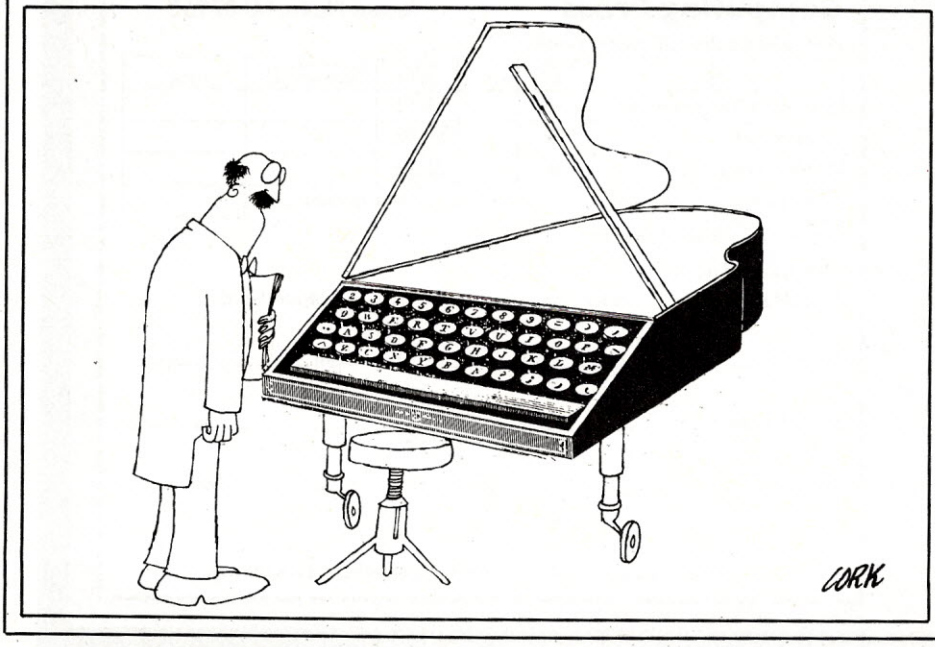

ATARI and TERMINAL USERS:

LOOK CLOSELY AT OUR $499.95 CP/M COMPUTER

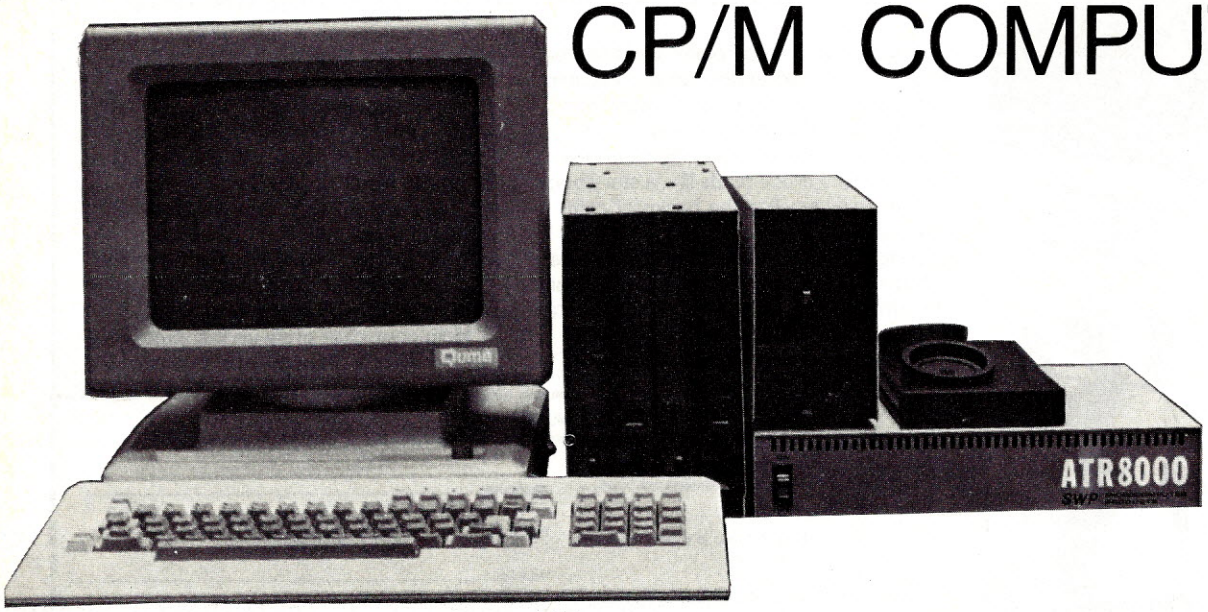

The ATR8000 is an amazingly versatile CP/M computer that uses either an RS-232 terminal or an ATARI home comptuer for the display device. The ATR8000 has these features:

- 64k RAM
- Z80A processor, 4 MHz
- RS-232 port with software to run a serial printer or a modem.
- Parallel PRINTER port.
- Runs up to four 5¼" and 8" drives that are any mixture of size, type (single and double-sided) and density.
- Includes double density CP/M 2.2.

The ATR8000 can read and write CP/M disks from other computers. Some of these are: Kaypro • Osborne • Xerox • Cromemco • TRS-80 I • H89 • NEC PC100A • Z100 and more!

ATR8000 s CP/M display is 80 columns wide with a moveable 40 column window. All 80 columns are displayed at once on a B&W TV or a monitor with AUTOTERM80, $29.95.

From the designers of CO-POWER-88

SWP Inc
MICROCOMPUTER PRODUCTS

2500 E. Randol Mill Road — 125
Arlington, Texas 76011
(817) 861-0421 (metro) 469-1181

Prices and specifications subject to change without notice. Trademarks: ATARI: ATARI, Inc. CP/M: Digital Research, Inc. Z80: Zilog. ATR8000: SWP, Inc.

Please rush me free literature on the ATR8000 for
☐ ATARI ☐ a terminal.

Send to: SWP Microcomputer Products, Inc.
2500 E. Randol Mill Rd., #125
Arlington, TX 76011

#400 #410

name _____

_____

street _____


city _____ state _____ zip _____

MAIL TODAY!

CIRCLE 305 ON READER SERVICE CARD

Let Colonel Byte take your child on a trip through Cybernia

They'll learn all about computers along the way!

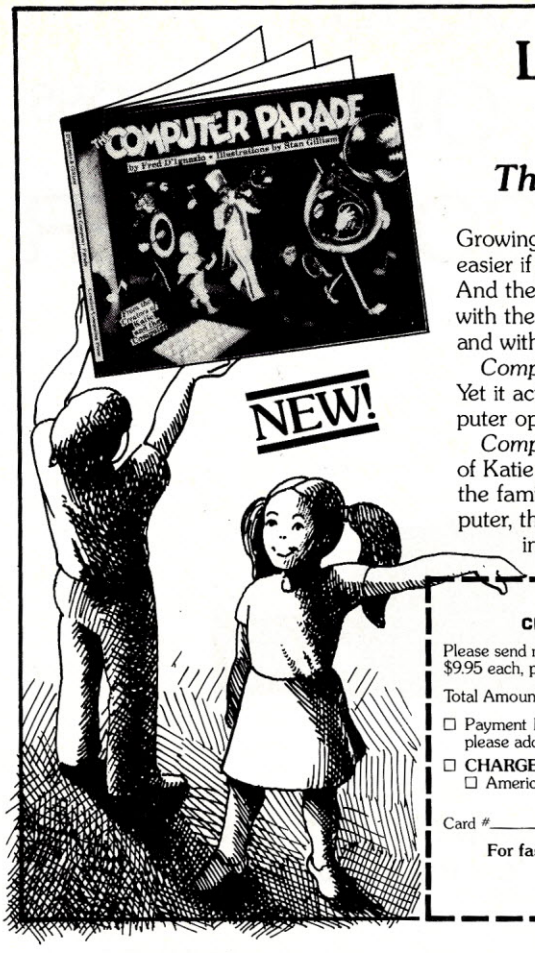

Growing up in the computer world will be easier if your child understands computers. And there's no better place to start than with the computer that's in your home—and with the help of this delightful book.

Computer Parade reads like a story book. Yet it actually teaches the basics of computer operation.

Computer Parade traces the adventures of Katie and her brother after they fall into the family computer. Once inside the computer, they find themselves in the imaginary land of Cybernia where they meet Colonel Byte. Colonel Byte takes them to a computer parade, where they learn how computer music is made. All along their fanciful journey, the threesome encounters friendly and ferocious dragons, computer bits, eeks and aaks. And of course they're always on the lookout for program bugs.

Any youngster age 4-10 will delight in *Computer Parade*. It's easy to read and richly illustrated in full color.

Help your child grow up computer literate by ordering your copies now.

MAIL TODAY TO:
CREATIVE COMPUTING PRESS, Dept. HB4H, 39 East Hanover Avenue, Morris Plains, NJ 07950

Please send me_____ copies of *Computer Parade* for $9.95 each, plus $2.00 shipping & handling per book.

Total Amount $_____

☐ Payment Enclosed. (CA, NJ and NY State residents please add applicable sales tax.)

☐ **CHARGE MY:**
☐ American Express ☐ MasterCard ☐ Visa

Card #_____ Exp._____

For faster service, PHONE TOLL FREE:
800-631-8112
(In NJ only: 201-540-0445)

Signature_____

Name_____
(please print)

Address_____

City/State/Zip_____

*Outside U.S., add $3 for shipping and handling.

☐ Check here to receive a FREE catalog of computing books, magazines and guides.

Also available in your local bookstore or computer store.

Epson, OKI, IDS, NEC, Diablo, Qume



ACOUSTIC ENCLOSURES

- Reduces Noise Up to 90%
- Heavy Duty Acrylic Cover
- Bottom Feed Capability
- Woodgrain Finish

SAVE! SAVE! FROM $99.00

Micro Printercenter™

Dealer & Ordering Info
800-343-4311
Master Charge and Visa Accepted
Shipping & Handling Charges Additional

CAB-TEK, Inc.
Riverside St. Nashua, NH 03062
CIVILIZING COMPUTERS

MPC I $99 (MX 80) MPC II $129 (OKI82)
MPC III $189 (83A, MX100) MPC IV $249 (Daisy Printer)
Power Control & Ventilation $80
Paper Rack $30 Bottom Feed Brackets $30
MPC I SHOWN


CIRCLE 271 ON READER SERVICE CARD

"POWER FAILURE PROBLEMS"

BLACKOUTS!
BROWNOUTS!
DIPS!

YOUR SOLUTION...

LINE-SAVER™



STANDBY UNINTERRUPTABLE POWER SYSTEM

SAVE YOUR DATA from power "blackouts," "brownouts" or line "dips."

PROTECT YOUR DATA from "transient voltages, spikes and EMI/RFI line noise."

LINE-SAVER™ stands-by to switch 250VA, 150 watts of power to your micro-computer. Its heavy duty internal sealed battery provides up to 40 minutes of back-up power; more than enough to SAVE your data and shut down your system if line power does not return.

LINE-SAVER™ provides constant protection for your system from damaging voltage surges, spikes and conducted line noise.

LINE-SAVER™ constantly monitors the AC line and itself, with a unique visual and audible three staged ANNUNCIATOR that provides you at-a-glance status.

LINE-SAVER™ is compact in size and utilizes the latest PWM technology to make it compatible with virtually every microcomputer system today.

LINE-SAVER™ is low in cost . . . **$395.00**

Call or write today for free literature

AEGIS®
Power Conditioning Equipment

ORDER TODAY
Out of State
Toll Free Order Number
1-800-523-9685
In-State Order No.
215-837-0700

MasterCard VISA

KALGLO®
6584 Ruch Rd., Dept.
Bethlehem, PA 18017

DEALER & OEM INQUIRIES INVITED

Add $10.00 for shipping & handling • COD's add $3.00
PA Res. add 6% sales tax

CIRCLE 169 ON READER SERVICE CARD

IBM Images, continued...

ful macro capabilities as well, and blocks of text can be assigned to a single keystroke for boilerplate assembly. There are some extra nifty features rarely found in word processors too. An automatic uppercase command capitalizes the first letter following the end of a sentence—a real blessing considering the position of the SHIFT keys on the PC keyboard. A "forms" mode can be used to design pages with protected areas; these forms can be saved as is or as regular text files for later editing. Print spooling, of course, is available, as is a PAUSE command for single sheet printing.

Formatting commands embedded in the text can be viewed in two modes: normal and expanded. In the normal mode the commands appear as little bright triangles and, if the cursor is positioned on top of one, the formatting command contained therein can be seen on the prompt line. In the expanded mode, the command is written out in full between European quote marks. Formatting commands can be edited like any other text, so sets of favorite formats can be saved and loaded at start-up time, or changed without having to delete and re-enter an entire set of commands.

There are four help screens available; you have the option of loading these into memory for really quick on-line help. Because the screens are stored as regular text files, you can edit them too. *Xywrite* is very, very fast. Paging and reformatting is instantaneous. The human interface is excellent and every time I have called Xyquest with a question or suggestion they have been responsive and helpful in every possible way.

The documentation is pretty good, but is slightly confusing in places and would benefit from a set of section dividers. I am undecided about the aesthetics of the display. The prompt line is on top of the screen, and this is very tiring on the eyes. On the other hand, there are Caps Lock and Num Lock indicators, the lack of which in another word processor has sometimes elicited amazingly unbecoming language from my normally temperate tongue.

Xywrite does lack some features that I sorely miss from my former word processor. These include the aforementioned page breaks and on-screen variable line spacing. Also lacking are row and column counters. When a file save/return is executed, the cursor goes to the beginning of the file—a real annoyance especially considering that there are no page numbers or GOTO commands (yet). Every time I have called to moan, wail, and petition for some addition, I am always assured that they will be incorporating these features in the next version. Their update policy is generous: free updates for bugs, $20 for an update, and trade-ins taken for new version numbers (e.g. *Xywrite III*).

Lasercycles

Lasercycles, brought to you by the Brady company, was inspired by the lightcycles featured in the movie *Tron*. I thought this scene was one of the most visually dazzling features of an otherwise dramatically vapid movie. Although *Lasercycles* is not quite as hair-raising, it is fun to play. The player is allowed three cycles and wins an additional cycle when a level (consisting of several arenas) has been successfully completed.

The concept is one of supreme untidiness: as it whips around the screen in an attempt to avoid an energy glob, each cycle leaves a trail behind. The globs track the trajectory of the cycle and can be eliminated only by causing them to run into an energized section of the trail.

A unit of energy either produces an energized section, or gives the cycle a brief moment of overdrive. Each arena comes equipped with five units of energy, and extra energy can be absorbed by directing the cycle into an occasionally visible power unit. There are numerous levels of difficulty in which the globs and cycles move faster, the energy sections become smaller and the walls of the arena shrink. The authors have kindly permitted alteration of the game parameter table with any program editor.


Movement in the game is best directed with a joystick, although it can be played from the keyboard. Once the game gets started, it moves very fast, but getting the game on the screen requires untold patience: it takes forever to load and initialize. Because it is copy protected, it cannot be put on a RAMdisk, and *Lasercycles* goes back to the disk for a painfully long interval of whirring between each game. Pressing a key at the inappropriate moment confuses the program, so it's hands off the keyboard until the prompts appear. The game is an entertaining and a refreshing change from slaughtering aliens or chasing fruit around a maze. END

Firms Mentioned In This Column

Robert J. Brady Co.
Bowie, MD 20715
(301) 262-6300

Xyquest
P.O. Box 372
Bedford, MA 01730
(617) 275-4439

GUIDE TO VIC-20® PROGRAMMING



If you've purchased a VIC-20 recently, you probably know all about playing its great games. But if you're now ready to learn about computer programming, it's time you discovered *Getting Acquainted With Your VIC-20.*

This newly revised book is a step-by-step guide to programming your VIC. Starting with the functions and commands of the BASIC language, it quickly teaches you how to write and adapt programs on your own. And then it shows you how to write programs to take full advantage of your computer's outstanding color, sound and music capabilities!

Even if you've never touched a computer before, the easy "learn by doing" techniques—coupled with the more than 60 programs in the book—will make you an expert VIC programmer in no time.

For parents and educators, there's a section on "VIC as Teacher" that can help you use your computer as a powerful children's learning aid in the classroom or at home.

Get the most from your new VIC-20. Order your copy of *Getting Acquainted With Your VIC-20* today!

5½" x 8½", softcover.
Over 60 full program listings.

VIC is a registered trademark of Commodore Business Machines.

For faster service, PHONE TOLL FREE:
800-631-8112
(In NJ only: 201-540-0445)

Also available at your local bookstore or computer store.

CREATIVE COMPUTING PRESS
Dept.HE9C, 39 E. Hanover Ave., Morris Plains, NJ 07950

Please send me _____ *Getting Acquainted With Your VIC-20* at $9.95* plus $2.00 postage and handling each. Outside USA add $3.00 per order. #15R

☐ PAYMENT ENCLOSED $_____
*Residents of CA, NJ and NY State add applicable sales tax.

☐ CHARGE MY:
(Charge and phone orders $10 minimum.)
☐ American Express
☐ MasterCard ☐ Visa

Card No._____ Exp. Date_____


Signature_____

Mr./Mrs./Ms._____
(please print full name)

Address_____ Apt._____

City/State/Zip_____

☐ Send me a FREE *Creative Computing* Catalog.

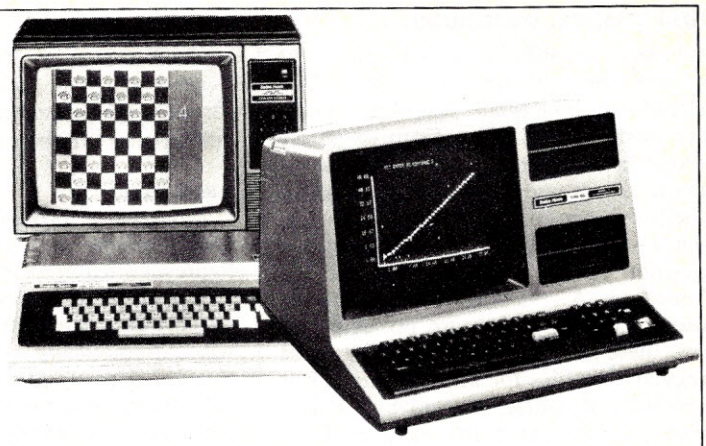

TRS-80 Strings

Stephen B. Gray

As we begin George Orwell's Year with the fifty-ninth TRS-80 Strings column, we look at a new Pocket Computer from Big Brother, a "trial version" of Pascal, a utility program that lets you execute files from the directory, and a highly useful and versatile database manager. Sorry, no room for a Short Program this time around.

Pocket Computer PC-3

If you were wondering about the gap between the PC-2 and PC-4, it was filled last Bastille Day, July 14, when Radio Shack announced the PC-3, "small enough to fit into a shirt pocket" (Figure 1). It is about $5\frac{1}{4}$" long, as compared with the PC-2, almost $7\frac{3}{4}$" long.

Compatible with the PC-1, which it replaces, the PC-3 provides 16 arithmetic and eight string functions and features a 24-character LCD display, accuracy up to 10 digits, and a 1.4K memory.

Other features include arrays and multiple statements. Strings hold up to seven characters. The PC-3 can also be used as a direct key-entry calculator.

The PC-3 is $99.95. The matching PC-3 printer/cassette interface, at $119.95, permits use of a cassette recorder to load and store programs and data on tape. The thermal dot-matrix printer produces a 24-character line, one line a second.

The interface is required to use Radio Shack's existing PC-1 library of 19 programs.

Pascal 80 Trial Version

If you have been reading *Creative* for several years, you may remember the Atari column that George Blank started writing in the June 1980 issue and the many articles he wrote in 1981-82 while he was the editorial director of the magazine.

George left *Creative* in 1982 to start his own company, New Classics Software, which offers Pascal 80, at $100, for the TRS-80 Models I, III, and 4 (in Mod III mode).

For those who want to try Pascal, but aren't sure they want to invest $100, New Classics has been offering, since June 1983, Pascal 80 Trial Version, for only $14.77. The cover of the little four-page manual (Figure 2) tells which features the trial version supports.

The back cover is worth quoting in full because it tells most of the story:

"The Pascal 80 Trial Version is a version of Pascal 80 designed to demonstrate many of the features of the language for those who are unsure about purchasing the full version. It can be an excellent introduction to programming in Pascal.

"The main difference between the two versions is that programs cannot be stored or retrieved in the trial version, while the full version allows you to save text and object files, append, include and chain programs, load text files, execute object files, and create command files for direct execution from DOS.

"Some of the other features found in the full version, but not in the trial version, include random and sequential disk files, pointer variables, curly braces for comments, the underline character in variable names, random number, graphic, and cursor control functions.

"Other than this brief pamphlet, no support can be provided for the trial version. Those desiring more information should consult a text book on standard

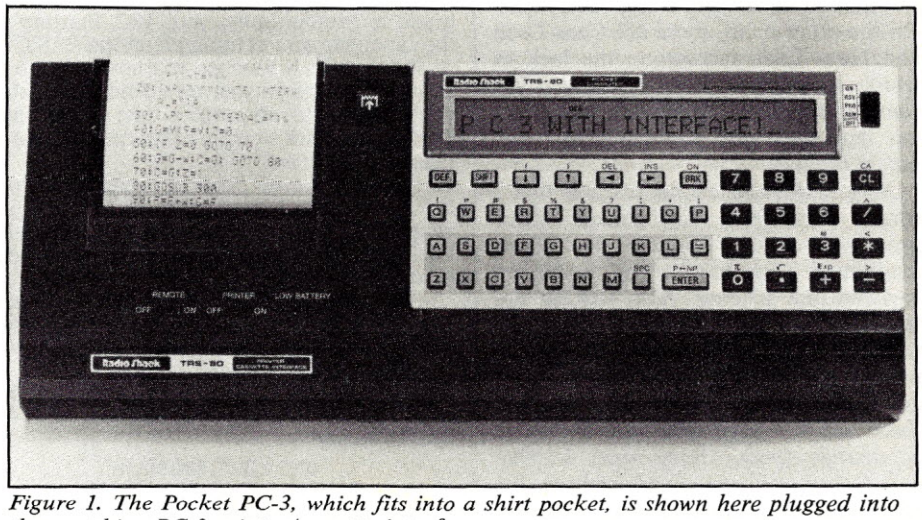


Figure 1. The Pocket PC-3, which fits into a shirt pocket, is shown here plugged into the matching PC-3 printer/cassette interface.

Pascal. We suggest *Oh! Pascal,* by Cooper and Clancy, which is available from New Classics Software for $20. Of course, those purchasing the full Pascal 80 will receive a 92-page, fully indexed manual in a three-ring binder, and telephone support will be available."

Although the trial version doesn't include pointer variables or disk files, nor does it allow you to save programs, you can list your programs to a printer.

Monitor and Editor

The other two pages of the manual tell how to get a listing of a program and briefly describe the monitor commands and the editor.

The monitor has five commands: E to enter the editor, K to clear the editor, Q to quit to DOS, C to compile, and R to run.

The text editor uses arrow keys to move the cursor about the screen, and has nine control functions that delete a character, erase a line, insert a space or a blank line, display the next or previous 15-line page, write the program to the printer, position the cursor at the beginning of the work space, or return you to the monitor menu.

Boot up Pascal 80 Trial Version, and the first display tells you:

```
THIS DISK WILL BOOT UP IN
A MOD I OR A MOD III. IT
WILL XFER THE FILES TO A
TRSDOS SYSTEM OR FORMATTED
DISK ON ANY DRIVE. IT IS
ALSO READABLE AS A DATA DISK
BY MOST POPULAR SYSTEMS.
```

You have to transfer the files to a disk that is already formatted or has TRSDOS on it. This way, New Classics can distribute a single disk for both the Model I and III/4. The disk can also be read as a data disk by LDOS, MULTIDOS, or DOSPLUS.

In TRSDOS (or whatever DOS you are in), you type in PASCAL, and you get the monitor menu. Press E, and you are ready to write a program in Pascal.

For example, to add 2 and 3, you need all of this:

```
PROGRAM SUM;
VAR SUM: INTEGER;
BEGIN SUM:=2+3;
WRITE (SUM)
END.
```

NEW CLASSICS SOFTWARE
239 FOX HILL ROAD·DENVILLE NEW JERSEY·07834·TELEPHONE 201-625-8838

PASCAL 80
TRIAL VERSION

By Phelps Gates and Richard Koch
Program copyright 1981, 1983 by Phelps Gates.
This diskette will boot in a TRS-80 Model I or Model III

Features Supported in the Trial Version

Variable types: REAL, INTEGER, CHAR, BOOLEAN, arrays, sets, records and user defined types.
Constants: TRUE, FALSE, MAXINT, PI and user defined.
Operators: +, -, *, /, DIV, MOD, standard comparison and set operators, AND, OR and NOT.
Functions: ABS, SQR, SQRT, SIN, COS, ARCTAN, EXP, LN, ORD, PRED, SUCC, CHR, ODD, ROUND and TRUNC.
Procedures: READ, READLN, WRITE, WRITELN.
Structures: IF..THEN..ELSE, CASE, FOR..NEXT, WHILE..DO, REPEAT..UNTIL and GOTO.
Built in files: INPUT (keyboard), OUTPUT (screen) and LP (printer).

Figure 2. The features supported by Pascal 80 Trial Version are spelled out on the front cover of the manual.

If you are familiar with Basic, most of this may seem unnecessary. But leave off the first line, and you get this display:

```
00:32:20 COMPILATION STARTING
0000 VAR SUM: INTEGER;
         ↑
EXPECTED PROGRAM
```

which means the compiler expected to find a PROGRAM line. The arrow points to where the compiler discovered the error, which may not be where the error is.

The 00:32:20 is a clock that indicates when the program was compiled. It is not an elapsed timer, so you must keep track of the previous time to calculate the compilation time, if you wish. In the full version, you can reset the clock to 00:00:00 with POKE commands.

Leave out the second line, and the display shows what has been compiled so far, with an arrow pointing to SUM, and displays:

```
UNDECLARED
```

to let you know what you left out.

Omit INTEGER from the second line, and the error message is:

```
BAD TYPE
```

to let you know that variables (and constants) have to be declared as to type.

And so it goes, with the editor helping you along, supplying more complete error messages than you will find in Basic. These messages, by the way, are unique to Pascal 80.

Software Bargain

Pascal 80 Trial Version looks like the software bargain of the year; the $14.77 includes postage and shipping charges. It comes with a coupon worth $10 off the regular price of Pascal 80; which makes it $90.

New Classics is hard at work converting Pascal 80 for the Model 4, to use the 24-by-80 display. This Model 4 version will be available separately.

The $14.77 price, incidentally, covers only the costs of the advertising, mailing, and the disk itself. Thus the disk is actually being given away, to provide prospective users with a taste of Pascal 80, as well as of Pascal itself.

The coupon packed with the trial version mentions a Pascal 80 User Group Game Disk for $10, and a Pascal 80 User Group Procedure Library Disk for $10. The latter is a collection of procedures to use in one's own Pascal programs, and George has very kindly offered to send it free to those who mention this column when ordering either version of Pascal 80.

If you are at all interested in the language that many computerists claim will supersede Basic, check out Pascal 80 Trial Version, from New Classics Software.

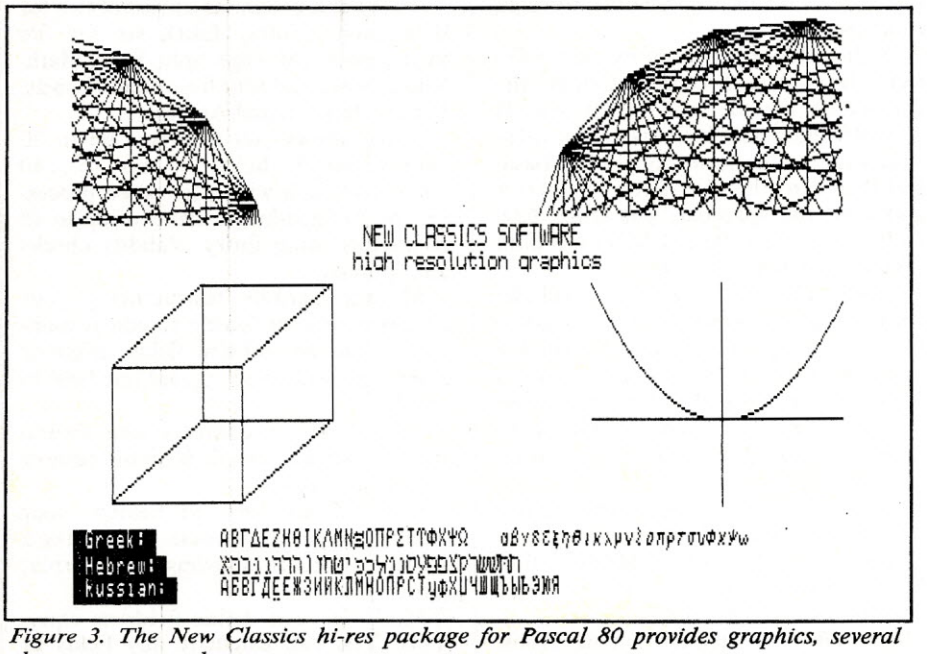


Figure 3. The New Classics hi-res package for Pascal 80 provides graphics, several character sets, and more.

The computer-age storybook for kids!



Katie and the Computer

By Fred D'Ignazio
Illustrated by Stan Gilliam

This wonderful storybook teaches young children how a microcomputer works. Katie ends up inside her dad's new micro...and has an adventure with Colonel Byte and the other characters who make a computer work. Her jou:ney follows the path of a computer command; her experiences are technically accurate yet easily understandable, right down to her encounters with a program bug. Additional material is included to help you relate the story to actual working parts of the computer. With truly exceptional color illustrations, this is an excellent first computer book for youngsters.

Hardcover, 11" x 8½", illustrated.

For faster service, PHONE TOLL FREE:

800-631-8112

(In NJ only: 201-540-0445)

Also available at your local bookstore or computer store.

CREATIVE COMPUTING PRESS
Dept. HE4C 39 East Hanover Avenue
Morris Plains, NJ 07950

Please send me _____ *Katie and the Computer* at $8.95* plus $2.00 postage and handling each. Outside USA add $3.00 per order. #12A

☐ PAYMENT ENCLOSED $_____
*Residents of CA, NJ and NY State add applicable sales tax.

☐ CHARGE MY:
☐ American Express
☐ MasterCard ☐ Visa

Card No._____

Exp. Date_____

Signature_____

Mr.
Mrs.
Ms._____
(please print full name)

Address_____Apt.____

City_____

State/Zip_____

☐ Send me a FREE *Creative Computing* Catalog.

TRS-80 Strings, continued...

Pascal 80 Hi-Res

New Classics has just developed a high-resolution package for Pascal 80, for users with Radio Shack's hi-res board in the Model III or Model 4, and at least 48K of memory.

The $39.95 package offers regular graphics, turtle graphics, turtle geometry, character sets for Greek, Russian, Hebrew, and Japanese katakana, plus math symbols and two ASCII sets (Figure 3). These can all be intermixed on a 24-line, 80-column screen, using regular or inverse characters.

CO-DIR Utility

CO-DIR 2.0, from Picotrin Technology, is a utility program that lets you perform, with only one or two keystrokes, nearly all the DOS commands related to individual files on disk. It lets you process the files directly from the listing on a directory screen.

CO-DIR 2.0, which stands for Cursor Oriented Directory Version 2.0, works on any TRS-80 Model I, III, or 4 with at least 32K, and uses NEWDOS/80 1.0 or 2.0, or DOSPLUS with the CAT library command (version 3.4 or later). The price is $49.

With *CO-DIR,* you can do some things that are difficult or impossible without it. For example, if you try to LIST the PATCH/BAS routine in DOSPLUS, you get a:

```
RUN access only
```

message. But with *CO-DIR,* you simply call up the directory, center the cursors on PATCH/BAS, hit L, and you get a complete listing, without line numbers. (No, you can't LIST password-protected routines.)

With *CO-DIR,* you can execute a file right from the directory. Center the cursors on the file, and hit ENTER. If *CO-DIR* finds no CMD extension, it assumes the file is Basic, so it loads Basic and then runs the file. If you hit ENTER and then the spacebar, you force *CO-DIR* to execute a file as CMD even if no CMD extension is found.

Other *CO-DIR* functions include: copy a file to a specified drive, show a free-space map for any drive, load (or list, modify, print, kill, zero, or rename) a file, do a string-search for a file name (including by extension or wildcard). Assistance is available via a HELP function.

Hit J, and you have activated the Job Control function, which allows you to activate a DO or CHAIN file; NEWDOS/80 uses /JCL files, DOSPLUS uses /BLD files.

CO-DIR even includes sound. Hook up an amplifier via the cassette port: low chirps mean a function is completed; high chirps mean there is an error in your instructions, or *CO-DIR* can't perform the function.

If you do a lot of programming, *CO-DIR* could be the most useful utility you have ever bought, because it makes the DOS functions faster and easier.

Data-Writer

Written by Software Options Inc. for the TRS-80 I/III/4 (48K, two disk drives, lowercase required), *Data-Writer* is a database manager that can be used with your word processor (*Scripsit, Lazy Writer,* or *Electric Pencil*), or by itself as a complete stand-alone system for managing text and numeric data.

Data-Writer consists of twelve programs for managing and using databases, including changing their structures. Other tasks easily performed with *Data-Writer* include mailing list maintenance, form letter production, and so on.

Data-Writer 2.0 is $145. If that sounds expensive, take a look at all it does; it may well be the most extensive DBMS program of its type available. Software Options claims it to be the most powerful for the TRS-80. Also, it supports a hard disk, unlike most DBMS systems. Radio Shack's *Profile III* costs more ($199, $299 for the hard disk version) and is a good DBMS, but not as versatile as *Data-Writer.*

Data-Writer works with DOSPLUS 3.5 (and previous versions), LDOS 5.1.3 (and previous 5.1 versions), and with other operating systems.

Twelve Programs In One

The twelve programs consist of two for data entry (Entry, Edit), six for file management (Manage, Split, Stats, Math, Select, Sort), and four for output (Labels, Letters, Report, and Access).

Entry allows you to define up to 20 variable-length fields of up to 240 characters each with your word processor, or 20 fixed-length fields of up to 45 characters using Entry. Validity checks are optional.

Manage permits restructuring your database without having to edit it manually. You can add new fields, delete or rearrange fields, and append one field to another.

Split divides a database into several smaller ones and can do it on the basis of a data breakpoint.

Stats allows you to search your database for inconsistencies, displaying a statistical report showing any format errors.

Math lets you define fields as equations. You can calculate any fields in your database using the four basic func-

tions, plus exponentiation. You may use up to 20 equations per run, and each equation may contain up to 255 characters.

Select enables you to create subsets of your original file by specifying limiting criteria, such as SELECT IF SEX = F, or SELECT IF AMOUNT > ZERO. Each subset is then stored under a new file name to be used as a new database.

Sort is a fast, two-level sequential direct-access sorting program that lets you sort on any field, even by last name or zip code embedded in a line. The *Data-Writer* ad says "it permits access to any record in your database (up to 10,000 records) in one second flat."

Letters permits creation of a form letter into which you can insert, from your database, up to 20 different names, addresses, amounts, keywords, and even phrases.

Reports is for writing reports, such as inventories, accounts payable and receivable, bibliographies, insurance coverage, stock issues, and so on.

Using Data-Writer

Data-Writer uses menus and prompts extensively, and is very easy to use. The first screen provides a menu of the main programs. Select *Entry,* and after you give your database a name, and decide which drive to store it on, you get this display:

```
===>>> DATA ENTRY - FIELD 1
===>>> TYPE A STAR (*) TO END

FIELD LABEL : ----------------
```

with space for 20 characters. Type in the label, and you get further prompts:

```
FIELD LENGTH :
```

and

```
MANDATORY ENTRY (Y/N) :
```

and then you have asked which of six validity checks you want performed at data-entry time, including no check, all numeric, length check, and so on.

After you are asked if you want to repeat this field from the previous record, you get a display of all you have just entered, so you can edit it, if you need to. If not, hit ENTER, and go on to the next field.

When you are through delineating the fields, hit * and you get a data-entry screen, showing all your field names and record lengths, with a blinking cursor at the beginning of the first field, ready for you to start entering data.

If you attach an amplifier and speaker to your cassette port, *Data-Writer* will signal an invalid entry, if you try to skip over a mandatory field, or try to type words in an all-numeric field.

After you have filled in the fields (and perhaps skipped over some of the non-mandatory fields), *Data-Writer* asks if you want to write the data to the file, edit it, or end using the current database.

Select the last option, and you are asked if you want to add more records to the current database or to a different one, or add to the abbreviation table, or end the program. The abbreviation table is a clever device that lets you enter as little as a single character, such as M, during data entry, and it will be expanded in the display, to Minneapolis, for example.

After Data Entry

After entering all the data for your database into the file, you can select data from it, add to it, edit it, restructure it, split it into several smaller databases, check it for errors, create subsets, sort, and print reports.

If you decide to sort, you have given the names of all the current field labels, so you don't have to remember them, and then you are asked which field labels are to be the primary and secondary sort keys. You can sort in ascending or descending order. Give the data to be sorted a name for its output file, and after the sort, the data will be stored under that name. Display the output file, and you see first the field labels, each on a separate line, and then the file data itself, with each item on a separate line.

The Bottom Line

Data-Writer has many more features, such as the many options available for creating reports, but there just isn't space here to describe them all. Among the DBMS programs I have tried so far, this is the best—very easy to use, with a maximum of features and flexibility. The combination of *Data-Writer* and a word processing program is all many people will need for what they want a computer to do.

The manual, also a winner, and more than 100 pages long, explains everything simply and fully and assumes no knowledge of computers or databases. END


Firms Mentioned In This Column

New Classics Software
239 Fox Hill Rd.
Denville, NJ 07834
(201) 625-8838

Picotrin Technology
3531 San Castle Blvd.
Lantana, FL 33462
(305) 586-2377

Software Options Inc.
19 Rector St.
New York, NY 10008
(212) 785-8285

GAME BOOKS FROM CREATIVE COMPUTING



BASIC COMPUTER GAMES, Microcomputer Edition, edited by David H. Ahl. Here's a great collection of 101 fascinating games, all written in easy-to-use Microsoft BASIC. Play Craps, Combat, Super Star Trek, Lunar LEM Rocket, Gomoko, Checkers, Boxing, Bowling–and 93 others! With an introduction, notes on Microsoft BASIC, and conversion instructions for other BASICs, 8¼" x 11", softcover, illustrated, with an index. 183 pp. $7.95 ($1.50) **#6C**

MORE BASIC COMPUTER GAMES, edited by David H. Ahl and Steve North. In this sequel to *Basic Computer Games* you'll find 84 challenging new games, complete with sample runs, program listings and illustrations. All run in Microsoft BASIC. Race your Ferrari, become a millionaire, joust with a knight, crack a safe, and more! Conversion table to other BASICs included. 8¼" x 11", softcover, illustrated, 200 pp. $7.95 ($1.50) **#6C2**
TRS-80 Microcomputer Edition, $7.95 ($1.50). **#6C4**

TRS-80 is a registered trademark of the Radio Shack Division of Tandy Corp.

CREATIVE COMPUTING PRESS Dept. HE1C
39 East Hanover Avenue, Morris Plains, New Jersey 07950

Send me the books listed below.

ITEM NO.	QTY.	TITLE	PRICE EACH	P&H* ( )	TOTAL
		CA, NJ and NY residents add applicable sales tax			
		Outside USA add $3 for regular postage and handling per order.		TOTAL AMOUNT	

CHECK ONE:
☐ PAYMENT ENCLOSED $_____
☐ CHARGE MY:
☐ American Express ☐ MasterCard ☐ Visa
(Charge and phone orders $10 minimum.)

Card No._____ Exp. Date_____

Mr./Mrs./Ms._____
(please print full name)

Address_____ Apt_____

City_____

State_____ Zip_____

For faster service, **CALL TOLL FREE: 800-631-8112.**
(In NJ call 201-540-0445)
Institutions only–purchase orders under $50 not accepted.



"Gurmal buys a Computer" 1984 Calendar

Gurmal is Coming...

Share in the adventures of Gurmal each month with a new hilarious, side splitting scene from the "Gurmal Buys a Computer" calendar for 1984. Gurmal stumbles through the world of Hardware, Software and Robotics from the Corporate Office to his home.

ALSO

The Gurmal Book

64 pages of computer humor with Gurmal's friends and family

Please send me_____ copy(s) of the "Gurmal buys a Computer" Calendar for 1984 @ $6.95 or the Gurmal Book @ $5.95 or both Calendar and Book for $10.00 [Utah residents add 5.25% sales tax] + 50¢ postage & handling to:

Computer Humor, Inc.
P.O. Box 859
Park City, UT 84060


© 1983 Computer Humor, Inc.



CIRCLE 138 ON READER SERVICE CARD

Dirty Power In

Ultra Quiet



KLEEN LINE Power Out

Computer Protection

KLEEN LINE® CONDITIONER

Prevents:

- Computer Damage
- Brownout Interruptions
- Lightning Spike Damage
- Disruptive Line Noise
- Program Errors

Regulator • Filter • Suppressor

KLR-250A	250 Watt Load	$291.95
KLR-250A-1S0	250 Watt Load; Patented Filter Isolated Sockets	$346.95
KLR-500A	500 Watt Load	$390.95
KLR-500A-1S0	500 Watt Load; Patented Filter Isolated Sockets	$445.95

Shipping: $12.75 Land; $45.50 Air

Ask Your Local Dealer

ESP® Electronic Specialists, Inc.
171 South Main Street, Box 389, Natick, Massachusetts 01760

Toll Free Order Desk 1-800-225-4876
MasterCard, VISA, American Express

CIRCLE 108 ON READER SERVICE CARD

Book Reviews

How to Buy a Personal Computer, by Carlton Schrum. Alfred Publishing Co., 15335 Morrison St., Sherman Oaks, CA 91403. 64 pages, paperback $2.95. 1981.
Understanding Artificial Intelligence, by Paul Y. Gloess. Alfred Publishing Co. 47 pages, paperback $2.95. 1981.
Understanding Basic, by Richard G. Peddicord. Alfred Publishing Co. 48 pages, paperback $2.95. 1981.
Understanding Cobol, by Richard G. Peddicord. Alfred Publishing Co. 47 pages, paperback $2.95. 1981.
Understanding Fortran, by Herbert R. Ludwig. Alfred Publishing Co. 61 pages, paperback $2.95. 1981.
Understanding Pascal, by George Ledin Jr. Alfred Publishing Co. 63 pages, paperback $2.95. 1981.

These six "Handy Guides," tall and slim (4¼" x 11"), are part of four Alfred series that cover computers, cooking, music and photography. They are all described on the back covers as "practical, economical and concise . . . perfect for today's fast-moving adult on the run, they fit in anywhere—in pocket, purse, gadget bag, guitar case."

The guide to buying a personal computer takes a fast but competent look at what such machines are, why you should buy one, how to choose, system requirements for specific applications, and ends with a 13-page table comparing 26 personal computers. This brief guide packs more information per page than most similar publications.

The guide to artificial intelligence is subtitled, "An introduction to the world of computers that 'think,' " and does quite well in only 47 pages. After a brief introduction, it looks at the minimax procedure for evaluating tic-tac-toe; Automatic Theorem Proving; Predicate Calculus; Lisp: A Language for AI; Communication, People and Computers; Computer Vision; and AI, a State of Mind. This is an excellent introduction; for those who want to learn more, five books and four journals are referenced.

The Basic guide gets into a three-line program by page 8, using REM, PRINT and END, and enlarges on that by introducing simple arithmetic, spacing, strings, INPUT, and by page 16 a program for compound interest. Later pages introduce flowcharts and arrays, IF/THEN, PRINT USING, FOR/NEXT, and READ/DATA. The book ends with an 8½-page glossary as the finish to a very handy guide to the basics of Basic.

The Cobol guide first examines the basic concepts of the language, describes a standard environment, and then presents six program examples: (1) very short, prints IT WORKS; (2) one variable, no files; (3) with decision, no files; (4) simple payroll system; (5) processing test scores; and (6) accounts payable. Each example is fully explained with a flowchart, program notes, explanations of new statements, and sample outputs. The excellent guide ends with a list of reserved words, a bibliography for "where to go from here," and an 8½-page glossary.

The Fortran guide jumps right into a simple program for summing 40 four-digit numbers, then shows the flowchart, and

explains the rules for admissible characters, variables and constants. From there it goes into statement layout, real/integer mode arithmetic, input/output, format, read/print, GOTO, IF, loops, DO, subscripts and arrays. Each statement is explained with a short program using it, with output if helpful. An 8½-page glossary ends this brief but very informative book.

The Pascal guide, written by the computer-series editor, introduces and discusses the language for seven pages before presenting two short programs, for printing a name and for making some geometry calculations. After discussing more Pascal features, the reader is asked to write a program; the solution is given on the next page. From there on the guide presents examples of each feature as it is discussed, with helpful program notes, and more exercises. The author covers subprograms, choosing (IF, CASE), looping (WHILE . . . DO, REPEAT . . . UNTIL), and data types. Very well written, the book ends by recommending two Pascal books for further reading.

These six guides are highly recommended to those who want to know just enough about a subject to be informed (but not overwhelmed by detail), or those who want to find out if they like the subject enough to want to go further with it. For $2.95 each, you can't go wrong; these six are well worth every penny. Six more very useful Alfred Handy Guides in the computer series will be reviewed here shortly.

TRS-80 Color Basic, by Bob Albrecht. John Wiley & Sons Inc., New York. 384 pages, paperback $9.95. 1982.

Because Radio Shack's Color Computer manual leaves much to be desired, authors like Bob Albrecht have stepped in to fill the gap by writing books such as this, which goes into much more detail than the skimpy original, and which is highly readable.

The 13 chapters cover an introduction, Easy Stuff (cursor, CLEAR, PRINT, ENTER, SOUND), Basic Programs, Number Boxes, String Boxes, Skipping Around the Screen (placing characters), Graphics Galore, Meandering (RND), Playtime Junction (IF/THEN/ELSE, INKEY$), String Functions, Subscripted Variables, Computing Problems and Challenges, and The Color Basic Toolbox (a quick reference guide). Eleven appendixes are about hooking up the computer, using a cassette recorder, error messages, arithmetic, reserved words, screen maps, sound and music, color codes and graphics characters, ASCII codes, joysticks, and a list of eight books and magazines on the Color Computer.

This is the sixth Self-Teaching Guide that Albrecht has written for Wiley. Each chapter in an STG consists of short sections called frames, most of which here end with questions or things to do on the computer. Each chapter begins with a brief list of what the chapter covers; if you feel you already know it, you can skip to the end of the chapter and take the Self-Test.

ATARI® ATARI® ATARI® ATARI®

INTRODUCING. . .
Super Mailer PLUS
From Royal Software
"Capt. ZIP"
48K DISK
$49.95
NEW
Dealer Inquiries Invited
The Most User Friendly Mail Management program available! It even allows you to catalog your record, book or other collections... Limited only by your imagination!
Fast, machine language sorts—Works on single or double density format—Auto-deletes of duplicates—Print disk directory—Official State abbreviations built-in—Special coding feature—Re-label fields for unlimited uses—Merge files—Create sub-files—Search on any field—Print labels or file copy—More!

ASTRA 1620
● Double Density/ Double Drives!
Only $488 + FRT

APE-FACE Printer Interface
$89.50

Microperipheral
Modem & Printer Interface
● Auto Dial/ Auto Answer
$149 + FRT

FREE CATALOG
► WITH ANY ORDER . . . OR SEND $1.00 (Refundable with Order)
★ OVER 1000 items for your ATARI!
Including product descriptions.
● EPSON ● PERCOM
● BRODERBUND ● APX
● ROKLAN ● ON-LINE
● DATASOFT ● ATARI®
● ADVENTURE INT'L
● SYNAPSE ● VISICALC ● Much More

COMPUTER PALACE Formerly Royal Software
DEALING EXCLUSIVELY IN
New Products! New Lower Prices!!!
ATARI
TOLL FREE 1-800-452-8013
(No Information On This Line!) Orders Only Please!
FOR INFORMATION CALL 503-683-5361

★ We handle only ATARI compatible hardware & software . . . so we know what works best! CALL US FIRST!!!

SUPER SPECIALS... Up To 70% Off!
K-Razy Shootout Cartridge Special $17.95
From Royal Software
Special $9.95
Reg. $29.95
Meteor Storm 24K Disk Only
Save the cities & the people!
100% Machine Language
Fast action game

	Regular	SPECIAL
Achon Quest(D,T)	29.95	17.95
Alien Numbers(D,T)	29.95	Super! 9.95
Alien Swarm(D,T)	29.95	Special! 9.95
Baja Buggies(D,T)	31.95	Wow! 17.95
Bug Off(D,T)	29.95	Look! 9.95
Frogger(D,T)	34.95	23.95
Genetic Drift(D,T)	29.95	17.95
Ghost Encounters(D,T)	29.95	17.95
Intruder(Inhome)(D,T)	29.95	Great! 9.95
Labyrinth(D,T)	29.95	17.95
Magic Mail(D)	59.95	Deal! 29.90
Marauder(D)	34.95	19.90
Megalegs(CTIA Only)(T)	34.95	Look! 9.95
Meteor Storm(D)	29.95	Gee! 9.95
River Rescue(C)	39.95	29.90
Slime(Synapse)(D,T)	34.95	19.95
Stratos(D,T)	34.95	19.95
Survival of the Fittest(C)	39.95	Look! 17.95
Survivor(D,T)	34.95	19.90
Tutti-Frutti(D,T)	29.95	Wow! 9.95
Votrax Type-N-Talk	350.00	A Steal! 150.00
Wall War(D)	29.95	Super! 17.95

LIMITED QUANTITIES—WHILE SUPPLIES LAST!

CREDIT CARD ORDERS - TOLL FREE 1-800-452-8013
(ORDERS ONLY - For Information (503) 683-6620
Shipping & Handling: UPS or PARCEL POST $2.00
UPS Air (48 hr. Delivery!) $3.90

COMPUTER PALACE Formerly Royal Software
2160 W. 11th Ave.
Eugene, OR 97402
(503) 683-5361

CIRCLE 200 ON READER SERVICE CARD



Precision Data Products
P.O. Box 8332
Grand Rapids, MI 49508-0332
Outside U.S.A. (616) 452-3457
Michigan 1-800-632-2468
Outside Michigan 1-800-258-0028

3M Brand Diskettes @ Our Prices + Toll-Free Ordering = Error Free Performance

VISA **Precision Data's Prices** MasterCard

8" Diskette	Per Diskette (Orders of 50 or more)
Single Sided - Single Density - Soft Sector	
SS - SD Storage Box	$1.99
SS - SD Bulk with Envelope No 3M Logo	1.90
Single Sided - Double Density - Hard or Soft Sector	
SS - DD Storage Box	2.59
Double Sided - Double Density - Soft or 32 Hard Sector	
DS - DD Storage Box	3.39
5¼" Diskette	
Single Sided - Double Density - Soft or Hard Sector	
SS - DD - RH Storage Box	1.89
SS - DD - RH Bulk with Envelope No 3M Logo	1.80
SS - DD - 96 TPI - RH Storage Box	2.85
Double Sided - Double Density - Soft or Hard Sector	
DS - DD - RH Storage Box	2.79
DS - DD - RH Bulk with Envelope No 3M Logo	2.70
DS - DD - 96 TPI - RH Storage Box	3.80
Apple Fileware Compatible	4.49
Certified Data Cartridges	
DC 100A	13.50
DC 300XL	20.65

Shipping & Handling $3.00/50 DiskettesSurcharge of 10% for quantities less than 50 Diskettes

CIRCLE 206 ON READER SERVICE CARD

SHELF CONSCIOUS?

Now you can organize your copies of
CREATIVE COMPUTING

Now your magazines can be a handsome addition to your decor, well organized, and easy to find, thanks to these durable library-quality cases or binders. They're made of luxury-look leatherette over high-quality binder board. And both styles are custom-designed for this or any other magazine you save, with size, color and imprint selected by the publisher. FREE transfer foil included for marking dates and volumes.

Magazine binders



holds your issues on individual snap-in rods, combining them into one volume. $7.95 each; 3 for $22.50; 6 for $42.95. Mixed titles OK for quantity prices.

Open-back cases



store your issues for individual reference. $6.95 each; 3 for $19.75; 6 for $37.50. Mixed titles OK for quantity prices.

For faster service,
CALL TOLL-FREE 800-526-0790
(In NJ only 201-540-0445)

Creative Computing
P.O. Box 5120, Philadelphia, PA 19141
Please send: ☐ Cases ☐ Binders

TITLE	QUANTITY
Creative Computing	
Other:	

☐ PAYMENT ENCLOSED $_____.* Add $1.00 *per order* for postage and handling. Outside USA add $2.50 *per unit* ordered; send US funds only.

☐ CHARGE (Minimum $10):
☐ American Express ☐ MasterCard
☐ Visa

Card No._____ Exp. Date_____
Signature_____
Print Name_____
Address_____
City_____
State/Zip_____
*Residents of PA add 6% sales tax.

Book Reviews, continued...

The answers to the Self-Test list the frame numbers that relate to the question, so if you miss one, you can review the related frames.

The only thing wrong with this book is that it doesn't cover Extended Color Basic because Albrecht knew his friend Don Inman was writing a book on the subject (published by Reston; it will be reviewed here).

Albrecht has had enough experience in using and teaching computers to know just what should be in such books and how to write them. There are many programs and examples of program lines, blanks to be filled in, explanatory callouts, explanations of program lines, etc. And above all, a clearly written, highly detailed text that covers just about everything you'd want to know about the basics of Color Basic.

It is indeed, as the back cover claims, an "entertaining self-instructional book" that is "the ideal introductory aid for kids, parents, and teachers using the Color Computer."

Learning TRS-80 Basic: for Models I, II/16 and III, by David A. Lien. CompuSoft Publishing, 1050-E Pioneer Way, El Cajon, CA 92020. 544 pages, paperback $19.95, plus $1.65 shipping and handling. 1982.

The back cover says this book is "completely reorganized and updated," but if you have read Radio Shack's TRS-80 *User's Manual for Level 1* and *Learning Level II,* (both by Lien), then you have read just about all but four chapters of his latest book.

Which is not to detract from *Learning TRS-80 Basic* at all; it is very well written and deserves the high praise it has received. But if you have read those two previous books, you may not want to spend $19.95 for the 30 pages that comprise the four new chapters.

Twenty-six chapters are taken from the first book, and twenty from the second, almost word for word. An extra-wide right margin contains notes that indicate how some models may differ from the text, especially the Model II.

The entirely new chapters are 20: Intermediate Basic (multiple-statement lines, variable names, shorthand tricks, arrow keys, optional NEXT, POS(N), etc.); 41: Advanced Graphics (string packing, array loading, cursor control codes, graphics-character code patterns); 42: Graphics INKEY$ (real-time input); and 44: Model III POKE Features (cassette-speed changes, foreign character set, video-display memory).

If those four chapters sound interesting, and if you haven't read the two previous TRS-80 books or would like all the information in one handy volume, this is one of the basic books for your library, with over 500 pages of easily understood text written by a born teacher. If you want more details than you found in the Radio Shack Level II manual, this book belongs on your shelf.

Pet Talk, by Evelyn B. Avsharian. Kids Computer Series, Box 1411, Ann Arbor, MI 48106. 47 pages, paperback $5.95. 1980.

This book for beginning users of the Commodore Pet computer was developed for third grade and up. According to the accompanying letter, "Teachers and older teenagers who would like to learn about beginning programming for computers will enjoy sailing through this non-technical tutor in 3-4 hours. Students age 7 or more can (without a teacher) sit down with a computer for the first time, and, using *Pet Talk,* immediately begin to operate, experiment, and learn from this self-teaching book."

The book is completely handwritten, with large block lettering. Each page covers a different topic. The first page starts by

telling how to turn on the Pet, "Turn me on by pressing the switch on my back. I have a Flashing White Square that's like a magic crayon. It's called a CURSOR." The page goes on to ask the reader to look for the up/down CRSR and SHIFT keys, to press them and see what happens.

Subsequent pages introduce the various command keys. By page 9, the reader learns how to type in a short PRINT line, which is expanded upon in the following page. He then learns how to use LIST, and the comma and semicolon for spacing. By page 15 he writes a second program, using INPUT, and learns the use of N$, which isn't called a string (or anything else) in the book.

Later pages introduce GOTO, the four math functions, REM, IF/THEN, END, and the beginning of string manipulation, with LEFT$, RIGHT$, MID$ and LEN, and then TAB and a short program that displays a sinewave using TAB.

Page 11 reviews the material up to that point, pages 28-30 review later material, and pages 31-32 offer a test, with blanks to be filled in.

This is just about the easiest way to learn elementary Pet Basic, and although there are a couple of places where the writing is somewhat strained (as in "You can even type line numbers in that are out of order . . . . "), they are minor items in a very well written text that can be recommended for children in the third and fourth grades, or for anybody who wants a simple and easy introduction to Pet Basic.

Kids Can Touch: A Child's Guide to the Apple II Plus Computer, by Patricia M. Schillingburg. Kids Can Touch, 6 Magnolia Place, Summit, NJ 07901. 47 pages, paperback $4.95, plus $1 shipping. 1981.

According to the letter accompanying this book, "Children take computers for granted, but computers are often threatening to adults. They think they need to be math experts to work them, or they fear they might cause destruction. Neither of which is true. However, these myths need to be exploded." This book, "to be used with the Apple II Plus and written for 10 year olds, meets the needs of both audiences," and is a "lively self-teaching guide with whimsical illustrations," the letter continues.

The seven chapters are titled: It's for Kids (parts of the computer, how to turn it on, booting a disk, simple commands, etc.), Your Name's The Game (loops, PRINT, GOTO, RUN, LIST, NEW), More Programming (disks, SPEED, HOME, FLASH, NORMAL, INVERSE, strings, GOTO, GOSUB, INPUT, SAVE, LOAD), Starting a Conversation (IF/THEN, spacing, FOR/NEXT, DATA/READ, bugs), The Big Switch (microchips, binary numbers, languages), Why Computers? (brief history), and Computers Have Come and Are Here to Stay (effects of computers).

Meant to be used along with an Apple II Plus computer, this book, although fairly well written, is for an audience somewhere between young children and adults. Adults will be bored with the "See Spot run" writing, such as "There is a MONITOR. It is a viewing screen, or an actual television, which allows the computer to talk to us." On the other hand, the average fifth-grader may be put off by the vocabulary, by the long sentences, by page after page of solid text, all in dot-matrix print with short extenders and thus not easy to read, and all right-justified, which means a lot of extra spaces in each line, making it even harder to read. The delightful illustrations are the best part of this book.

The book should be OK for brighter kids, or for adults intimidated by more complex texts. However, it would have been much better had the author worked in conjunction with a schoolteacher, tailoring the book to the average ten-year-old. END

IT'S SIMPLE. . . . . .
CALL & SAVE MONEY!

1-800-841-0860

TELEMARKETING COMPUTERS AND EQUIPMENT TO SAVE YOU MONEY

SINCE 1978

TRS-80 COMPUTERS

• PURE RADIO SHACK EQUIPMENT •

UP TO 20% AND MORE DISCOUNT

CALL FOR PRICES
ON COMPLETE LINE

PRINTERS AND EQUIPMENT

EPSON
OKIDATA
SCM SMITH CORONA
RB ROBOT

CALL

Star MICRONICS, INC
C. Itoh
Hayes
Novation

CALL commodore

WE SELL IBM P.C. COMPATIBLES

Since 1978
• PIONEER IN DIRECT TO CONSUMER SALES OF MICRO COMPUTERS AND ELECTRONICS
• NAME BRAND PRODUCTS
• LARGE INVENTORIES
• NEXT DAY SHIPMENT ON MOST PRODUCTS

FREE UPON REQUEST
• DISCOUNT PRICE LIST AND INFORMATION KIT
• COPY OF MFR'S WARRANTY
• PRICES AND PRODUCTS ARE SUBJECT TO CHANGE WITHOUT NOTICE

Man's Best Friend

Micro Management Systems, Inc.
2803 Thomasville Road East
Cairo, Georgia 31728
(912) 377-7120 #3

CIRCLE 175 ON READER SERVICE CARD

creative computing CLASSIFIED

SOFTWARE

FREE SOFTWARE DIRECTORY. Database manager, mailing list, inventory, accounting, payroll. TRS-80, xerox, IBM-PC. Long SASE. 37¢. Micro Architect, 96 Dothan, Arlington, MA 02174. 617-643-4713.

VIC-20 TRS 80 SOFTWARE, HARDWARE—Morse code, RTTY, EPROM, programmer memory. FRANK LYMAN, P.O. Box 3091, Nashua, NH 03061.

TI-99/4A PROGRAMMERS: Affordable Software! Catalog, only $1. PROGRAMS SOFTWARE, 1435 Burnley Square North, Columbus, OH 43229.

TI 99/4A SOFTWARE. Free price list plus newsletter. Glen Dobbs, Box 801CC-1, Santa Maria, CA 93456.

VIC-20/COMMODORE-64 Educational Software designed by teachers. Free catalog. ATHENA SOFTWARE, 727 Swarthmore, Newark, DE 19711.

TI-99/4A owners. Send for free catalog of new and exciting, low cost software. DYNAMO, Box 690, Hicksville, NY 11801.

CHECK OUR SOFTWARE PRICES FIRST! Business-Education-Games for all popular computers. Free brochure. LOG-ON, Box 747, Winchester, CA 92396. (714) 926-1141.

FREE EDUCATIONAL SOFTWARE CATALOG—Pet, Commodore 64, Apple II+, TRS-80—Island Software, PO Box 300, Dept. G, Lake Grove, NY 11755. (516) 585-3755.

TAKEOVER—Strategic wargame for TI-99/4A. Send $16: Schnitzel Software, 45 Lexiington Rd., Howell, NJ 07731.

HANDICAPPING PROGRAMS FOR MOST PERSONAL COMPUTERS. Free Catalog: Gambler's Edge Computing, Dept B4, 250 Richards Rd., Suite 254, Kansas City, MO 64116. 1-800-821-3343. 1-816-471-8660.

COMMODORE 64, VIC-20, 99-4/A, SINCLAIR, and ATARI software. Free catalog. Excaliber Enterprises. Dept. C2, Box 20093, Riverside, CA 92516 (714) 359-8567.

X-RATED XBASIC ADDS PM GRAPHICS, String arrays, 30 new functions to Atari Basic $129.95. FDOS gives named file handling, DOS 2.0S compatibility to APX fig-FORTH 39.95. Superware, 2028 Kingshouse Road, Silver Springs, MD 20904. (301) 236-4459.

ATARI SOFTWARE-Discount prices. Free catalog. LaMont Software, P.O. Box 473. Herndon, VA 22070. (703) 620-3655.

MULTI-LINGUAL SOFTWARE for Spanish, French, German, other languages. Apple II + IIe. FREE CATALOG. Le Professeur, P.O. Box 301C, Swanton, Vermont 05488. (514) 747-9130.

ADULT PARTY GAMES, BODY PARTS—$29.95. Atari 32K disk, also for the Apple II: Partly Software, P.O.B. 3025, Mililani, HI 96789.

WORDPROCESSORS, Courseware, Spreadsheets, Databases, Games. For savings over 15% send S.A.S.E.: Computer Software, P.O. Box 1361, Dept. CE, Bloomington, IL 61702-1361.

INCOME TAX PROGRAM for VIC-20 and Commodore 64. Menu driven, saves tax data on tape/disk, printer output. Form 1040/2441, Schedules A,B,D and G. Available January 1984. Cassette $49.95. dealer inquiries invited. Send orders/inquiries to: U.C. Software, PO Box 2036, Universal City, TX 78148.

TAX SOFTWARE for your TI, RS, Apple, Commodore (20, 64), IBM-PC. $20-$40. Available January 3rd; shipped within 48 hours! SEND FOR FREE DETAILS. EUGENE BOCK & ASSOCIATES CONSULTANTS, 135 Heartwood Drive, Lansdale, PA 19446, (215) 362-5082.

MAXELL DISKETTES, MD-1, $25 a case. Dysan diskettes, use any price in this book. Free shipping. 1-(800) 245-6000. Tape World, 220 Spring St., Butler, PA 16001. (412) 283-8621.

TI99/4A PROGRAMS. Six for $15. SASE for list. Specify BASIC, XBASIC; disk, cassette. CC Software, 2713 Silverspur, Corpus Christi, TX 78410.

APPLE II, CIVIL-ARCHITECTURE design software. Hydraulics, hydrology, earthwork, beam design, structural, vertical curve street design, and flood routing. Brochure available. CIVIL-WARE, 3112 Duffield Avenue, Loveland, CO 80537. (303) 669-0830.

SUPERIOR VIC-20 SOFTWARE! Education programs and adventure games. FREE program summaries with price list. Creative Workshop, PO Box 2725, Dept. 21, Spring Valley, CA 92077.

FREE CATALOG OF DISCOUNT SOFTWARE. Specify computer. The Floppy Disk, Box 5392C, North Hollywood, CA 91616.

20-30% DISCOUNT specify Apple/IBM software. Free catalog. Soft Warehouse, P.O. Box 153 Dept. C, West Islip, NY 11795.

COMMODORE 64/VIC 20 Games/educational software. Over 400 titles! Write for FREE catalog! American Peripherals, 122 Bangor St., Lindenhurst, NY 11757.

ATTENTION TI 99/4A HOME COMPUTER USERS! Four super graphic game programs. Send $12.00 for data cassette. Alpha Software, 162 Chapel Drive, Churchville, PA 18966.

VITAMIN/MINERAL deficiency program-analyzes your answers to 192 questions concerning your body, then prints a chart showing probable deficiencies. $89.50. TRS-80 1/111/4, 48K. Call (619) 372-5355. Allied Systems Co, PO Box 245, Trona, CA 93562.

ATTENTION APPLE, IBM, Commodore, Atari, TI 99/4A users, Extensive selection of software. Send for catalog, specify model. Celjim Enterprises, 3687 Mexico, Westerville, Ohio, 43081. (614) 890-7725 after 4:30.

HARDWARE

NEC and OKIDATA PRINTERS, AMDEK MONITORS. Free Price List. Lowest Prices! Tech-Systems, P.O. Box 565, Spring, TX 77383.

TRS80 MODEL IV word processor-perfect for letters, memos, internal correspondence. Requires 2 disk drives, Epson printer. $29.50 ppd Roterr Development, POB 173, Clovis, NM 88101.

USED COMPUTER terminals, printers, modems, cables, surplus electronic parts. Specials: CRT's $20.00. Modems $35.00. Catalog $1.00. Rondure Company. "The Computer Room" CC. 2522 Butler Street. Dallas, TX 75235. (214) 630-4621.

COMPUTER EQUIPMENT/SUPPLIES

COMPUTER PAPER—SAVE $$$—Top quality. Fast shipping. Low single-carton prices. Super quantity discounts. Call A-1, (800) 628-8736 or (213) 804-1270.

FLIP YOUR 5¼ DISK—Use both sides, special punch, template, and instructions, $8.00. Intelex Computer Wares, 147 S. Brentwood Terr., Mt. Laurel, NJ 08054.

FREE! Computer Supplies Catalog—low prices—Satisfaction guaranteed—DATA SYSTEMS, Box 99; Fern Rock, Florida 32730 (305) 788-2145.

PRINT WHEELS WITH DURABLE GLASS REINFORCED CHARACTERS. For Diablo, QUME, C. Itoh Printers. Last up to 10x longer than conventional plastic printwheels. Business Support Services, 705 Butternut Ave., Royal Oak, MMI 48073. (313) 585-4736.

DISCOUNT PRICES on all computer supplies. Call or write for your free brochure! Datacom, P.O. Box 02294, Cleveland, OH 44102. (216) 281-8820.

CUSTOMIZER COMPUTER DESK—BUILD YOUR OWN. Complete plans $16.00. Include your equipment dimensions. DSG Products, 4278 Paseo de Oro, Cypress, CA 90630.

FREE 56-PAGE COMPUTER catalog crammed full of thousands of the best buys and lowest prices around! A.P. Computer Products, 8 Division St., Holtsville, NY 11742. (516) 698-8636.

ATTENTION APPLE—IBM—Commodore—Atari—TI 99/4A users. G10X $299.00. Extensive selection software—peripherals—most microcomputers—competitive prices. Catalog. Celjim Enterprises, 3687 Mexico, Westerville, Ohio 43081. (614) 890-7725, after 4:30, weekends. VISA, Mastercard (credit card, 3% handling), certified check, M.O., plus $15.00 shipping. Ohio residents add 5.5% tax.

COMPUTER PUBLICATIONS

HOW TO MAKE MONEY WITH YOUR MICROCOMPUTER. Hard-back, 168 page guide shows how . . . Money back guaranteed . . . Send $14.95 to RH Publications, P.O. Box 105/C, Sullivan, IL 61951. Send $1.00 for specialized computer book list.

FREE ISSUE-FINANCIAL newsletter with programs for home computers. Send stamped addressed envelope to ODD LOTS Publishing Company, 17596 Wildemere, Detroit, MI 48221.

COMPUTER CLUB

JOIN THE BIG RED APPLE CLUB, a national Apple-user's group with benefits including monthly newsletter and large library of free software. Annual membership $12. Sample newsletter $1. BIG RED APPLE CLUB, 1301 N. 19th, Norfolk, NE 68701 (402) 379-3531.

FOR SALE/BARTER

CABLE T.V. EQUIPMENT. Channel 3 or 4 Notch Filter $20.00. Information $1.00. Goldcoast, P.O. Box 63/6025B, Margate, FL 33063.

LOWEST POSSIBLE PRICES ANYWHERE! Computers Hardware—Software—Printers, Audio, Video, Car Stereo. ELECTRIFIED DISCOUNTERS, 996 Orange Ave., West Haven, CT 06576 MC/VISA. (203) 937-0106.

BUSINESS OPPORTUNITIES

MAIL ORDER OPPORTUNITY! Start profitable home business without experience or capital. Information free. MAIL ORDER ASSOCIATES, Dept. 570, Montvale, NJ 07645.

COMPUTER CASH—101 exciting, new, sparetime home businesses. Report $4.50. Associated Research, Box 22485C. Houston, TX 77227.

SMALL COMPUTER BUSINESSES...Over 100 you can start anywhere—anytime. Unique 40 pg. catalog—$1. C.B.I.E.N., PO Box 4759, Santa Barbara, CA 93103.

PUBLISHER SEEKS true computer experiences in hacking/crime/society twisting. Pay if used. AW Box 5115, Tahoe City, CA 95730.

BUSINESS SERVICES

LOST IN THE PERSONAL AND MICRO-COMPUTER MAZE? Business Applications Systems can help you find your way. For more information, write: Business Application Systems, Dept CCM, 1734 Barry Avenue, West Los Angeles, CA 90025.

GAMES

APPLE-IIe and Apple-II+ users, get the new Foxxivision entertainment pack. 8 quality games on the same disk for $24.95. Extremely fast delivery! Visa/Mastercharge accepted. Foxxivision Inc., 28090 Tavistock Trail, Southfield, Michigan 48034.

COMPOSERS—A MUSIC HISTORY GAME. For Apple II. Diskette: $29.95 Free Documentation available. Theme Press, Box 121381, Nashville, TN 37212.

PROGRAMS

PROGRAMS: 5 for $2.50 plus S.A.S.E. LIST IN BASIC. SEND TO: P.D.M. ENTERPRISES, P/O BOX 56675, North Pole, AK 99705.

TI99/4A X-Basic Star Trek, $5. Frogger, $8 requires joystick, Best Software, P.O. Box 22446, Baltimore, MD 21203.

TIMEX/SINCLAIR

KROK, STAR SEARCH, NOAH'S ARK, finest programs available. Machine language action, graphics. SASE Brown Cottage, 5486 Bright Hawk, Columbia, MD 21045.

TIMEX/SINCLAIR 16K Star Trek, Household Inventory +3 more $5. ZX81CC Club, P.O. Box 22446, Baltimore, Md 21203.

TRS-80

TRS-80 COLOR COMPUTER Software available Chattanooga Choo-Choo Software. P.O. BOx 15892, CHATTANOOGA, TN 37415. (615) 875-8656.

COMMODORE 64

ARCADE ACTION—MOVIE THRILLS—"Lightcycles" futuristic motorcycle chase-fast machine language for Commodore 64 on Disk or cassette. Send $15.95 to UNICORN Box 7L, Graysummit, MO 63039.

COMMODORE 64 Casino Pac—includes Blackjack, Poker, Keno, Slots—Graphic Simulations of Vegas video machines—$39. 64TOUR—intro to 64's features and capabilities—$12. (Disk or Tape). Advanced Microwave, 1701 A Park Glen Circle, Santa Ana, CA 92706. (714) 554-6470.

ATARI

NEW computerized "SLOT MACHINE"—Authentic action—Realistic sounds—Seven playing levels. ATARI 400/800. Send $14.95 to Jackpot Tape, 139 West Arboles, Thousand Oaks, CA 91360.

APPLE PRODUCTS

APPLE 9-TRACK TAPE DRIVES. Read/writ[illegible]ustry standard 800 bpi tapes on an Apple. Call/write for detailed brochure. Electrovalue Industrial Inc., Box 376-D, Morris Plains, N.J. 07950. (201) 267-1117.

INSTRUCTION

UNIVERSITY DEGREES BY MAIL! Bachelors, Masters, Ph.D.s ... Free revealing details. Counseling, Box 389-CE01, Tustin, CA 92680.

COMPUTER REPAIRS

DON'T THROW OUT your disk drive before calling us! We'll help you diagnose/repair. Call: Micro Tek Digital Group. (512) 258-8472.

PLANS AND KITS

PROJECTION TV ... CONVERT your TV or COMPUTER MONITOR to project 7 foot picture ... Results comparable to $2,500 projectors...Total Cost less than $30.00 ... PLANS and 8" LENS $19.95 ... Illustrated information FREE. Macrocoma-EE, Washington Crossing, Pennsylvania 18977. Creditcard orders 24 hours, (215) 736-3979.

COMPUTER WORK STATION: Build your own work station from one sheet of plywood. Detailed plans and instructions. $5.25 J&L, 113 Kimber Dr., Bridgeville, PA 15017.

MAILING LISTS

COMPUTER SHOW ATTENDEES N.Y., N.J.: 15,000 names. $30/M. P/S labels. For info, (201) 297-2526.

USERS GROUPS

FREE VIC-20 and COMMODORE 64 USERS GROUP MEMBERSHIP with software purchase. Why pay to belong to a users group when you don't have to? Benefits: Newsletter, extensive club library, discounts, contests, questions hot-line and more! Free details—(803) 797-1533. Lords of Basic, PO Box 459, Dept. 103, Ladson, SC 29456.

MISCELLANEOUS

BUMPER STICKERS! "Byte My Software" & "I Love My Computer." 3½"×15", quality vinyl, 2 for $3.00 postpaid. R. Chapel, P.O. Box 56, Oakdale, MA 01539.

creative computing's RETAIL ROSTER

A DIRECTORY OF STORES AND THE PRODUCTS THEY CARRY

TO PLACE A LISTING CALL COLLECT: LOIS PRICE (212) 725-4215

ALABAMA

VILLAGE COMPUTERS, 1720 28th Avenue South, Homewood, 35209. (205) 870-8943. Apple, Vector, Graphics, Peripherals, Software, Training and Service.

Eagle MicroSystems — Full service/support. Corona, Kaypro, Hewlett-Packard Computers. Specializing in Peachtree-MicroPro Software. 114 West Magnolia, Auburn 36830. (205) 826-3691.

ARIZONA

HEATHKIT ELECTRONIC CENTERS—Heath/Zenith Computers, Software, Peripherals. PHOENIX—2727 W. Indian School Rd., (602) 279-6247. TUCSON—7109 E. Broadway, (602) 885-6773.

CALIFORNIA

HEATHKIT ELECTRONIC CENTERS—Heath/Zenith Computers, Software, Peripherals. ANAHEIM—330 E. Ball Rd., (714) 776-9420. CAMPBELL—2350 S. Bascom Ave., (408) 377-8920. EL CERRITO—6000 Potrero Ave., (415) 236-8870. LA MESA—8363 Center Drive, (714) 461-0110. LOS ANGELES—2309 S. Flower St., (213) 749-0261. POMONA—1555 N. Orange Grove Ave., (714) 623-3543. REDWOOD CITY—2001 Middlefield Rd., (415) 365-8155. SACRAMENTO—1860 Fulton Ave., (916) 486-1575. WOODLAND HILLS—22504 Ventura Blvd., (213) 883-0531.

THE COMPUTER STORE OF OAKLAND—Apple, KayPro, Osborne, Televideo, Texas Instruments. Classes/Services/Financing/Free Parking. 1320 Webster, (94612). (415) 763-7900.

VALLEJO—COMPUTER IDEAS, 1029 Tennessee St., 94590. (707) 552-5076. Commodore, Epson, Sanyo. Software/Peripherals. Full Service/Support.

FAIRFIELD—THE SOFTWARE PLACE, 727 Texas Street, 94533, (707) 427-2104. Software, books, magazines, and accessories for your computer. Sale prices everyday!

DALY CITY—LOTUS CENTURY, 287 Lake Merced Blvd., 94105. (415) 992-5230. All major computer lines at discount prices!

COLORADO

HEATHKIT ELECTRONIC CENTERS—Heath/Zenith Computers, Software, Peripherals. DENVER—5940 W. 38th Ave., (303) 422-3408.

CONNECTICUT

C & E DISTRIBUTING—Edgewood Drive, Jewett City 06351. (203) 427-0657. Retail outlet and wholesaling for dealers.

HEATHKIT ELECTRONIC CENTERS—Heath/Zenith Computers, Software, Peripherals. AVON—395 W. Main St. (Rt. 44), (203) 678-0323.

BMC COMPUTER CENTER—107 College St., Middletown, 06457. One stop automation specialists—providing solutions for you! (203) 347-8515.

B L R COMPUTER SOLUTIONS INC. (203) 744-5715. Televideo Business Systems, Anadex, Diablo, Micropro, MBSI, ABS. Complete turnkey installations!

EXECUTIVE SOFTWARE-Stamford-(203) 359-2604. Dedicated to excellence in microcomputers! Authorized dealer for KAYPRO & ALTOS.

FLORIDA

FORT LAUDERDALE—THE SOFTWARE CONNECTION, 5460 N. State Road 7, 33319. (305) 484-7547. Discounted software/peripherals for TRS-80.

HEATHKIT ELECTRONIC CENTERS—Heath/Zenith Computers, Software, Peripherals. HIALEAH—4705 W. 16th Ave., (305) 823-2280. JACKSONVILLE—8262 Arlington Expressway, (904) 725-4554. PLANTATION—7173 W. Broward Blvd., (305) 791-7300. TAMPA—4109 Hillsborough Ave., (813) 886-2541.

HOLLYWOOD—COMPUTERS 101, 101 Hollywood Fashion Center, 33023. (305) 981-1011. Franklin, KayPro. Gemini Printers, DTC Daisy Wheel Printers, ATARI, Etc.

GOERINGS' BOOK CENTER—1310 West University Avenue, Gainesville 32603. (904) 378-0363. Books and magazines. Open until 9:00. Sun 1:00 to 5:00.

NORTHWEST FLORIDA-Computer Center Inc., 7143 9th Ave., Pensacola, 32504. (904) 478-6558. Authorized sales/service/training Commodore, Corona, P.C., others.

GEORGIA

HEATHKIT ELECTRONIC CENTERS—Heath/Zenith Computers, Software, Peripherals. ATLANTA—5285 Roswell Rd., (404) 252-4341.

ILLINOIS

VIDEO ETC., 465 Lake Cook Plaza, DEERFIELD, 60015, (312) 498-9669. Other locations: SKOKIE (312) 675-3655, ORLAND PARK (312) 460-8980, BUFFALO GROVE, (312) 459-6677, strong Hard/Software support for Apple, Atari, Kay Pro, IBM-PC

DATA DOMAIN OF SCHAUMBURG, 1612 E. Algonquin Rd., Schaumburg 60195. (312) 397-8700. 12-9 Mon.-Fri., 10-5 Sat. Authorized Sales and Service for Apple II, Apple III, LISA, Osborne and Alpha Micro Computers. Hewlett-Packard Calculators and accessories. Largest Book and Magazine selection in Midwest. VISA, MC, Amer. Exp. accepted for phone orders.

LOMBARD-COMPLETE COMPUTING. 890 E. Roosevelt. (312) 620-0808. Kaypro, Eagle, Victor, Atari, Commodore 64, Great Software Selection! Service/Training.

FARNSWORTH COMPUTER CENTER—1891 N. Farnsworth Ave., Aurora 60505, (312) 851-3888 and 383 E. North Ave., Villa Park 60181, (312) 833-7100. Mon.-Fri. 10-8, Sat. 10-5, Apple, Fortune, Hewlett-Packard Series 80 Systems, HP Calculators, IDS Prism, SMC, Daisy Writer Printers.

INDIANA

BYTREX COMPUTER SYSTEMS—5958 Stellhorn Rd., Fort Wayne 46815. (219) 485-7511. Atari, Zenith, Sony, Televideo. Hardware/Software, Sales & Service.

SOUTHERN COMPUTER SYSTEMS—Shelbyville, (502) 633-5639; Louisville, (502) 491-7704. For more information, see listing under Kentucky.

KENTUCKY

SOUTHERN COMPUTER SYSTEMS—SHELBYVILLE, 630 Main Street, 40065, (502) 633-5639; LOUISVILLE, 10474 Blue Grass Parkway, 40299, (502) 491-7704. Microcomputers: Northstar, TRS-80, Kaypro, Franklin. Peripherals: Okidata, C. Itoh, Corvus. Software: All major brands. Turnkey Systems. We service all major brands!

MARYLAND

HEATHKIT ELECTRONIC CENTERS—Heath/Zenith Computers, Software, Peripherals. BALTIMORE—1713 E. Joppa Rd., (301) 661-4446. ROCKVILLE—5542 Nicholson Lane, (301) 881-5420.

MASSACHUSETTS

SCIENCE FANTASY BOOKSTORE—18 Eliot St., Harvard Square, Cambridge 02138; (617) 547-5917. 11-6 Monday-Saturday till 8 Thursday. Apple, Atari, IBM, TRS-80, and Commodore 64 strategy and adventure games.

HEATHKIT ELECTRONIC CENTERS—Heath/Zenith Computers, Software, Peripherals. PEABODY—242 Andover St., (617) 531-9330. WELLESLEY—165 Worchester Ave., (617) 237-1510.

RAM COMPUTER CENTER—ACTON, 427 Great Road, 01720: (617) 263-0418. N.E.'s Largest Selection of Personal Computer Software.

MICHIGAN

COMPUTERLAND—35850 Van Dyke, STERLING HEIGHTS 48077, (313) 268-4400; 22000 Greater Mack Ave., ST. CLAIR SHORES 48080, (313) 772-6540, Apple, Compaq, DEC, Epson, Fortune, IBM, Osborne, TI PRO.

MISSOURI

COMPUTER ANNEX—411 South Campbell, Springfield 65806. (417) 864-7036. Franklin, Epson, Hardware/Software, Service, Supplies, Classes.

MONTANA

THE COMPUTER STORE—BILLINGS, 1216 16th St. West, 59102. (406) 245-0092. Apple, Kay Pro, Hewlett Packard, Commodore. Hardware/Software/Peripherals—Service/Training.

NEW HAMPSHIRE

COMPUTER MART OF NEW HAMPSHIRE, 170 Main St., Nashua, 03060, (603) 883-2386. THE Apple Specialists. Full line Hardware/Software. Training/Service.

VIDEO STORE—140 Congress, Portsmouth 03801. (603) 431-1211. Osborne and Epson QX-10 for your business/home. Software. Supplies.

NEW JERSEY

SOFTWARE MART—352 Bloomfield Avenue, Caldwell 07006, 201-228-4949. Software for Apple, Atari, TRS-80 10-20% off list.

COMPUTERLAND, 35 Plaza, Rt. 4 West Paramus, 07652 (201) 845-9303. Apple, IBM, DEC, etc. We know small computers.

STONEHENGE COMPUTER CORP., 89 Summit Ave. Summit 07901. (201) 277-1020. 10-5:30 M-F, 10-5 Sat. Apple. IBM, Wicat. Authorized Dealer Sales and Service.

WAYNE SOFTWARE—1459 Route #23, Wayne 07470. (Across from Packanack Center) Books, Programs, Discount Prices! (201) 628-7318.

HEATHKIT ELECTRONIC CENTERS—Heath/Zenith Computers, Software, Peripherals. ASBURY PARK—1013 State Hwy. 35, (201) 775-1231. FAIR LAWN—35-07 Broadway (Rt. 4), (201) 791-6935.

VIDEO CONNECTION and COMPUTER CENTER OF SOMERSET—900 Easton Avenue, 08873. (201) 545-8733. Atari, Altos, Commodore, IBM. Hardware/Software/Supplies.

SOFTWARE SPECTRUM, 595 Somerset St., North Plainfield, NJ 07060. (201) 561-8777. Programs sold-rented! Apple, Atari, Commodore, TRS-80, IBM PC, others. OVER 1,000 TITLES! 20% DISCOUNT.

NEW YORK

LEIGH'S COMPUTERS, 212 East 85 Street, New York City 10028. (212) 879-6257. Apple, Atari, Franklin, VIC 20, Commodore 64,—Hardware/Software. IBM Software. All Peripherals. Discount prices.

COMPUTER WORLD—6464 W. Quaker St., Orchard Park, 14127. (716) 662-4141. M-F: 9-9, Sat: 9-5. Atari, Commodore—VIC-20, 64. Epson HX20, QX10 computers, and printers. Hardware/Software.

SOFTWARE EMPORIUM—151 Mineola/Willis Ave., Roslyn Heights, 11577. (516) 625-0550. LARGEST SELECTION OF SOFTWARE ON L.I.: Apple, Atari, TI, Commodore, IBM and more + hardware/peripherals/books/magazines.

WATERTOWN—MCDASNY COMPUTERS, Stateway Plaza, 13601. (315) 782-6808. Apple—Software/Peripherals. Full Service. Training is our specialty!

ALPHA STEREO—345 Cornelia Street, Plattsburgh 12901, (518) 561-2822. Atari computers and software. Weekdays 10-8, Sat. 10-6, Sun. 12-5.

FARMINGVILLE-DATASCAN COMPUTER SYSTEMS, 2306 N. Ocean Ave., 11738. (516) 698-6285. Atari, NEC, KAYPRO, APPLE Compatibles. Business Systems. Software/Peripherals/Service.

COMPUTERWARE—2384 Hempstead Turnpike, East Meadow, 11554; (516) 731-7939. Large selection of Apple, Atari, Commodore software. Featuring business, utility and games. Call for the latest software releases. Authorized Franklin Ace service.

HEATHKIT ELECTRONIC CENTERS—Heath/Zenith Computers, Software, Peripherals. AMHERST—3476 Sheridan Dr., (716) 835-3090. ROCHESTER—937 Jefferson Rd., (716) 424-2560. N. WHITE PLAINS—7 Reservoir Rd., (914) 761-7690.

NORTH CAROLINA

HICKORY—SIMPLIFIED SOFTWARE, 118 Third Avenue, N.W., 28601, (704) 328-2386. Authorized Zenith Data Systems Dealer. Software for Z100, IBM/PC. DEALER INQUIRIES INVITED.

HEATHKIT ELECTRONIC CENTERS—Heath/Zenith Computers, Software, Peripherals. GREENSBORO—4620 W. Market St., (919) 299-5390.

OHIO

ABACUS II—1417 Bernath Pkwy., TOLEDO 43615; (419) 865-1009. 4751 Monroe St. (419) 471-0082. 10-6, 10-9 Thursdays. IBM-PC, Epson, Apple, Osborne, Lisa.

BARNHART COMPUTER CENTER—548 N. Main, Urbana 43078. (513) 653-7257. ATARI, KayPro Portable, Columbia (IBM Compatible). Timex/Sinclair.

NORTH COAST COMPUTERS, 650 Dover Center, Bay Village 44140, 216-835-4345. 10-6 Mon-Fri, 10-8 Tuesday, 9:30-5 Saturday. Apple, Osborne, Vector Graphics, Altos.

TOLEDO—HEATHKIT ELECTRONIC CENTER, 48 South Byrne Rd., 43615, (419) 537-1887. Heath/Zenith Computers, Software, Peripherals.

COMPUTER CORNER—5104 Mayfield Rd., LYNDHURST 44124. (216) 473-5010. Commodore, NEC, SKS, Atari, Epson, Star. Hardware/Software/Peripherals. Authorized Service—Training/Classes.

SOUTHERN COMPUTER SYSTEMS—Shelbyville, (502) 633-5639; Louisville, (502) 491-7704. For more information, see listing under Kentucky.

OKLAHOMA

HEATHKIT ELECTRONIC CENTERS—Heath/Zenith Computers, Software, Peripherals. OKLAHOMA CITY—2727 Northwest Expressway, (405) 848-7593.

PENNSYLVANIA

PERSONAL SOFTWARE, 146 Paoli Pike, Paoli, 19355. (215) 296-2726. Software Specialists. Custom Programs, Canned Programs and Peripherals.

HEATHKIT ELECTRONIC CENTERS—Heath/Zenith Computers, Software, Peripherals. PHILADELPHIA—6318 Roosevelt Ave., (215) 288-0180. FRAZER—630 Lancaster Pike, (Rt. 30), (215) 647-5555. PITTSBURGH—3482 Wm. Penn. Hwy., (412) 824-3564.

RHODE ISLAND

COMPUTOPIA, 653 North Main Street, Providence, RI 02906, (401) 274-0330. Computer and peripherals specialist. Full Service, Classes.

HEATHKIT ELECTRONIC CENTERS—Heath/Zenith Computers, Software, Peripherals. WARWICK—558 Greenwich Ave., (401) 738-5150.

UTAH

HEATHKIT ELECTRONIC CENTERS—Heath/Zenith Computers, Software, Peripherals. MIDVALE—58 East 7200 South, (801) 566-4626.

VERMONT

MONTPELIER, TIRONE'S INC., 22 Langdon Street 05602, (802) 223-6063. Atari, TI 99/4A. Peripherals, Software, Training. Authorized Atari Service Center.

VIRGINIA

HEATHKIT ELECTRONIC CENTERS—Heath/Zenith Computers, Software, Peripherals. ALEXANDRIA—6201 Richmond Hwy., (703) 765-5515. VIRGINIA BEACH—1055 Independence Blvd., (804) 460-0997.

WASHINGTON

COMPUTERS +, 2504 Jefferson Avenue, Tacoma, 98402. (206) 272-2329. Atari/Commodore Computers. Atari/Commodore/TRS-80 Software. Supplies.

HEATHKIT ELECTRONIC CENTERS—Heath/Zenith Computers, Software, Peripherals. SEATTLE—505 8th Ave., North, (206) 682-2172. TUKWILA—15439 53rd Ave. South, (206) 246-5358. VANCOUVER—516 S.E. Chaklov Dr., (206) 254-4441.

LYNNWOOD—MEDIA MAN—18500 33rd W., Suite B-2 (In the Alderwood Plaza), 206/775-8544. Software and supplies for Apple, Atari, IBM, Commodore.

CANADA

ARKON ELECTRONICS LTD.—409 Queen St. West, Toronto M5V 2A5, (416) 593-6502. Apple dealer, Software/Hardware for Apple, Atari, Commodore 64, VIC-20, TRS-80, and more. #1 in service! Books/Magazines. U.S. Inquiries.

BYTE COMPUTERS-VANCOUVER, 2151 Burrard Street, V6J 3H7, (604) 738-2181. Apple Authorized National Account Dealer. DEC, IMS, MORROWS, QX-10. Hardware/Software/Service/Training.

SABRE COMPUTER SYSTEMS—Unit #1—2810 St. John St., Port Moody, B.C. V3H 2C1. Hardware/Software/Peripherals for business, education and home: Apple, Atari, Commodore, IBM and more. Full Service/Support/Training & Mail Order. U.S. Inquiries.

the creative computer mart

SOFTWARE AND HARDWARE SHOPPERS GUIDE

Maxell Floppy Disks

The Mini-Disks with maximum quality.



Dealer inquiries invited. C.O.D's accepted. Call FREE (800) 235-4137.



PACIFIC EXCHANGES
100 Foothill Blvd., San Luis San Luis Obispo, CA 93401. In Cal. call (800) 592-5935 or (805)543-1037.

CIRCLE 330 ON READER SERVICE CARD

SAVE UP TO 50% ON Floppy Disks & Computer Supplies

We Discount the Top Brands
3M-Scotch® • Verbatim® • Dysan
Memorex • BASF • Maxell®
TDK • Ultramagnetics
We also stock
Ribbons • Paper • Labels
Cleaning Kits • Printwheels
Storage Products
Call, write, or utilize Reader Service for our FREE new DISCOUNT catalog
LYBEN COMPUTER SYSTEMS
27204 Harper
St. Clair Shores, MI 48081
(313) 777-7780
Offering Reliability and Same Day Service

CIRCLE 335 ON READER SERVICE CARD

MS DOS & ATARI Compatible APPLICATION SOFTWARE

POWERFUL Business Software	Integrated
ORDER ENTRY INVOICING INVENTORY CONTROL ACCOUNTS RECEIVABLE SALES ANALYSIS MAILING LABELS PURCHASE ORDERS	$695 Complete (MS DOS Only) Demo Pkg. $50
Residential Property Analysis for Homeowners, Buyers & Agents	$29.95
Investment Property Cash Flow Analysis	$49.95
Sales Manager Database for Sales Activity	$99.95


Contact:
Distributed Computing Systems
PO Box 185
Lombard, Illinois 60148
(312) 495-0121

★MICROCOMPUTER★
BUSINESS SOFTWARE

MEDICAL MGMT...
DENTAL MGMT...
INSURANCE AGENT
LEGAL BILLING.....
PROPERTY MGMT..
AND MUCH MORE !

UNIVAIR INTERNATIONAL
9024 St. Charles Rock Road
ST. LOUIS, MISSOURI 63114
(314) 426-1099

CompuCover®



COVER YOUR INVESTMENT
• Static Free • Custom Fitted
• Cloth Backed Vinyl • Clear Plastic
WE COVER ALL SYSTEMS
FROM ADDS TO ZENITH
1-800-874-6391
ORDER LINE
Dealer Inquiries Invited
CompuCover
P.O. Box 324 Dept. B
Mary Esther, FL 32569
Customer Service
(904) 243-5793
Telex 469783
CALL TOLL FREE

DISKETTES maxell.

REG. PRICE
28.95 5¼" SS/DD SOFT SECTOR
39.50 5¼" DS/DD SOFT SECTOR

Buy 2 to 4 Boxes — Get a Library Case With Ea. Box Free ($4.00 VALUE) or 10% OFF REG. PRICE

HOLIDAY GRAB BAG
VERBATIM 5¼ SS/DD SOFT SECT. 23.00
MEMOREX 5¼ SS/DD SOFT SECT. 23.00
3M - SCOTCH 5¼ DS/DD SOFT SECT. 22.00
Add $2.00 Handling in USA
C.O.D.
5% Tax in Fla. Only
APO/Box No's & Canada Add 3.50 Shipping
MEGA BYTE INDUSTRIES
4899 S.W. 45th Street
Ft. Lauderdale, Florida 33314
305-587-1130
1-800-327-1013

maxell. Buy 5 to 9 Boxes — Get a Plastic Storage Flip n File Box (Holds 75 Mini-Disks) Free ($35.00 VALUE) or 15% OFF REG. PRICE

maxell. Buy 10 Boxes — Get a Complete Computer Maintenance Kit Free ($55.00 VALUE) or 25% OFF REG. PRICE

Allow one week delivery. This offer may be retracted anytime.

A.T.I.L.A.-APPLE THREADED INTERPRETIVE LANGUAGE

THE **FORTH FOR THE APPLE™**

"Incredible Features at an Incredible Price"

- Complete Forth Word Set
- Full Screen Editor
- Complete Structured 6502 Macro Assembler
- Hi-Res Graphics
- Floating point with all popular functions
- Complete self contained DOS
- Interface to DOS 3.3 Files
- Fifty+ Page Manual
- Strings, Array, Case, Lo-Res, Sound Words, and More!

COMPLETE! **29.95** NJ residents incl. 6% Sales Tax

Minimum system: Apple II, II Plus, or IIe w/48K and one disk drive; can use language card and more disk drives if available.


Visa/MasterCard accepted; incl. card #, exp. date and signature, or send check or M.O. to:

TERRY BROTHERS SOFTWARE
P.O. BOX 29, ROOSEVELT, NJ 08555
(609) 799-9190

CIRCLE 336 ON READER SERVICE CARD

IS OFFICE **NOISE** OUT OF **CONTROL**

SILENCER ENCLOSURES
can help clean up noise pollution



FREE BROCHURE AND PRICE LIST

Sound enclosures designed for most word and data processing printers!

MKM mfg. inc.
P.O. BOX 4297
SAN RAFAEL, CA 94903
PH (415) 479-0633

CIRCLE 340 ON READER SERVICE CARD

TRS-80 MODEL 4
Word Processing Program



- Works with **TRSDOS 6.0**
- **90K TEXT BUFFER** when expanded memory is installed.
- Built-in **FORM LETTER** and **MAIL-MERGE** capabilities.
- Performs **PROPORTIONAL-SPACE** right-margin justification on over 60 different printers (all drivers included **FREE**).
- Same powerful editing features as **ZORLOF II**, with dozens more features added.
- Versions also available to run on **MODEL I, MODEL III, LNW-80, PMC-80,** and **MAX-80** (80x24 display).

LeScript costs $200 less than competing products matching its capabilities.

CALL 1-305-259-9397

ANITEK SOFTWARE PRODUCTS
P.O. BOX 361136
MELBOURNE, FL 32936


FREE SHIPPING WITHIN THE U.S.; OUTSIDE THE U.S. ADD $10.00 FOR SHIPPING; FLORIDA RESIDENTS ADD 5% SALES TAX. ALL ORDERS PREPAID BY CHECK, MONEY ORDER, CREDIT CARD OR C.O.D.

---

wabash®

When it comes to Flexible Disks, nobody does it better than Wabash.

MasterCard, Visa Accepted.
Call Free: (800) 235-4137



PACIFIC EXCHANGES
100 Foothill Blvd
San Luis Obispo, CA
93401 (In Cal call
(805) 543-1037)

CIRCLE 330 ON READER SERVICE CARD


TIRED
of looking for reliable Source of Supply?
RUNDOWN
from Looking???
NERVOUS
about QUALITY??



DISKETTES +
RIBBONS +
ACCESSORIES

Call Bob Kelly Now. . .
Kelly Computer Supplies
1811 Carl St. • St. Paul, MN 55113
Toll Free . . . 800 - 447 - 2929
MN Res. Call Collect. . .612/644-9030

3M SCOTCH DISKETTES



Best Prices On
TRS-80 Computers

Our 6th year of discounts
Ed or Joe McManus
Fgt. Prepaid. Save Tax.
Toll Free 800-231-3680
Marymac Industries, Inc.
22511 Katy Fwy., Katy
(Houston) Tx 77450
1-713-392-0747
Telex 774132

See us in the Wall Street Journal every Tues., Wed., Thurs.

TDK®
The heart of your system.

Dealer inquiries invited

5¼" Soft Sector — Box/10

M1D-S	1 side/dbl dens	**$27.50**
M2D-S	2 sides/dbl dens	**$39.50**
M2D-X-S	2 side/quad 96 tpi	**$44.50**

8" Soft Sector

F1-S	1 side/sgl or dbl dens	**$38.30**
F2D-S	2 side/dbl dens	**$44.50**

Checks-VISA-MC-C.O.D./Add $2 Shipping
Call or write for our complete list.

LYBEN COMPUTER SYSTEMS
27204 Harper Ave., St. Clair Shores, MI 48081
Phone: (313) 777-7780

SAVE 50% ON TDK DISKETTES

CIRCLE 334 ON READER SERVICE CARD

$1,250.00

FRANKLIN SYSTEM

SYSCOM II (Apple Compatible)	$ 550.
APPLE IIe SYSTEM	$1,675.
FRANKLIN 1200	$1,599.
***APPLE TYPE DRIVE**	**$ 180.**
128 K Card	$ 250.
GEMINI 10	$ 300.

FREE BROCHURE

!!WE WILL BEAT ANY PRICE!!

SOFTSELL SYSTEMS
P. O. Box 18928
Philadelphia, Pa. 19119 (215) 665-5639
Visa, MasterCard preferred or C.O.D.
Apple is a trademark of Apple Computer

CIRCLE 331 ON READER SERVICE CARD

MICROCOMPUTER OWNERS OUR BROKERS IN YOUR OFFICE EVERY TRADING DAY

That's right! Through your computer we will be in your office with recommendations. Not vague buy low, sell high verbage . . . . but with SPECIFIC TRADES and defined risk. You will know our thinking before the trade, and you decide what trades are placed in your account.

If you are serious about your Commodity portfolio, let us show you our stuff. For an introduction to our QuickBroker microcomputer service, send your name, address, phone number to:

WORLEY COMMODITIES, INC
16000 Memorial Drive — Suite 280
Houston, Texas 77079 • 713/497-7787

Worley Commodities, Inc.
A REFCO AFFILIATE

Houston • New Orleans • Oklahoma City

CIRCLE 342 ON READER SERVICE CARD

CREATIVE PROGRAMMING OPPORTUNITY

Innovative software company seeks experienced assembly and C language programmers (6502 preferred) interested in creative applications including:

- graphics
- animation
- music/sound effects
- artificial intelligence
- simulations
- systems programming
- and robotics.

Join the people who wrote PAINT and MovieMaker and participate in our growth.

Send resume to:
INTERACTIVE PICTURE SYSTEMS
c/o James Ehlers
2004 Spring Garden Street
Philadelphia, PA 19130



Sure it's insured?

SAFEWARE™ Insurance provides full replacement of hardware, media and purchased software. As little as $35/yr covers:
• Fire • Theft • Power Surges
• Earthquake • Water Damage • Auto Accident

For information or immediate coverage call:

1-800-848-3469


In Ohio call (614) 262-0559

SAFEWARE™

SAFEWARE, THE INSURANCE AGENCY INC.

CIRCLE 332 ON READER SERVICE CARD

OKIDATA



92A
160 CPS
DOT MATRIX
PRINTER

IN STOCK **$455** LIMITED TIME ONLY

OKIDATA 93 - 850.00
WABASH DISK 165.00
per case of 100
ss/sd - 165.00 ss/dd 195.00
ss/dd - 275.00 vebatim
dadalife - 245.00

DISK CONNECTION LTD. • 703 451-4100
6641 Backlick Rd.,
Springfield, VA 22150
KAYPRO, EAGLE,
OKIDATA, TRANSTAR
Choice Visa, Mastercard

CIRCLE 341 ON READER SERVICE CARD

IBM FLEXIBLE DISCS

WE WILL NOT BE UNDERSOLD!! Call Free **(800)235-4137** for prices and information. Dealer inquiries invited and C.O.D's accepted.



VISA

PACIFIC EXCHANGES
100 Foothill Blvd.
San Luis Obispo, CA
93401. In Cal. call
(800)592-5935 or
(805)543-1037

CIRCLE 330 ON READER SERVICE CARD

ONLY $19.95



Self-Centering — **Full X-Y Coordinate Control**
360° Cursor Control — **2 Firing Buttons**

THE AMPOTRONIC SELF-CENTERING JOY STICK FOR APPLE COMPUTERS

Joy Stick Non-Self Centering	**$16.50**
Z-80 Card	**$75.00**
80 Column Card	**$75.00**
16K RAM Card	**$45.00**
Fan for Apple, 2 Power Outlets	**$40.00**
Power Center, 6 Outlets	**$19.00**
RF Module	**$12.00**
Computer Paper 15#, 3300 sheets 9½"x11"	**$29.95/box**
Diskettes	**Call**

Include $2.50 min. for shipping/handling.
NY State residents add sales tax.
Send check or money order to
AMPOC ENTERPRISES INC.
5 BEEKMAN ST. SUITE 720, NY 10038
(212) 233-1780
Dealer inquiries welcome

Educational Software! Pre-Christmas Specials

	List	Our Price
Koala Pads Apple II with-Micro-Illustrator Atari, Vic 20, Commodore 64	124.95	87.50
Mastertype Apple II, Atari, Commodore 64	99.95	73.95
Bankstreet Writer Apple II, Atari, Commodore 64	39.95	29.95
Story Machine Apple II, Commodore 64, Atari, IBM	69.95	48.95
Snooper Troopers Apple II, Commodore Disk/Cart, Atari D/Cart.	44.95	31.50
HBJ SAT Prep. Apple II, IBM, Commodore 64, TRS 80, Atari	34.95	21.95
In Search of the Most Amazing Thing IBM-PC, Apple II, Commodore, Atari	79.95	55.95
CAI - The Gamer Show	39.95	27.95

Add 5% or 2.00 for Shiping and Handling.
Cal. residents add 6.5% Sales Tax.
Visa and Mastercharge accepted

EDU-TECH

Learning Lab
9003 Reseda Blvd., Suite 205-A
Northridge, CA 91324 (213) 701-9438

CIRCLE 339 ON READER SERVICE CARD

Educational Programs for —
ATARI, VIC 20, TI 99/4A
TRS 80 Color Computer
Commodore 64
only **$7.00** per cassette

Alphabet, Physics, Algebra, Weather, Planetary Positions and many others.


Now! Offering, also
SAT Preparation
(5 cassettes)

Write for free list:

MOSES ENGINEERING
P.O. Box 11038
Huntsville, Al 35805
Telephone (205) 837-3356

TDK flexible disks

Call Free **(800)235-4137** for prices and information. Dealer inquiries invited. C.O.D. and charge cards accepted.



VISA

PACIFIC EXCHANGES
100 Foothill Blvd.
San Luis Obispo, CA
93401. (In Cal. call
(805) 543-1037.)

CIRCLE 330 ON READER SERVICE CARD

APPLEWARE, INC.

The Apple Users Group Software Library Bonanza
At truly affordable prices!

PROGRAMS $1.00 EACH

For the first time enjoy your Apple to its fullest capacity, using specially **packed disks with over 60 outstanding programs each.** (not available from any other source)

Each packed disk includes an extensive variety of interesting, useful and entertaining programs indispensable to all computerists! Each mixed category packed disk includes:

BUSINESS • EDUCATIONAL • DATA BASE • GAMES
UTILITIES • SCIENCE • MUSIC • GRAPHICS • FINANCE

Library Disks I, II and III are mixed categories. Dedicated disks are:

• GAMES • UTILITIES • GRAPHICS • INTEGER • SCIENCE & TECHNOLOGY. Each packed disk is available for only $59.95 each.

WHY PAY MORE?

Order direct from this ad and **Save up to $150.** Buy Library Disks I, II and III and get a special bonus disk **FREE** - over 260 programs for $179.95 + $3. shipping. For the best value, receive all 9 disks featuring over 600 of our best programs for **only 65¢ each** - for a package price of only $389. Postage Paid!

NEW...Business • Professional • Executive Package (enabling you to bring your business to its highest level of efficiency) also available, circle Readers Service Card for our complete catalog.

For Orders Only Call now
TOLL FREE: 1-800-327-8684
Florida: 1-305-987-8665

MasterCard VISA

Compatible with II, II+, IIe, III Emul., and Franklin Ace (For 3.3 DOS)

CIRCLE 343 ON READER SERVICE CARD

TIRED
of looking for reliable Source of Supply?
RUNDOWN
from Looking???
NERVOUS
about QUALITY??



DISKETTES + RIBBONS + ACCESSORIES

Call Bob Kelly Now. . .
Kelly Computer Supplies
1811 Carl St. • St. Paul, MN 55113
Toll Free . . . 800 - 447 - 2929
MN Res. Call Collect. . .612/644-9030
MEMOREX - DISKETTES

5¼ in. DISK STORAGE FOR 17.5¢ PER DISK

DISKPAGE II™

Finally an affordable notebook storage system that's safe and easy to use.
Each **DISKPAGE II™**:
— fits into any standard three-ring loose-leaf notebook.
— holds two 5-1/4" disks securely. They cannot fall out.
— has lots of space for titles, file listings and notes.

PERFECT FOR STUDENTS, INSTRUCTORS, USER GROUPS AND HOME USERS FED UP WITH THE HIGH COST OF DISK STORAGE.

Send check or money order for 35¢ per page (min. order 10 pages) to:

DALY COMPUTER ACCESSORIES CO.
P.O. Box 545
Elmsford, N.Y. 10523

Please add $1.50/order for shipping & handling
N.Y. State residents add 5-3/4% sales tax
EDUCATIONAL DISCOUNTS AVAILABLE
For sample DISKPAGE II send $1.00 for s/h.

wabash
Flexible Diskettes
6 Year Warranty – 100% Certified
FREE DELIVERY

5¼" SINGLE SIDE SINGLE DENSITY 48 TPI W/HUB RING Packed 10 per Soft Pack	$1.60 each	BULK SSSD 100/Case White Envelope W/HUB RING	$1.40 each
5¼" SINGLE SIDE DOUBLE DENSITY 48 TPI W/HUB RING Packed 10 per Soft Pack	$1.89 each	BULK SSDD 100/Case White Envelope W/HUB RING	$1.70 each
5¼" DOUBLE SIDE DOUBLE DENSITY 48 TPI W/HUB RING Packed 10 per Soft Pack	$2.75 each	BULK DSDD 100/Case White Envelope W/HUB RING	$2.44 each

"Call for Quantity Prices"

TOLL FREE NAT'L **1-800-634-2248**
(800-MEGA-BIT)

We accept money orders, certified checks, personal checks (take 10 days), VISA and MasterCard. N.D. add 4%.

Software Services™
1326 – 25th St. S. Suite D2
Fargo, ND 58103
1-701-280-0121

KCOVER COMPUTER KEYBOARD PROTECTION
DEALER INQUIRIES INVITED
ANTI-STATIC • UNBREAKABLE • LIFETIME WARRANTY



$9.95
FITS KEYBOARDS UP TO 14.25 x 5 in

FOR USE WITH MOST MICRO COMPUTERS
APPLE · ATARI · COMMODORE · TEXAS INSTRUMENTS · TRS-80 ...

☐ PAYMENT ENCLOSED $_____ * Add $1.00 *per order* for postage and handling. Outside USA add $2.50 *per unit* ordered; send US funds only ☐ Visa ☐ MasterCard

PENGUIN PRODUCTS
P.O. BOX 7008
ROSEVILLE, MI 48305
1-800-732-0614
Michigan Residents Add 4%

ELF—The Statistical Package
Reads All . . . Writes All
For IBM, Apple, and CP/M

FEATURES
• Reads and writes from VisiCalc, Super-Calc, dBase II, DIF, etc. • Factor analysis and principal components • Stepwise regression • Stepwise discriminant analysis • Analysis of variance (1 and 2 way) • Mean, standard deviation, etc. • T-test on means • Crosstabs • Frequencies • Histograms • Create and revise a database • Complete transformation language • Report writer • Software numeric keypad • more . . .

CAPACITY
DATABASE: Observations: unlimited (multi-diskette). Variables: IBM 350+, Apple 250, CP/M 150. ANALYSIS (minimim) IBM 35+, Apple 25+, CP/M 15+. Note: some CP/M machines require smaller capacity version.

PRICE
IBM $350, MS DOS $350, Apple $200, CP/M $200, CP/M 86 coming soon. To order or for further information write or call:

The Winchendon Group, Inc.,
PO Box 10339, Alexandria, VA 22310
(703) 960-2587

MC/Visa
Trademarks: VisiCalc; VisiCorp; dBase II; Ashton-Tate; SuperCalc; Sorcim; ELF: The Winchendon Group, Inc.

YOUR SEARCH IS OVER

For all your Computer Software, Hardware & Accessories
Great Service - Low Prices

Call 1-800-237-3500
In N.Y. State 212-246-0300

Call or write for our
FREE CATALOGUE

GOREN COMPUTER
P.O. Box 366, Brooklyn, N.Y. 11229

CIRCLE 337 ON READER SERVICE CARD

SPEEDY EPROM PROGRAMMER
For APPLE II

Programming any EPROM
2716, 2732, 2732A
2764, 27128
2516, 2532, 2564
in just 30 seconds.
Only $119.00
1 Year Full Warranty

Handwell corp
4962 El Camino Real, Los Altos, CA 94022
Tel: (415) 962-9265 (inside Calif.)
1-(800) 821-3628 (outside Calif.)
TLX: 171947 HANDWELL LTOS

YORK 10™ CASSETTES



• **LOWER PRICES**
• **LONGER LENGTHS**
DATA TRAC C-06, C-12, C-24

From the leading supplier of Computer Grade Cassettes, new, longer length C-12's (6 minutes per side) provide the extra few feet needed for some 16K programs.

● Premium 5-screw shell with leader — BASF tape
● Error Free ● Money back Guarantee


ITEM	1 DOZ	2 DOZ
C-06	7.00	13.00
C-12	7.50	14.00
C-24	9.00	17.00
Hard Box	2.50	4.00

SHIPPING/HANDLING $3.50
NOTE: Outside 48 Contin. States shipping $3.50 PLUS $1 per caddy, per dozen cassettes, per dozen boxes, per 10 discs. In Cont. U.S. shipments are by UPS unless Parcel Post requested. California residents add Sales Tax

FOR IMMEDIATE SHIPMENT USE YOUR VISA OR MASTERCARD **Call: 213/700-0330**

YORK 10™ Computerware
9525 Vassar Ave. #CR Chatsworth, CA 91311

JUKI 6100
LETTER QUALITY PRINTER



• $499.

- 18 cps
- Word processing and graphic functions
- Proportional spacing control
- Uses IBM Selectric ribbons
- Compatible with Kaypro, IBM, Apple, Osborne, and others.

Free shipping in U.S.

COMPUTERS and more
2420 University Ave., San Diego, Ca. 92104
To Order (619) 291-1442

CIRCLE 338 ON READER SERVICE CARD
CIRCLE 333 ON READER SERVICE CARD

PROMPT DELIVERY! AND
TRY TO BEAT THESE IC PRICES:

64K DYNAMIC RAM ICs
200 ns @ $5.65
150 ns @ $5.95
120 ns @ $6.27

16K DYNAMIC RAM ICs
200 ns @ $1.56

OTHER ICs

27128	300 ns	$19.20
2764	250 ns	$5.50
2732	450 ns	$4.25
6264P-15	150 ns	$38.00
6116P-3	150 ns	$5.62


Prices 10/18/83

MasterCard/VISA or UPS CASH COD
Factory New, Prime Parts µP∞
MICROPROCESSORS UNLIMITED
24,000 South Peoria Ave.
BEGGS, OK. 74421 **(918) 267-4961**

Prices subject to change. Please expect higher prices on some parts due to world wide shortages. Call for volume prices. Subject to available quantities. Shipping & Insurance extra. Cash discount prices shown. Federal Express Standard Air for $5.99! Orders received by 5 PM CST can be delivered to you by the next morning.

MEMOREX
FLEXIBLE DISCS

WE WILL NOT BE UNDER-SOLD!! Call Free **(800)235-4137** for prices and information. Dealer inquiries invited and C.O.D.'s accepted.




PACIFIC EXCHANGES
100 Foothill Blvd.
San Luis Obispo, CA
93401 In Cal. call
(800)592-5935 or
(805)543-1037


CIRCLE 330 ON READER SERVICE CARD

Scotch Diskettes

Rely on Scotch® diskettes to keep your valuable data safe. Dependable Scotch diskettes are tested and guaranteed error-free. The low abrasivity saves your read/write heads. They're compatible with most diskette drives.



(800)235-4137



Dealer Inquiries Invited

PACIFIC EXCHANGES
100 Foothill Blvd.
San Luis Obispo, CA
93401. In Cal. Call
(800) 592-5935 or
(805) 543-1037.

CIRCLE 330 ON READER SERVICE CARD

How to use computers to teach math!

COMPUTERS IN MATHEMATICS:


A SOURCE BOOK OF IDEAS

Now that more and more math departments have access to a microcomputer, the problem becomes: How to use the computer effectively as a teaching aid?

Here's where COMPUTERS IN MATHEMATICS can help you. This book of reprints from *Creative Computing* magazine is a goldmine of learning ideas, problem-solving strategies, programming hints, puzzles, brain teasers, and much more!

COMPUTERS IN MATHEMATICS covers nine subject areas:

- Computer literacy and computers in society.
- Thinking strategies and how to solve problems.
- Computer simulations and how to write them.
- Probability.
- Mathematical miscellany, from circular functions to differential equations.
- Art and graphics and their relation to mathematics.
- Computer Assisted Instruction (CAI).
- Programming style.
- Puzzles, problems and programming ideas.



8¼" x 11", softcover, hundreds of black-and-white diagrams and illustrations.

In all, COMPUTERS IN MATHEMATICS contains 77 fascinating articles, over 200 problems for assignment, and nearly 100 programs. Edited and with a preface by David H. Ahl, Editor-in-Chief of *Creative Computing*, this immensely practical volume is an invaluable classroom tool for teachers and students of all grades.

USE THE COUPON TO ORDER YOUR COPY TODAY!

CREATIVE COMPUTING PRESS Dept 8A9B, 39 East Hanover Avenue Morris Plains, New Jersey 07950

Please send me _____ copies of COMPUTERS IN MATHEMATICS: A Sourcebook of Ideas, at $15.95, plus $2.00 postage & handling,* each. #12D

CHECK ONE: ☐ **Payment enclosed $**_____ (CA, NJ and NY STATE residents add applicable sales tax.)

☐ **Charge my:** ☐ American Express ☐ MasterCard ☐ Visa

Card No._____ Expire Date_____

Signature_____

Mr./Mrs./Ms._____
(please print full name)

Address_____ Apt._____

City_____ State_____ Zip_____

*Outside USA add $3.00 per order.

For faster service, call **TOLL FREE 800-631-8112.** (In NJ call 201-540-0445.)

1984 Business Activity Planner



IT'S A GREAT GIFT IDEA, TOO!

Imagine! A complete Appointment Book, Financial Record Keeping System, Travel Information Guide, Health and Fitness Aid and Directory... All in one book!

No matter how organized and successful you are today, our Planner will make you even better in the future... or your money back!

IT'S AN APPOINTMENT BOOK!
SEE-A-WEEK CALENDAR
■ A full week... at a glance! Time planning becomes easy when your appointments, meetings, luncheon and dinner engagements and special activities are in front of you.

HALF-HOUR TIME SCHEDULING
■ Convenient scheduling... seven days a week.

THINGS TO DO TODAY
■ Keep track of important follow-ups, telephone calls and correspondence.

SEVEN SNAP-LOCK RINGS
■ The seven ring format insures that your pages won't pull out... unless you want them to!

BEAUTIFUL, SOFT, LEATHER-LIKE BINDER
■ Padded front and back, your 9½ x 11½ Planner is comfortable to carry. You can take it with you wherever you go. The sturdy, permanent bookmark always keeps you in the right week and the two inside pockets enable you to keep all your important papers in your **1984 Activity Planner.**

YOUR CHOICE OF IMPRINTS
■ Order the 1984 Business Activity Planner for everyone in your office ... and select the cover imprint for each person! Available with Business Activity Planner, Chairman of the Board Activity Planner, Executive Woman Activity Planner, or Executive Activity Planner.

IT'S MUCH MORE!
■ Each Section is Index-Tabbed for Instant Retrieval of Information.

FINANCIAL RECORD KEEPER
■ 12 Income and Expense Reports
■ 1984 Business Tax Calendar
■ Executive Compensation Checklist
■ Personal Investment Portfolio

HEALTH AND FITNESS AID
■ Fat - Cholesterol - Calorie Charts
■ Value of Various Exercises
■ Substitution Chart for Better Health
■ First Aid Tips

TRAVEL INFORMATION
■ Average Temperatures for Most Major Cities
■ Rank and Population of the Top 100 U.S. Cities
■ Traveling Distances
■ Toll-Free Telephone Numbers for Major Airlines, Auto Rentals, Hotels, Motels and much more!

MISCELLANEOUS
This section is filled with valuable information including Principal Holidays, French and California Wine Vintage Charts and more.

DIRECTORY
Places all emergency and important telephone numbers at your fingertips.

ZIFF-DAVIS ACTIVITY PLANNER P.O. Box 16-2354, Miami, FL 33116
Please send me the following 1984 Activity Planners at $38.95* each plus $5 per copy postage and handling. Outside U.S.A. add $10 per copy postage and handling.

Specify quantity for each cover imprint ordered:
____ Business Activity Planner(s)
____ Chairman of the Board Activity Planner(s)
____ Executive Woman Activity Planner(s)
____ Executive Activity Planner(s)

QUANTITY DISCOUNTS
(on total number of Planners)

6-20	10% off	($4 P&H each)
21-50	15% off	($3 P&H each)
51-or more	20% off	($2 P&H each)

☐ Payment enclosed. ☐ American Express ☐ Visa ☐ MasterCard ☐ Purchase Order enclosed.
Card No. _____ Exp. Date _____
Signature _____
Name _____ (please print)
Company _____
Address _____
City/State/Zip _____

*Florida residents add 5% sales tax.
SATISFACTION GUARANTEED or return within 10 days for a prompt refund!
CC1


FOR FASTER SERVICE CALL TOLL FREE
800-327-1969
(In Fla. and Canada call (305) 595-8744.)

Index To Advertisers

Reader Service No.	Advertiser	Page
101	Aardvark	115
102	Abacus	225
105	Acorn Computer Corp.	Cov 2
103	Adventure International	108
•	ALF Products	64
158	Allenbach	111
240	American Mitac Corp.	154
•	Apple Computer	62, 63
245	Archives	258
110	Arktronics	15
•	Artworx	196
104	Atari Software	36, 37
112	Atlantic Computer Accessories	30
117	Avalon Hill Game Co.	41
107	BASF	75
116	Beagle Brothers	255
238	Beagle Brothers	254
139	The Book Company (Continental Software)	2
123	Broderbund	81
119	BRS After Dark	33
129	BSI, Blue Sky Software	250
121	Bytewriter	241
271	Cab-Tek	288
122	Cal Soft	239
120	Carolina Micro	220
124	Chrislin Industries	265
•	C-Load	202
113	Collins International	118
115	Communications Electronic	260, 261
125	Commodore Business Computers	249
141	Compu Serve	199
130	Computer Advanced Ideas Software	29
126	The Computer Book Club	87-89
128	Computer Discount Products	269
138	Computer Humor	294
131	Computer Mail Order	272, 273
133	Computer Outlet	259
134	Computronics	Cov 3
246	Condor Software	224
136	Conroy-La Pointe	96, 97
140	Cosmic Computers	263
•	Counterpoint Software	13
143	Creative Computing Peripherals	165
273	Data Link	230
145	Data Most	141
254	Data Most	143
147	Decision Support	14
152	Designware	39
•	Digital Equipment Corp.	84, 85
137	Digital Research	230
148	Discwasher	147
149	DJR	120
171	Educational Media Assoc.	194
244	Electronic Protection Devices	207
108	Electronic Specialists	294
159	EPYX	79
153	EPYX	129
151	EPYX	193
142	Excalibur	11
154	Fastrack	177
156	FirstStar	243
164	Franklin Computer	162
157	Gen Tech	233
252	General Videotex	275
189	Greenwood	91
183	Happy Hands	178
160	Hayden Software	151
161	Hayes Microcomputer Products	Cover 2
162	Hayes Microcomputer Products	46, 47
163	Hesware	159
165	IBM	160, 161
177	I.J.G.	145
155	Indus Systems	156
178	Infocom	24, 25
166	In Home Software	189
167	Jenson Tools	116
169	Kalglo Electronics Co.	288
170	Kensington	68
184	Koala Technologies Corp.	76, 77
172	Leading Edge	Cov 4
190	Leading Edge	9
173	Limbic Systems	264
185	Lyco	278, 279
•	Macmillan Book Clubs	169-171
251	Mann Vinyl Products	264
•	Memtek	203
174	Micro Lab	21
175	Micro Management Systems	297
193	Micro Sci	131
•	Mind Systems	8
226	Monogram	31
176	Mountain View Press	229
179	Mytek	209
•	National Education Corp.	179
180	NEBS Computer Forms	281
181	NEC	112, 113
196	Nibble Notch	194
182	Nonagon	175
•	NRI Schools/Electronic Div.	65
242	Odesta	149
198	Okidata	235
279	Opportunities for Learning	58
186	Orange Micro	281
188	Personal Computer Network	74
206	Precision Data Products	296
292	Programmers Institute	5
201	Prometheus Products	133
243	Qantex	1
253	Quark	126-127
276	Quentin	204
191	Radio Shack	49-54
192	RCE	228
194	Readers Digest	134, 135
282	R.H. Electronics	102
199	Rhino Robots	186
308	Riteman	195
200	Royal Software	295
237	RR Software	214
211	Sakata U.S.A. Corp.	61
202	Howard Sams	66
233	Howard Sams	67
212	Howard Sams	200
220	Screen Play	213
168	Scott, Foresman	137
203	Sharp	57
205	Sierra On Line	107
204	Sierra On Line	245
207	Sierra On Line	190
208	SJB	271
213	Software City	232
209	So. Cal. Research Group	257
210	South-Western Publishing	208
•	Spinnaker	16, 17
•	Standard & Poors	185
214	Star Micronics	237
215	Stimutech	59
232	Strategic Simulations	217
249	Strobe	125
234	Sublogic	71
257	Sublogic	167
217	Sundex	223
305	SWP	287
218	Sweet Gum Inc.	116
219	Systems Mgt. Assoc.	187
221	Tech Sketch	230
222	Tecmar	7
223	Tiger Vision	178
250	Transend SSM	173
236	Transtar	139
225	Tronix	27
241	Turning Point Software	183
227	Tymac Controls	253
248	Unicorn	123
229	Videx	23
230	Warlock	58
268	Winner's Circle	83
231	Xerox	73

Introducing the Most Powerful Business Software Ever!

FOR YOUR TRS-80™ • APPLE™ • IBM PC™ • OSBORNE™ • XEROX™ • KAYPRO™ • ALL COMMODORE Computers • TELEVIDEO™ • ZENITH™ • SANYO™ • NEC™ • DEC™ TI PROFESSIONAL COMPUTER™ • SUPERBRAIN JR.™ • EPSON™ • Any CP/M™ Computer with 8" Disk Drives
CP/M-based Computers must be equipped with Microsoft BASIC (MBASIC of BASIC-80)

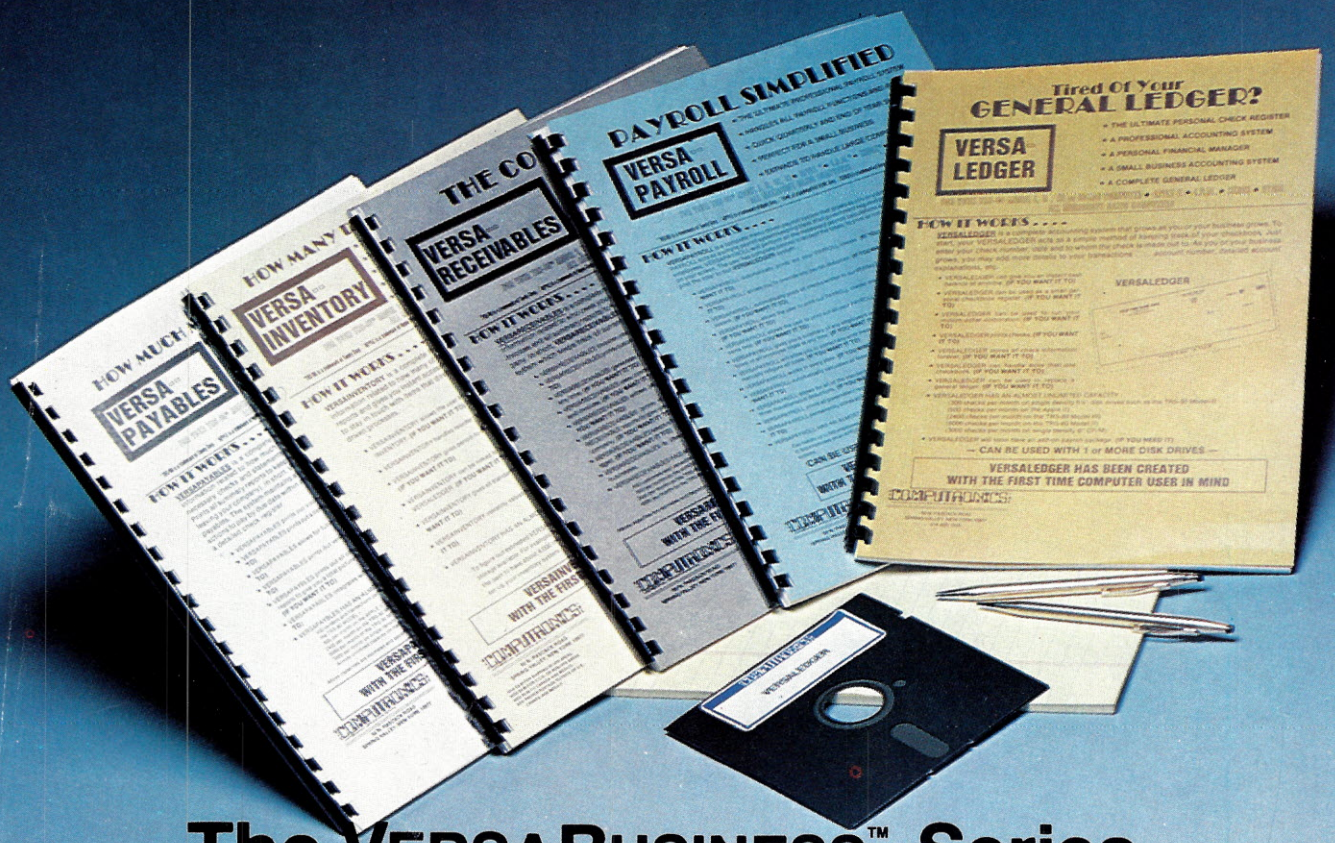

The VERSABUSINESS™ Series

Each **VERSABUSINESS** module can be purchased and used independently, or can be linked in any combination to form a complete, coordinated business system.

VERSARECEIVABLES™ $99.95

VERSARECEIVABLES™ is a complete menu-driven accounts receivable, invoicing, and monthly statement-generating system. It keeps track of all information related to who owes you or your company money, and can provide automatic billing for past due accounts. VERSARECEIVABLES™ prints all necessary statements, invoices, and summary reports and can be linked with VERSALEDGER II™ and VERSAINVENTORY™.

VERSAPAYABLES™ $99.95

VERSAPAYABLES™ is designed to keep track of current and aged payables, keeping you in touch with all information regarding how much money your company owes, and to whom. VERSAPAYABLES™ maintains a complete record on each vendor, prints checks, check registers, vouchers, transaction reports, aged payables reports, vendor reports, and more. With VERSAPAYABLES™, you can even let your computer automatically select which vouchers are to be paid.

VERSAPAYROLL™ $99.95

VERSAPAYROLL™ is a powerful and sophisticated, but easy to use payroll system that keeps track of all government-required payroll information. Complete employee records are maintained, and all necessary payroll calculations are performed automatically, with totals displayed on screen for operator approval. A payroll can be run totally, automatically, or the operator can intervene to prevent a check from being printed, or to alter information on it. If desired, totals may be posted to the VERSALEDGER II™ system.

VERSAINVENTORY™ $99.95

VERSAINVENTORY™ is a complete inventory control system that gives you instant access to data on any item. VERSAINVENTORY™ keeps track of all information related to what items are in stock, out of stock, on backorder, etc., stores sales and pricing data, alerts you when an item falls below a preset reorder point, and allows you to enter and print invoices directly or to link with the VERSARECEIVABLES™ system. VERSAINVENTORY™ prints all needed inventory listings, reports of items below reorder point, inventory value reports, period and year-to-date sales reports, price lists, inventory checklists, etc.

VERSALEDGER II™ $149.95

VERSALEDGER II™ is a complete accounting system that grows as your business grows. VERSALEDGER II™ can be used as a simple personal checkbook register, expanded to a small business bookkeeping system or developed into a large corporate general ledger system **without any additional software.**

- VERSALEDGER II™ gives you almost unlimited storage capacity (300 to 10,000 entries per month, depending on the system),
- stores all check and general ledger information forever,
- prints tractor-feed checks,
- handles multiple checkbooks and general ledgers,
- prints 17 customized accounting reports including check registers, balance sheets, income statements, transaction reports, account listings, etc.

VERSALEDGER II™ comes with a professionally-written 160 page manual designed for first-time users. The VERSALEDGER II™ manual will help you become quickly familiar with VERSALEDGER II™, using complete sample data files supplied on diskette and more than 50 pages of sample printouts.

SATISFACTION GUARANTEED!

Every **VERSABUSINESS™** module is guaranteed to outperform all other competitive systems, and at a fraction of their cost. If you are not satisfied with any **VERSABUSINESS™** module, you may return it within 30 days for a refund. Manuals for any **VERSABUSINESS™** module may be purchased for $25 each, credited toward a later purchase of that module.
All CP/M-based Computers must be equipped with Microsoft BASIC (MBASIC or BASIC-80)

To Order:
Write or call Toll-free (800) 431-2818
(N.Y.S. residents call 914-425-1535)

* add $3 for shipping in UPS areas
* add $4 for C.O.D. or non-UPS areas
* add $5 to CANADA or MEXICO
* add proper postage elsewhere

VISA AMERICAN EXPRESS MasterCard

DEALER INQUIRIES WELCOME
All prices and specifications subject to change / Delivery subject to availability.


COMPUTRONICS INC

50 N. PASCACK ROAD, SPRING VALLEY, N.Y. 10977

TRS-80 trademark Tandy Corp. · APPLE trademark Apple Corp. · IBM PC trademark IBM Corp. · OSBORNE trademark Osborne Corp. · XEROX trademark Xerox Corp. · KAYPRO trademark Non-Linear Systems, Inc. · TELEVIDEO trademark Televideo Systems, Inc. · SANYO trademark Sanyo Corp. · NEC trademark NEC Corp. · DEC trademark Digital Equipment Corp. · ZENITH trademark Zenith Corp. TI PROFESSIONAL COMPUTER trademark Texas Instruments, Inc. · SUPERBRAIN trademark Intertec Corp. · CP/M trademark Digital Research · EPSON trademark Epson Corp.

CIRCLE 134 ON READER SERVICE CARD

History will record as a profound irony
that the most powerful word processing package
ever created for the IBM® Personal Computer
can be worked with two fingers.

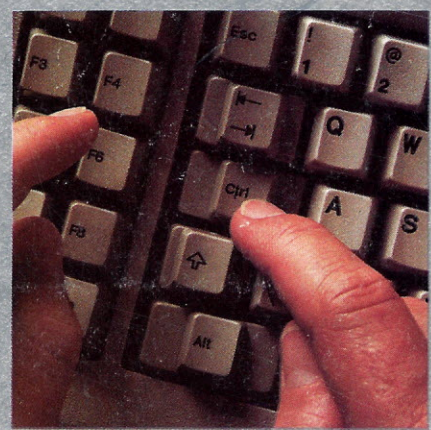

It was created by Leading Edge,® specifically to take advantage of the power of the IBM PC, plus the simplicity that all that power ought to be able to give you—but didn't.

Until now, you could go for the simplicity, and end up with a somewhat glorified typewriter. Or you could go for the power, and go nuts performing dozens of commands to do even the simplest things.

But with Leading Edge Word Processing™ you get both.

You don't have to start with an ounce of understanding about word processing.

You don't even have to be a terrific typist. (Matter of fact, the worse you type, the more the help.)

So come along:

Hunt and peck your way into the future.

LEADING EDGE®

Leading Edge Products Inc., Headquarters and Retail Division, 225 Turnpike Street, Canton, Mass. 02021 (800) 343-6833 (617) 828-8150

*IBM is a registered trademark of International Business Machines Corporation.

CIRCLE 172 ON READER SERVICE CARD